Über dieses Buch

Dies ist ein digitales Exemplar eines Buches, das seit Generationen in den Regalen der Bibliotheken aufbewahrt wurde, bevor es von Google im Rahmen eines Projekts, mit dem die Bücher dieser Welt online verfügbar gemacht werden sollen, sorgfältig gescannt wurde.

Das Buch hat das Urheberrecht überdauert und kann nun öffentlich zugänglich gemacht werden. Ein öffentlich zugängliches Buch ist ein Buch, das niemals Urheberrechten unterlag oder bei dem die Schutzfrist des Urheberrechts abgelaufen ist. Ob ein Buch öffentlich zugänglich ist, kann von Land zu Land unterschiedlich sein. Öffentlich zugängliche Bücher sind unser Tor zur Vergangenheit und stellen ein geschichtliches, kulturelles und wissenschaftliches Vermögen dar, das häufig nur schwierig zu entdecken ist.

Gebrauchsspuren, Anmerkungen und andere Randbemerkungen, die im Originalband enthalten sind, finden sich auch in dieser Datei – eine Erinnerung an die lange Reise, die das Buch vom Verleger zu einer Bibliothek und weiter zu Ihnen hinter sich gebracht hat.

Nutzungsrichtlinien

Google ist stolz, mit Bibliotheken in partnerschaftlicher Zusammenarbeit öffentlich zugängliches Material zu digitalisieren und einer breiten Masse zugänglich zu machen. Öffentlich zugängliche Bücher gehören der Öffentlichkeit, und wir sind nur ihre Hüter. Nichtsdestotrotz ist diese Arbeit kostspielig. Um diese Ressource weiterhin zur Verfügung stellen zu können, haben wir Schritte unternommen, um den Missbrauch durch kommerzielle Parteien zu verhindern. Dazu gehören technische Einschränkungen für automatisierte Abfragen.

Wir bitten Sie um Einhaltung folgender Richtlinien:

+ *Nutzung der Dateien zu nichtkommerziellen Zwecken* Wir haben Google Buchsuche für Endanwender konzipiert und möchten, dass Sie diese Dateien nur für persönliche, nichtkommerzielle Zwecke verwenden.

+ *Keine automatisierten Abfragen* Senden Sie keine automatisierten Abfragen irgendwelcher Art an das Google-System. Wenn Sie Recherchen über maschinelle Übersetzung, optische Zeichenerkennung oder andere Bereiche durchführen, in denen der Zugang zu Text in großen Mengen nützlich ist, wenden Sie sich bitte an uns. Wir fördern die Nutzung des öffentlich zugänglichen Materials für diese Zwecke und können Ihnen unter Umständen helfen.

+ *Beibehaltung von Google-Markenelementen* Das "Wasserzeichen" von Google, das Sie in jeder Datei finden, ist wichtig zur Information über dieses Projekt und hilft den Anwendern weiteres Material über Google Buchsuche zu finden. Bitte entfernen Sie das Wasserzeichen nicht.

+ *Bewegen Sie sich innerhalb der Legalität* Unabhängig von Ihrem Verwendungszweck müssen Sie sich Ihrer Verantwortung bewusst sein, sicherzustellen, dass Ihre Nutzung legal ist. Gehen Sie nicht davon aus, dass ein Buch, das nach unserem Dafürhalten für Nutzer in den USA öffentlich zugänglich ist, auch für Nutzer in anderen Ländern öffentlich zugänglich ist. Ob ein Buch noch dem Urheberrecht unterliegt, ist von Land zu Land verschieden. Wir können keine Beratung leisten, ob eine bestimmte Nutzung eines bestimmten Buches gesetzlich zulässig ist. Gehen Sie nicht davon aus, dass das Erscheinen eines Buchs in Google Buchsuche bedeutet, dass es in jeder Form und überall auf der Welt verwendet werden kann. Eine Urheberrechtsverletzung kann schwerwiegende Folgen haben.

Über Google Buchsuche

Das Ziel von Google besteht darin, die weltweiten Informationen zu organisieren und allgemein nutzbar und zugänglich zu machen. Google Buchsuche hilft Lesern dabei, die Bücher dieser Welt zu entdecken, und unterstützt Autoren und Verleger dabei, neue Zielgruppen zu erreichen. Den gesamten Buchtext können Sie im Internet unter `http://books.google.com` durchsuchen.

This is a reproduction of a library book that was digitized by Google as part of an ongoing effort to preserve the information in books and make it universally accessible.

Google™ books

https://books.google.com

NYPL RESEARCH LIBRARIES
3 3433 00775166 6

Digitized by Google

Digitized by Google

Tramway
TPB

Digitized by Google

Digitized by Google

Digitized by Google

Digitized by Google

THE TRAMWAY AND RAILWAY WORLD.
(REGISTERED AS A NEWSPAPER.)
FOUNDED, 1892.

PRICE ONE SHILLING

JULY 13, 1916
Vol. XL., No. 3
WITH
"MOTOR TRAFFIC" SECTION

716517

Contents, Page xi.
Index to Advertisements, Page xiii.

Offices: AMBERLEY HOUSE, NORFOLK STREET, LONDON, W.C.
Telegrams, "TRAMIGRO, LONDON."
Telephone No., "GERRARD 2948."

The Tramway and Railway WORLD

ILLUSTRATED

A REVIEW OF PROGRESS IN *Electric* AND OTHER *Traction.*

Osram
LAMPS
Traction Type

The Strong and Efficient Lamps for Tramcar and Railway Lighting
Specially constructed to stand rough handling and excessive vibration. From 90 to 135 volts.
Made at the Osram-Robertson Lamp Works, Hammersmith, London, W.
Wholesale only:—
The General Electric Company, Limited
Head Office: 67 Queen Victoria St., London, E.C.

Digitized by Google

ROLLING STOCK SPECIALITIES.

BRITAIN
EXPECTS
BRITISH
BUYERS
TO BUY
BRITISH
GOODS

OUR RATTAN

(NATURAL, GLAZE, DULL FINISH, OR COLOURED)

in twill, straight, or fancy weaves,
canvas backed or unbacked, is

BRITISH MADE THROUGHOUT

from the splitting of the cane to the finished article.

We hold **LARGE STOCKS OF RAW MATERIALS** and can

GUARANTEE PROMPT DELIVERIES.

Particulars of other **BRITISH SPECIALITIES** *upon application.*

THE GENERAL SEATING COMPANY LTD.
13 CITY ROAD, LONDON, E.C.

Digitized by Google

THE TRAMWAY AND RAILWAY WORLD

AN ILLUSTRATED REVIEW OF PROGRESS IN

ELECTRIC AND OTHER TRACTION

Established in 1892.

Index to Volume XL

July-December

1916

LONDON:

THE TRAMWAY AND RAILWAY WORLD PUBLISHING COMPANY, LIMITED,

AMBERLEY HOUSE, NORFOLK STREET.

Digitized by Google

INDEX TO VOLUME XL.

July—December, 1916

ARTICLES MARKED THUS * ARE ILLUSTRATED.

PAGE

A

Abingdon Rural Council *v.* Oxford Tramways Company 438
Accumulators, Edison* 54
Air Raid Precautions on Tramways 355
Rail Traffic During 413
Albion Motors for War Department 211
Tipping Wagon* 53
Works, Women Employees at* 440
Alternatives to Tramways 300
Ambulance Van* 296
Archangel, Tramways on Ice 355
Army Supply Motors en Route* 297
Arterial Roads, Deputation on 436
Auckland Tramway Tracks* 17
Autobus Line on the Pacific Coast 57
Automobile Engines 371
Automobile Experiences in the War .. 130, 205
Ayr Tramway Cars* 26

B

Balanced Windows* 301
Barrett Jacks* 122
Battery, Edison Electric* 54
Battery Vehicles, Import of 208
Progress of 368
Belfast Tramways, Appointment of Manager* 115
Benzole 208
Bexley, Rail Planers at* 342
Blackpool Municipal Motor Vehicles 134
Board of Trade, London Traffic Branch Report 113
Bradford Corporation Van as Ambulance* .. 296
Railless Cars* 258
Bridge Maintenance 128
Brighton Corporation and Motor Omnibuses .. 295
Brighton Omnibus Settlement 438
Brill Front Entrance Omnibus* 56
Bristol Tramways Option: Committee's Expenses 196
British Automobile Traction 59
British Chemical Substitute for Petrol 128
British Electric Traction Company 40
British Empire Producers' Organisation 184, 257, 419
British-Italian Corporation 104
Broad Street to Richmond, L. and N.W.R., Electrification* 335

C

Car Operation* 410
Car Traffic in Mexico City 415
Car Traffic Prohibition 418
Catalogues—
Daimler Company 212
Thornycroft and Company 212
Centre Door Electric Cars* 407
Certified Occupations 424
Charing Cross Bridge and South Eastern Improvements 348

PAGE

Chars-à-bancs Stopped as War Measure .. 204
Chester Tramways 300
Chicago Elevated Railroad's Safety Record .. 105
Chicago, Milwaukee, and St. Paul Railway Electrification* 169
Christmas Day Holiday 355
Coal Contracts, State Regulation of 26
Commercial Intelligence Department formed by the Board of Trade 346, 347
Commercial Vehicles of Great Britain 301
Conduit Construction in Paris and London* .. 20
Continental Tyre Company 59
Contracts and Orders 43, 119, 194, 287, 358, 425
Convoy of Napiers in the East* 57
Copper Wire Manufacture, Restriction of .. 355
Correspondence—
Goods Traffic on Tramways 347, 418
Corrosion of Trolley Wire* 349
Corrugation* 105
Coventry Tramways, Christmas Holidays .. 355

D

Daimler Company's Catalogue 212
Daimlers at St. Helens* 209
Damages against Oxford Tramways Company .. 438
Defence of the Realm Act 101
Definition of Motor Spirit 436
Dennis Ambulance for Blackpool* 133
Fire Engines for Russia* 132
Vehicle for Traders* 56
Depreciation of Omnibuses and Income Tax .. 60
Destination Lamps, Improved* 354
Dick, Kerr and Company, Ltd., The Year's Work 357
Purchase of A. E. G. 358
Diesel-Electric Rail Motor Car* 245
Dilution of Labour 372
Disabled Men as Drivers 186
Drivers, Disabled Men as 186
Drivers of Motor Vehicles, Inadequate Supply of 51
Duty Sheets and Time Tables 40

E

Early Motor Vehicles 437
Eastbourne Motor Omnibuses 52
Accounts of 58
Edinburgh and Electrification 115
Position at End of Lease 185
Proposals by Experts 350
Tramways Lease 185
Edison Battery, The* 54
Wagon at Southampton* 136
Wagons for Refuse Removal 135
Editorial 28, 166, 182, 254, 344, 416
Air Raids and Lights on Vehicles 256
Collection of Used Tickets 183
Comfort of the Passenger 28
Differential Gears and Corrugations .. 107

Digitized by Google

EDITORIAL—*continued.* PAGE

Efficient Training 29
Future of Edinburgh Tramways 185
Future Requirements 254
Goods Traffic 255
Great Railway Electrification, A 182
Halfpenny Fares 344
Home Office Report on Motormen 183
Lights on Vehicles 256
London Tramway Finance 106
London Tramway Problem 417
Motormen 183
Overhead Electric System 344
Partially Disabled Men as Motormen .. 183
Rail Traction in the War 345
Right Man in the Right Place, The .. 182
Safety First 416
Town Planning 416
Trade After the War.. .. .. 30, 108, 184
Tramway Services after Two Years of War 106
Tramways and the War 254
Tramways and Town Planning 416
Used Ticket Collection 183
Efficiency in Car Operation* 410
Efficiency Meetings.. .. .. .. 40, 348
Electric Locomotives* 93
Chicago, Milwaukee, and St. Paul* 176
Electric Tipping Wagon* 136
Electric Traction on Italian State Railways* .. 93
Electric Vehicle Committee 60, 128, 208
Electric Wagons for Refuse Removal 135
Electrification of Railways—
Chicago, Milwaukee, and St. Paul Railway* 169
Italian State Railways* 93
London and North Western Railway* .. 335
London and South Western Railway .. 426
Melbourne Suburban Railways 348
Employees and Military Service 25
Engineering Trades Committee 26
Engines for Automobiles 371
Excess Profits Duty 374, 423
Expediting Traffic in London 114

F

Fares and Tickets 251
Fares, Increases of 110
L.C.C. Special 352
Payment of 251
Financial Reports and Meetings
41, 116, 193, 286, 356, 424
Financing of Overseas Contracts 25
Four-wheel Driven Tractors 205
French Army Transport 369
Front Entrance Omnibus* 56
Front Exit Cars at Ayr* 26
Fuel Economy, Experiments in 118, 421
Future of Edinburgh Tramways.. ..115, 185, 350

G

Garcke's Manual 421
Gas Fuel for Generating Stations 247
Glasgow to London by Motor 211
Glasgow Tramway Battalion Trophy* 121
Goods Service on Tramways 271
Goods Traffic on Tramways 271, 347, 418
Government and Trade after the War 346
Great Falls Power Station* 172
Grinder for Rails* 249, 342

H

Halfpenny Fare Stages 252
Halifax Tramways, Institution of Queues .. 348
Halley Lorry* 210, 211
Van* 302
Harvest Poster, A 110
Home Office Report on Disabled Men as Drivers 186
Huddersfield Tramways Coal Cars* 273
Institution of Queues on 348

I

Ice, Tramways Laid on 355
Illuminated Car in Shanghai* 258
Import of Commercial Vehicles Prohibited 51, 52
Income Tax and Omnibus Depreciation 60
Increased Fares 110
Indian Railway Policy 250
Institution of Automobile Engineers 212
Meeting of London Graduates 374
Presidential Address by L. A. Legros .. 371
Insurance and Tramways 421
Iron and Steel Committee 26, 346
Italian State Railways, Electric Traction on* .. 93

J

Jacks, Barrett* 122

K

Keighley Railless Trolley Service 122

L

Leasing Right of Way for Omnibuses 295
Leeds Rail, The* 102
Licensing of Disabled Men as Drivers 203
Lifeguards for Omnibuses* 136
Lighting Arrangements in London 436
Regulations 424
Lights (Vehicle) Order, 1915 285
With Cattle 345
Locomotives on Highways Act, 1896 437
London and North Western Electrification* 335
London and South Western Electrification .. 426
London County Council Tramways 351
Accounts, 1915-16 112
Record Revenue 112
London Electric Railway Extension 420
London General Omnibus Cinema 258
Safety First Campaign 354
London Motor Ambulance Service 56
London Omnibuses Purchased by Government 52
London Omnibus Traffic 207
London Street Traffic Casualties 442
London Traffic Group 122
London Traffic Report 113
London Trailer Cars* 247
London Tramway Finance 252
London Underground and L.G.O.C. Efficiency Meetings 40, 348
London War Workers' Omnibuses 206

M

Manchester Traffic Problem 109
Mansion House Meeting 257
Manual of Electrical Undertakings 421
Maps—
Cheshire Tramways 272
Italian State Electric Railways 94
Lancashire Tramways 272
Petrograd Tramways 414
Medical Examination on L.C.C. Tramways .. 351
Melbourne Suburban Railways Electrification .. 348

Digitized by Google

PAGE

Metropolitan Association of Electric Tramway Managers 39, 353
Mexico City, Traffic in 415
Microscopical Investigation of Corroded Trolley Wires* 349
Military Service Act 25
Motor and Tire Companies 441
Motor Car Imports 296
Motor Census 204
Motor Construction Permits 436
Motor Drivers' Examination 133
Motor Fire Appliances 132
Motor Lorries at Verdun 435
Motor Omnibus Costs 52
Motor Spirit, Definition of 436
Motor Traction for Municipal Work 298
Motor Traction in the War* 129, 130, 297

MOTOR TRAFFIC SECTION
51, 127, 203, 295, 367, 435
Abingdon Rural Council *v.* Oxford Tramways Company 438
Accumulators, Edison* 54
Albion Motors for War Department .. 211
Tipping Wagon* 53
Albion Works, Women Employees at* .. 440
Alternatives to Tramways 300
Ambulance Van* 296
Army Supply Motors en route* 297
Arterial Roads, Deputation on 436
Autobus Line on the Pacific Coast 57
Automobile Engines 371
Automobile Experiences in the War .. 130, 205
Balanced Windows* 301
Battery Vehicles—
Edison* 54
Imports of 208
Progress of 368
Tipping Wagons* 136
Benzole 208
Blackpool's Municipal Motor Vehicles .. 134
Bradford Ambulance Van* 296
Bridge Maintenance 128
Brighton Corporation and Motor Omnibuses 295
Brighton Omnibus Settlement 438
Brill Front Entrance Omnibus* 56
British Automobile Traction 59
Catalogues—
Daimler Company 212
Thornycroft and Co. 212
Chars-à-bancs Stopped as a War Measure 204
Chemical Substitute for Petrol 128
Chester Tramways, Use of Motor Omnibuses 300
Commercial Vehicles of Great Britain .. 301
Continental Tyre Company 59
Daimler Company's Catalogue 212
Daimler Omnibuses at St. Helens* 209
Damages Awarded against Oxford Tramways Company 438
Definition of Motor Spirit 436
Dennis Ambulance for Blackpool* 133
Fire Engine for Russia* 132
Vehicles for Traders* 56
Dilution of Labour 372
Drivers for Motor Vehicles, Inadequate Supply 51
Early Motor Vehicles 437
Eastbourne Motor Omnibuses 52
Accounts of 58
Edison Battery, The* 54

MOTOR TRAFFIC SECTION—*continued.* PAGE

Edison Wagon at Southampton* 136
Electric Tipping Wagon* 136
Electric Vehicle Committee 60, 128, 208
Electric Wagons for Refuse Removal .. 135
Engines for Automobiles 371
Excess Profits Duty 374
Four-Wheel Driven Tractors 205
French Army Transport 369
Front Entrance Omnibus* 56
Glasgow to London by Motor 211
Halley Lorry* 210, 211
Van* 302
Import of Commercial Vehicles Prohibited .. 51, 52
Income Tax and Omnibus Depreciation .. 60
Indian Motor Vehicle Imports 440
Institution of Automobile Engineers .. 212, 371, 374
Meeting of London Graduates 374
Presidential Address. By L. A. Legros 371
Leasing Rights of Way for Omnibuses .. 295
Licensing Disabled Men as Drivers 203
Lifeguard for Omnibuses* 136
Lighting Arrangements in London 436
Locomotives on Highways Act, 1896 .. 437
London Motor Ambulance Service 56
London Omnibuses Purchased by Government 52
London Omnibus Traffic, Usefulness of .. 207
London Street Traffic Casualties 442
London War Workers' Omnibuses 206
Motor and Tire Companies 441
Motor Car Imports 296
Motor Census 204
Motor Construction Permits 436
Motor Drivers' Examination 133
Motor Fire Appliances 132
Motor Lorries at Verdun 435
Motor Omnibus Costs 52, 58, 210
Motor Traction for Municipal Work .. 298
Motor Traction in the War* 129, 130, 297
Motor Traffic Notes 60, 136, 211, 302, 374, 442
Motor Transport, Possibilities of 435
Motor Vehicles for Municipalities 59, 132, 209, 297, 373, 439
Motor Vehicle Imports 446
Progress in 437
Munitions Motor Transport, 4-ton Model .. 203
Napier Lorries in the Air Service* 437
Vans* 53, 57, 133, 300
Northampton Tramways Parcel Van* 370
Omnibus Costs at Warrington 210
Omnibus Depreciation and Income Tax .. 60
Omnibus Routes, New 133
Rights of Way 295
Omnibus Windows* 301
Omnibuses on Rural Roads 438
Oxford Tramways Company's Action .. 438
Parcel Van on Northampton Tramways* 370
Patriotic Tramway Work at Bradford .. 296
Permits for Motor Construction 436
Petrol Allowances 373
Petrol Committee 127, 128, 204, 295
Petrol Lorry Costs 439
Petrol Restrictions 204, 436
Petrol Situation 127
Petrol Substitute 59, 128, 208
Petrol Supplies 51
Petrol Tractor for Heavy Guns 205
Pneumatic-Tired Stretcher Carrier* .. 440
Possibilities of Motor Transport 435
Provincial Omnibus Owners and Excess Profits Duty 374

Digitized by Google

MOTOR TRAFFIC SECTION—*continued.* PAGE

Red Flag Anniversary 437
Refuse Removed by Electric Wagons .. 135
Restriction of Omnibus Routes 300
Rights of Way for Omnibuses . .. 295
Road Charges for Omnibuses 206
Roads Construction at the Front 206
Running Costs of Municipal Motors 298
Russian Ambulances, Appeal for 206
Russian Government Purchase Straker Machines* 369
Seats for Omnibus Conductors 53
Spencer Moulton Solid Tires* 442
Steam Tractors at Portsmouth 211
Stevens Petrol-Electric Vehicles, Ltd. .. 59
Straker Machines for Russian Government* 369
Omnibuses* 207
Stretcher Carrier, Pneumatic-Tired* .. 440
Tanks, The Meaning of* 437
Thornycroft Catalogue 212
Chassis in Peace and War* 370
Tilling, Thomas, Ltd., and Brighton Omnibuses 438
Time Tables and Duty Sheets 40
Tire Fitters 369
Transport in French Army 369
User of Road by Omnibuses 295
Voluntary Motor Transport 296
War Legislation 52
Warrington Omnibus Costs 210
Window Balance* 301
Women as Motor Drivers 300
In Motor Works* 440
York Electric Omnibuses 208

Motor Transport, Possibilities of 435
Motor Vehicles for Municipalities 59, 132, 209, 297, 373, 439
Motor Vehicle Imports 440
Progress 437
Motormen's Gallantry under Fire 420
Motormen, Medical Examination on L.C.C. Tramways 351
Municipal Tramways Association 108, 259
Annual Business Meeting 279
Annual Conference 108, 259
Annual Report of Executive Council .. 283
Presidential Address (Peter Fisher) .. 262
Retrospect, A 260
Some Notes on Passenger Transportation* (J. M. McElroy) 263
Utilisation of Tramways for Goods Service* (W. Clough and G. W. Holford) 271
Munitions Motor Transport Department 4-ton Model 203

N

Napier Lorries in the Air Service* 437
Motor Vehicles* 133, 300
Vans in the East* 57
Vans for Railways* 53
New and Prospective Work 426
Newcastle Tramways War Service 355
New Publications 421
New York State Railway Car* 408
Northampton Tramways Parcel Van* 370

O

Omnibus Costs at Warrington 210
Omnibus Rights of Way 295
Omnibus Routes, New 133, 286, 424
On Rural Roads 438
Omnibus Traffic in Worcestershire 354
Omnibus Windows* 301
One Man Cars 409
Overhead Trolley Risks* 104, 413
Overseas Contracts Committee 25
Oxford Tramways Company, Judgment Against 438

P

Parcel Van on Northampton Tramways* .. 370
Paris Economic Conference 30
Regulations and Government 342
Paris Tramways Electrification* 20
Passenger Transportation 263
Passengers' Liabilities 108
Patent List 46, 122, 198, 290, 363, 431
Patriotic Tramway Work at Bradford* 296
Payment of Fares 251
Permits for Motor Construction 436
Personal 43, 119, 195, 288, 359, 426
Petrograd Electric Tramways* 414
Tramways on Ice 355
Petrol Allowances 373
Petrol Committee's Task 127, 295
Petrol Lorry Costs 439
Petrol Restrictions 204, 436
Petrol Substitutes 59, 128, 208
Petrol Supplies 51
Petrol Tractors for Heavy Guns 205
Pirelli General Cable Works 40
Plea for the Passenger 32
Pneumatic-Tired Stretcher Carrier* 440
Police (Miscellaneous Provisions) Act 184
Portsmouth Tramways' Year* 192
Possibilities of Motor Transport 435
Prevention of Street Accidents 422
Private Bill Notices 423
Protection from Trolley Boom* 104, 413
Provincial Omnibus Owners and Excess Profits Duty 374

Q

Queues for Boarding Tramcars 348

R

Raid Warnings and Car Services 355
Rail Corrugation, Causes of 253
Rail Design, Wear and Corrugation* 101
Rail Motor Car, Diesel Electric* 245
Rail Planer* 249, 342
Rail Traffic and Air Raids 413
Railless Trolley Battery Vehicle* 275
Red Flag, Anniversary of Abolition of 437
Refuse Removal by Electric Wagons 135
Remodelling Rails* 249
Reserved Occupations 25
Resilient Track and Rail Corrugation* 105
Restricted Lighting and Services 424
Restriction of Omnibus Routes 300
Revision of Certified Occupations 424
Richmond Electric Service* 335
Richmond (Virginia) Track* 105
Road Charges for Omnibuses 206
Roads Construction at the Front 206
Rolling Stock of Paris Tramways* 21
Rotary Converter Traction Equipment* 415
Running Cost of Municipal Motors 298
Russian Ambulances, Appeal for 206
Russian Government, Purchase of Straker Machines* 369
Russian Tramways on Ice 355

Digitized by Google

PAGE

S

Safety First Campaign 37, 258, 354
Specimen Advertisements 38
Safety Work of the London General Omnibus Co. 37
Sandberg Rails 104
Scientific and Industrial Research 258
Seats for Omnibus Conductors 53
Shanghai Tramways Illuminated Car* 258
Southampton Visited by Metropolitan Tramway Managers 39
South Eastern Improvements, Charing Cross Bridge 348
Southern Pacific Centre Door Car* 407
Spare Plant in Generating Stations 421
Special Car Traffic Prohibition 418
Spencer Moulton Solid Tires* 442
Steam Tractors at Portsmouth 211
Steel Purchase for Tramways 355
Stevens Petrol-Electric Vehicles, Limited .. 59
Stonebridge Park Power Station* 336
Straker-Squire Omnibuses* 207
Machines for Russia* 369
Street Accidents Prevention 422
Stretcher Carrier, Pneumatic-Tired* 440
Summer Time Act: Lives Saved 346
Sydney Electric Railway Scheme 181

T

Tanks, The Manning of* 437
Thornycroft Catalogue 212
Thornycroft Chassis in Peace and War* 370
Tickets, Origin and Development 198
Tilling, Thomas, Limited, and Brighton Omnibus Arrangements 438
Time Tables and Duty Sheets 40
Tire Fitters, Limited Number 369
Track Foundation in Auckland, N.Z.* 17
Trade after the War 25, 26, 30, 108, 184, 257, 346, 419
Trade, Annual Statement of 110
Traffic Returns 47, 123, 199, 291, 363, 431
Trailer Cars for London* 247
Paris* 25
Tramway and Light Railway Notes 45, 120, 197, 289, 361, 428
Aberdeen 197
Ashton 45
Barrow-in-Furness 289
Belfast 120
Birmingham 45, 289, 361, 428
Blackpool 197, 289, 361, 428
Bradford 120, 289, 361, 428
Bristol 45, 289
Cardiff 428
Chesterfield 429
Coventry 120
Croydon 197
Darlington 289
Doncaster 361, 429
Dover 429
Dublin 429
Dudley 429
Dundee 289
Edinburgh 45, 197, 289, 429
Glasgow 45, 120, 197, 289, 361
Huddersfield 197, 429
Hull 361, 429
Ilford 429
Ilkeston 45
Ipswich 429
Lanarkshire 429
Leeds 45, 290, 361

PAGE

Tramway and Light Railway Notes—*continued.*
Liverpool 120, 361
Llandudno 429
London 45, 121, 197, 361, 429
Lowestoft 430
Manchester 45, 197, 290, 430
Middlesex 121
Newcastle-on-Tyne 46, 197, 290, 362
Norwich 430
Oldham 290, 362
Paisley 198
Plymouth 46, 362, 430
Portsmouth 198, 362, 430
Rawtenstall 430
Rochdale 290
Salford 290, 362
Sheffield 46, 121, 198, 362
Southampton 46, 121
Southend 362
Swansea 362
Walsall 430
West Ham 121
York 46, 430
Tramway Chairmen for 1916-17 428
Tramway Men's Roll of Honour 189
With the Colours 188
Tramway Passengers and their Fares 251
Tramway Supplies During the War 285
Tramway Tickets, Supply of 284
Tramway Transit and Comforts (W. T. Robson) 32
Tramways and Light Railways Association 25, 31, 431
Annual Dinner 39
Eighth Annual Conference 31
Offices, New 431
President's Address 31
Safety Work of the London General Omnibus Company, by H. E. Blain .. 37
Tramway Transit and Comfort for the Passenger, by W. T. Robson 32
Tramways, Railways, and the Defence of the Realm Act 101
Transport of the French Army 369
Trolley Arm, Protection from* 104, 413
Trolley Wires, Corrosion of* 349

U

Uniforms for Portsmouth Tramway Employees* 192
User of Roads by Omnibuses 295

V

Voluntary Motor Transport 296

W

War Legislation 52
Warrington Omnibus Costs 210
West Ham Tramway Rolling Stock* 179
Window Balance* 301
Women as Conductors and Drivers 354
Motor Cab Drivers 300
Tramcar Drivers 354
Women in Motor Works* 440
Worcestershire, Omnibus Traffic in 354
Woods-Gilbert Rail Planer* 240, 342

Y

York Electric Omnibuses 208
Yorkshire Managers' Association 430

Z

Zurich Tramways 343

Digitized by Google

PERSONAL REFERENCES AND AUTHORS' INDEX.

	PAGE		PAGE
Baker, A.	351	Hume, G. H.	351
Benedict, Ernest	36	Jones, T. Norman	105
Bevis, H.	40	Lawson, A. J.	252, 348
Bingham, F. C.	198	Layng, J. F.	410
Blain, H. E.	37	Legros, L. A.	371
Bland, F.	35	Mandelick, W. E.	39
Bond, Harold	17	Mason, A. V.	34
Bradfield, J. J. C.	181	McElroy, J. M.	100, 263
Bradley, W. F.	130	Miles, John	281, 282
Brodie, J. A.	115, 350	Mitchell, J. C.	426
Burns, John	348	Moffet, J. S. D.	115, 179
Campbell, A. H.	115, 350	Mozley, H.	277, 281, 418
Chivers, A. W. A.	34	Pelissier, G. E.,	103
Clough, W.	271, 279	Robertson, Leslie S.	119
Coutts, F.	36	Robson, W. T.	32, 36, 39
Cram, R. C.	102	Rutherford, W.	419
Davis, J.	181	Scott, J.	349
Docker, F. Dudley	184	Sellon, Stephen	36, 347
Edwardes, E. H.	35	Shaws, H.	298
Edwards, W. V.	35	Shepherd, C. W.	35
England, Harry	39	Smart, F. W.	439
Fell, A. L. C.	351	Smith, F.	269
Fisher, Peter	262	Spaven, W. R.	193
Gettings, C. F.	354	Spencer, C. J.	276
Gordon, H. H.	268	Stanley, Hon. Arthur	30
Graham, S.	355	Stanley, Sir Albert	207
Grosart, D. McD.	413	Stevens, W. A.	59
Hame, J. W.	36	Stokes, H. P.	342
Hamilton, J. B.	115, 270, 278, 350	Timpson, J.	193
Harvey, L. E.	36	Varwell, H. B.	269
Hatton, E.	35, 36, 355	Wale, H. W.	270
Holford, G. W.	271	Webb, Sir A.	348
Holt, R. B.	101	White, Sir George	420
Howley, R. J.	39	Wilkinson, R. H.	278
Hughes, W. M.	30	Winfield, T. C.	181

Digitized by Google

Digitized by Google

716517

THERMIT LTD.

WORKS

675, COMMERCIAL ROAD, E.

Which is now their

ONLY ADDRESS

Registered Trade Mark

THERMIT LIMITED
675, Commercial Road
LONDON, E.

Telegrams:—
"FULMEN STEP LONDON"

Telephone: EAST 4157

Digitized by Google

Our Reputation



as manufacturers of Metal Filament Lamps dates back to the production of the "Tantalum," which was the FIRST successful Drawn Wire Lamp introduced to the Market.

WOTAN

Drawn Wire

LAMPS

are of high Standard Quality, the result of long manufacturing experience. They give most efficient Lighting for the lowest possible Current Consumption.

Suitable for all types of Installation: alternating or direct current.

PRICE LISTS ON APPLICATION.

SIEMENS BROTHERS DYNAMO WORKS LIMITED, 38 & 39, UPPER THAMES STREET, LONDON, E.C.

Digitized by Google

Telegrams:
"THOUGHTFUL, LONDON."

THE

Telephone
8186 LONDON WALL

LORAIN STEEL CO.

36-38, New Broad Street, London, E.C.

Highest Possible Recognition

Awarded at the Panama-Pacific International Exposition for the general excellence of Girder, Groove, Guard and High Tee Rails and Special Track Work products; the greatest merit being recognised in the following special products exhibited as representing the highest development of the Art:—

"Tadpole" Tongue Switch
Tongue-Holding Device
Electrically Welded Rail Joints

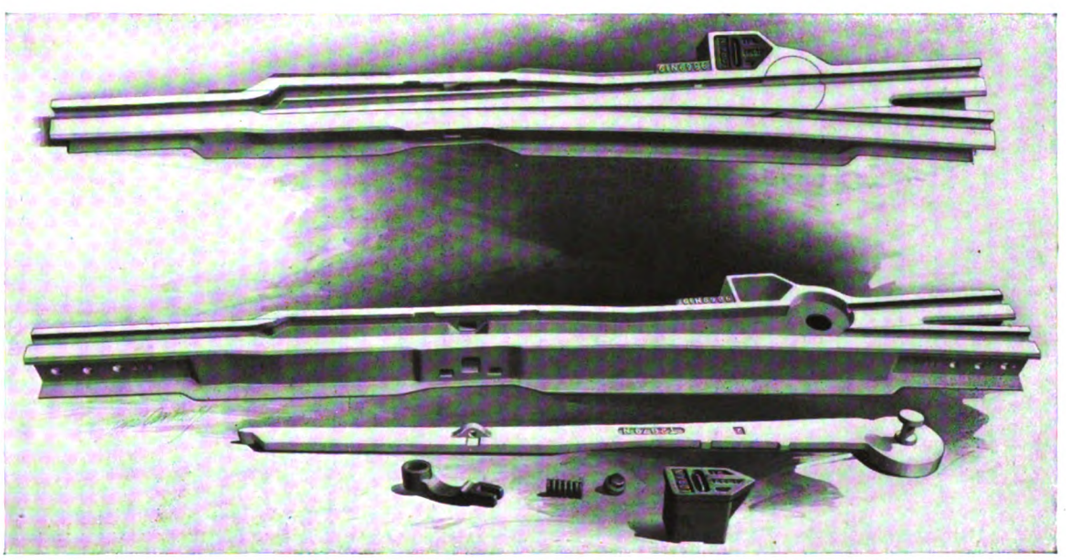

SOLID MANGANESE TADPOLE TONGUE SWITCH
Made with either grooved or plain Tongue

Digitized by Google

Large D.C. Generators

for

Electric Lighting *and* Power Stations.

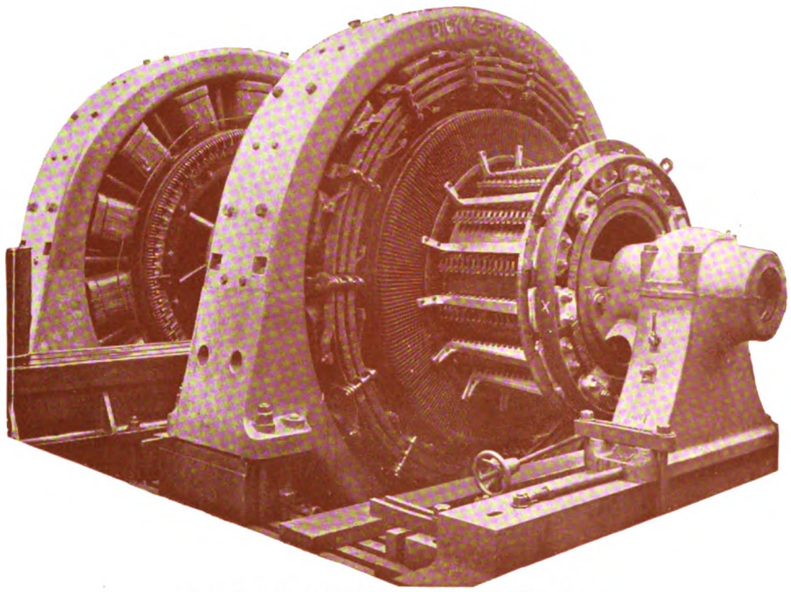

Two D.C. Compound Wound Interpole Generators
1000 K.W., 14/14 Poles, 300 R.P.M. 215/235 Volts.

D.K. Generators merit your consideration through the following features:—Skilled workmanship, strong mechanical construction, sound electrical design, subjected to thorough and exacting tests during the various stages of construction, efficient and economical in service.

DICK, KERR

& CO., LIMITED.

Head Office: ABCHURCH YARD, CANNON ST., LONDON, E.C.

Branch Offices: Manchester, Newcastle, Tokyo, Sydney, Johannesburg, Buenos Aires, Rio de Janeiro, and Milan.

Digitized by Google

Traction Controllers

with Metallic Shield Blow-out.

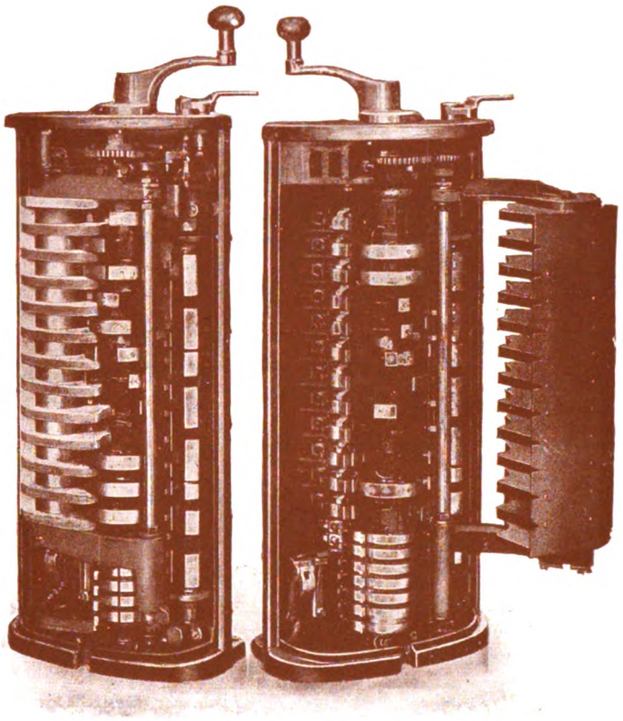

THE success which has been gained by our Metallic Shield Blow-out Controller during recent years has abundantly proved the soundness of the principles involved in its design.

In our latest standard controllers the blow-out has been made particularly powerful, securing cleaner contacts and thereby reducing the maintenance costs.

DICK, KERR

& CO., LIMITED.

Head Office: ABCHURCH YARD, CANNON ST., LONDON, E.C.

Branch Offices: Manchester, Newcastle, Tokyo, Sydney, Johannesburg, Buenos Aires, Rio de Janeiro, and Milan.

Digitized by Google

Fifteen Hundred Kilowatt
B.T.H. Rotary Converters

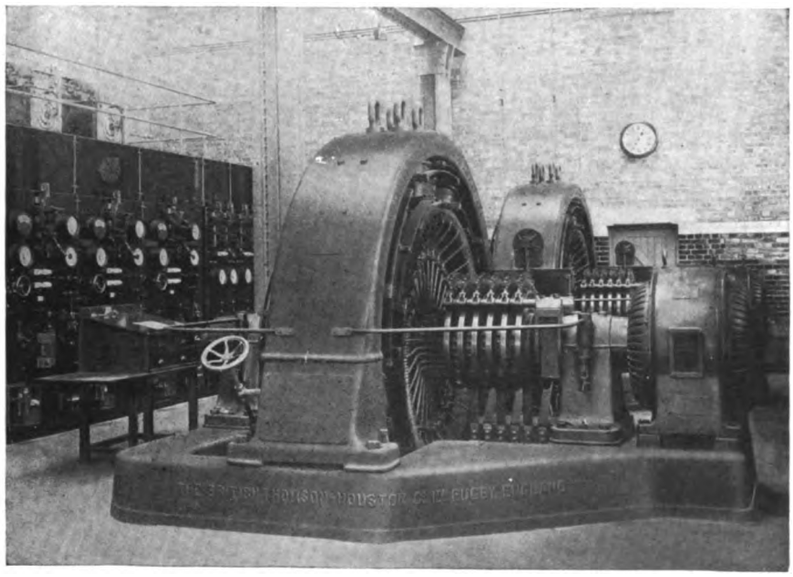

in Raynes Park Sub-station

L. & S.W. Railway.

B T-H

The Electrical Hall Mark for Quality.

The British Thomson-Houston Co. Ltd.

ELECTRICAL ENGINEERS AND MANUFACTURERS.

Head Office and Works: RUGBY, ENGLAND.

FREDERICK SMITH AND COMPANY,

WIRE MANUFACTURERS

(Incorporated in the LONDON ELECTRIC WIRE CO. and SMITHS, Ltd.),

Contractors to British and Foreign Governments and Railway Companies.

Telegraphic Address: "ANACONDA, MANCHESTER."

COPPER WIRE

100 Per Cent. Conductivity.
ALL SIZES TO ·001.

Hard Drawn H.C. Copper Line Wire; Special Tinned Wire.

COPPER TROLLEY WIRE

Specially Prepared and Tested; Half-Mile and Mile Lengths.

BRONZE TROLLEY WIRE

HIGH STRAIN. Unequalled for Durability Combined with Conductivity.

SILICIUM BRONZE WIRE

("COG WHEEL BRAND"), C QUALITY, for TELEPHONE LINES, &c.

PHOSPHOR BRONZE SPRING WIRE.

ALUMINIUM WIRE AND STRIP FOR ALL ELECTRICAL PURPOSES.

Anaconda Works, Salford, MANCHESTER.

Digitized by Google

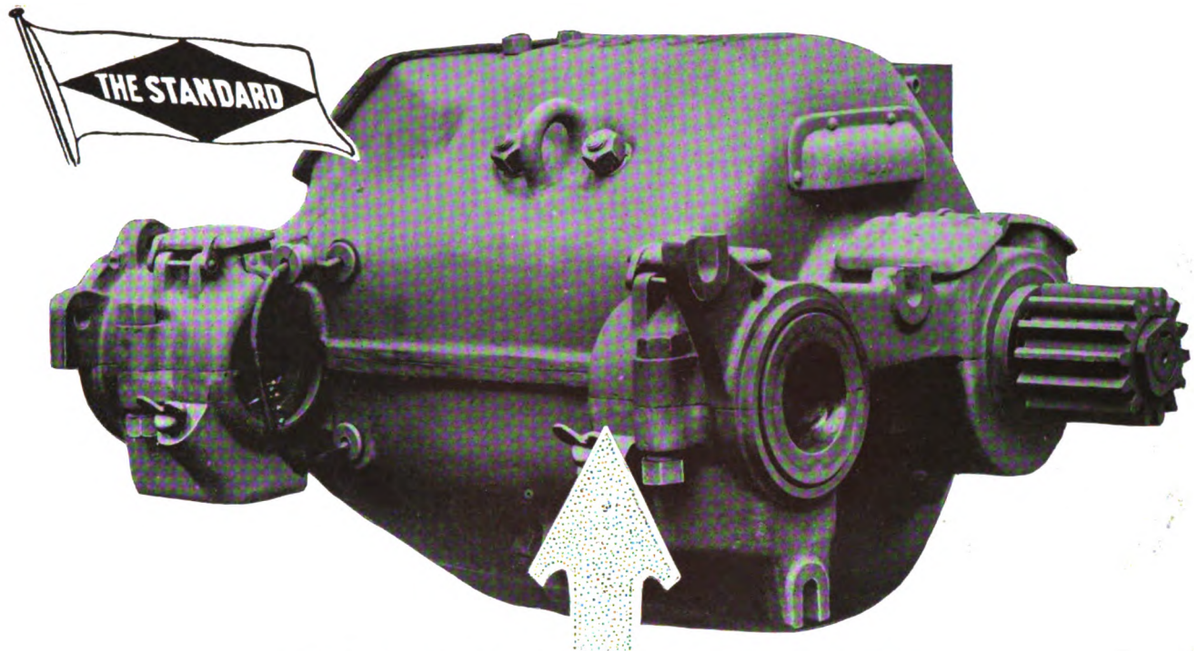

TRACTION MOTORS

don't break down through faulty insulation when the windings are periodically treated with STANDARD VARNISH.

This attention carried out regularly prevents the deleterious penetration of moisture, oils, acids, etc., to delicate parts, cuts out heavy repair bills and costly delays that follow a "hold-up."

CATALOGUE AND EXPERT ADVICE WHERE NECESSARY FROM PINCHIN, JOHNSON AND COMPANY, LTD. 26 BEVIS MARKS, LONDON, E.C.

STANDARD VARNISHES are used *regularly* by the principal Tramways of the U.K., by the leading Electrical Manufacturing Firms, Lighting and Power Stations, etc., so you are not experimenting with unknown and unproved materials when using

The STANDARD INSULATING VARNISHES & COMPOUNDS

Digitized by Google

HADFIELDS LTD

WORKMEN EMPLOYED OVER 6000 — HECLA & EAST HECLA WORKS SHEFFIELD, ENGLAND. — WORKS AREA 110 ACRES

Hadfield's Patent 'Hecla' Point

Made of Hadfield's Patent 'ERA' Manganese Steel.

The only Point on the Market with a perfect and continuous Bearing for the full length of the Tongue.

SOLID. NO PIN. NO TROUBLE.

Bearing Surface at Heel End.
Actual width of effective bearing area in this design only 1¾ in. around pin.

The area of the bearing surface where the heel of the tongue rests has been increased to the utmost limit consistent with utility.

The tongue can be renewed, or adjusted for wear, in a few minutes without interfering with the paving.

The patent mechanism for moving the tongue is acknowledged to be unique for its simplicity and originality of design.

Solid Bearing throughout.



Hadfield's are Specialists in Designing & Constructing Complete Lay-Outs and Junctions of every description.

SOLE MAKERS OF

HADFIELD'S PATENT ERA MANGANESE STEEL

THE SUPREME TRAMWAY POINTS, CROSSINGS

MATERIAL FOR SPECIAL TRACK-WORK ETC.

Digitized by Google

CONTENTS

	Page
Track Foundation in Auckland (New Zealand) (Illus.)	17
Paris Tramways Electrification (Illus.)	20
Employees and Military Service	25
Front Exit Cars at Ayr (Illus.)	26
State Regulations of Coal Contracts	26
Engineering Trades after the War	26
Editorial Comments—The Comfort of the Passenger	28
More Efficient Training	29
Trade after the War	30
Tramways and Light Railways Association	31—39
Tramway Transit and Comfort	32
Safety Work of the London General Omnibus Company	37
The Annual Dinner	39
Metropolitan Association of Electric Tramway Managers	39
Time Tables and Duty Sheets	40
British Electric Traction Company	40
Financial Reports and Meetings	41
Contracts and Orders	43
Personal	43
Tramway and Light Railway Notes	45
Patent List	46
MOTOR TRAFFIC SECTION	51
War Legislation	52
Government Purchases of London Omnibuses	52
Albion Tipping Wagon in Belfast (Illus.)	53
Seats for Omnibus Conductors	53
Napier Vans in Railway Work (Illus.)	53
The Edison Battery (Illus.)	54
Standardised Vehicles for Traders (Illus.)	56
Front Entrance Omnibus (Illus.)	56
An Autobus Line on the Pacific Coast	57
Convoy of Napiers in the East (Illus.)	57
Eastbourne Corporation Omnibuses	58
The Continental Tyre Company	59
Motor Vehicles for Municipalities	59
British Automobile Traction	59
Stevens Petrol-Electric Vehicles, Ltd.	59
Omnibus Depreciation and Income Tax	60
Electric Vehicle Committee	60
Motor Traffic Notes	60
Traffic Returns	47-48
Directories of Electric Tramways and Railways	xxiii-xxx
Municipal Tramways	xxiii-xxiv
Company Tramways	xxiv-xxvi
Particulars of Track and Equipment	xxvii-xxx
Buyer's Guide	xvi-xx
Index to Advertisements	xiii

WE ARE ADDING ALL THE TIME TO OUR LIST OF TRAMWAYS WHICH USE

TOOL STEEL GEARS and PINIONS

but most of our orders are now from systems which have used T. S. material for some time. Experience is better than statements, and to-day we offer records and not promises

SCHOLEY & CO. LIMITED

56, Victoria Street WESTMINSTER LONDON, S.W.

Digitized by Google

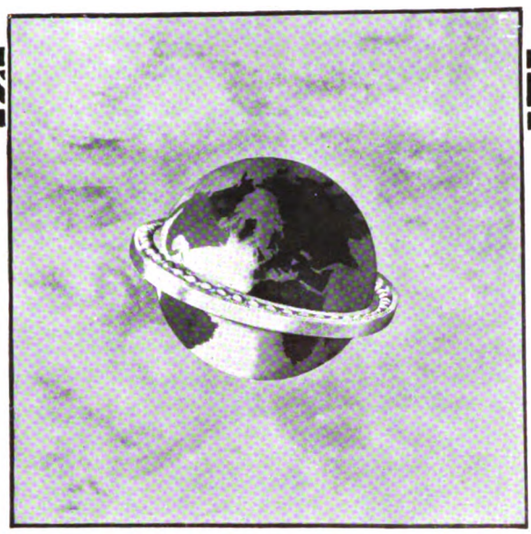

SKEFKO.SKF
(PATENTED) MADE IN ENGLAND TRADE MARK

SELF-ALIGNING DOUBLE ROW

BALL BEARINGS

are universal in application

OUR SERVICE
IS WORLD WIDE

The Skefko Ball Bearing Co. Ltd.
HEAD OFFICE AND WORKS LUTON, ENGLAND
London Office - - 28, Victoria Street, S.W.

FLOWER BRAND.

TRADE MARK

MAGNOLIA ANTI-FRICTION METAL

TRADE MARK

MAGNOLIA METAL

THE D. H. STOLL COMPANY, INC.
MANUFACTURERS OF PRESSES, SHEARS, DIES AND SPECIAL SHEET METAL WORKING MACHINERY.

Buffalo, N.Y., April 7, 1914

Gentlemen :—We have used your metal for the past few years in all our Power Presses and Shears, both large and small, with the most satisfactory results.

This applies both to the equipment, which we have manufactured here for our own use, and the many carloads shipped to some of the largest manufacturers in both the United States, Canada and abroad, in which was the entire plant equipment for many large plants.

As above stated, we have used this metal in both large and small machines and some machines running as high as 60 to 70 tons for heavy sheet metal drawing work.

Yours very truly,
THE D. H. STOLL COMPANY.

MAGNOLIA ANTI-FRICTION METAL COMPANY OF GREAT BRITAIN, LTD.

Tel. No.: City 6596. *49, Queen Victoria Street, LONDON, E.C.* Teleg.: "Magnolier, London."

Tel. No.: 254-01. **LA MAGNOLIA,** *21, Rue de Petrograd, PARIS.* Teleg.: "Metamagno, Paris."

Digitized by Google

INDEX TO ADVERTISEMENTS.

	PAGE
Allen, Edgar, & Co., Ltd., Sheffield	146
Auto-Ticket Printing Co., Ltd., Liverpool	—
Avon India Rubber Co., Ltd., Melksham	129
Baker, John, & Co., (Rotherham) Ltd., Rotherham	xxii
Beckett, Laycock & Watkinson, Ltd., Willesden ...	xx
Bell Punch & Printing Co., Ltd., London, E.C. ...	144
Brill Company, J. G., London, E.C.	xxxv
British Insulated & Helsby Cables, Ltd., Prescot...	xxxi
British Thomson-Houston Co., Ltd., Rugby ...	viii
British Westinghouse Electric & Manufacturing Co., Ltd., Manchester	xix
Brockhouse, J., & Co., Ltd., West Bromwich ...	147
Bruce Peebles & Co., Edinburgh	—
Carbic Limited, 51, Holborn Viaduct, London, E.C.	—
Clayton & Co. (Huddersfield), Ltd., Huddersfield...	132
Cleveland Metal Co., Stockton-on-Tees	xviii
Clough, Smith, & Co., Ltd., London, E.C.	—
Coan, R. W., 219, Goswell Road, London, E.C. ...	xviii
Commercial Cars, Ltd., Luton	136
Courtenay, J. W., Ltd., London, W.C.	143
Coventry Chain Co., Ltd., Coventry	xiv
Daimler Co., Ltd., Coventry	49
Dennis Bros., Guildford	141
Dick, Kerr & Co., Ltd., London, E.C. ... vi, vii,	148
Docker Brothers, Ltd., London, E.C.	144
Dunlop Rubber Co., Ltd., Aston Cross, Birmingham	135
Edison Accumulators, Ltd., London, S.W.	—
Edison & Swan United Electric Light Co., Ltd., Ponders End	xxi
Electric Construction Co., Ltd., London, E.C. ...	—
Equipment & Engineering Co., London ...xxxiii,	xxxviii
Fodens, Ltd., Sandbach	138
Garrould, E. & R., Edgware Road, London, W. ...	134
General Electric Co., Ltd., London, E.C.	i
General Seating Co., Ltd., London, E.C.	ii
Glasgow Numerical Ticket Printing Co., Glasgow...	xxxii
Goodyear Tyre and Rubber Co., Ltd., London, W.C.	137
Green, Geo. W., & Co. (Feltham), Ltd., Feltham ...	xxxii
Grover & Co., Ltd., Wharf Road, London, N. ...	xxxii
Hadfields, Ltd., Sheffield	x
Halley's Industrial Motors, Ltd., Glasgow	130
Henley's Telegraph Works Co., Ltd., London	xix, 139
Hurst, Nelson & Co., Ltd., Motherwell ...	... xxxvii
Indian Directory and Year Book	xiv
International Truck and Car Co., Ltd., London ...	—
Johnson & Phillips, Ltd., London, S.E. ...	xxxviii
Lacre Motor Car Co., 78, York Road, London ...	133

	PAGE
Leyland Motors (1914), Ltd., Leyland	131
"L'Industrie des Tramways et Chemins de Fer," Paris	144
Lorain Steel Co., London, E.C	v
Macintosh, Chas., & Co., Ltd., Manchester ... xxxvi,	140
Magnolia Anti-Friction Metal Co., London, E.C. ...	xii
Maudslay Motor Co., Ltd., 4, Parkside, Coventry ...	130
Millars' Timber & Trading Co., Ltd., London, E.C. ...	—
Mirrlees Watson Co., Ltd., Glasgow	47
"Motor Traction," 20, Tudor Street, London, E.C.	xviii
Napier, D., and Son, London, W.	50
Nobles & Hoare, Ltd., Cornwall Rd., London, S.E....	—
Oriental Tube Co., Ltd., West Bromwich	47
Patent File and Tool Co., Ltd., London, E.C. ...	xiv
Pease & Partners, Ltd., Middlesbrough	xxii
Peckham Truck & Engineering Co., Ltd., London...	xv
Pinchin, Johnson & Co., Ltd., London, E.C. ...	ix
R.E.T Construction Co., Ltd., London, E.C. ...	xxxii
Scholey & Co., Ltd., London, E.C.	xi
Shepherd's Parging Block Co., Milkstone, Rochdale	xiii
Shrewsbury & Challiner Tyre Co., Ltd., Manchester	—
Siemens Bros. Dynamo Works, Ltd., London, S.W.	iv
Skefko Ball Bearing Co., Ltd., Luton	xii
Smith, Frederick, & Co., Ltd., Salford, Manchester	viii
Standard Underground Cable Co., London, E.C. ...	xviii
Stewarts & Lloyds, 41, Oswald Street, Glasgow ...	147
Straker & Squire, Ltd., London, S.E.	128
Taylor, John, 7, Strand Street, Liverpool	—
Thermit, Ltd., London, E.C.	iii
Thornycroft, John I. & Co., London, S.W.	134
Tilling-Stevens, Ltd., 26, Victoria Street, S.W. ...	127
Titan Trackwork Co., Ltd., Sheffield	xv
"Tramway and Railway World"	xvi
Tramway Supplies, Ltd., Leeds	147
Tudor Accumulator Co., Ltd., London, S.W. ...	132
Turner-Smith, W., 78, 80, and 82, Brompton Road	—
Tyne Metal Co., Ltd., Newcastle-upon-Tyne ...	147
Underground Electric Railways Co., Ltd., London...	xxxiv
United Electric Car Company, Preston, Lancs. ...	xxxiii
Walter Scott, Ltd., Leeds Steel Works, Leeds ...	145
Watlington & Co., Ltd., London	xxxiv
Waygood-Otis, Ltd., London, S.E.	xvi
White Motors and Accessories, Ltd., London, S.W.	xvii
Willans & Robinson, Ltd., Rugby	—
Williamson, Alfred, Ashton-under-Lyne	xiv
Wilson Rolling Shutter Co. (1914) Ltd., London, S.W.	—
Wood-Milne, Ltd., Preston	142
Zenith Carburetter Co., London, W....	132

Digitized by Google

Dreadnought Rail Files

are the most efficient and economical tools for track work, and they cost but a few pence more than the inferior ordinary article.

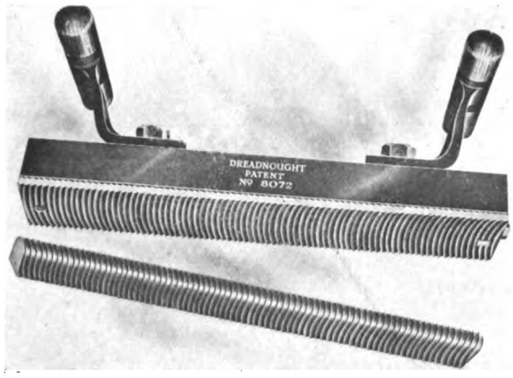

Illustration of FLAT and GROOVE Dreadnought Rail Files.

BRITISH MAKE **SPECIAL SHEFFIELD CRUCIBLE STEEL**

The Patent File & Tool Co. Ltd., 8, WHITE STREET LONDON, E.C.

THE COVENTRY CHAINS

Suit every variety of British and American —Service Vehicle—

Catalogue D/5 post free.

"THE COVENTRY" CHAIN CO., LTD., COVENTRY, ENGLAND.

LONDON : 47, Victoria Street, W. MANCHESTER : 233, Deansgate.

ALFRED WILLIAMSON

TRAMWAY & RAILWAY TICKET PRINTER,
ASHTON-UNDER-LYNE.

THE 'WILLIAMSON' REGISTERING TICKET BELL PUNCH

TICKETS & PUNCHES
Supplied on the Very Best Terms.

ESTABLISHED 1835.

Telephone: 320 Ashton-under-Lyne.

THE STRONGEST PUNCH ON THE MARKET.

SAMPLES & PRICES ON APPLICATION.

PUNCHES ON SALE OR HIRE.

Enlarged Directory of Merchants and Manufacturers in India, and ———Year Book, 1916-17———

BEST ADVERTISING MEDIUM THROUGHOUT INDIA

This edition will contain not only the addresses of Merchants and Manufacturers in India, dealing in each class of goods, classified in alphabetical order, but will also include various useful facts and figures concerning Indian trade and Industry, with trade acts, patent and design acts, interesting account of Native States and Political divisions of India, and a complete list of residents, societies, hospitals, colleges, schools, newspapers, clubs, physicians, libraries and other enormous information not accessible even in more expensive works of reference. A *special feature* of this edition is the foreign section of prominent business houses located everywhere throughout the British Empire and friendly countries. . .

ROYAL EDITION (Illustrated with photos of ruling Chiefs, gentry, and views of India)—Rs. 25 *or* £1-15-0

PEOPLE'S EDITION Rs. 10 *or* 15 Shillings

Laxmichand Dossabhai & Bros.
RAJKOT, India

Digitized by Google

ALL TYPES OF TRAMWAY POINTS

Made of
"TITAN"
MANGANESE STEEL

TITAN TRACKWORK CO.
Rutland Works, Rutland Road, SHEFFIELD LTD.

BEWARE OF IMITATIONS,

THERE IS
ONLY ONE
PENDULUM GEAR

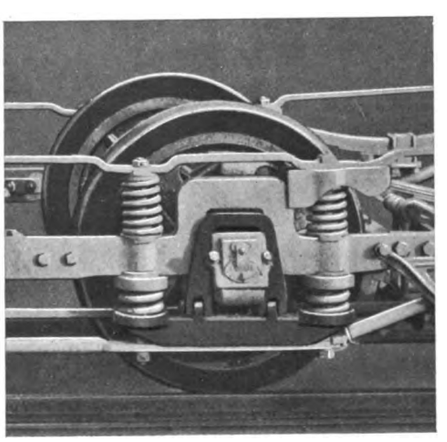

MANY ATTEMPTS HAVE AND ARE BEING MADE TO GET A GEAR
AS GOOD
BUT WITHOUT SUCCESS

THE PECKHAM PENDULUM GEAR

IN USE ON OVER 35 TRAMWAYS IN THIS COUNTRY

THE PECKHAM TRUCK & ENGINEERING CO., LTD.
26, BUDGE ROW
CANNON STREET, LONDON, E.C.

TELEPHONE CITY 3294
TELEGRAMS "TRUXENPECK CANNON, LONDON"

3

Digitized by Google

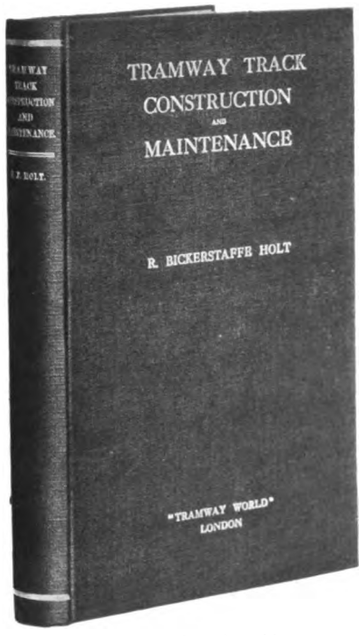

250 pages, 10 × 6¼ × 1 in., with over 150 illustrations—Price 10s. 6d.

SOME PRESS OPINIONS

"THE GLASGOW HERALD."

"The volume is bound to be of the greatest possible value to permanent way engineers."

"THE IRON AND COAL TRADES REVIEW."

"The book throughout bears the stamp of close practical experience with all branches of the subject."

"THE ELECTRICAL TIMES."

"Those who wish to discuss 'What's Wrong with the Track?' will find Mr. Holt's views and suggestions indispensable to their researches."

"THE YORKSHIRE POST."

"It is a thoroughly practical book. Mr. Holt has confined himself to really important matters, and has written on them with the authority that comes of practical scientific experience."

"THE ELECTRICIAN."

"The book, which throughout is essentially practical rather than academic, leaves upon the mind the impression of a thoughtful and helpful contribution to the knowledge of engineers engaged upon track work."

"THE ELECTRICAL INDUSTRIES."

"Mr. Holt has the gift of clear exposition in a degree to which few engineers can lay claim. His book is mainly intended for tramway engineers, and we can assure that gentle band of controversialists that they will find enough in it to keep them happy for a long time."

TRAMWAY & RAILWAY WORLD OFFICES
Amberley House, Norfolk Street, London, W.C.

ESTABLISHED 1833

WAYGOOD-OTIS, LTD.

Lift Makers — To H.M. The King.

By Appointment

WAYGOOD-OTIS LIFTS

of all kinds and for all purposes.

FALMOUTH ROAD, LONDON, S.E.

BUYER'S GUIDE

The Names of Advertisers whose announcements appear in consecutive issues of THE TRAMWAY AND RAILWAY WORLD are inserted free of charge, under such headings as may be desired.

ACCUMULATORS, ELECTRICAL.
Edison Accumulators, Ltd., London.
Tudor Accumulator Co., London, S.W.

ADVERTISING, TRAMWAY AND RAILWAY.
J. W. Courtenay, Ltd., London.

AIR BRAKES. (See Brakes.)

ALUMINIUM.
British Aluminium Co., Ltd., London, E.C.

AMMETERS. (See Voltmeters.)

ANCHOR CHAIRS.
Blackwell & Co., London.

ANGLE IRON BUFFERS.
Brill Company, J. G., London, S.W.

ANTI-FRICTION METAL.
Magnolia Anti-Friction Metal Co., Ltd., E.C.

AUTOMATIC BRAKE ADJUSTERS. (See Brake Adjusters.)

AXLE BOXES.
Brill Company, J. G., London, E.C.
Peckham Truck and Eng. Co., London, S.W.

AXLES AND TYRES.
Anger Mfg. & Supply Co., Ltd., Preston, Lancs.
Baker, John, & Co., Rotherham.
Equipment & Engineering Co., London, W.C.

BALL BEARINGS.
Skefko Ball Bearing Co., Ltd., Luton.

BATTERIES, STORAGE. (See Accumulators.)

BEARINGS.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
Skefko Ball Bearing Co., Ltd., Luton.
Watlington & Co., Ltd., London, E.C.

BELLS AND GONGS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Watlington & Co., Ltd., London, E.C.

BLINDS AND CURTAINS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.

BOILERS.
Babcock & Wilcox, Ltd., London, E.C.

BOLTS.
Allen, Edgar & Co., Ltd., Sheffield.
Bayliss, Jones, & Bayliss, Wolverhampton.
Brockhouse J., & Co., Ltd., West Bromwich.
Hadfields, Ltd., Sheffield.
Peckham Truck and Eng. Co., London, S.W.
"The Coventry" Repetition Co., Coventry.
Titan Trackwork Co., Ltd., Nottingham.

BOND PAINTS.
Ruberoid Co., Ltd., London, E.C.

BOXES, JOURNAL.
Anger Mfg. & Supply Co., Ltd., Preston, Lancs.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
Watlington & Co., Ltd., London, E.C.

BRACKETS AND CROSS ARMS. (See Poles.)

BRAKE ADJUSTERS.
Anger Mfg. & Supply Co., Ltd., Preston, Lancs.

BRAKES, CAR.
Brill Company, J. G., London, E.C.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Electric Co.
Dick, Kerr, & Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peacock Brake Co., London, E.C.
Peckham Truck and Eng. Co., London, S.W.

BRAKE HANDLES.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peacock Brake Co., London, E.C.
United Electric Car Co., Ltd., Preston.

BRAKE SHOES.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
Hadfields, Ltd., Sheffield.
Hurst, Nelson & Co., Ltd., Motherwell.
Peacock Brake Co., London, E.C.
Peckham Truck and Eng. Co., London, S.W.
Tyne Metal Co., Ltd., Newcastle-on-Tyne.
United Electric Car Co., Ltd., Preston.

BROOMS, TRACK.
Brush Elec. Engineering Co., Ltd.
Hurst, Nelson & Co., Ltd., Motherwell.
Watlington & Co., Ltd., London, E.C.

BRUSHES, DYNAMO AND MOTOR.
British Westinghouse Co., Ltd., London.
Electric Construction Co., Ltd., London.
Watlington & Co., Ltd., London, E.C.

CABLES, ELECTRIC TRAMWAY AND LIGHTING.
British Aluminium Co., Ltd., London, E.C.
British Westinghouse Co., Ltd., London.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.
Henley's Telegraph Works Co., Ltd., London
Macintosh & Co., Ltd., Chas., London, E.C.

CABLE PULLEYS.
Tyne Metal Co., Ltd., Newcastle-on-Tyne.

CABLE TRAMWAYS.
Dick, Kerr & Co., Ltd., London, E.C.

CARBON BRUSHES. (See Dynamo & Motor Brushes.)

CARBURETTORS.
Green, Geo. W., & Co., Ltd., Feltham.

CAR CURTAINS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.

CAR JACKS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.
Watlington & Co., Ltd., London, E.C.

CAR ROOF COVERINGS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

CAR SEATS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
United Electric Car Co., Ltd., Preston, Lancs.

CAR STEPS. (See Movable Car Steps.)

CAR STOVES.
Brill Company, J. G., London, E.C.

CAR TRIMMINGS.
Brill Company, J. G., London, E.C.
General Seating Co., Ltd., London, E.C.

CARS, TRAMWAY.
Brill Company, J. G., London, E.C.
Dick, Kerr & Co., Ltd., London.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

CAR TRUCKS.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
United Electric Car Co., Preston.

CASTINGS.
Allen, Edgar & Co., Ltd., Sheffield.
Hadfields, Ltd., Sheffield.
Hurst, Nelson & Co., Ltd., Motherwell.
Stewarts & Lloyds, Glasgow.
Titan Trackwork Co., Ltd., Nottingham.

CHAINS.
Coventry Chain Co., Ltd., Coventry.

CHARS-A-BANCS.
Clayton & Co. Huddersfield, Ltd., Huddersfield.

CIRCUIT BREAKERS.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Electric Construction Co., Ltd., London.
Watlington & Co., Ltd., London, E.C.

COLOURS. (See Paint.)

COMMERCIAL MOTORS.
Clayton & Co. Huddersfield, Ltd., Huddersfield.

COMMUTATORS & COMMUTATOR SEGMENTS.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

CONDENSING PLANT.
Belliss & Morcom, Ltd., Birmingham.
Mirrlees Watson Co., Ltd., Glasgow.

Digitized by Google

THE Tramway & Railway World
WITH MOTOR TRAFFIC SECTION

Founded 1892. LONDON, JULY 13, 1916. 716517 VOL. XL.

TRACK FOUNDATION IN AUCKLAND, NEW ZEALAND.

By HAROLD BOND.

Track foundation has been throughout the history of electric traction one of the most difficult problems which tramway engineers and tramway financiers have had to deal with, and probably few have met with greater difficulties than those which have been experienced on the system of the Auckland Electric Tramways Company. The city of Auckland lies on the shores of the Waitemata Harbour, the central part of the city being located on the comparatively flat land fringing the water front, and from here the ground rises rapidly to the undulating country where the remainder of the city and the suburbs are situated. Moreover, this undulating country is broken by a number of extinct volcanic cones, and it will thus be seen that the main physical features of the tramway system are a large number of more or less excessive grades, and, for the most part, somewhat tortuous routes. Further, the large and heavy cars, together with the high speeds at which they run, tend towards an abnormal wear and tear on the permanent way.

General View of the City of Auckland from North Shore of Waitemata Harbour.

It should be mentioned that in Auckland the system of paving the tramway area across its full width with granite setts is not employed, and therefore, except in certain main streets in the city where Neuchalet asphalte, wooden blocks, or some other form of paving has been adopted, a concrete base to the road surface between the rails is not necessary. Ordinary water-bound macadam with a single row of setts, laid serrated on each side of the rails, is the type of road surface adopted on by far the larger portion of the system. This water-bound macadam is gradually being replaced by some form of tar or bituminous macadam, and on these portions the stone setts along the edges of the rails are dispensed with. This tar and bituminous macadam not only serves the purpose of forming a more lasting road surface, but has a considerable influence on the life of the track foundation, as it will be shown later that the chief object that has to be attained on the clay areas is the prevention of the track foundation becoming water-logged during the winter months, when the rainfall in Auckland is fairly heavy.

The standard foundation adopted when the tracks were first laid down, some fourteen years ago, was that generally known as the longitudinal concrete stringer construction, a concrete stringer 1 ft. 6 in. wide and 9 in. deep being laid directly in the ground and under the centre of each rail. The rails, which were of 92 lb. girder section, were embedded slightly in the concrete. This form of foundation has proved fairly durable on the small portion of the system which is on the rock area, but on the clay area it has proved difficult and expensive to maintain. The trenches in which the concrete stringers are laid form a natural drainage for the surrounding soil, the water collects in these trenches, and, having no further means of escape, puddling commences, and in time the concrete is left

Digitized by Google

without support, the tendency then being for it to break up into short lengths and sink down more or less irregularly, allowing the track to become wavy, the rails crippled, and the block edging to sink below or fall away from the rails. Resort to packing metal chips between the rail and concrete only met with

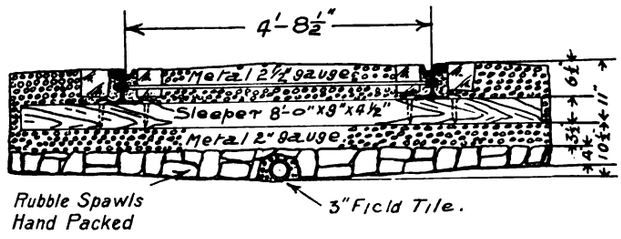

Fig. 1.

temporary success, as the same puddling action continued, and the concrete sank still further.

It became apparent to the general manager, Mr. J. J. Walklate, that remedies would have to be sought in two directions; firstly, in a larger bearing area for the foundation, and secondly in the proper drainage of the foundation, but at the same time a construction which was not prohibitive in cost would have to be discovered. To this end the wooden cross-sleeper construction with a foundation of rubble-spawls, drained with field-tiles, was adopted,

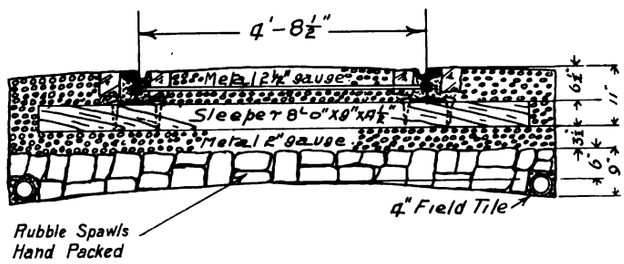

Fig. 2.

and with certain improvements, which have from time to time been found advisable, these form the main features of the present day track foundation in Auckland. The earliest standard type of wooden cross-sleeper construction, and one which was employed for some years, is shown in Fig. 1. From this it will be seen that a trench about 8 ft. 6 in. wide was excavated, having a depth at the sides of 1 ft. 0½ in., with a fall of 3 in. to the centre, a row of 3 in. field-tiles being laid down the centre at this lowest point. On the bottom of this trench large rubble-spawls were hand packed to a depth varying from 4 in. at the outside to 7 in.

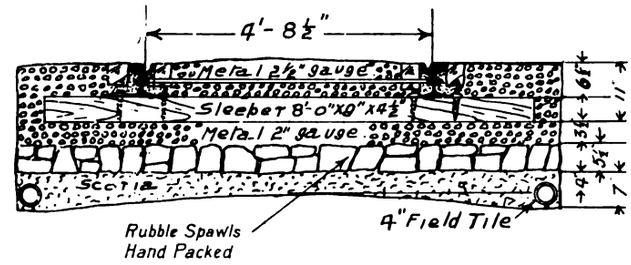

Fig. 3.

near the centre of the trench, small bluestone metal being placed round the field-tiles to prevent breakage. Above this rubble-spawl foundation a depth of 3½ in. of bluestone metal, broken to 2 in. gauge, was employed for packing up the sleepers. The rails were spiked down to the sleepers, these being of Australian hard-

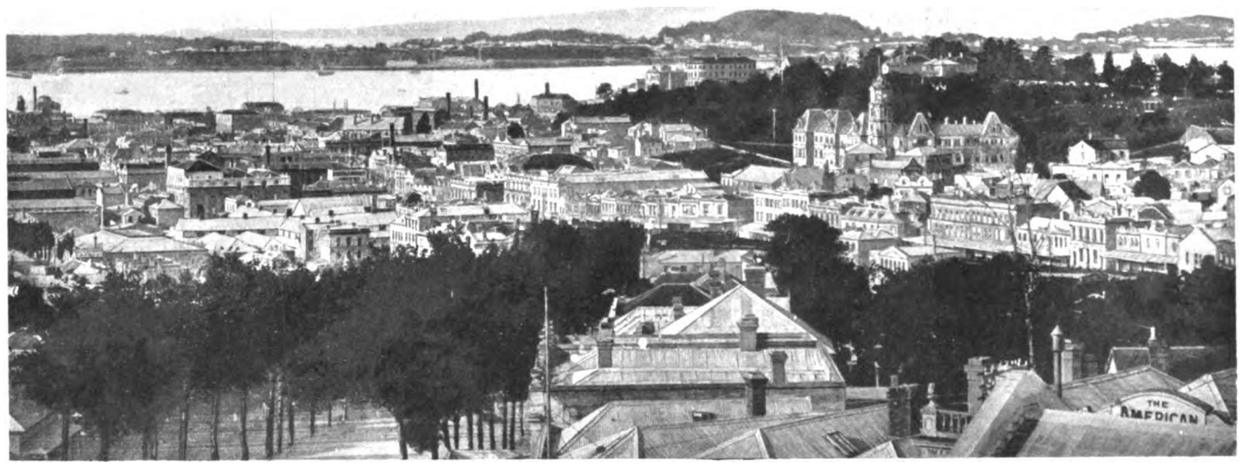

The Business District of Auckland.

wood, 8 ft. by 9 in. by 4½ in., and being placed at about 2 ft. 3 in. centres. Outlets were obtained for the field-tiles into cess-pits, &c., wherever possible.

This construction, although superior to the concrete stringer type, was found to be defective in so much that in time the field-tiles were liable to silt up and allow water to lie in the trench, thus leading to puddling of the clay, and resulting in a gradual sinking of the track. This led to the adoption of an improved type of wooden cross-sleeper construction, shown in Fig. 2. Here it will be seen that the depth of rubble-spawls was increased from an average of 5½ in. to an average of 7½ in., while the bottom of the trench was given a fall from the centre to the outside, a double row of 4 in. field-tiles, one on each side of the trench, replacing the single row of 3 in. field-tiles in the centre. Apart from the greater depth of spawls and the extra row of field-tiles, this construction had the advantage over the earlier one in so much that, should the field-tiles become silted up, they could be taken out and cleaned without disturbing the foundation to any extent.

This Fig. 2 construction has been used on nearly all extensions and reconstructions during the past three or four years, but recently a further improvement has

Digitized by Google

been made on areas where the clay is of an excessively puddling nature by the use of a volcanic ash, known as scoria, which is readily obtainable from the extinct volcanoes round about the city. Where this scoria is used the depth of the trench is increased to about 27 in. on the outside with a fall of 3 in. from the centre as before. A layer of scoria is placed on the bottom of the trench to a depth of 4 in. and 7 in. at the centre and sides respectively, the double row of field-tiles being placed on the outsides of the trench as in the Fig. 2 construction, but, being embedded in the scoria, it is not necessary to place bluestone metal round them. On top of this layer of scoria the rubble-spawls are then laid to a depth of from 5 in. to 6 in. This construction is shown in Fig. 3.

Although scoria has not yet been in use sufficiently long for any decisive conclusions to be come to as to its value, it is believed that it is of such a nature that it will prevent the silting up of the field-tiles and the working up of the clay into the foundations of the track. Moreover, scoria being of a fine nature, should distribute evenly over the whole of the bottom of the trench the weights transmitted to it from the spawls above, and further, being of a porous nature, it should form a natural drain in the bottom of the trench apart from the field-tiles. There would seem to be a certain tendency in the constructions shown in Figs. 1 and 2 for the spawls to be driven into the bottom of the trench, and thus for the even distribution of weight to be lost. It is believed that the layer of scoria below the spawls will obviate this defect.

On routes where the tramway traffic is particularly heavy the 92 lb. rail is being replaced by a stronger and deeper rail, weighing 110 lbs. per yard, and coach screws are being used in place of spikes for holding the rails down to the sleepers. In recent years the distance between centres of sleepers has been reduced to 2 ft. 2 in., and in some cases less.

On existing track laid on the original longitudinal concrete stringers, when replacing the foundation by any of the above-mentioned types of wooden cross-sleeper construction the work is carried out without any cessation of traffic. The trench is excavated on either side of the concrete stringers which, if they have not already been broken sufficiently while in use, are broken into short lengths with gads and removed into the trench, where they are spawled and used in the new foundation, the rails being meanwhile supported on wooden blocks.

No new tracks are now being constructed with the longitudinal concrete stringer, even where rock is met with, as it is found that the concrete is liable to disintegrate immediately underneath the rails, and because this rigid form of construction tends to encourage the development of corrugation. In such cases wooden cross-sleepers are employed, a few inches of metal being used for packing between the sleepers and solid rock.

A few experimental lengths have recently been laid, both on clay and rock areas, with the sleepers packed up directly on scoria, no rubble-spawl or bluestone being used in the foundation.

From the foregoing remarks it will be seen that the severe local conditions of traffic, together with a very unsuitable sub-soil, have necessitated a very large amount of thought being given to the problem of reducing the cost of maintenance of the tracks, while at the same time keeping the original and reconstruction costs within bounds.

View showing Centre Pole Construction in Queen Street and Type of Car Used in Auckland.

Digitized by Google

PARIS TRAMWAYS ELECTRIFICATION.

(*Concluded**).

Type of Conduit Adopted—Comparison with London Designs.

The type of central conduit adopted by the General Omnibus Company for use in Paris closely resembled that chosen by the London County Council. Some improvements were made, however, one of which lies in the fact that whereas the London conduit yokes are only alternately provided with two arms, in the Paris design

Fig. 1.—Sectional and Plan View of Yokes, Slot and Track Rails.

every yoke stretches right across the track, and hence serves to carry the weight of rolling stock on the running rails, which rest on their arms. The yokes, which, as stated in the table given on page 346 of the issue of May 11, are set at intervals of 4 ft. 3 in., are of cast metal, and weigh about 360 lbs. each. Every effort has been made to reduce their weight while maintaining their strength and solidity. Cast-iron was thought preferable to steel, as giving greater rigidity and avoiding differences in slot width due to the ductility of steel. To have used cast steel would have involved an impossibly heavy outlay.

Weight reducing holes are cast in the chairs, to the number of twelve in each, with stiffening ribs round them. These also serve to bind the yokes firmly into the concrete. The total depth of the chair below the slot rail is 24 inches. Very severe tests under hydraulic pressure were made on chairs picked out at random, the material standing a compression test of from 7 to 16 tons before fracture at the particular part of the yoke under test.

The slot rails are, of course, fixed to the yoke centres, special $\frac{7}{8}$ inch bolts being used for the purpose. The bolt heads are underneath, and are shaped so that no rough edges shall project from the contour of the conduit itself. The bolt holes are made oval to allow of varying the width of slot. In Fig. 1 are shown sectional and plan views of conduit and yoke, from which may be seen the double T section of the yoke arms†. These arms are 6 in. high and $7\frac{1}{4}$ in. broad, thus presenting a good wide surface as rail chairs for carrying the running rails. The latter rest on flat pieces of teak laid on the yoke arms ; these wooden plates measure $7\frac{1}{4}$ in. by $6\frac{1}{2}$ in. by $\frac{5}{8}$ in. thick. Stamped steel plates shaped to fit the slopes of rail base are used one on each side of the running rail, with four bolts passing through the steel plates and flat top of yoke arm. The heads of these bolts are set underneath the top plate of yoke arm, and are protected from the concrete bed of conduit by a tin plate hood, which leaves enough space to allow of the bolts being easily extracted and replaced without breaking or disturbing the concrete.

As the steel tie plates have rectangular bolt holes cast in them to permit of horizontal adjustment, when once the line is gauged up they are kept in place by means of soft steel keys of wedge shape, driven firmly home. Further, in order to give additional elasticity to the rail foundations, bedded on to the yoke arms, and to prevent the bolts from shaking loose to the eventual destruction of the road bed from "pumping" rails, plates of paraffined teakwood, $\frac{3}{8}$ in. thick, are inserted under the rail base at the yoke arms. These plates will bear a crushing stress of at least $5\frac{1}{4}$ tons per square inch when the wood is dry, and they are paraffined to prevent them from absorbing moisture, which would greatly reduce their resistance. Whilst sufficiently thick to stand hard work, they are thin enough not to interfere unduly with tightening up the holding-down bolts. Special projections are cast on the upper surface of the yoke arms, which serve for anchoring short, flat steel tie rods to the slot rails, thus greatly stiffening the structure at the yoke arms, the tie rods being attached to the slot rail webs close under the treads (Fig. 2). They measure approximately 2 ft. in length by 4 in. in width, and prove sufficient to maintain a permanent slot width where the street paving is of stone, but in the case of wood paving other and longer tie rods of similar section are put in at the middle of each interval between the yoke tie rods. These are anchored at the outer ends to the line rails.

The running rails themselves are as usual of the grooved type, weighing about 102 lbs. to the yard; they are $7\frac{1}{4}$ in. deep, with a base $6\frac{1}{4}$ in. wide; the normal length is 59-60 ft., but shorter ones are also employed down to 32 ft.

The slot rails of Z section (Fig. 1) weigh 63 lbs. per yard ; they are $7\frac{1}{4}$ in. deep, with a base $3\frac{3}{4}$ in. wide. The

Fig. 2.—Conduit Track Ready for Paving, showing Roof of Conduit and Slot Rails Tied to Yokes.

slot width, which in the case of some conduits runs about $1\frac{3}{4}$ in., and even $2\frac{3}{8}$ in. on several of the side conduit systems, has been reduced to $1\frac{7}{16}$ in. The total opening therefore, including the slot, is not more than 4 in., or about the same as that of an ordinary grooved running rail, including the groove.

The steel contact rails in the conduit average 25 ft. 7 in. in length ; they are of T section set sideways, the crosspiece being much longer than the stem, having a width of $4\frac{3}{4}$ in. on the contact face. They weigh

* Continuation of an article begun in The Tramway and Railway World of May 11 and continued in the issue of June 8.

† Vide also cross section and plan, p. 346, May 11, 1916.

Digitized by Google

about 25½ lb. per yard. The resistance is approximately 13 microhms per centimetre, and the kilometric resistance ·08 watt at 0° Centigrade. The cross section is considered ample for limiting the fall of pressure within reasonable limits, and thus avoids the need of numerous feeders. To prevent jarring on the passage of the contact ploughs, the ends of the rails are machined off.

The rails are supported on insulators fixed at distances apart of 12 ft. 0 in. on straight lengths of line. Elsewhere, on curves of short radius, at crossings and points, they are naturally spaced at much shorter intervals. A means of horizontal adjustment in fixing the rails to the insulators is provided by the use in the shank of the fork plate carrying the stem of T rail of an oval hole through which passes a square-headed stud screwing up into the insulator. Lock nuts above and below the fork plate keep the rail and fork plate in the proper vertical position. Two copper cable bonds of ample section serve to ensure electric continuity at each rail joint. These are soldered into copper sleeves pressed beforehand into holes at the rail ends, the soldering being done after the rails are fixed in position.

The insulators are of the single bell type with corrugated surfaces, and are sufficient for the working pressure of 600 volts. Each is cemented into a corresponding cast-iron bell, which serves to keep off mud from the insulator and forms part of the insulator supporting bracket, bolted on to the base of the adjacent slot rail above. To make sure that the insulator supports had the same levels throughout, the bolts and covering bells were set on separate continuous supports—a hundred at a time—the cement being then run in and left to dry.

The Choice of Rolling Stock.

The question of rolling stock to be employed on the newly-transformed system was one calling for long and anxious consideration. The importance of choosing the most suitable and convenient type of vehicle from the passengers' point of view, and one that would prove the safest and most economical to operate, could not be overrated. The "imperiale" or open upper deck, with roof, to which Parisians have long become accustomed, has many inconveniences. It is difficult of access, comfortless in winter, allows little head room on the lower deck, and makes it no easy matter to collect the fares.

Probably every electric tramway manager operating both double deck and single deck cars has found from experience that the running time of the latter is much less than that of the former over the same routes. The delay in going up and down a narrow and awkward staircase adds greatly to the length of stops, but this delay cannot well be avoided, as there must be allowed a minimum time to mount or descend, especially for women and children. As for the second objection, since the upper deck has a roof, it might be said that by glazing the sides and ends the top seats could be made perfectly comfortable in winter. Unfortunately the prescribed maximum width of 6 ft. 6 in. makes an "imperiale" closed in at the sides still more difficult for the conductors to collect fares properly.

The upper deck, roofed but left open at the sides, is therefore deserted in winter owing to the want of comfort; consequently the carrying capacity of the line is very much reduced, and also (since the "imperiale" is always second-class) only first-class places and too small a number of second-class seats on the lower deck are available for would-be passengers, who thereupon take to other and competing means of transport where they can find more second-class room. The third difficulty of the "imperiale," that of low head room, cannot well be avoided, as on many lines the overall height of car is limited by the vertical space available under certain bridges. This leads to cramped accommodation, bad ventilation, and great inconvenience to passengers in moving in and out. Lastly, the collection of fares on a car with "imperiale" is certainly difficult to carry out under good conditions, especially with sectional tariffs.

On the other hand, a car with "impériale" has the great advantage of large seating capacity without excessive car length, and consequently allows the use of two axles only. Nevertheless this advantage is not enough in itself, and long experience has by now shown that the difficulties already specified must lead to preference being given to vehicles without the "imperiale."

The need for great capacity of passenger accommodation implies an increase in the length of cars, and thereby raises a number of points requiring attention—easy running round curves, absence of rocking and side motion, strength and yet lightness of trucks and body, and there is sometimes being involved a difficult lowering of the framework in the centre of the body to allow of a platform for passengers to ascend to or alight from the car.

Experiments carried on by the company before 1910 in electric traction, having in view the present general transformation, had led to the use of bogie cars, that is, the adoption of four axles per car.

The technical problem to be solved in the first place was that of the arrangement and use of these four axles, bearing in mind the conditions that call for sufficient adhesion when towing trail cars. The following solutions call for consideration:—

1. *Cars with Two Bogies and Four Motors.*—This method, of course, gives every satisfaction so far as adhesion is concerned with four axles and a motor mounted on each, but the heavy expense both of first cost and of operation preclude its use on city lines where the amount of energy used must be reduced to a minimum, whatever attraction might be found in railway work or tramways on the outskirts and in the country.

2. *Cars with Two Equal Wheeled Bogies: Two Axles Motor Driven, Two Trailing.*—In view of the working conditions with motors in series or parallel, if four are not used then we must assume two, one motor axle being arranged on each bogie. This arrangement is in use by the General Paris Tramways Company, but it has the defect of insufficient adhesion, and could not be employed on the General Omnibus Company's lines for this reason, as the grades are heavy and trail cars are customary.

3. *Cars with Two Bogies, as in No. 2, but with Bogie Wheels Coupled.*—It has been proposed, in order to gain adhesion, to couple the bogie wheels either by side rods or endless chains. The former suggestion is hardly possible on an overall width of only 6 ft. 6 in.; the cost of installing and working a chain coupling, although tested carefully, proved excessive and out of the question in practice.

4. *Cars with Two Bogies: "Maximum Traction" Trucks.*—This well-known type of truck, each consisting of one motor-driven rear axle and a pony wheel front axle, offers very general advantages that fully justifies its use on most of the Paris lines, both the General Paris Tramways Company as well as the Eastern Paris Tramways Company employing the system, so that the General Omnibus Company followed good precedent in deciding on its adoption. A strong point in its favour is the possibility of setting the points

Digitized by Google

of support of the car body very close to the motor-driven axle, thereby increasing the adhesion. The trucks give a very easy motion, especially round sharp curves, but they cost more to maintain in comparison with parallel axle trucks, and the whole of the weight not being on the driven wheels, they have hardly

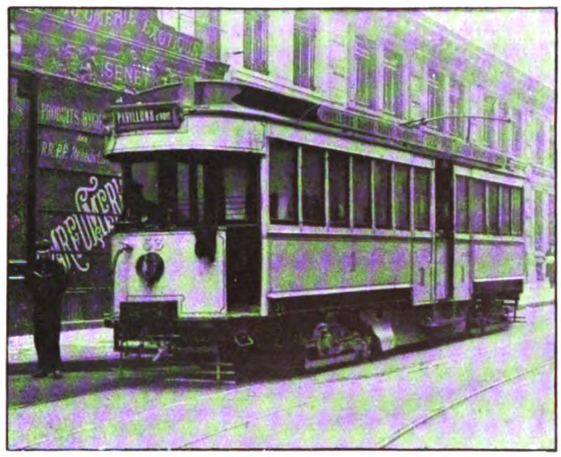

Fig. 3.—Car with Maximum Traction Trucks—East Paris Tramway Company.

enough adhesion for working with trailers on lines having grades steeper than 1 in 33. However, they give excellent service on many of the General Omnibus Company's lines where conditions are favourable.

5. *Cars with Long Wheelbase and Two Motor-driven Axles.*—For some of the steeper grade lines it was found necessary to arrange for a type of car the entire weight of which would be available for adhesion, and also for a car of large seating capacity. These conditions have been satisfied by the use of a long wheel-base car with two parallel axles, each motor-driven. Experiments showed that with a wheel base of 13 ft. 4 in., and a suitable wheel flange, a car could easily pass round a curve of only 60 ft. radius. The type of car actually decided upon, and introduced into the service, has a wheel base of 12 ft. only, the total length

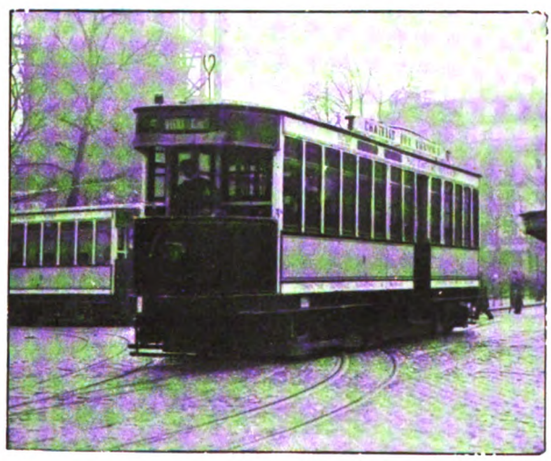

Fig. 4.—Car with Equal Wheeled Bogies—Paris General Tramways Company.

over all being 40 ft. 8 in., yet it has practically no pitching or side motion whatever. A slightly smaller car of this type has also been designed for lines where the traffic is less dense; this has a wheel base of 10 ft. 9½ in., with a total length of 34 ft. and seating capacity for 45 passengers.

Description of Cars in Use.—Three-car Trains.

The types of cars in use by the General Omnibus Company are therefore four in number:—

(*a*) Double bogie truck (maximum traction), carrying 54 passengers.
(*b*) Long wheel base, single truck, double motor cars, carrying 49.
(*c*) Long platform, single truck, double motor cars, carrying 45.
(*d*) Trail cars carrying 57.

Some illustrations of the types of car in use by other Parisian companies at the time of converting to electric traction the General Omnibus Company's network are shown in the annexed figures. Fig. 3 represents a maximum traction car on the Eastern Paris Tramway Company's system, having a weight of 14½ tons and carrying 59 passengers (25 standing, 34 seated). Fig. 4 shows one of the General Paris Tramway Company's cars with equal-wheeled bogies; one bogie has two motors. These cars weigh 18½ tons each, and carry 57 passengers—30 seated and 27 on the platforms.

The General Omnibus Company's cars are shown in Figs. 4 to 13, the following being a brief description of the vehicles represented:—Figs. 5 and 6 are the maximum traction truck cars of Class A, weighing empty 14·8 tons each. The height of the intermediate

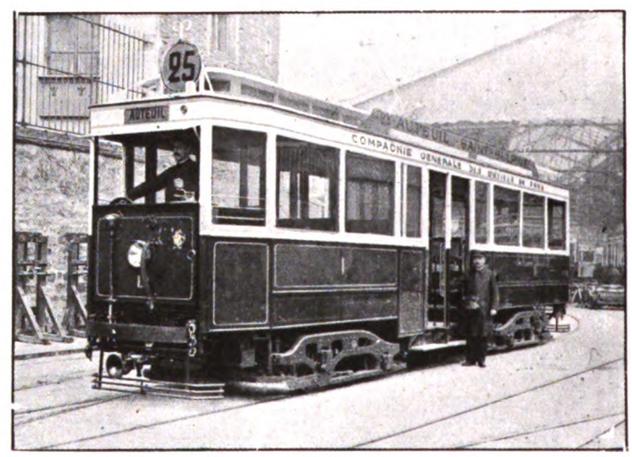

Fig. 5.—Car with Maximum Traction Trucks—Paris General Omnibus Company.

step from ground level is 12¼ inches, and the height from that to the central platform 9¾ inches. Sliding doors give access to the car interiors. Details and a general view of truck are given in Figs. 7 and 8.

Class B—the long wheel base car—is shown in Figs. 9 and 10, and a perspective view of the truck itself in Fig. 11. The weight empty is 13½ tons.

Cars of Classes C and D are represented in Figs. 12 and 13. The first-named weigh 12½ tons each; the latter 7·9 tons. The weights of the motor-equipped cars thus range from 5 to 5½ cwt. per passenger, inclusive of the most complete electric equipment, air brakes with automatic air compressor, and double spring suspension, so that the dead weight cannot be called excessive, taking these features into account.

Amongst the special characteristics of the new rolling stock should be mentioned the following that are regarded as embodying valuable improvements in practice.

First, the car body longitudinal sills are all formed of steel plate in order to obtain strength and lightness, having in mind their great length and the need for dropping them in the centre to allow of centre platforms. They are, in addition, bent round at the ends

Digitized by Google

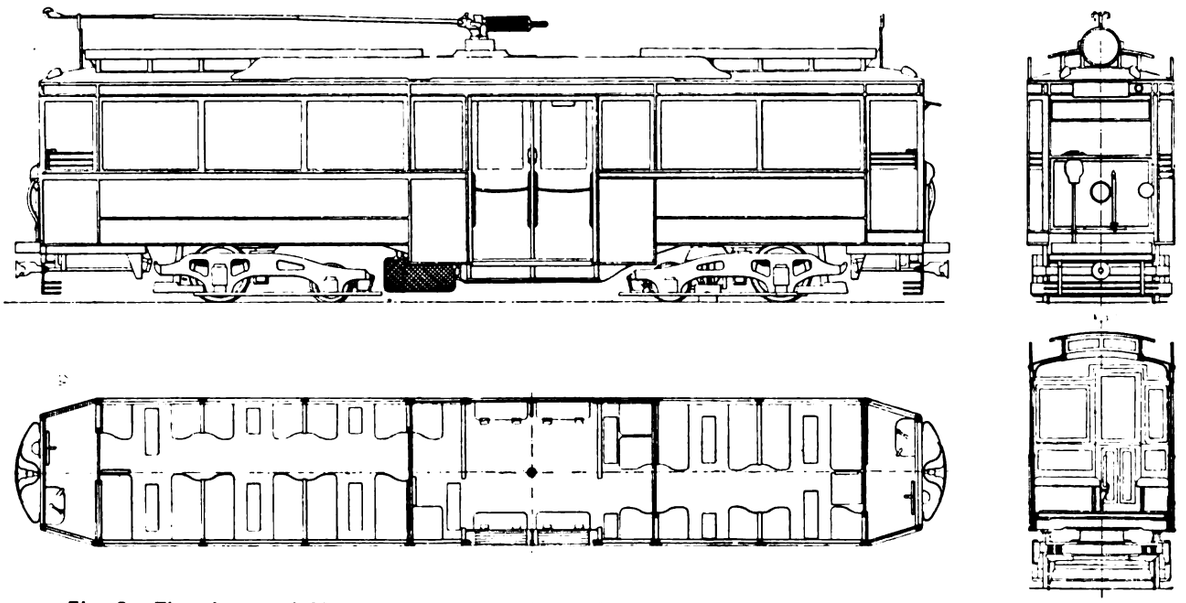

Fig. 6.—Elevations and Plan of Car with Maximum Traction Trucks.—Paris General Omnibus Company.

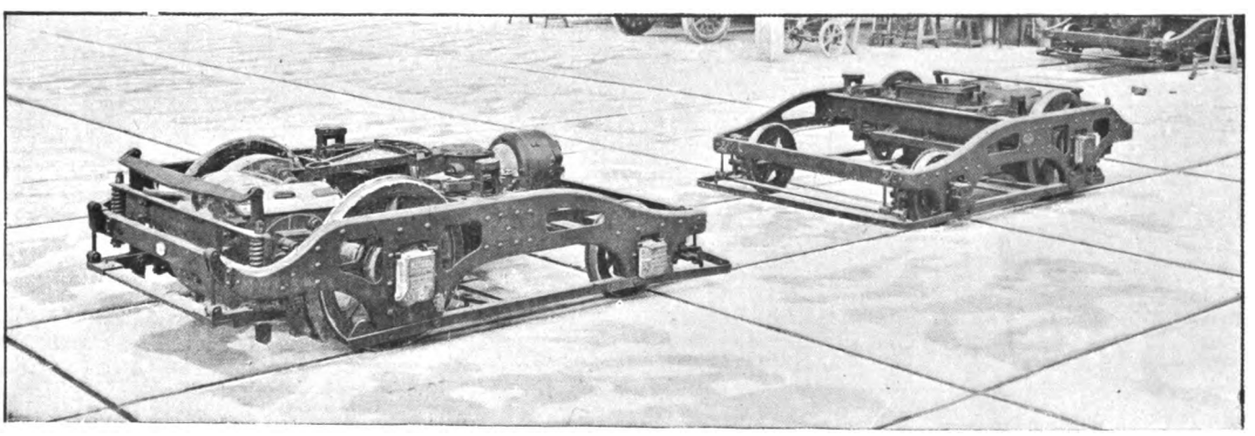

Fig. 7.—Maximum Traction Bogies—Paris General Omnibus Company.

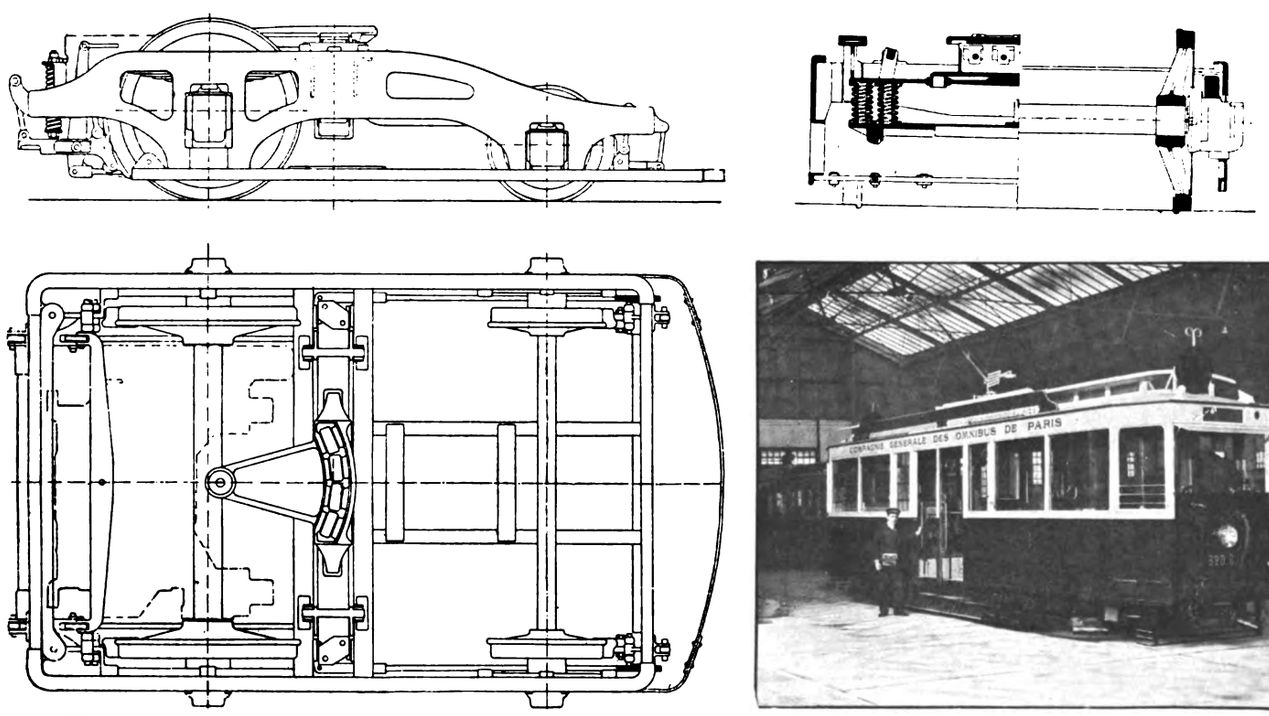

Fig. 8.—Elevations and Plan of Maximum Traction Bogies.

Fig. 9.—Single Truck Car with Extra Long Wheel Base.

Digitized by Google

to stiffen the platforms, and being entirely covered by the body, allow of some effort being made to preserve a pleasing external appearance to the car. An additional advantage lies in the facility thus offered for letting down to their full depth the car side windows, a matter of some importance in the summer.

Next, all motor trucks are provided with double spring suspensions, one being formed of leaf springs between axle-boxes and truck sills, the other of coiled springs mounted on a crossbeam at each end of truck. These will be noticed in the line drawings that illustrate the trucks.

The electric equipment throughout is by the French Thomson-Houston Company; motors are of two types, G.E. 216 for the long wheel base cars, and T.H. 523 for the maximum traction trucks. The respective weights are 22 cwts. and 25 cwts., not including gear-wheel or gear box. The controller has nine contacts, of which three are for shunting the motor fields coils, two in series and one in parallel. Taking into account the running notches in series and in parallel, without resistances being inserted, the motorman has five economical running notches out of the nine. Each car is provided with a main circuit breaker, two automatic switches, and two fuses.

The trolley pole arrangements are of the usual type, except that in case the trolley wheel runs off the overhead wire a catch at the base of the pole at once releases the tension and the trolley head descends to a level below that of the trolley wire, thus avoiding any danger to the latter. A slight pull on the trolley pole rope re-engages the pole base tension, and as soon as this takes place the full tension is re-established by releasing the pole rope. The wheel is then replaced against the wire.

To cope with heavy traffic on Sundays on the line running from the Louvre to Versailles, three-car trains are run. These comprise each two motor cars with a trail car in between. The motor cars in this case are furnished with multiple unit equipments, so that all four motors may be operated. Westinghouse air brakes and hand brakes also are provided on all cars. Compressed air is obtained from electric motor-driven compressors started and stopped automatically.

Car lighting is carried out normally by means of two circuits of nine lamps in series on each car, fed from the traction circuit. Emergency lighting is provided for by means of a small accumulator set charged from the traction circuit and feeding a special circuit, which includes the headlights and a small number of interior

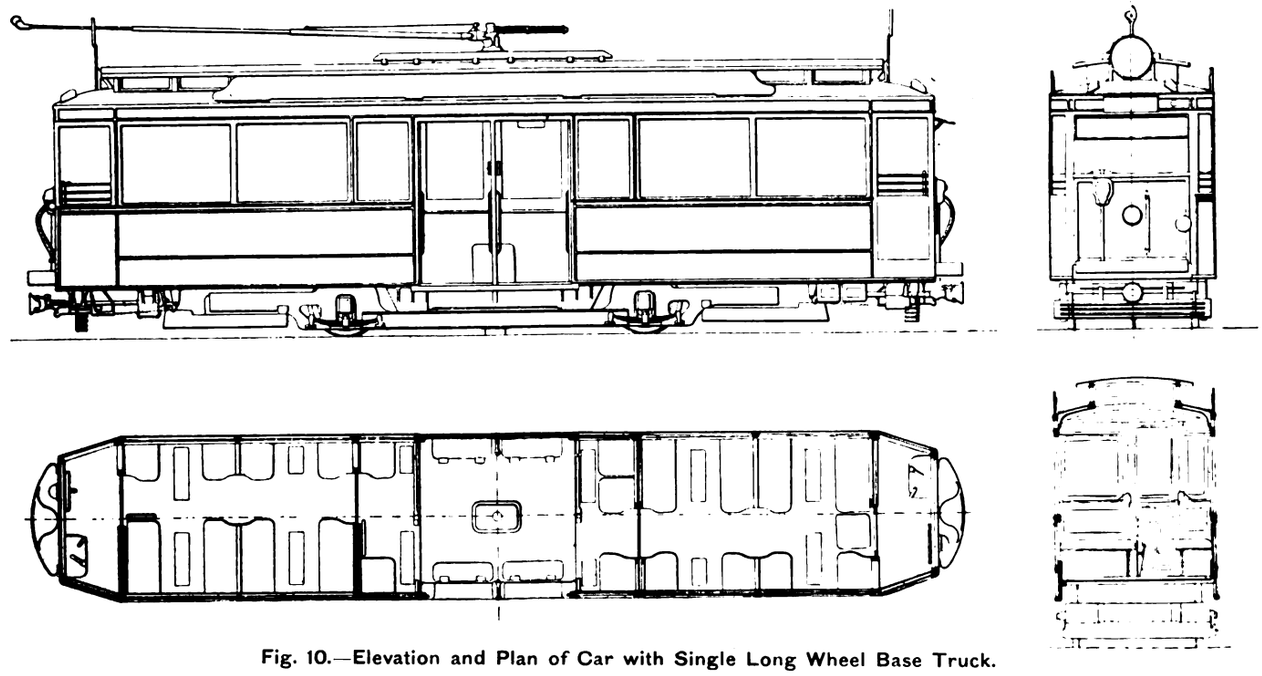

Fig. 10.—Elevation and Plan of Car with Single Long Wheel Base Truck.

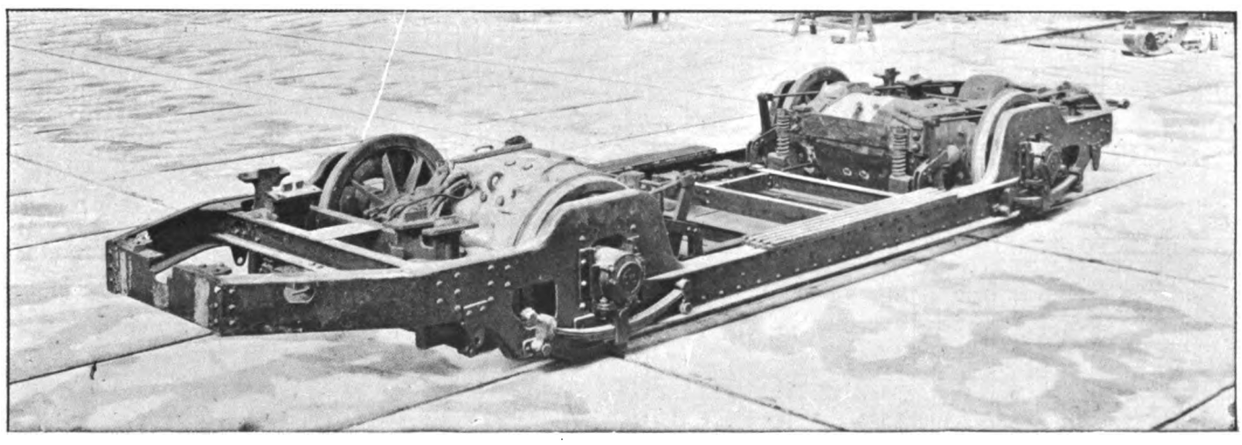

Fig. 11.—Long Wheel Base Truck—Paris General Omnibus Company.

Digitized by Google

lights, in this case with metal filaments for a pressure of 10 volts. In the event of the ordinary traction circuit being interrupted through breakdown of supply, the trolley running off, or failure of contact rails on the underground conduit sections, the battery is thrown into and out of action by a special solenoid with automatic arrangement for maintaining constant

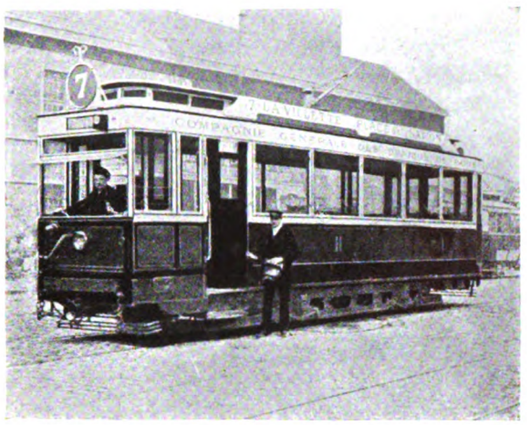

Fig. 12.—Car with Parallel Axle Truck.

polarity, an important matter on the conduit sections of the undertaking, where change of polarity is frequently necessary, and would otherwise lead to the battery being discharged into the line.

The heating of the cars is done by electricity, the current passing through the heaters being regulated so as to maintain as far as possible a temperature at

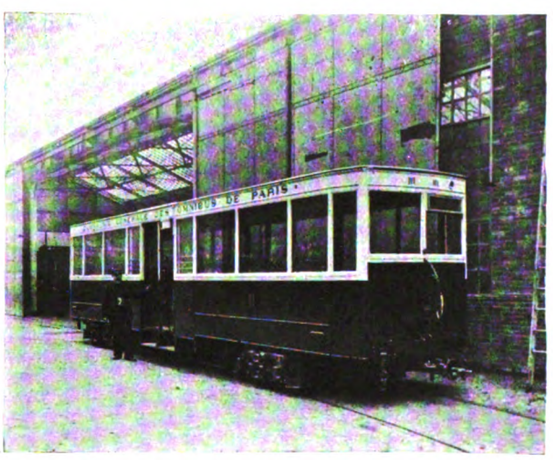

Fig. 13.—Trailer Car—Paris General Omnibus Company.

the heater face of 65 degrees above that of the surrounding air.

At the time when these details were prepared the company had actually in service a total of 1,050 cars, of which 200 were of the maximum traction type, 450 of the long wheel base type, and 400 trail cars.

FINANCING OF OVERSEAS CONTRACTS.

Board of Trade Committee Appointed.

The President of the Board of Trade has appointed the following committee to consider the best means of meeting the needs of British firms after the war as regards financial facilities for trade, particularly with reference to the financing of large overseas contracts and to prepare a detailed scheme for that purpose :—Lord Faringdon (chairman), Mr. B. P. Blackett, C.B., Sir W. H. Clark, C.M.G., Mr. F. Dudley Docker, C.B., Mr. G. Farrer, Mr. W. H. N. Goschen, the Right Hon. F. Huth Jackson, Mr. W. Leaf, the Hon. A. Mills, Mr. J. H. Simpson, and Mr. R. Vassar-Smith. Mr. Hartley Withers will act as secretary.

EMPLOYEES AND MILITARY SERVICE.

On June 24 there came into force the Military Service Act, which extends compulsory service to unattested married men up to the age of 41 years, unless exempted. After that date an application for exemption can only be made by the special permission of the local tribunal on special grounds, and these applications must be submitted within thirty days from June 24. Every eligible man who has not reported by July 24 will be in the position of an absentee.

Revision of the lists of reserved occupations has been made, including the cases of employees of generating stations. Two conferences took place between a deputation of the Tramways and Light Railways Association and a Board of Trade Committee on Reserved Occupations, with the result that the association has invited members in charge of generating stations to endeavour wherever possible to release men for the Services from the following occupations :—Meter readers, clerks (except chief clerks), assistant storekeepers, all cleaners employed in cleaning floors, walls, etc., in central stations, labourers (single men up to twenty-five or thirty years of age) employed on general labouring about a station, but excluding coal and ash handlers. The committee have thanked the deputation, and again urged that every effort be made to release men of military age, and that employment be given to discharged naval and military men, or to women.

Managers of a number of tramway undertakings have applied to local tribunals during the past few weeks for exemption of depot foremen, inspectors, motormen, fitters, switchboard attendants, clerks, stokers, paviors, night timekeeper, motor inspector, truck men, permanent way foremen, etc. The tramways represented included Torquay, Ramsbottom, Rawtenstall, Cheltenham, Southend, Rhondda, Wallasey, Midland Joint Committee, Chatham and District, Blackpool, St. Anne's and Lytham, Peterborough, York, Bradford, Coventry, and Nottingham. Periods ranging from one to four months were granted in many of the applications, and the manager at Peterborough was allowed six months. As it will be impossible to replace the great majority of the motormen, services will have to be reduced in the event of tribunals refusing to entertain applications for further exemptions. At Nottingham, for instance, only a month was granted to 21 motormen, all of whom are married, two older men being given three and four months.

The Coventry Tribunal suggested further reduction of the service. Mr. T. R. Whitehead replied that the department had to scheme to maintain the existing service with the help of fifteen voluntary drivers. The tribunal referred the list to the military representative for further consideration.

Brighton Corporation are endeavouring to solve the problem by following the example of Newcastle, Bradford, Birmingham, and Coventry, where a number of citizens have come forward to be trained as motormen. These drivers work in the early morning, in the evening, or on Sundays, and have performed very useful service. Mr. W. Marsh, the Brighton manager, has called for two dozen volunteers, and they will receive payment.

Glasgow Tramways Department continues to add to the number of stalwart women who are driving cars. At the end of May 106 women were so employed.

To the comparatively small number of tramways that have been able to come under the Munitions of War Act, 1916, the Aberdeen undertaking has now to be added. One result is that there are provisions to prevent strikes or lock-outs, while no employees can take up other employment until they are given a certificate of discharge.

Digitized by Google

FRONT EXIT CARS AT AYR.

The advantages of the front exit are at length being recognised. We have on various occasions called attention to the saving of time which would be effected if tramcar passengers were to leave from the driver's end of the car, thus freeing the other end for passengers entering. The Board of Trade do not now persist in objecting to this arrangement, as experience has shown that it is no more dangerous than the old method. In fact, the latter is more dangerous for the passengers entering, because they have to stand in the roadway waiting till all the passengers leaving have got out, and during that period they face the risk of being run down by some careless driver. The scheme whereby passengers leave by the front platform requires, of course, some modification of the car. The part of the front dashboard on the near side has to be removed, and a step provided, and in many cases the stair will have to be altered. The platforms then become somewhat similar to those of the old horse-cars, which were open on both sides. A movable bar or other barrier can be fitted to close the exits on the side of the car which for the time being is the off side. It is perhaps because of the changes required in the rolling stock that the front exit has not been more widely adopted in this country. In our issue of April 13 last appeared an illustrated description of the single-deck cars in Newcastle as modified by the addition of a front exit. We are now enabled, by the courtesy of Mr. W. Grant, general manager of Ayr Corporation Tramways, to give illustrations showing how the front exit scheme has been carried out on some of the top deck cars at Ayr.

Exit under Stairway Closed by Bar.

It is remarkable to find, in a description of a car built by the J. G. Brill Company for the Santiago Tramways, Chili, which appeared in our issue of April 5th, 1906, the following passage :—" Entrances are provided on both sides of the platform. The platform step facing the deck stairs is twice the width of that on the opposite side." These words apply perfectly to the Ayr car, as may be seen from the drawings on page 27, in which are set out principal dimensions, etc. An inspection of these and of the reproductions of photographs will make the whole arrangement perfectly clear.

Front Exit Car—Ayr Tramways.

Mr. Grant describes the scheme as a double exit one. He has found the double exits to be of very great assistance during the heavy rush traffic in the summer season, and at the time of the Ayr race meetings. The normal traffic in Ayr is not very great, but at times, owing to the number of visitors, it becomes almost overwhelming.

STATE REGULATION OF COAL CONTRACTS.

An Order in Council, published in a supplement to the *London Gazette* on June 29, provides for the addition of the following to the Defence of the Realm regulations :—

It shall be lawful for the Admiralty or Army Council, or the Minister of Munitions, or any person authorised by them to act in their behalf, after consultation with the Board of Trade, to give directions as to the priority to be given the execution of orders, or contracts for the supply of coal or coke with a view to securing precedence for orders, or contracts, in accordance with their national importance, and the owner, agent, or manager of any mine, or any other person affected by the directions who fails to comply with any direction so given, and any person who in any certificate or document given, or issued, for the purpose of securing priority for any order or contract in pursuance of such directions, makes any false statement or false representations, shall be guilty of an offence against these regulations.

COAL SUPPLY TO PUBLIC UNDERTAKINGS.

The Board of Trade on June 29 received a deputation representing gas and electricity undertakings in reference to the difficulty of obtaining coal and in making contracts at suitable prices. Mr. Marwood replied that the Board were prepared, if approached, to use their influence with the District Coal Committees and to see that prices were justified by the Price of Coal (Limitation) Act.

ENGINEERING TRADES AFTER THE WAR.

The Board of Trade announces that in view of the wide range of the industries included within the scope of the committee appointed to deal with the position of the iron, steel, and engineering trades after the war, the president has sub-divided the work between the two following committees :—

Engineering Trades.—Sir Clarendon Hyde (chairman), Mr. A. Balfour (Sheffield), Mr. H. J. Hobson, Mr. W. B. Lang, Sir Hallewell Rogers, Mr. H. B. Rowell, and Mr. D. Vickers. Mr. A. F. Ilsley will act as secretary.

Iron and Steel Trades.—Mr. G. Scoby Smith (chairman), Sir Hugh Bell, Messrs. A. Colville, J. Cox, J. Garvin, G. M. Ritchie, H. Summers, and B. Talbot, Mr. C. R. Woods, of Bradford, acting as secretary.

Digitized by Google

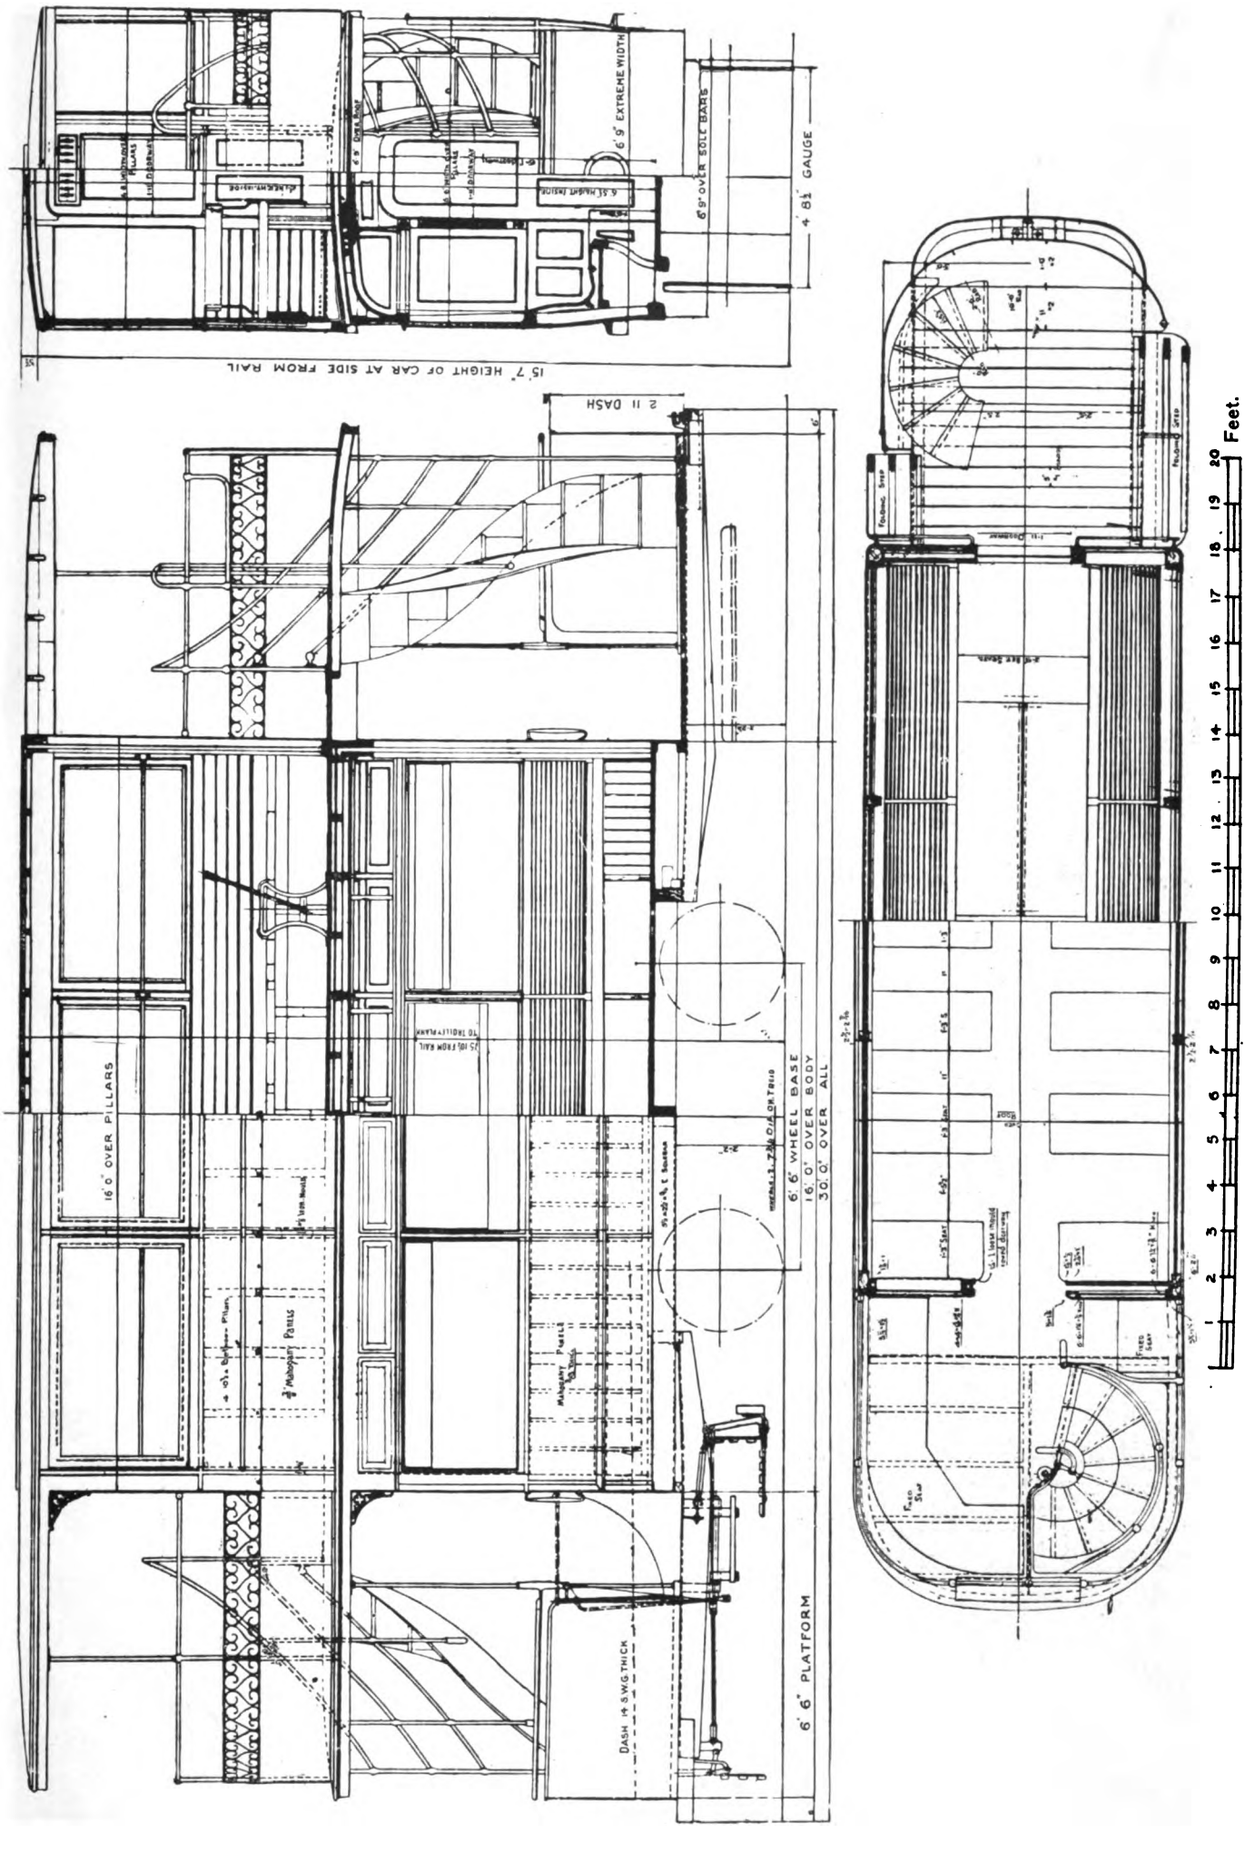

Elevation and Plan of Ayr Corporation Car with Front Exit.

Digitized by Google

THE
Tramway and Railway World

FOUNDED IN 1892 AND PUBLISHED BY
THE TRAMWAY AND RAILWAY WORLD PUBLISHING COMPANY, LIMITED,
AMBERLEY HOUSE, NORFOLK STREET, LONDON, W.C.

SUBSCRIPTION:

THE TRAMWAY AND RAILWAY WORLD can be obtained, post free, at the following rates:

FOR THE UNITED KINGDOM—Twenty-five Shillings per annum

THE ANNUAL SUBSCRIPTION INCLUDES 64 ISSUES, OF WHICH 12 ARE ILLUSTRATED NUMBERS.

FOR ALL PLACES ABROAD—Thirty Shillings per annum.

Single Copies—One Shilling (Postage, 2 pence—Abroad, 5 pence).

THE EDITORIAL AND PUBLISHING OFFICES OF
THE TRAMWAY AND RAILWAY WORLD
ARE AT AMBERLEY HOUSE, NORFOLK STREET,
LONDON, W.C.

Telephone No.: GERRARD 2048.
Telegraphic Address: "TRAMIGRO, ESTRAND, LONDON."

LONDON, JULY 13, 1916.

The Comfort of the Passenger.

Within its purposely limited scope the annual conference of the Tramways and Light Railway Association, held on June 30, was eminently successful. The proceedings lasted only a few hours, but the comments of members from all parts of the country indicated that the occasion provided sufficient of interest and stimulus to make attendance well worth the effort required in these days of stress to cope with anything beyond the daily task. How difficult routine work has become was clearly indicated in the interesting review of the year's activity given by Mr. Arthur Stanley, which will be found in full in the following pages. It is a record that shows how great services the Association continues to perform for the industry. The single session permitted only one paper to be read, and it was fitting that that should present some departure. It was the comfort of the passenger viewed more or less from the public standpoint to which Mr. Robson invited consideration, instead of to some point of tramway administration from within. That is not to say that the comfort of the passenger is not considered in ordinary tramway deliberations. Tracing matters back to fundamentals, all tramway engineering and operation are directed first to the conveyance of the passenger, and second to his comfort. Thus indirectly the comfort aspect lurks consciously or unconsciously at the root of most tramway problems; for the greater the comfort the greater the inducement to the public to use the cars. Nevertheless the placing of this question of comfort in the foreground, and the consideration of all other tramway questions as a means to this end, was as novel as it was praiseworthy. Mr. Robson's paper opened by the bold assertion that the comfort of the passenger has not always been sufficiently considered, and the value of the numerous suggestions which he made is undeniable. We can refer here to only a very few of them; readers may study the full text of the paper and the discussion thereon elsewhere in this issue. The condition of the track is a point of the utmost importance for the comfort of the passenger. It is true that during the war it is not practicable to indulge in extensive track renewals, but Mr. Robson was, no doubt, looking to the time when normal conditions will be restored. A good deal can be said for improvements in trucks and brakes, but that means special expenditure, which on any extensive scale must also be postponed. It is unfortunate that powerful brakes capable of being applied by the exercise of very little muscular effort on the part of the driver are not more extensively in use. A brake of the kind would be specially welcome at the present time.

* * * * *

Mr. Robson advocated cross seats on the lower deck instead of longitudinal ones, both as being more comfortable and because they more readily insure the full occupation of the seating capacity. In the discussion, Mr. Hatton, of Newcastle, pointed out that on his system they had to change cross seats to longitudinal in order to allow room for more standing passengers. Of course that does not promote the comfort of the passenger, and it may be regarded as a war emergency expedient. There can be no question that Mr. Robson's advocacy of rattan spring seating instead of hard wood will meet with approval, especially for those lines where the track is not all that it should be in peace times. One of the most important improvements advocated was the front platform near-side exit. Mr. Robson's remarks in favour of this arrangement met with general favour.

Digitized by Google

It has often in the past been advocated in these pages ; and now that Board of Trade restrictions have been withdrawn, we ought to see the reform widely carried out. With most types of car the alterations required would not be very expensive. Such an arrangement certainly adds immensely both to the comfort and safety of the passenger, and it also cuts down the duration of stops at busy points enormously. Mr. Hatton, who, as described in a recent issue, has already adopted the idea, was able from experience to testify to the great value of the front exit. He added there had not been a single accident associated with the front exit cars, and that as soon as labour conditions permitted more cars are to be adapted. It was surely by irony or grim humour that in a discussion on the comfort of the passenger the question of cars with no seats at all should have been mooted by one or two members. The object of this proposal is to enable more passengers per car to be carried in munition areas, the workmen all standing and packed together as close as may be. The idea, like many other expedients now forced upon us, has its value in war time, but is not expected to have an enduring popularity in happier days. Mr. Robson's paper contained many interesting suggestions for improving the internal appearance and the ventilation of cars, and prompt attention should also be given to his proposal for the abolition of unnecessary stopping places. That is a reform that will be of value for all time. Shorter running time is an advantage well worth the sacrifice entailed by a little more pedestrianism.

More Efficient Training.

The representatives of tramway and omnibus undertakings who visited the training school of the London General Omnibus Company could not have come away without feeling grateful to Mr. H. E. Blain, the operating manager of the Omnibus and Underground Companies, for the opportunity of learning what is being done by these great companies in securing the safety of the public. Never in the history of the Tramway and Light Railway Association has a more instructive two hours been spent than on the occasion of the visit to the Milman Street training depot. Those who enjoyed that privilege owe a duty to their undertakings and to the public to see that the work which has been so well initiated by Mr. Blain is carried to full fruition elsewhere. In other words, the use of the cinematograph in the imparting of safety lessons to employees and increasing their general efficiency, ought to be taken up under the joint auspices of the Tramways and Light Railways Association and of the Municipal Tramways Association. With the aid of the tramways companies of the London Traffic Group, the L.G.O. Company have rendered a public service in a double sense. First there is the triple benefit to public passenger undertakings, to the users of their vehicles, and to the general public arising from the inculcation of "safety first" principles. Secondly, the films serve to revive traffic observances that were in danger of being forgotten. We refer to the rules of the road for tramcars and omnibuses. The omnibus driver has not always paid heed to the rule requiring a driver to extend his arm when he is about to pull up or to turn a corner ; in London nowadays this precaution is seldom forgotten. A plea has often been advanced that tramcar drivers should be provided with mechanical means of giving a signal. While the suggestion may not be a feasible one, there is no reason why conductors should not extend an arm whenever they ring the stopping bell from their platform. We are convinced that the use of films for the instruction of tramway employees has only to be mentioned for a joint committee to be appointed, and that the result of their labours would prove as satisfactory as the work of Mr. Blain and his assistants has been. The testimony of the Omnibus Company is doubly favourable. The films have been of service in teaching drivers and conductors to become more quickly efficient in this period of stress, and there has been a marked diminution in the number of accidents in which their vehicles have been involved. This means a gain to the public as well as to the coffers of the company. The management, indeed, may claim to have beaten the Americans in the thoroughness of their work ; for the reduction of accidents has exceeded the rate recorded in the case of the electric railway that last year won the medal given for annual competition in the United States.

Digitized by Google

TRADE AFTER THE WAR.

Success of the Economic Conference.

The International Economic Conference of the Allies in Paris was more successful than the most sanguine had ventured to hope. The momentous resolutions at which it unanimously arrived will have far-reaching consequences, and must greatly encourage those who are not unnaturally anxious as to the course of trade development after the war. The resolutions are more definite, more favourable to the fostering of the trade of Britain and her Allies, more opposed to any resumption of German trade permeation and domination than could confidently have been looked for. Of the determined attitude of the representatives of our Allies there was no doubt; the question was whether the British delegates would back them up fully, seeing that a large proportion of the members of His Majesty's Government are—or shall we say have been—pronounced doctrinaire free traders. But not only did the British delegates support the views of their foreign colleagues—they did more; they took an active part in formulating policy in that they framed some of the resolutions. It is plain that our Government have fully realised that old fiscal controversies are dead, that the question is not one of free trade versus protection, but that it is a question of self-preservation, of the preservation of British industries against keen, insidious, and malignant competition with hostile political motives behind it. The benefit which has accrued from Mr. Hughes and Mr. Bonar Law being included among the British representatives is probably greater than can be estimated.

Several members of the Government had from time to time indicated, though in very general terms, that they realised that the old *regime* had passed away, and that things must be looked at in a new light. The Prime Minister himself, speaking at Ladybank on June 14, the day of the opening of the conference and just a week before the resolutions of the conference were made public, used these words in regard to the relations of the mother country and the dominions:—

> With such an Imperial record it will never be possible, in my judgment, to revert to our old methods of counsel and of government. The fabric of the Empire will have to be refashioned and the relations, not only between Great Britain and Ireland, but between the United Kingdom and our Dominions, will of necessity be brought under close and connected review.

That related more particularly to Imperial government, but in that Imperial trade is involved.

The Resolutions and Their Application.

We may pass over the resolutions for prohibiting trading with the enemy during the war and for tightening the blockade. These are as a matter of course. Quite admirable also are the resolutions for transitory measures of trade reconstruction of the allied countries. Among these it should be noted that none of the Allies are to be hampered by any claim put forward by the enemy Powers to most-favoured-nation treatment. To prevent dumping during the transitory period the Allies are to fix a length of time during which the commerce of the enemy Powers shall be submitted to special treatment. Most important are the permanent measures of mutual assistance and collaboration among the Allies. The latter are to render themselves independent of enemy countries as regards raw materials, manufactured articles, and financial, commercial, and maritime organisation. Among means suggested are subsidies of enterprises, financial assistance for the encouragement of scientific and technical research, and the development of national industries and resources, and customs duties or prohibition. The Allies are to adopt such measures as may seem to them most suitable for the purpose, having regard to the principles which govern their economic policy. Other resolutions are designed to facilitate mutual trade relations, to assimilate patent laws, and to unify the efforts of the Allies in other ways.

The question now is, what application is to be made of the resolutions? Here we would single out at once the rock on which this country may possibly split if the old fiscal theories are allowed to have weight. It lies in the words quoted above, "having regard to the principles which govern their economic policy." The resolutions at present are not binding on any of the allied Governments. They have to be considered by them, and in so far as approved some of them at least will require legislation which means the approval of specific means by the Legislatures concerned. France has already accepted the resolutions, and it does not appear likely that there will be difficulty so far as the other Allies are concerned; but it yet remains to be seen how far our Government will adopt the crucial proposal to which the quoted words apply. If it is decided to adopt the resolution, the exact nature of the concrete proposals following thereon may afford a field for controversy. However, the country, Parliament, and even the Government, have travelled so far since this war began that one may believe they will not hesitate to take strong steps to preserve and develop trade and all our industries. The Government should take to heart the advice of Mr. Hughes. That may be summed up in the words prompt and decided action. And there is good hope, because Mr. Bonar Law says he is certain that the resolutions will be adopted by the Government and the House of Commons.

Close of Mr. Hughes's Visit.

The visit of Mr. Hughes, the Premier of Australia, has come to an end, and it has truly been a remarkable mission. When he arrived a few months ago he was comparatively unknown in this country; he leaves it one of the best-known and admired of our Imperial statesmen. He has been a vivifying force among us in stirring up the Imperial spirit, and in urging the necessity of trade organisation and development so as to resist German encroachment. Lord Rosebery has described him as a hurricane speaker. He is a Labour leader and he is a Protectionist—a combination strange to the British working man. He has addressed trade unionists, manufacturers, traders, politicians, and has everywhere been received with enthusiasm. His empire-building ideas have awakened a responsive chord everywhere. The enthusiastic farewell which Mr. Hughes received at a dinner given by the Australians of London on June 23 afforded Mr. Bonar Law the opportunity, in a warmly eulogistic speech, to make the statement mentioned above that the Government and the House of Commons will adopt the conference resolutions. Mr. Hughes, in his reply, also expressed the belief that the conference resolutions will be carried into effect, and that they will contribute to the making of the greatest economic alliance the world has ever seen. It was made plain also from the speeches that the home and dominion Governments will also take care of the question of a closer Imperial unity, just as Mr. Asquith, in the passage already quoted, foreshadowed a Parliament and Government for the whole Empire.

The British Engineers' Association has made a strong appeal to all engineering firms to combine for the better organisation of the industry after the war. It already includes over 300 firms. The Association will urge the Government to place the industry in a position to compete successfully with enemy countries after peace has been restored.

Digitized by Google

Tramways and Light Railways Association

Eighth Annual Congress, held in London, June 30, 1916.

The annual general meeting and congress of the Tramways and Light Railways Association were held on Friday, June 30, 1916, at the Westminster Palace Hotel. The Hon. Arthur Stanley, M.P., chairman of the Council, presided, and there was a fair attendance of members. The Secretary, Mr. A. de Turckheim, having read the notice convening the meeting and the auditor's certificate, the Chairman moved the adoption of the report and accounts.

The Hon. Arthur Stanley's Address.

The Chairman said:—We have followed last year's precedent and confined our annual congress to one day instead of making it a two or three days' gathering as in pre-war times. As most of you are very busy, we decided to take the business meeting in the afternoon, so as to enable some of our out-of-town members to travel up in the morning, and as we are having our informal dinner to-night—my friend, Mr. England, reminds me that there are to be no speeches—they will only have to spend one night away from home, which is a good thing for everybody, and I hope that these arrangements will meet with their convenience. I extend to you all a hearty welcome, and I trust that our meeting to-day may prove a pleasant as well as an instructive one. I am much pleased to see Mr. Bellamy here, the son of my old friend the late Mr. Bellamy, of Liverpool, who introduced me to the tramway world; he has been through the whole of the Gallipoli affair, and we are all glad to see that he is none the worse for it. (Hear, hear.)

I will now proceed to make a few remarks on the report and accounts. The revenue from subscriptions amounted to £775, against £832 last year. This is a falling off of some £60, which is due to the fact that a number of our members are away on war service, and we all sincerely hope that after this war is over they will return safe and well. The expenditure for the year amounted to £635, against £822 last year, a reduction of some £180, due chiefly to the fact that we incurred no expenditure on our congress in 1915, and generally practised strict economy all round. Adding £14, being interest on bank deposit and War Loan, and writing off some £30 on subscription account, we show a net excess of revenue over expenditure of £125 15s. 9d. during 1915; this, added to the credit balance brought forward from previous years, gives us a total balance of £430 to carry forward. (Hear, hear.) As I told you last year, £300 of this we invested in 4½ per cent. Government War Loan. I fear that the current year will show a further falling off in our subscriptions, but as long as we can keep our receipts higher than our expenditure we shall be all right. It is difficult to secure new members under present conditions, but if any of you can induce some of your friends to join the association you will be assisting us very much. There are still a great many men connected with the industry who so far have not joined us.

I have again to refer to the loss of some old friends since our last meeting. One of our very earliest members, Sir Charles Rivers-Wilson, died a few months ago. You will all remember that he was our first president in 1897, and to the last he took a lively interest in our affairs, although owing to his great age, 85, he did not take any active interest in our work during the last few years. We have lost also Mr. Robert Hammond, one of the pioneers, who assisted at our last congress at Newcastle. We extend our heartfelt sympathy to their relatives, to whom suitable letters of condolence were sent at the time. I should like to add one word of sympathy and congratulation to our old friend, Mr. Fell, who happily is now recovering from a long and severe illness. I hope we shall very soon see him among us again. (Hear, hear.)

Coming back to the affairs of the association, I think that it is a matter of congratulation that after a year and a half of war and of difficult conditions, we should still have been able to add £125 to our reserve fund. Although we have not made a great stir we have been active in many directions. Owing to the war, new conditions have arisen, new legislation has been passed, and many circumstances affecting our business have had to be met and dealt with. The most serious problem to confront us perhaps was the loss of employees. Certainly I think we may pride ourselves on the fact that the tramway industry has done its share in providing the nation with men to fight its battles. On some systems 40, 50, and 60 per cent. of the staffs joined H.M. forces, or some department connected with the war, and managers had to do the best they could to find substitutes or to work their systems with greatly reduced staffs. Much confusion arose in the early days owing to the establishment of various public bodies, committees, etc, to deal with recruiting, and it was not always easy to know who were the proper authorities to approach with a view to retaining indispensable men. We felt that in other ways, too, but matters have settled down now, and we know where we stand. The question of employing women conductors was faced some time ago, and they are now in almost universal use with, I am told, satisfactory results. Indeed, women are now taking the place of men as drivers on some of our systems where traffic is not very dense, and where there are no gradients or complications of brakes. That they will come into general use as drivers does not seem at all likely. Driving a tramcar is a very different thing from driving a motor car; the strain is not one which should be placed upon women, nor would it be to the public safety.

The supply of materials has engaged our serious attention, and we were fortunate in being able to arrive at a satisfactory arrangement with a committee of manufacturers for the delivery of steel tires. The question of rails is more difficult, and is engaging the attention of one of our committees. Then there is the question of supplies of paper for tramway tickets. In this matter we acted with the Association of Motor Omnibuses, and we hoped to be able jointly to convince the members of the Royal Commission on Paper that an exception should be made in the case of paper manufacturers supplying tramway and omnibus tickets, and that the Royal Commission would grant them a licence guaranteeing a greater import than two-thirds of the quantity imported in 1914. In this we were disappointed, the Commission having refused to receive our joint deputation which proposed to state our case. Our committee consulted with the various ticket makers, with the object of finding a way out of the difficulty, and we recommended to our members, as the only means of economising paper, to endeavour wherever possible, to reduce the size of their tickets. I believe that this is pretty generally being done. Then there is our old friend, the Finance (No. 2) Act, 1915, and excess profits. I suppose that most of you spent many weary hours over this puzzling Act. After much discussion and voluminous correspondence, the association decided to make formal application to the Board of Referees on behalf of its company tramway members under Section 42 for an increase of the statutory percentage from 6 per cent. to 12 per cent. We think this is a fair percentage in the case of undertakings having a limited tenure, and our committee of experts are prepared to substantiate our contention if called upon to do so. The matter is under consideration at the present time.

At a meeting such as this, I think reference should be made to a piece of legislation which, although not dealing with tramways, will, I think, affect a good many of us; I mean the Local Government (Emergency Provisions) Bill, 1916, Section 20 of which prohibits the establishment of new routes for motor omnibuses without the consent of the highway authority, or where such consent is unreasonably refused, without the consent of the Local Government Board. Well, gentlemen, there may be differences of opinion in this room as to the merits of this section. We all know the old veto which has so long been a thorn in our tramway side, and we can extend, perhaps, some sympathy to a kindred industry on the birth of this new veto. Where I think we as tramway men can all agree is on this point—if the motor omnibus business is to be made to contribute towards the maintenance of roads, it would only be fair to include all heavy commercial vehicles, which cause far greater damage to the roads than motor omnibuses. Instead of piecemeal legislation we, as an association, would have preferred a general Act applying to all users of the roads, and apportioning to each section of traffic its fair proportion of the cost of maintenance. It is impossible to take up a thing like this during a war. I think after the war is over, and they take the question into consideration in the various departments, we ought to concentrate on this point, and see that the burden of the cost of the roads is fairly divided among all those who use the roads. At any rate, we have been able to work harmoniously with the various motor omnibus interests; of course many tramway undertakings to-day own and run motor omnibuses.

Digitized by Google

I now wish to refer more particularly to the case of allowances for depreciation of motor omnibuses for income-tax purposes. A joint committee, consisting of members of our association, the Municipal Tramways Association, the two Motor Omnibus Associations, and the Association of Municipal Treasurers, under the chairmanship of Mr. Howley, a member of our council, after many months of hard work submitted their report to the authorities at Somerset House, and we all hope that as a result of that report we shall obtain a standard method of assessment for motor omnibuses, in the same way as we obtained a standard method for tramways some few years ago. The Board of Trade have recently appointed an Electrical Committee to go into the whole question of the condition of the electrical industry, and to hear evidence. I think you will like me to extend our sincere congratulations to our late vice-chairman, Mr. James Devonshire, upon his appointment as a member of that committee. (Hear, hear.) I do not think they could possibly have selected a better man or one better qualified for the position than Mr. Devonshire, and I think we have to congratulate ourselves and the committee on his selection. Mr. Devonshire has devoted many years to the interests of electricity, both in regard to tramways and to power supply. The council think it is most important that the tramway industry should be represented at the inquiry now being held by the Electrical Committee, and I wish to propose to the meeting that Mr. Stephen Sellon should be invited to give evidence on our behalf. (Applause.) Mr. Sellon has spent over 30 years in the tramway business, and it may safely be said that what he does not know about it is not worth knowing. Our interests will be in safe hands, and I hope you will all agree to my proposal, and that Mr. Sellon will consent to accept the task. (Hear, hear.) I think that brings me to the end of my remarks. You will all realise that I have not been able to give very much personal attention to the work of the association this year, but thanks to our very admirable secretary, Mr. de Turckheim, I have been posted as to what has been going on. I should like to say again that I think it is a most satisfactory thing in a year like this that we should be able to show such good results. If the society can weather 22 or 23 months such as we have had since the outbreak of the war, I think it shows that we are in a very strong and flourishing condition. I now beg formally to move "That the report and statement of accounts for the year ended December 31, 1915, be approved and passed." I will ask Mr. England to second that, and after that if there are any questions I will try and answer them. (Applause.)

Mr. HARRY ENGLAND.—I have much pleasure in seconding the adoption of the report.

There were no questions, and the motion was carried unanimously.

The CHAIRMAN.—Our Articles of Association require that one-third of our members of council should retire for a period of at least one year, and those who retire to-day are Messrs. Shirreff Hilton, Baker, Dugdale, Goodyer, Williams, and J. Cameron. We thank them very much indeed for the assistance they have given us during the last three years. We are always very sorry to part with old friends on the council, and we hope to see them back again on the council at the earliest possible stage. Your council have unanimously decided to recommend for election to these vacancies the following gentlemen :—Mr. A. H. Beatty, of Messrs. Balfour, Beatty and Company. I deeply regret to hear from our secretary that Mr. Beatty lost his son at the front some few days ago ; I am sure you will wish me to convey the most heartfelt sympathy of this meeting to Mr. Beatty and his family. (Hear, hear.) Mr. Bulfin, general manager of the Bournemouth Corporation Tramways ; Mr. Vincent Edwards, general manager of the Hastings and District Tramways Company ; Mr. A. W. A. Chivers, British Electrical Federation, Limited ; Mr. H. M. Sayers, consulting engineer, an old colleague whom we welcome back to this country ; and Mr. G. M. Harriss, the new general manager of the Dublin United Tramways Company, whom we congratulate on his recent promotion, and we congratulate him still further on the fact that his tramways did not suffer, or were not badly damaged, during the late riots. We welcome these gentlemen, whose assistance in our work in the future will be valuable. Is it your pleasure that we elect the six gentlemen whose names I have mentioned *en bloc* ? If so, I move that they be elected members of the council.

Mr. A. V. MASON formally seconded, and the motion was carried unanimously.

The CHAIRMAN.—The next resolution, for the appointment of auditor, should be proposed by a member of the association.

Mr. J. W. DUGDALE moved "That Mr. A. W. Chambers, the retiring hon. auditor, be re-elected for the ensuing year, and that the thanks of the association be given to Mr. Chambers for so kindly placing his valuable services at our disposal."

Mr. C. W. SHEPHERD formally seconded, and the motion was agreed to unanimously.

The CHAIRMAN.—I have now to ask that you will be good enough to excuse me ; I have another meeting to attend, and I am only too sorry that I cannot wait to hear Mr. Robson's paper, but I hope to have the pleasure of meeting you all at dinner this evening.

Mr. HARRY ENGLAND, vice-chairman of the association, then took the chair, and called upon Mr. Robson, who read the following paper :—

TRAMWAY TRANSIT AND COMFORT:
A PLEA FOR THE PASSENGER.

By W. TUKE ROBSON

(*General Manager, Southampton Corporation Tramways*).

In dealing with a subject not strictly connected with war time difficulties, I feel that an apology is perhaps needed, but I am sure that all those engaged in the control of tramway undertakings will feel with me that to attempt to write a paper on the complexities and difficulties of the present time would be a gigantic task, and one which could not be adequately dealt with in the short space of time available. Each undertaking is bravely engaged in fighting its own battles, and the publicity afforded by the generous assistance of the Tramway Press and the two Tramway Associations cannot be too highly praised. Moreover, the subject of this short paper is not wholly dissociated with the present situation when one considers the necessity for increasing the life of existing permanent way, and also the fact that the termination of the war will mean, in many cases, the acquiring of new rolling stock. This will afford tramway authorities a glorious opportunity of striking out new lines in directions free from hide-bound obsolete design.

Personally I feel that the opportunity to escape for even an hour from the vagaries of the woman conductor, and the wiles of the war bonus, will be warmly welcomed by those of us who are visibly ageing through the strain and stress of war time tramway administration.

The object of this paper is to endeavour to point out that the passenger has not always been sufficiently considered in the prosperous times of the past. He has had a cheap ride it is true, but not always a comfortable one, and in making plans for the future it might be well to consider how his comfort may be increased, not particularly because he deserves it, but because by such means he might be induced to ride more often.

THE TRACK.

Just before the outbreak of war I rode down a steep hill on a certain tramway system in the upper saloon of a car. The speed was not particularly excessive, but the condition of the track, together with the condition of the car, turned that ride into a species of nightmare. We were hurled from side to side as the car rocked and bumped its way downwards, and by a merciful Providence reached the bottom, bruised but whole, with that feeling of thankfulness which I imagine one would experience after successfully emerging from a railway collision.

On reaching home I looked up the annual report of this undertaking, and found that the sum of, roughly, £20,000 had been allocated to the relief of rates out of the surplus profits in the last four years alone. A small proportion of this amount would have been much better spent in track renewals.

At the present time track renewals are difficult, if not impossible, but much can be done in the way of repairs of a permanent nature. It is surprising that so many systems have not done more to abolish hammered joints, considering the facilities which exist in the way of thermit and arc welding. There has been, I am afraid, a tendency to patch up, instead of getting rid of the trouble once and for all by effecting a lasting and permanent abolition. The impossibility of obtaining new rails at present should only serve to wake us to the necessity of increasing the life of existing track by one or other of the means which are at our disposal, and at the same time dispose of a great deal of the disturbing noise which so many systems suffer from.

RAIL CLEANING.

The question of rail groove cleaning has never received the consideration which is due to this method of reducing noise, and in the only town where I have personally known it to be systematically carried out, the beneficial effect caused by throwing the refuse out of the groove on to the paving was modified by the intense irritation which this well-meaning policy caused the borough engineer. One hopes that in the near future vacuum cleaning will bring about the desired result.

TRUCKS.

It is, however, in the direction of rolling stock that the hopes of a passenger desiring a more comfortable ride must principally be centred, and one cannot help feeling that the design of the tramway truck has not kept pace with that of railway practice in this respect. We are mounting our cars on practically the same truck as we did fifteen years ago, and although we may add various devices in the hope of gaining flexibility and radial action, it must nevertheless be admitted that a really comfortable riding truck is not yet an accomplished fact.

BRAKES.

One thing in particular always strikes one—that the principle of the hand-brake should show practically no improvement in all the years that have passed. To all intents and purposes it is the same brake as on the horse-cars twenty years ago, and the unpleasant jarring action is only intensified by the greater speed and weight of the modern car, to say nothing of the extra elbow grease required by the operator. The various devices of inserted gearing have

Digitized by Google

relieved this to a certain extent, but have not improved things from the point of view of those travelling in the car. An interesting experiment is being made at Huddersfield at the present time, in the nature of a brake drum-keyed on an extended armature shaft in the same way as the pinion, with a Ferodo-lined band-brake operated in the usual way by means of the brake spindle. The advantages of such a brake are obvious, and in actual practice it is proving a great success. I am indebted to Mr. R. H. Wilkinson, the general manager at Huddersfield, for the opportunity of inspecting this brake of his design, and for permission to mention it in this paper. There would appear to be quite a movement in the direction of improved brakes at the present time, and similar efforts should be applied to the whole truck. It is quite certain that the easy, comfortable ride one obtains in modern electric railways serves to show the need of improvement in tramway truck design.

Seating.

The longitudinal seating of the usual British car, and the wearisome cry of "Move up, please," or "Sit closer together, please," makes one wonder why the use of cross-seats in the lower saloon has never become more common. The advantage of being able to tell at a glance if any seat is available is very obvious, and there is no sacrifice of capacity, as those who have had experience can testify. A 24-passenger cross-seat car holds 24, whereas on a longitudinal-seated car the best conductor often is unable to induce, say, 22 passengers to move up and make room for 24. There is infinitely more comfort in facing the direction in which the car is travelling and in being able to look out of the window without twisting one's neck into a species of spiral. Moreover, the painful situation, which has been known to occur through a passenger being compelled to sit and stare at someone whom he dislikes intensely on the opposite seat, becomes agreeably impossible in a transverse seat car. Staring at one's fellow travellers can easily become a habit, and I know one town in particular where every fresh passenger is made to run the gauntlet of so many pairs of eyes, to the great discomfort of sensitive people. I would warmly recommend this type of seat to those who are considering the question of new rolling stock. The question of gauge is not an obstacle, as cross-seats have been most successfully adopted at West Hartlepool, a narrow gauge system.

Seat Cushions.

Before leaving the question of seating, is it not time that the uncomfortably hard wood seat was superseded by something more comfortable to sit upon? In the old days wool mats and rep cushions were used with insanitary success, but now that natural glaze rattan spring seatings are available, there is no reason why every bad joint, point and crossing, should be punctuated with disturbing regularity upon the tender portion of one's anatomy.

Ventilation.

The question of providing adequate ventilation without undue draught has long been one of the problems of tramway management, and it is, I think, quite evident that ventilators should be fixed and not subject to the whim of any passenger. Even on the hottest day there is always someone ready to shut out fresh air if allowed to do so, and the best method I have yet found is to arrange the ventilator windows to open outwards on a quadrant, in the direction in which the car is travelling. A stop is provided with quadrant to prevent the entire closing of the frame, and a thumbscrew holds the ventilator open to the fullest extent in the summer time.

In the old-fashioned car, which has no ventilator windows, a good plan is to insert wire gauze at the top of the door window. This simple arrangement is most effective in providing fresh air just where it is required, without perceptible draught.

Experiments have been made with induced draught by means of a fan driven from the axle, and there would appear to be no reason why this method should not be adopted with success. The atmosphere of most cars on Saturday nights certainly suggests the desirability of providing far more adequate ventilation than has hitherto been adopted.

Exits.

The tendency of passengers to sit as near as possible to the rear end of the car in order to get out more easily is only natural, and it is quite evident that any arrangement whereby a passenger may alight from the near side of the front platform would both add to his comfort and also make the conductor's duties easier. There would appear to be difficulties in the way of ticket checking, and also by reason of the staircase at the front end, although this can be overcome by an adaptation of the reversed stairway on a slightly extended platform. It would be interesting to hear the experience of Newcastle and other places where experiments in this direction have been made. From the passenger's point of view it must be one of his greatest grievances that, after nobly doing his duty and taking a seat at the front of the car, in order to leave room for those entering after him, he should be compelled to fight his way back to the rear in order to alight.

Interior Finish.

From an æsthetic point of view, many car bodies I have seen built during recent years leave much to be desired. A uniform finish in teak or oak is not nearly so attractive as a contrast afforded by, say, oak and mahogany, and although the heavy elaboration of carved mouldings has given place to simpler design, there are, nevertheless, still far too many sharp corners and ledges for the accumulation of dust. In the writer's opinion, the modern car should follow the example of the modern house, and have rounded corners without mouldings and dust-traps. Instead of mirrors, more or less mottled as years go by, the end panels might well serve as frames for attractive photographs, displaying the charms of the district through which the cars run, confined as far as possible to views at the extreme ends of the routes, costing the exploring passenger the maximum fare to get there.

Top Covers.

The value of top-covered cars, especially in wet weather, is, of course, appreciated to the fullest extent, but it is not so easy to understand why the top saloon is often so much more uncomfortable and unattractive than the lower one. They are in many cases merely a sort of box top, cramped and dirty looking, apparently designed with no desire to make them attractive or easy to clean. An interior finish of alternate light and dark matchboard with sashless lazy-tong windows and tip-up seats, allowing a clear floor for cleaning, with a row of ventilator windows to match those in the lower saloon, would give a wholesome attractive effect, and would please the ordinary passenger as well as "drawing" the man who boards a top-covered car in order to have a comfortable smoke.

The seating frequently leaves much to be desired; the outside canopy seats especially are often extremely uncomfortable by reason of the absence of a back, one's shoulder-blades coming in painful contact with the iron rail surrounding the canopy platform.

Odd Fittings.

It may appear a trivial matter to criticise the position of switches and waybill racks, but everyone must have seen the surprising effect when a conductor, fiddling about over someone's head, is caught unawares on a curve and launched broadside against an unoffending passenger. This would appear to indicate the desirability of fitting all switches, racks, and articles of this description in the region of the platform, so that the conductor or inspector would not require to inconvenience or mystify passengers by these little operations, which to the lay mind are usually unnecessary.

Open Air Riding.

A year's experience of south country tramways makes one wonder if the British principle of a double-deck closed car has been too closely followed, at any rate in the south. The continental open trailer and the convenience of being allowed to stand and smoke on a roomy platform certainly appeals to one as a passenger, and the extraordinary popularity of a car on the Blackpool toast-rack principle, adopted at Southampton, certainly leaves no room for doubt as to the preference of the travelling public.

Long after the novelty had worn off passengers could be seen remaining on the car for two or three double journeys, enjoying the fresh air. One of the most noticeable features of this car is that, except in very windy weather, there is no discomfort through draught, and although the car was built as a pure experiment, the idea certainly suggests itself that trailers on this principle would be a great asset to any system requiring additional cars for summer traffic.

Shelters.

It is hardly reasonable to expect intending passengers to stand and wait in wind and rain without feeling a natural annoyance, and, while the erection of shelters with seats generally results in a form of philanthropy in providing homes for the destitute, there is no doubt that pavement verandahs are greatly appreciated, and are very useful in soothing and detaining the kind of passenger who becomes vindictive and walks home just because there does not happen to be a car exactly when he wants one.

Bill Sticking.

The practice of obscuring passengers' vision by sticking bills all over the windows has lately reached greater proportions than ever, and some of the large systems are the worst offenders in this respect. On some systems it is really difficult nowadays to see where you have got to, and the opportunity given to wags to scribble on the bills assists in the general untidiness of the car. Hanging cards are even worse, as they swing about and disarrange the hats of lady passengers. The philanthropic objects advertised in this way are very deserving, but after all windows were made to see out of, and not to be used as travelling hoardings.

Speed and Stops.

The writer once boarded a car passing through a town, and was informed by the conductor that it was hardly worth while getting on, as the car was going to wait ten minutes while he and his mate had their dinner. Such a proceeding being too much of a novelty to miss, I waited to see if such a thing could really be, and sure enough the car did wait ten minutes, not at a terminus even, but at a passing place quite near the centre of the system. We have read that standing cars gather no passengers, and this one certainly did not. Such a case as this is, I trust, unique, and the growing tendency to improve the time-table by fitting the excellent modern equipments which do so much to improve the speed on gradients

Digitized by Google

is very acceptable to those using the cars. The war has also given us a fine opportunity of getting rid of certain unnecessary stopping places, and it will be found that the travelling public as a whole are quite pleased to find the cars getting along quicker. Many systems suffer from too many stopping places, and the excuse for remedying the evil which now offers itself is too good to miss.

Influence of Local Conditions.

It is somewhat deplorable, especially from a passenger's point of view, that on many systems some purely local obstruction should have been allowed to govern the design of the whole of the car service for future ages. Quite a number of tramway authorities have had to reduce head-room to the smallest possible limit because of one wretched bridge or archway, with the result that the curses of the travelling public have fallen upon the cars themselves, instead of the real origin of the trouble. An expenditure at the beginning in reducing the road level or otherwise removing the obstacle in the way would have been money well spent if it resulted in more roomy and comfortable rolling stock. I would go further, and say that if the comfort of the passenger had been made the first consideration the anathemas would then have been levelled at the obstruction instead of the cars, and in all probability public opinion would have done the rest.

Parcels.

Large and awkwardly shaped parcels are frequently a source of irritation to passengers, expecially when they overlap the owner and partially rest on his next door neighbour. We all know the man who brings a Gladstone bag into the car and places it behind his feet, which consequently project halfway across the gangway and trip up unwary but unoffending people. The best way of dealing with this evil is to charge for parcels beyond a certain size and weight, and insist on them being placed on one or other of the platforms.

Meals on Cars.

When travelling on a certain northern system recently the edifying sight was witnessed of the conductor "wolfing" an eight-inch teacake in one hand, and alternately drinking from a huge jug held in the other. This was not even in an outlying district, but well within the mile radius from the centre of the town. If the duty sheet will not permit of meal-time reliefs altogether, food taken on cars should be confined to something in the nature of a snack at outlying termini or away from the main streets.

Fares.

I do not propose to enter into this debatable subject at all, except to say that it is obvious that all passengers should be treated with absolute fairness and equality, with as much convenience to themselves as is possible, after providing for efficient checking. The sale of books of tickets has recently met with so much success in certain towns that the subject ought not to be ignored in considering the point of view of the passenger.

Conclusion.

To dispose briefly of a number of minor details, one might mention that waste ticket-boxes are greatly appreciated by those passengers who are inclined towards tidiness. A railway time-table at each end of the car is often very useful, and large illuminated route numbers are a great boon if the system is large enough to warrant them. Other matters, such as clocks in cars and cleanliness of person and uniform, were dealt with by Mr. Mason in his "Bread-and-Butter Tips" last year, and it is to his excellent paper that I am indebted for the idea which suggested itself (on being asked to contribute a paper for this meeting), that the point of view of the passenger might reasonably be submitted this year instead of dealing with the aspect of tramway administration from within. Someone once said that tramway passengers were composed of all classes of humanity, mostly fools, but I venture to suggest that after nearly twenty years of electric traction the travelling public are entitled to many things which on the average system they do not get, particularly in the nature of a more comfortable ride, less noise, easier exit, and less petty annoyance.

I am quite aware that there are grumblers who deserve no consideration, and who would still grumble about something or other if they had a special car free of charge, but after all they represent a very small proportion of the whole, and can be ignored, as indeed they usually are. Grumbling, like every other evil, can easily become a habit, and if every possible opportunity to "grouse" is removed, the popularity, which is really essential to the success of the undertaking, will be to a large degree assured, and financial benefit to the promoters will undoubtedly result.

In conclusion, I would ask for mercy from certain undertakings whose failings are here disclosed (wild horses would not drag their identity from me), and as the object of a paper should be to promote a live discussion, I trust that these somewhat disjointed views will afford an opportunity for both operating and commercial members to take part.

THE DISCUSSION.

The Chairman.—The meeting is now open for discussion; the paper contains ample material for consideration, and I hope it will be discussed as fully as time allows.

Mr. A. V. Mason (general manager and engineer, South Metropolitan Electric Tramways and Lighting Company).—I have to thank Mr. Robson very much for his paper, and especially for his kind remarks regarding myself and my paper read last year. As regards the technical part of the paper, the thing that interested me most was the question of brakes. I should like to hear something from members on the question of air brakes. If we have got to substitute women motor drivers in place of men—and doubtless many of us will have to do so—this question of air brakes will have to be considered. Even on a route that is fairly hilly there would not be a great deal of difficulty. I am quite certain that with an air brake women could operate the cars, but with the ordinary mechanical hand brake, which, as Mr. Robson says, has had very little modification in the last fifteen or twenty years, they could not. Then as to the question of trucks, I have lately experimented with ball bearings. Although they are rather expensively put in, the trucks ride very much smoother and better. There is rather a curious result to show on the set I have obtained. Whenever we have a fairly empty car the ball bearings save a considerable amount of current.

A Member.—Name?

Mr. Mason.—I will not mention the name; I am not advertising, but when the car gets loaded it seems to run heavily; the current goes up.

The Chairman.—As compared with plain bearings?

Mr. Mason.—Yes. I do not know whether anyone has had the same experience as I have had. I have only one car so fitted. It was interesting to hear Mr. Robson speak of open-air riding. A number of years ago I had exactly the same experience as he has had with trailers. With cross-seated cars, or trailers, passengers must be very much more comfortable than on top deck cars. Naturally the closer to the ground the passenger is carried the less the oscillation. I also note with pleasure Mr. Robson's remarks on shelters. For many years past I have tried to induce several local councils to agree to pavement shelters, but without success. I did get plans for one through, but it was side-tracked on to a side road. I am also very interested in Mr. Robson's remarks *re* windows and bill-sticking. Here in London it is one of the things we have to thank the police for that under no conditions may we put bills lower than six inches below the window rail. It is somewhat strange to find oneself in the position of blessing the police.

Mr. A. W. A. Chivers.—I did not intend to speak, but at your invitation, sir, I will offer one or two observations. The suggestion of doing something more for the passenger is one that I agree with in certain respects, but not in others. While I agree that a clean, well-ventilated and lighted car, with high speeds and easy riding, will attract passengers, and for that reason should be encouraged, I think that, generally speaking, the ordinary tramway passenger has had a great deal more done for him than he has adequately paid for. The average return of profit on capital expenditure on tramways is in many cases extremely low, and I am afraid that if the passenger is studied to a very much larger extent the return will be considerably less. With regard to the question of trucks, I cannot agree altogether with Mr. Robson. I am of opinion that trucks have been considerably improved since the horse-car days. For an example of easy riding that a modern tramway truck will give, I would refer to those cases where cars have to run partly over sleeper construction, which is practically the same as railway construction, and partly over ordinary street railways with concrete foundations. When riding on the cars one can tell immediately the car enters upon sleeper construction. I think many of us here had the privilege of attending the congress at Blackpool some years ago, when we noticed what remarkably good riding there was on the Fleetwood lines, where the track was laid across the fields, compared with the riding through the streets on ordinary street railway construction with concrete foundations. The companies in which I am interested have several lines of sleeper construction, and with the modern trucks the cars ride extremely well, and compare very favourably with the riding on electrified railways and some steam railways. So I think that it is the rigid street tramway construction that is to a large extent responsible for the hard riding we experience on some of our street railways. The question of brakes is one that interests me also, and if there is anyone here who has any particulars of the hand brake that is being used at Huddersfield, I should be glad to have more information about it. Some time ago I assisted in carrying out comparative tests on brake stops between an ordinary single truck tramcar and a modern motor omnibus, and some of us present at the tests were very much struck with the very efficient stops we got with the drum brake used on the omnibus. That led some of us to consider whether a similar form of brake could be used on a tramcar. There was great difficulty in getting the brake drum on the car axle, but it was possible to put it on an extended armature shaft. That idea, however, was not carried out, for the reason that owing to the comparatively high armature shaft speed we thought the speed of the brake friction surface would be so great that the co-efficient of friction at those speeds would be extremely low, and that we should get in practice a bad stop. Therefore if anybody can tell me what the average rate of deceleration is with the form of brake being used at Huddersfield, I shall be extremely obliged. As to car seats, I agree to a certain extent with Mr. Robson,

Digitized by Google

but I think there are a good many arguments in favour of longitudinal seats, especially to-day, when cars are overcrowded during rush traffic. I think the question of fare collection is a most important one. It has been debated at our meetings many times, and I am quite sure myself that in a dense and short-distance traffic the collection of fares is much more greatly facilitated with longitudinal seating than with the cross seating. Another point is that the passengers sitting on the outside cross seats have much more difficulty in signalling to the conductor when they wish to alight from the car. The best form of seat depends almost entirely on the conditions under which the car is to be operated. As to the suggestion with regard to seat cushions, I think that there are many places where cushions may well be adopted, and they might in some instances attract more passengers. In some cases my companies have adopted cushions, but I think that in manufacturing towns the ordinary tramcar seat, as almost universally adopted, is quite good enough. On the question of ventilation, I agree that it is a matter for improvement. The ventilation is extremely bad in some cases, especially in some double-deck cars where the inside part of the body is comparatively low. Some years ago I was working on the design of some cars for one of our undertakings—a single-deck type that enabled us to increase the height of the car considerably, and this had a material effect upon the ventilation. The large, roomy body, which is well ventilated by means of end and side ventilators and with torpedo ventilators in the roof, has given, our manager tells me, very great satisfaction. I thank Mr. Robson very much for his paper.

The CHAIRMAN.—Can you tell us, Mr. Hatton, anything about the front exit cars mentioned in the paper?

Mr. E. HATTON (general manager and engineer, Newcastle Corporation Tramways).—I do not know that it is possible to tell you anything more than you have seen in the tramway papers*, except that from the general experience we have had with these front exit cars during two or three months' working, I think you may take it as probable that we shall alter all the cars to that pattern ultimately. I am speaking of single truck cars now, and our experience with these will lead to two or three alterations with double deckers. I think Newcastle was probably the first town in the country to adopt cross seats on the whole of its cars with the exception of about 20; consequently we have had many years' experience with them. But in altering these cars, and allowing a large number of passengers to stand up, the cross seats were an obstruction, so we have had to go back to longitudinal seats. I agree with the last speaker that with longitudinal seats it is very much easier to collect the fares than with cross seats. The cars we have altered are very wide cars, perfectly straight down at the sides, and there is a lot of room, and we have purposely made the seats as narrow as possible. Where the passenger sits down, the floor has been raised up about three inches over the old floor level, so that other passengers can stand in the body of the car without treading on the feet of the seated passengers. There is only room for one person to get on at a time; the passengers have to form up in queues. We have got four altered cars running. Of course, at the present time, our labour difficulties are a bar to effecting these alterations, or we should have completed a larger number of cars. We have not had a single accident on those cars yet, and if that condition of affairs is maintained when we get the whole of the vehicles converted, it will make a very great difference at the end of the year in the claims for compensation. The cars of which I am now speaking are not new cars; if one were building entirely new cars we should have a still more finished article. We should also give the motorman protection; it is quite possible to do that without exceeding too great a length. I am not settled in my own mind yet whether big single-deck cars in towns where there are easy gradients would not be infinitely preferable to double deckers. A lot of people contend that a double-truck car is much more damaging to the permanent way than a single-truck car. That has not been our experience. We have one particular route on which there is possibly the heaviest traffic of the whole system, and owing to the heavy traffic we have almost exclusively to work double-truck cars on it of the four-motor type. As for its life, the track there to-day is in as good a condition as in any other part of the city. So the assertion as to damage to track by double truck cars is not borne out by our experience.

Mr. W. V. EDWARDS (general manager and electrical engineer, Hastings and District Tramways, Limited).—With regard to front exits, I should like to know whether there would be any difficulty in respect of the Board of Trade regulations? I have a strong feeling that in the regulations for the tramways with which I am connected it is settled that all passengers must get out at the rear. I should like to know if that is a usual or a special regulation?

The CHAIRMAN.—The Board of Trade have no objection so long as the exits are on the near side.

Mr. C. W. SHEPHERD (secretary, Edinburgh Tramways Company).—The words in Mr. Robson's paper that struck me most forcibly were "comfort to passengers." From the experience of an old tramway man—I think possibly Mr. Cameron can bear me out—I should say that comfort was the last thing that was thought of in the old days. As a matter of fact, to-day I believe that people are very pleased if they can get on a car at all without any comforts. I believe that the only people who are trying to cater for the comfort of passengers are the London County Council, because they have adopted what to my mind has been wanting for several years, i.e., the trailer car. As you all know, conductors are available but it is very difficult to get the drivers. The difficulty in catering for the travelling public always has been that you have to take back in an hour and a half at night a traffic that takes three hours to bring down in the morning; therefore you cannot expect those passengers to have very much comfort. But I would like to secure the candid opinion of this meeting with regard to the vexed question that Mr. Robson deals with, i.e., the question of employees consuming food on the cars. You are faced to-day with the problem of female conductors, and I am quite sure of this, that if a general method is not adopted to enable the women to get regular meals, etc., their health will be much impaired in a very short time. That will create a bar against the employment of women, and I think we ought to be very careful. Mr. Robson does not say in his paper whether he approves of the man who eats his meal on the car or whether he approves of the man who says he is going to wait ten minutes at the terminus in order to get his food. I should like an expression of opinion as to whether these things should or should not be done. I shall be much obliged to the author if he can give us an explanation as to that.

Mr. F. BLAND.—There are two matters in this paper on which I should like to offer observations. One is the question of the track. The author says that track renewals are difficult, if not impossible. I do not agree with him. Certain things have arisen which the Council of this Association has helped to rectify. A few months ago it was thought to be impossible to get tires or axles, but by arrangement with certain manufacturers that difficulty has been got over. Then difficulties arose about rails. The Council were also able to assist in that matter. Let the members explain to the Council what their trouble is, and then I am sure that they will give them all the assistance they possibly can. Many members seem to have made up their minds that it is impossible to get material of any kind, and consequently they defer matters, putting off the evil day. Although they are making a great deal more money than before; still they think they cannot afford to make renewals. The time will come when they will have to pay more, and it is to their benefit to consider the matter now. The next question I want to deal with is that of books of tickets or tokens. Books of tickets are very handy in a way, although some I have seen are a great nuisance and the conductors complain of them. Tokens might be very much better—some towns have them—but you cannot expect a man to buy half-a-crown or five shillings' worth of tokens and carry them about with him unless he receives some benefit. I think you have got to offer the man some inducement to buy the tokens, say 2d. in the half-crown, otherwise people will not go out of their way to buy them, and I think that is, to a great extent, the opinion of the man in the street.

Mr. E. H. EDWARDES (general manager, Lancashire United Tramways Company).—There is just one point I should like to touch on, viz., the question of trucks. I should like to hear the views of some other members in regard to it. In my opinion the modern tramway truck is the limit.

The CHAIRMAN.—Which way?

Mr. EDWARDES.—There has been very little alteration in them during the last ten years; their design is rotten, as my friend Mr. Mason says. Take the side frame of the tramway truck. Why should it still be made of a solid chunk of steel instead of some steel stampings or girder construction? I never could find that out. Some three or four years ago I determined to get some steel stampings. I think I tried every maker in England; not one maker would make them unless I paid two or three hundred pounds for a die, a thing that a small system like mine could not afford. They said that managers preferred a solid steel frame. But why design them so? Fancy building a bridge of a solid lump of steel. I possess some 40 or 50 trucks, which were made in Germany or Belgium with side frames of steel stampings. These have been in service now for fourteen years. They are ordinary double-deck cars with no tops, and they have never given me the slightest trouble. Recently I put covered tops on, and the side frames now show signs of giving way, owing to the additional weight. The trucks are very light, and if they had been slightly heavier they would have been satisfactory for any load. I believe most managers have trouble with their solid frames—bending one way or the other, or riding solidly. I am of opinion that it would be a very good thing if this association were to appoint a committee of experts to design a truck frame, and then try to persuade some makers in England to manufacture a decent one. As to the last speaker's remarks about the maintenance of track, of course we can get some rails at a certain awful figure, but we cannot afford to pay £17 or £18 a ton for rails. As for cast steel, I recently wanted some steel centres for my wheels; the quotation was £56 10s. a ton. There is a limit in all things, and why the price should be so high I think is very difficult to answer. I thank Mr. Robson for his interesting paper.

The CHAIRMAN.—Mr. Sellon, I think you are interested in the design of cars.

[* *Vide* THE TRAMWAY AND RAILWAY WORLD, of April 13, 1916.]

Digitized by Google

Mr. STEPHEN SELLON.—I had no intention of speaking at this meeting, being in an indifferent state of health. But I would like to say that I am not quite in accord with the reader of the paper, inasmuch as all that we want in the tramway business is plenty of money, and we only get plenty of money by doing the best we can for our passengers. Therefore if we can give him a car that will induce traffic, by all means make it more comfortable. We are then raking in shekels we should not otherwise get. Therefore I say that everything that can be done to tempt passengers to ride on your cars should be the object of every general manager. Mr. Chivers made one remark which rather struck me—why give these facilities and these advantages to passengers when the return on capital expenditure is so limited? The answer, of course, is this—what is your capital expenditure? Perhaps it is too high or too large. If the capital expenditure is abnormal, why should the passenger suffer? That is simple; he is at a disadvantage because the undertaking has been badly financed. As regards the longitudinal seat, I venture to suggest that if this meeting were polled, there would be a very large excess of opinion that the longitudinal seat is to the advantage of everybody, both as to accommodation and as to the collection of fares. Mr. Bland made a suggestion that at this stage we should not trouble ourselves about accepting these suggestions, and do the best we can in an economical way by improving faulty joints, etc., because he had a very large supply of rails, or could get them.

Mr. BLAND.—No, no.

Mr. SELLON.—I should like to know where those rails are. I have not got that information, and I should also like to know what price they are; because then, if I found that I had to pay £15 a ton for rails, I think I should be inclined to mend a few joints before I entered upon that sort of enterprise. I do not think there is much more in the paper that I can criticise, because generally I think we must all agree that it suggests a considerable number of little advantages to the management of an undertaking.

Mr. L. E. HARVEY (manager, Ilford Council Tramways).—I did not come prepared to say anything, but with regard to the point raised by Mr. Edwardes—the design of trucks—my experience is very different from his. I know that such trucks as he mentions are a constant source of trouble, chiefly cracking and breaking in all parts. I am sorry my cars are fitted with them. With regard to tokens, I adopted the token system two years ago, allowing 13 penny tokens for a shilling, and 26 halfpenny tokens for a shilling—for I am sorry to say we are afflicted with halfpenny fares. We find those terms work very well. The tokens are put in ordinary paper envelopes, and one can buy them of a conductor or an inspector, and they can also be bought in any quantity at the office. The tokens answer very well; the public approve of them. The only difficulty we have is with the books, owing to the discount.

Mr. J. W. HAME (general manager and electrical engineer, York Corporation Tramways).—Mention has been made of trailer cars. We have trailers in use in York to a limited extent, and so far they have been very satisfactory indeed. I think the outlook is such that the trailer car is likely to be used much more in the future in this country than it has been used in the past. I think the air brake may also come into use a good deal more than it has done. As to the question of the use of a brake drum, I should be interested to know what is the peculiar advantage of using a separate drum instead of using the drum in the form of wheels. It seems to me that there must always be an advantage in using the brake on the wheels, because by so doing those wheels are constantly kept true. If you use a separate drum, and the car moves ever so little and the wheels are locked, innumerable little flats must come on those wheels. There is an interesting point in Mr. Robson's paper with regard to having cars constructed to meet special conditions of low arches and bridges, which unfortunately prevail in some towns. In York there are a number of bars and low arches, but we have been able to maintain the standard height and width of the car without cramping the body.

The CHAIRMAN.—I suppose you have gone some other way.

Mr. HAME.—We have not. We have gone past arches at the sides by a specially constructed track instead of going through the very low arches and bars.

Mr. ERNEST BENEDICT.—I should like to say a word as a passenger. A great deal is being said about safety first. We are all interested in safety first, but I think there are other things that a conductor should be taught. Omnibus conductors used to be called cads, probably because they tried to be very haughty—a different being from anybody else. If he can be taught not to gaze pensively into the interior of the car when the passenger he has seen out of the corner of his eye calls upon him to stop, or to refrain from pulling the string when a passenger is just catching hold of the handrail to get off, there would be an improvement. For when he has pulled the string he will not stop. These are little things we suffer from. Then there is another matter. Why are tickets not collected and sent to the papermakers? I have often asked that, but I have never received an answer that I could understand.

Major F. COUTTS (general manager and electrical engineer, Paisley District Tramways Company).—I would like to offer a remark arising out of Mr. Harvey's observation as to the difficulty of the discount ticket business with the 13 tokens for 1s. It does not seem to be very good business to place the conductor in a position to put in a shilling and take out 13 tickets which the conductor can sell for 13d. That was a very common practice in a town that I once knew, and it had to be stopped. If you number the tickets in the lots sold, selling them in the office only, and require the purchasers to give their names and addresses, they will get their cousins and aunts to purchase and work the thing in a way that really amounts to an increase of salary, the company obtaining no advantage whatever.

The CHAIRMAN.—That was in Scotland. (Laughter.)

Major COUTTS.—I do not know whether Mr. Harvey finds that sort of thing happening in England, but I should like to know whether attention has been paid to the point and whether it really does occur or not. There is another question I should like to ask, namely, whether any manager has had any experience with cars without seats. (Laughter.) I found my rolling stock was quite unable to take the number of munition workers whom we had to carry; a car constructed to carry 57 would be packed with 100 or 120. By taking the seats away altogether I think I could manage to put in 150 persons. I should be glad to know if anyone has had any experience with seatless cars. This would put the extra passengers on the lower deck, which is safer than crowding the upper deck.

Mr. E. HATTON.—In reply to Major Coutts, I may say that it was first proposed at Newcastle that our single-deck cars should be built or altered so as to be entirely without seats, so that passengers should stand up and thus we could carry considerably more munition workers. Owing to lack of labour we could not maintain a sufficient number of cars in service to keep them for this particular use, and as we had to run two or three miles through the centre of the town before we began to carry the munition workers, we did not think that a very large number of people would pay the ordinary fare and stand up. Therefore we had to abandon the idea, and put longitudinal seats in these cars, but we left enough room to stand 40 people in the centre of the car in two rows. We have a very large number of people to carry in these times. I had not had experience of cars entirely without seats, except that in Salford the Trafford Park Company ran special cars without seats for the Westinghouse workpeople. They are really useful cars for quickly dealing with crowds.

The CHAIRMAN.—I must now close the discussion, as time is getting on. I will ask you to pass a hearty vote of thanks to Mr. Robson for having prepared and read this paper. I do not think I need add anything to what has already been said.

The vote of thanks having been accorded with acclamation,

Mr. W. TUKE ROBSON, in reply, said:—I am extremely interested in what Mr. Hatton has just told us about seatless cars. I did think of introducing the subject myself, but as I had taken up the idea of making passengers more comfortable I did not see very well how I could deal with it. But where you have crowds of workmen who must be got away it is an idea worth considering. Mr. Mason raised the question of air brakes as being specially suitable for women drivers. I agree with him. If women drivers do come, as they may, it is extremely likely that we shall have to start making a very much more easily acting brake than we have got at present. Mr. Chivers told us that in his opinion the passengers had had a very good time; but the point I think he missed is that many tramways are now open to great competition; many tramways have omnibuses running in competition with them, and something has got to be done. I am convinced that tramcars must be made more comfortable to ride in if we are to get the patronage we need. Mr. Chivers also asked about the Huddersfield brake to which I referred. I may say that the brake I saw in actual working was perfectly marvellous; you could brake the car up with finger and thumb as easily as you can stop a motor car. I think that also answers the point raised by Mr. Hame. The advantage, of course, is that with this you have a perfectly geared brake, and the slightest touch on the handle is enough to stop the car without skidding. You do not skid because you have the Ferodo lining—the proper brake material instead of metal to metal. Mr. Chivers also stated that in manufacturing towns hard seats were quite good enough. I used to think that, but when all is said and done, what is the majority of your passengers composed of even in manufacturing towns? Not working men at all, but the residents in the town. If you take the electric railways, even in mining districts, you will find them comfortable in actual construction. Their cars have all got rattan seats now, and why should not tramcars have the same? Mr. Chivers also referred to some of his cars having been built with more head room; he suggested that that supplied enough ventilation, but I have not found that to be the case myself. I think we want more ventilation than is simply given through building a car high. Mr. Shepherd told us that comfort was the last thing thought of in the old days, but he does not say whether passengers should be made more comfortable now. I have already explained that it is not only a question of making passengers more comfortable, but of inducing more passengers to ride. He also raised the question of meals on cars. I thought that I said in my paper that if the duty

Digitized by Google

sheet does not permit of mealtime reliefs, meals should be confined to something in the nature of a snack at outlying termini or away from the main streets. I do not like to see a man drinking out of a jug on a car. Mr. Edwardes told us that the modern truck is the limit; and I agree with him whole-heartedly. Mr. Bland spoke on the question of track renewals. I know that track renewals are not impossible if you have the rails by you. I have got plenty of rails to do track renewals, and I am going to do them, but if you have not got the rails in stock you cannot afford to pay the £17 a ton which is asked for rails at the present time. For that reason I mentioned the importance of track maintenance. There are methods now which I am sorry were not touched on, methods by which a badly worn or worn-out track and joints can be got into good order by welding. We have recently improved a good deal of our track by thermit welding. The old joint can be stripped, and by packing the rail up, thermit welding, and then grinding smooth, you have a practically perfect joint. I do not know that there are any other points to reply to. I expected to receive very much more slating than I have received, and I am exceedingly obliged to you for the way in which you have received my paper. (Applause.)

The proceedings then closed.

SAFETY WORK OF THE LONDON GENERAL OMNIBUS COMPANY.

ADDRESS BY MR. H. E. BLAIN, OPERATING MANAGER, LONDON UNDERGROUND RAILWAYS AND GENERAL OMNIBUS COMPANY.

The members then paid a visit to the London General Omnibus Company's Training School at Milman's Street, Chelsea, whither they were conveyed by private omnibuses. The visitors were heartily welcomed by Mr. H. E. Blain, the operating manager of the company and the Underground Railways. There was a thorough inspection of the well-fitted, light class-rooms, mess-rooms, clothing stores, etc., and the members had the opportunity of listening to some of the lectures to drivers and conductors. After tea, which was served in the cinematograph hall, special films were shown illustrating London traffic scenes, with reference to the rules of the road for omnibuses, tramcars, and general traffic, methods of training, etc.*

Mr. H. E. BLAIN'S address on "The Safety Movement" was intently listened to. He said:—I have to offer you a hearty welcome to our training school in the name of the company. I have to say that it is a great regret to our managing director, Sir Albert Stanley, that he is unable to be present as he had desired, but he is engaged on War Office work and has asked me to express his regret that he cannot be here to welcome you personally. May I say that to me this feels like old times, for I see many old friends round these tables. I am indeed glad to think that the motor omnibus has not severed our old friendships. Although now engaged with different means of traction, I do not think anything has interfered with the friendship that has existed between us for so long. My friend Mr. de Turckheim—that reference does not seem to meet with the applause it deserves—(laughter and applause)—with that ubiquity which characterises his every action, came to me a month or so back and suggested that he would like to arrange for an inspection of this training school in connection with the annual congress of the Tramways and Light Railways Association, and we were exceedingly pleased to fall in with the suggestion. I hope that you have been interested in the work in the class-rooms, and I also hope that you will be interested in the safety and training films which we propose to display to you shortly. Mr. de Turckheim suggested that a few cursory remarks on the safety movement might be interesting also.

I think that you probably are all aware that the London General Omnibus Company has taken for some time past a considerable part in what is called the "safety campaign." We had intended in 1914 to begin that campaign, but in common with a good many other things it was prevented then by the war. Owing to the danger of the darkened streets and to circumstances connected with the war, it has been necessary during the last few months to pay special attention to this matter, not I am glad to say so far as our own employees are concerned so much as regards the general public. We have been endeavouring for some time past to direct the attention of the public even more than of our own employees to the necessity of exerting themselves and of learning from those little legends which you see all about this training school. When war broke out, at the start, in 48 hours we lost 1,500 of our men to the colours—a number which was increased by the end of the first week to 2,000. We have sent from this company alone over 5,500 men to serve their King and country. Taking our combined industries of underground railways, omnibuses, and tramways, that number is increased to over 9,000, so that you can readily imagine that the question of training assumed a very serious importance to us then, and we were indeed glad to feel that in 1913 this building which you have inspected had been not quite erected but transformed so as to be available for training purposes in connection with our great company. You have been supplied with a little pamphlet containing some information with regard to the school, and I do not propose to say more about it except that we have here the headquarters, first of all, of the engagement of traffic staff, the training and clothing of traffic staff, and the headquarters of the mess-rooms for the traffic staff. We have some 18 mess-rooms in the garages, and we are gradually extending by opening places at terminal points. For instance, in the yard at Victoria Station we have one, and we hope to have others shortly at the terminus at Liverpool Street and the Crystal Palace, two main terminal points. We also have opened certain rooms and mess-rooms for the staff in connection with women conductors. We already have rooms in over 200 houses at terminal points so that they may have proper facilities for washing and general convenience.

I have mentioned the number of our employees who enlisted from our staff of drivers, and it is very well known that a third of our fleet of omnibuses is on the Continent. Our present staff of drivers is 3,500, and 50 per cent. of those are new men since the outbreak of the war. They have gone through the school, and we have a great deal of satisfaction—and I think also some measure of pride—in the fact that with all these people responsible for driving the omnibuses, notwithstanding the huge percentage of new men, our record with regard to accidents has been persistently falling. We have been paying, as I have hinted, very great attention both to the training of the men and to the reduction in the number of accidents in the public streets. The figures with regard to the reduction of accidents are most surprising. So far as I am concerned, I think last Monday I completed my third year with this company, and among other things which certainly gave me cause for very considerable surprise was the enormous amount of compensation which was necessitated by the number of accidents. You all know that the motor omnibus industry in the streets of London is of comparatively recent date. Both the employees themselves and the public had to become accustomed to this new means of locomotion, and you know that in the earlier days—there are even people here with a past (laughter)—there were people who spoke of the motor omnibus as being a Juggernaut that killed large numbers of people in the streets.

It has been our duty to endeavour to reduce the number of fatalities and the number of accidents. I am glad to say during my three years so far as claims and payments are concerned they have been reduced by no less a figure than 50 per cent. I will not give you the total figure, because you want to sleep well to-night. (Laughter.) Since 1910 the total number of accidents has been reduced by 68 per cent., and that figure has been a constantly improving one for every one of those years, being now only 2·15 accidents per 10,000 miles run for the whole fleet. (Applause.) With regard to the safety campaign, you know like many other good things it originated in America—Mr. Mandelick's blushes I believe are quite audible. (Laughter.) There is there a Brady gold medal awarded every year to the traction company that has been most prominent in connection with the safety campaign, and the Boston Elevated Railway, which won it in 1914, state that they had spent £1,500 on the campaign and had reduced their accidents by 25 per cent. I think we have beaten that record without beginning officially the safety campaign, and with the campaign that we are now beginning we feel confident we can rely upon reducing our accidents even more.

We have in this training school, first, the training film, which you will see presently, and which is part of the ordinary curriculum of both drivers and conductors, inspectors, and all other grades who are trained here. I will leave you to judge for yourselves the value of that film, but in passing I may say that we attach the greatest importance to and have found exceedingly useful the cinematograph method in training in connection with transit work. I can with every confidence recommend this to you when systems are large enough to undertake it—I can recommend you to try it even in connection with training for small systems—the method which you will presently see on the screen. As to the question of lifeguards, lifeguards in connection with motor omnibuses have been exceedingly difficult things. I think we have had something like 900 different designs submitted, almost all of which were absolutely impracticable. But after a good deal of discussion and a certain amount of hesitation, the side lifeguard, now made compulsory by the police, was adopted, and we have had 123 cases of lives saved by that side guard. We are trying another sort of front lifeguard on one route, not the one you saw in the yard, but a new one that is being experimented with. The police have not yet approved it, but we hope to get approval of that guard.

I may say in connection with this safety campaign, so far as the general public are concerned, we have been definitely attempting to direct their attention to the matter. We have had a series of advertisements in all the Press right round the London area. We have been giving special prominence to this Safety First—Is it Safe? And you will see on the screen the type of advertisements we have selected. We have also posted on the back staircase of all our fleet three legends, two of which are permanent, but the middle one is changed every Monday morning—one is "Safety First" and the third is "Is it Safe?" Those legends you will also see on the screen. It is unnecessary to say that having advertised in the Press, they have also been good enough to give us a certain amount of assistance in impressing the legends on the public. Then we have, I dare say you may have noticed, during the whole

* A description and illustrations of the Training School were given in THE TRAMWAY AND RAILWAY WORLD of April 13, 1916.

Digitized by Google

of this winter session a series of efficiency meetings for our operating staff, omnibuses, tramways, and railways, at which we sometimes have had the pleasure of having present managers and officials of the tramways connected with the combine. We have had safety papers there, with some exceedingly interesting comparisons between the results obtained on railways and on omnibuses and on tramways, and I think the effect of those comparisons has been stimulative to the superintendents in charge of the respective branches of our industry.

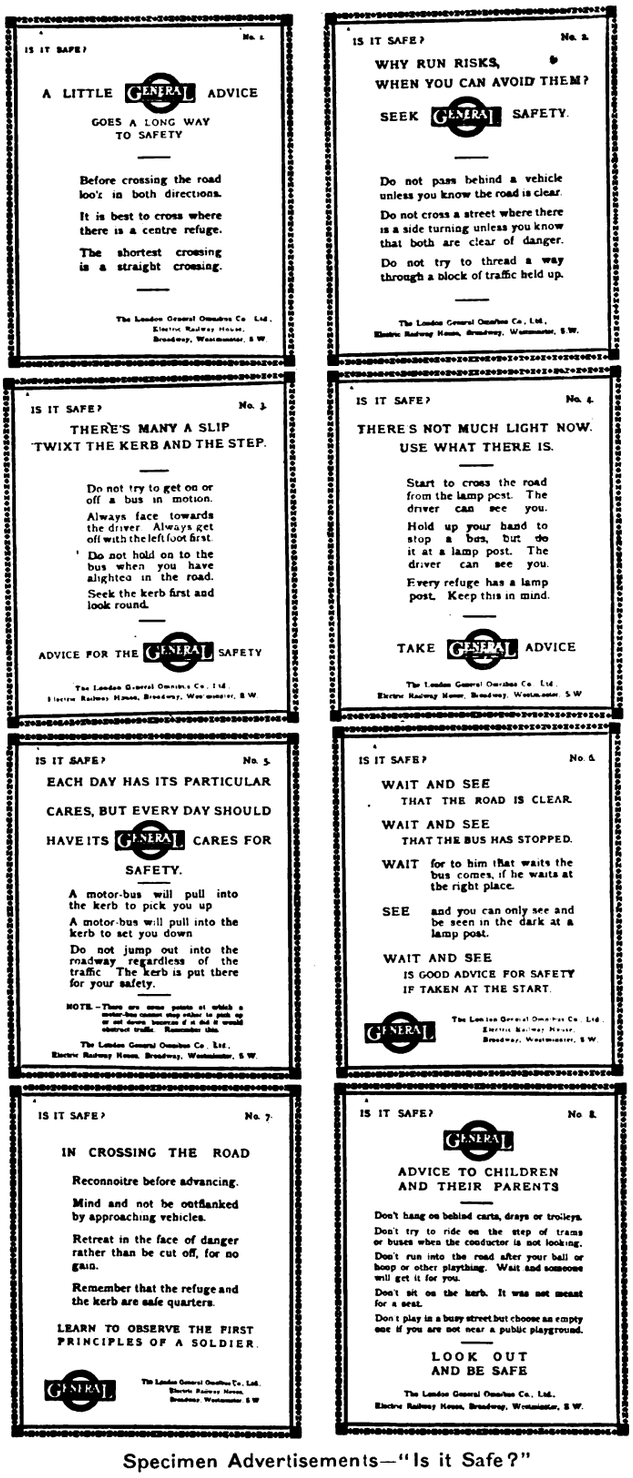

Specimen Advertisements—"Is it Safe?"

We have issued, or are beginning to issue, a series of safety pamphlets, of one of which I think you have all had a copy. One is addressed particularly to children, and through the London County Council schools we have this week distributed over a quarter of a million of those pamphlets. We have put a little picture on the back, and think that probably the children will take them home and be sufficiently interested to read the contents. We are following this up with others—I think the next is going to be a pathetic ballad of ten little nigger boys, with silhouetted drawings. With regard to miscellaneous publicity—I am afraid the corridors are too light to allow you to see them—but we have shades on all our lamps in the corridors, with little safety instructions, such as "Mind your step," and those shades are being put on all lamps at railway stations on our underground railways.

We are now busy with a new film, parts of which have been constructed in this way; we have analysed all types of accidents that we have had on the omnibus routes for the last two years; we have selected all those that are frequently recurring; we have reconstructed—it seems rather Irish—those accidents which we have had with either tramcars or omnibuses, and we have placed them in such a position that we get a graphic representation of those particular accidents. Those are being reproduced in the way you see at the back of the mess-room menu card. We are going to issue a little brochure, with illustrations of the types of accidents and how they ought to have been avoided if the instructions to the men had been carried out. With regard to our new film, we shall be glad to lend portions of it to cinematograph proprietors in the area, free of charge, and as they are always glad to have anything free, we do not think we shall have much difficulty in getting them placed. I have now alluded briefly, in accordance with Mr. de Turckheim's suggestion, to how we entered on this campaign with regard to the Safety Movement. He also suggested that you might be interested in another matter, which does not come within the scope of the safety movement, viz., women conductors.

Women Conductors and Mess Rooms.

We have up to to-day interviewed over 13,000 women applicants since we took into consideration their engagement last March. We have now passed through this school 1,000, and taking to-day's figures a third of our fleet of motor omnibuses is manned by women at the back. (Laughter.) We have 14 women instructors; we had to begin with the instruction being given by male instructors attached to the school. Now we have trained sufficient of our new applicants so that they can take over the work—you saw one class actually in progress by one of our lady lecturers to a class of girls. We have 19 female timekeepers; that has only just been beginning the last week or two, but as we are losing men at a very rapid rate we have to consider the employment of women on the inspecting staff as well as in the other directions, and we have 12 female cashiers attached to the depots. Now it has been suggested—I heard somebody speaking about it during the discussion this afternoon—that these girls will be unable to stand the strain. Well, out of those 1,000 girls we have only lost up to the present 37; that is about 4 per cent., and only some 20 of those have given up the work because it is too hard. It is interesting to know that practically all those gave up within three or four days. Our experience is that this work is not too arduous for women; on the contrary, our difficulty is to keep them supplied with uniforms, because we find that after about a month of open air, exercise, and our excellent 6½d. dinners, uniforms at first a bit slack get tight, and they have to be taken away and a bigger uniform supplied. We have had quite a number of cases where in three months we have had to rig a girl out no less than three times.

With regard to the mess-rooms, I am not quite sure whether I said that we had 18 of them, but it may interest you to know something about the figures. We have put on the table a number of specimen menu cards from our different mess-rooms—you can take them away if you like and are interested; you see we give a very good dinner, meat and two vegetables and a sweet, for 6½d. We have not found it necessary to increase the cost of anything since the war except tea. We used to give tea for ½d.; that is the only item we have had to put up to a penny. Our annual turnover in these rooms amounts to 2½ million transactions, which are not very heavy, averaging a little over 3d. each. The income this year will be £30,000. (Applause.) The company provide the accommodation, lighting, and equipment, but the mess-rooms at those prices pay the cost of the food and the necessary staff. We do not want to make a profit out of it. My chief trouble when I criticised the accounts for the last two or three months has been to find that it has been getting on the wrong side, i.e., a little profit is being made. We do not want to see that, so we shall probably have to increase the quantities supplied as we cannot well decrease the prices. Any of you who are interested in mess transactions may like to know that 36½ per cent. is raised on meat, 8 from cakes and biscuits, 7 bacon, 6 eggs, 5½ from tinned goods, 5½ tea, etc., 4½ butter, 4 bread, 4 sugar, 2½ flour and rice, and 2 per cent. from potatoes. These are dry statistics, but I thought they might interest you, as the matter has not been gone into very extensively by anybody outside this company and our staff. Our genuine opinion is that it is a very fine thing for the company and the staff. There is no question about it. If you can provide, as we are doing successfully, excellent food for your employees, they are better in physique, it is better for them than wandering about at terminal points into public houses, and we are more than repaid by the genuine good which is the result of this particular department. (Applause.) It has been a great delight to meet you here. Some day I feel that the whole of the traction people will be interested together in one association. The day has gone by for tramways,

Digitized by Google

omnibuses, and everything else to remain apart; we are all traffic people, and there is no more reason why traffic people cannot come together than certain other people do not come together. In conclusion, may I again say it has been a great pleasure to us to welcome you, and if you have seen anything to interest you we are delighted. (Applause.)

Mr. R. J. HOWLEY (joint manager, British Electric Traction Company).—I desire to propose a vote of thanks to Mr. Blain and the company for the very pleasant and instructive afternoon we have had. Of all the visits in the past which we have had in connection with our conferences, I think this has been one of the best. Not the least interesting part has been Mr. Blain's address. He has taken us right through the subject of Safety First, and I do not think anyone can go away feeling that everything has not been shown and that there has not been full information. To us, as people engaged in the tramway traction, what will come to our minds at once is that here we have seen the best example. It is an example which I am sorry to say that owing to our size many of us cannot follow. But it is the best example of keeping this industry up to date and making for the efficiency of the transit business. I welcome Mr. Blain's suggestion that there should be a closer interchange of ideas among all those engaged in passenger transit work; the whole efficiency of the industry depends on keeping with the times and going ahead. One of the most important things, especially in these days of increased speed, is public safety. We have seen to-day how magnificently the matter has been taken up by this important company and how thoroughly they have gone into it, right from the smallest detail up to the biggest point. We are all pleased particularly to have been here to-day under Mr. Blain's ægis; I think we all still regard him as a tramway man. For many years we have listened to him at the meetings of the various associations—listened to the instructive way in which he has always brought these matters before us. I think perhaps that in years to come the omnibus business will be connected with nearly all the tramway businesses represented here to-day. Mr. Blain is a difficult man to follow, for I think you will all agree with me that he has a command of language such as none of us have. I will therefore conclude by tendering our thanks to him, to Sir Albert Stanley, and to the officers and directors of the company for the very instructive and very pleasant afternoon they have afforded us.

Mr. J. CAMERON (general manager and secretary, Blackpool and Fleetwood Tramroad Company) formally seconded the motion, endorsing Mr. Howley's remarks as to the profitable nature of the visit, which to him as a provincial man was of peculiar interest.

Mr. HARRY ENGLAND (general manager and secretary, Yorkshire (West Riding) Electric Tramways).—It is my duty and privilege, in the absence of our chairman, to put the vote of thanks. But before doing so I should like to say a few words on my own behalf. I have known Mr. Blain for many years, long before he joined this competitive business. I join issue with him on that aspect of the question. It is not the competitive business in the sense in which it was regarded a few years ago. We are here as transport experts, whether of motor omnibus or tramcars is quite immaterial at present. What I want to do is to express my appreciation of Mr. Blain's efforts this afternoon and in the past. Those of us who had the privilege of attending the West Ham conference a few years ago know the way in which Mr. Blain organised the meetings and the way we were treated. In a similar way Mr. Blain has been equally as good to-day, and his efforts on behalf of the association are warmly appreciated. Whatever he does he does well and thoroughly, and we can all endorse what has been already said. I put this vote of thanks with the greatest possible pleasure.

The motion was carried with the heartiest acclamation.

Mr. BLAIN.—Mr. Howley and friends, for the personal side of the vote of thanks I thank you very sincerely. On the official side, I will ask our popular secretary, Mr. Mandelick, to say a few words.

Mr. W. E. MANDELICK (secretary of the Underground and Omnibus Companies) said:—I will not detain you very long with the few remarks I have to make. Of course, speaking as an underground man—I came to this country 16 years ago to help build the tube railways—we did take a very big chance in asking Mr. Blain to join our forces, because he really was a tramway man, and we did not think he would go underground or care to operate the omnibuses for us. But knowing the man and his reputation we took the chance, and you can see how well he has fallen into the new position. We are very much obliged to you all for coming here this afternoon, and I hope what little you have seen will prove interesting to you. Mr. Blain is really responsible for the progress we have been making in our Safety First campaign; he is very keen on the subject. Mr. Blain has had a great deal to do with the selection and training of the women conductors; he says they like their work, and has got us to put seats on the omnibuses for them, because it is better they should sit on the platform than on country routes sit inside the omnibuses. They are shelf seats and will make the ladies even happier and more contented than they were before. I am very much obliged to you for the vote of thanks.

The cinematograph exhibition and lecture by Instructor Savidge, which followed, were very much appreciated,

THE ANNUAL DINNER.

This event, which was an informal gathering of members and friends, took place at the Trocadero Restaurant, whither the company were conveyed in omnibuses on the conclusion of the proceedings at the Training School. The Right Hon. Viscount Chilston, the president, occupied the chair, and those present included the following:—

G. S. Albanese.
R. H. Aspinwall.
S. E. Baker.
Alex. Balfour.
Geo. Balfour.
A. H. Beatty.
W. W. Beaumont.
H. R. Beken.
Lieut. L. Bellamy.
E. Benedict.
C. Bickersteth.
H. E. Blain.
F. Bland.
F. Bourne.
P. B. Brown.
Ald. H. Brown.
J. Browning.
C. L. Buckley.
R. C. Bullough.
C. Burnet.
S. H. Callow.
J. Cameron.
J. M. Cater.
R. Chisnall.
Viscount Chilston.
R. W. T. Corbet.
H. P. Conibear.
H. B. Corrie.
Major F. Coutts.
A. Coveney.
Harris F. Crookes.
J. Deschacht.
A. de Turckheim.
J. Devonshire.
—. Dias.
Ald. F. A. Dunsford.
E. H. Edwardes.
W. Vincent Edwards.
H. England.
J. Fry.
T. E. Gatehouse.
T. B. Goodyer.
J. W. Hame.
W. H. Hawley.
E. J. Hazel.
L. E. Harvey.
E. Hatton.
F. Hewer.
W. T. Hill.
A. J. Hollington.
G. T. Hollington.
W. Shaw Hopking.
J. Housman.
R. J. Howley.
S. Hornsby.
J. S. Huddleston.
Fearnside Irvine.
N. Jacobs.
A. Johnson.
C. J. Jewell.
J. J. Kelley.
B. Kingsford.
C. J. Knight.
D. Y. Knight.
—. Kossovoi.
St. A. Ledger.
E. H. Lean.
A. G. Longdon.
W. L. Lorkin.
H. Lotery.
A. E. Manley.
W. L. Madgen.
P. V. MacMahon.
C. W. Mallins.
H. Martin.
A. V. Mason.
H. F. Maynard.
Coun. R. Mayne.
J. C. Mitchell.
C. Mittelhausen.
J. F. Moss.
E. A. Nash.
A. Norton.
W. B. Pickering.
Fletcher J. Purser.
E. S. Quilliam.
W. Tuke Robson.
C. W. Rooke.
Capt. A. Rozier.
E. Sangier.
S. F. Shears.
C. W. Shepherd.
S. Sellon.
G. J. Shave.
E. E. Sharp.
W. Shearer.
R. T. Simcock.
W. Alderson Smith.
P. H. Frost Smith.
H. K. Spark.
Hon. A. Stanley, M.P.
C. D. Stanley.
M. O. Spicknall.
Ald. E. Russell Taylor.
W. Thom.
J. P. Thomas.
A. Toms.
H. E. Townell.
J. H. Turner.
W. R. Turnell.
H. Tomlinson-Lee.
W. C. Ullmann.
—. Verdickt.
S. Watford.
H. L. White.
A. M. Willcox.
H. L. Williams.
W. Wyld.
H. T. Wigham.
H. R. White.

The toast of "His Majesty the King" was loyally honoured. The Chairman subsequently referred with satisfaction to the manner in which the Association had maintained its usefulness during a very trying year, and also observed that the industry was indebted to the women of the country for the manner in which they had come forward and filled the places of the many thousands of men who had gone to uphold the honour of the Empire on the battlefield. His Lordship also expressed, amid applause, the pride entertained by the members in the indefatigable work of the Hon. Arthur Stanley, C.B., as the head of the Red Cross organisation, which had accomplished so grand a work for the wounded and sick of the Allied Forces.

In acknowledging the remarks of the chairman and the hearty greeting of the company, the Hon. A. Stanley thanked the managers of the numerous tramway undertakings that had made collections on the cars for the funds of the Red Cross Society. He expressed regret that Alderman Russell Taylor, chairman of the Liverpool Tramways Committee, had been unable to be present, and proposed his election as a vice-president of the Association, which was agreed to unanimously. Mr. Stanley also alluded to the valuable and successful work of the secretary, Mr. de Turckheim, during the year in promoting the interests of the Association and the industry. Mr. de Turckheim briefly responded.

METROPOLITAN ASSOCIATION OF ELECTRIC TRAMWAY MANAGERS.

VISIT TO SOUTHAMPTON.

Members of the Metropolitan Association of Electric Tramway Managers on July 5 paid a visit to Southampton for the purpose of inspecting the tramways, and particularly the car depot and workshops. The hospitality with which the party was received, and the entertaining programme arranged by Mr. T. B. Goodyer, hon. secretary of the association, and Mr. W. T. Robson, general manager of Southampton Corporation Tramways, made the occasion thoroughly enjoyable, while enabling the visitors to acquire much information with reference to the tramways installation under very agreeable conditions. On arrival the party was met by Mr. Robson and conveyed in special cars to the pleasant and roomy offices of the tramway department. Here Alderman F. A. Dunsford, the chairman of the tramways committee, welcomed the visitors, who were subsequently entertained to luncheon at the South-Western Hotel by the Mayor, Alderman W. J. Dacombe, who presided. In expressing his pleasure at receiving the association, the Mayor paid a cordial compliment to Mr. Robson, who, he said, had been with them for a year and had made his presence felt in a way which was highly beneficial to the tramway undertaking and the public. The Council had recently accepted his advice in regard to a re-arrangement of fares which he (the Mayor) believed would have great advantages, and he had no doubt that other recommendations of the manager would be willingly accepted by the committee. Mr. W. C. Ullmann,

Digitized by Google

general manager and engineer of East Ham Corporation Tramways, expressed the thanks of the guests to the Mayor and Alderman Dunsford for their welcome and hospitality, and remarked that they were all impressed with the beauty of the town and the handsome appearance of the tramway cars.

After luncheon special cars conveyed the party to the pier, and in brilliant weather a trip was made across the Solent to Portsmouth, in the course of which the visitors were entertained to tea by Ald. Dunsford. On returning, a tour was made over a portion of the tramways and an hour was spent at the Portsdown car depot and workshops, the excellent equipment of which was perhaps a surprise to those who had not kept in touch with the progress of the undertaking. Of special interest were the Edison electric tower wagon and an electric permanent way tip wagon that has replaced five horses. A charging and welding plant installed in a car was also examined with interest. The method of repairing defective joints by cutting out the rail ends and welding in new pieces was carefully inspected.

Later the party visited the Pirelli General Cable Works, where they were received by Mr. H. Bevis, the managing director. The visit, though necessarily a brief one, as the party was to return to Waterloo by the eight o'clock train, proved of the greatest interest. The works are new, and the visitors were sensibly impressed by the character of the equipment. The making of cables involves much complicated apparatus, and the designers of the works have spared no effort to secure the latest equipment with a view to obtaining the highest efficiency in the manufacture of cables of all sizes. The works are, in fact, excellently planned and admirably equipped in every respect; and—a feature of encouragement to those who are concerned about British enterprise after the war—ample space has been provided for extensions. It was pleasant to learn also that the Corporation of Southampton have assisted the company in every possible way in the initiation of their enterprise. At the conclusion of the visit the Mayor, in proposing a vote of thanks to Mr. Bevis, spoke of the erection of the works as a great achievement, and expressed the pride which the Corporation felt in the selection of Southampton for the location of the new works. Mr. Bevis, in reply, alluded to the help they had received from the Corporation. They had set out to obtain clean works in clean and healthful surroundings.

TIME TABLES AND DUTY SHEETS.

At the May Efficiency Meeting of the Operating Department of the London Underground Railways and General Omnibus Company group, held at the L.G.O.C. Training School, Milman Street, Chelsea, S.W., a paper on "Time Tables and Duty Sheets: Comments and Criticisms on Methods and Practice" was read by Mr. Evan Evans, of the department of the railway superintendent of the line. The chair was occupied by Mr. H. E. Blain, the operating manager, and there was again a good attendance of officials.

Mr. Evans traced the changes in the working of the underground railways connected with the group, numerous slides being exhibited on the screen, the first showing the constant improvement effected in the frequency of the service on the busiest section—that between South Kensington and Mansion House—during the busiest hour of the day. This had grown from twelve trains per hour in 1871 to forty-three in 1916. The influence on railway time tables of physical limitations both imposed by the line itself and the number of its stations and junctions, as well as by the influence of the connections with other railways, was pointed out. Two standards were necessary in drafting a time table in skeleton form, one being for an hour of the peak load and one for an hour of the slack service, and it was usual to stimulate traffic by providing a service ahead of the immediate needs with a view to development. On a time table being put into operation, two points were kept under observation, viz., to see (a) how it fitted the needs of the traffic, and (b) how it worked. Attention to these matters had reduced the time occupied by trains over the tunnel section of the District Railway in the ratio of 49 to 27. Popularity and prosperity of routes were largely due to adequacy and punctuality of service, whilst unpunctuality also carried in its wake disorganisation and uneconomical working.

The railway lay-over facilities and coupling arrangements were described, and specimens of time tables discussed. It was pointed out that the principle of non-stopping at specified stations had three distinct advantages:—

(*a*) The assistance it gave in regulating the loading of the trains.
(*b*) Reduction in time occupied on the journey.
(*c*) Operating economy, enabling the rolling stock to run a greater mileage and reducing the current consumption,

two out of the three of these being to the advantage of the passenger, There were different systems of non-stopping; that adopted on the Piccadilly line being called in America the "skip-stop," trains passing alternate stations which were but a short distance apart. On the District Railway the junctions were utilised to act as relief lines, a clear run for each train being obtained by arranging for the previous train to be cleared at a junction, or itself to become a non-stop at a certain point. Methods of taking train loadings were described, together with the system of coupling and uncoupling additional carriages according to the traffic demands of different hours of the day.

In considering omnibus time tables, it was found that, just as the introduction of electric working on the railways had permitted a decrease of from 25 to 30 per cent. in the running times, so the displacement of the horse omnibus by the motor had achieved an equivalent improvement, and allowed of much longer journeys being undertaken, the increased facilities of through travelling being much appreciated by the public. The methods of omnibus time table preparation were described, and the particular problems involved discussed, slides being exhibited of leading charts and other interesting data.

The final portion of the paper dealt with the preparation of men's duty sheets, and the various systems in operation on both the railways and omnibuses were described and analysed, it being pointed out that this portion of the work was an exceedingly important one, requiring the exercise of considerable knowledge and skill.

The discussion was opened by Mr. E. R. Peaty, superintendent of the Time Schedules Department of the L.G.O.C., and he was followed by a number of the officials, some keen criticism resulting.

The next paper of the series will deal with ticket systems.

BRITISH ELECTRIC TRACTION COMPANY.

QUESTIONS FOR PARLIAMENTARY CONSIDERATION.

The twentieth annual meeting was held on June 23, Mr. E. Garcke presiding. In moving the adoption of the report (a summary of which appeared in our issue of June 10), the chairman stated that of 11,000 of their employees in Great Britain over 3,300 joined the forces before compulsory service was adopted, and 120 of them had made the highest sacrifice man could offer for his country. To some extent the vacancies had been filled by women, of whom nearly 2,000 were employed, and were giving complete satisfaction. Higher wages and prices for materials had had to be paid because of the war, and altogether the working expenses had increased considerably, but the company were not able to increase the fares and the rates charged for electricity. These were fixed by Acts of Parliament, and in most cases could not be increased. If, therefore, they showed larger profits, it was because they had done much more work, for they had earned less per passenger and per unit. They were making no so-called war profits. An Act had been passed taxing heavily all profits made during the war in excess of those of a pre-war period. Tramway and electricity supply companies, if they were profitable, were taken over by local authorities on the expiration of specified periods, and the price paid was generally less than the capital expended. Therefore those companies were bound to make large reserves out of profits, and it was only after the undertakings had been developed for several years that they were able to do that. A tax on profits in those cases was thus a tax on capital. The directors had suggested that the Act should give special protection to such companies, but the only concession they had been able to obtain was that those cases should receive special consideration. The revenue account showed a balance of profit of £209,000, or about £11,000 more than in the preceding year. After paying the debenture interest of £91,259 and the dividend of 6 per cent. for the year upon the cumulative participating preference stock, requiring £42,764, they had a balance of £75,146 besides the amount of £71,398 brought forward. Last year nothing was placed to reserve, but the directors thought that an addition of £20,327 to reserve, raising it to £410,000, was the right thing to do this year. Owing to the rearrangement of capital, they were able to pay a dividend of 3 per cent. on the new ordinary shares, and the carry-forward would be increased by £15,030, to £86,428. With regard to the dividend on the new ordinary stock, it might be remembered that when the scheme of rearrangement of capital was formulated he intimated that in the first year after the scheme had been carried through they would be in a position to pay on that stock a dividend of 4 per cent., and that they might expect the dividend gradually to improve. The accounts showed that their estimates were well founded, and that they could easily pay this year a dividend on the ordinary stock of more than the 3 per cent. suggested. The estimate, however, was made before the outbreak of war, but he still believed that they would not be disappointed in future. It was important that they should keep in a liquid form some part of their profits, especially as the present was not a favourable moment for the realisation of their investments. In due course they would receive about £86,000 in respect of their holding in the Devonport Tramways Company, which had been acquired by Plymouth Corporation. Under normal conditions he believed that the London and Suburban Traction Company, which was formed three years ago to amalgamate certain tramway, omnibus, and lighting companies, would have a successful career. The work of co-ordination had been carried further by the removal of the offices to Electric Railway House, where the companies had the advantage of the organisation provided by the Underground Railways Company. The loss to the company of the Bombay Electric Supply and Tramways, owing to the burden of double income-tax on small Indian shareholders, was much

Digitized by Google

regretted. With regard to the manufacturing departments, it was a hopeful augury that the commercial community within the British Empire was now thoroughly aroused to the necessity of being prepared to resist a renewal of the invasion to which their interests were exposed before the war.—Mr. C. Shirreff Hilton seconded the motion for the adoption of the report and the payment of the dividends.—The Chairman, in reply to points raised in a congratulatory discussion, said that the increase of fares was not an easy matter to deal with. Frequently an increase led to smaller profit, but there was no doubt that the services their companies were rendering to the public were not adequately remunerated. Among the many things that Parliament would have to deal with would be the important question whether public service enterprises that had done such excellent work for the poorer section of the community should not receive more liberal treatment at the hands of Parliament. In view of the altered circumstances after the war the Board of Trade had appointed an electrical committee for the consideration of these various matters, and the company's managers were preparing evidence to be submitted to that committee.

FINANCIAL REPORTS AND MEETINGS.

Provincial Tramways.—An interim dividend of 8d. per share on the ordinary shares for the year ending September 30 next will be paid.

Yorkshire (West Riding) Electric Tramways Company, Limited.—The directors paid on July 1 an interim dividend of 3 per cent., being at the rate of 6 per cent. per annum, on account of dividend accrued on the 6 per cent. cumulative preference shares.

South Metropolitan Electric Tramways Company.—The annual report gives the revenue for 1915 as £69,286, and after providing for all expenses and adding £4,500 to the renewals fund, there is a divisible balance of £15,488. A dividend of 5 per cent. is proposed on the preference shares for 1914, and 1 per cent. on account of the past year, adding £4,500 to the reserve, and carrying forward £812.

Jarrow and District Electric Traction Company.—During the past year the revenue totalled £8,855, an increase of £986. After meeting expenditure, debenture interest, and placing £800 to renewals, the balance available was £2,911, plus £1,026 brought forward. The directors have declared a dividend of 4 per cent. on the ordinary shares, while £900 has been placed to reserve, and £1,040 carried forward.

Wemyss District Tramways Company.—The report shows a profit for the year (including the balance brought forward), after providing interest on the mortgage stock and placing £200 to the fund for redemption of that stock, of £5,774, less £1,746 paid in dividend on the 6 per cent. preference shares. The directors propose a dividend of 7½ per cent., less income-tax, on ordinary shares, an additional 1½ per cent. on preference shares, carrying £2,000 to general reserve and £940 to next year's accounts.

A Year's War Traffic at Southampton.—The receipts of the Corporation tramways for the year ended March 31 totalled £78,064, or £10,022 more than for the previous year. The number of passengers rose by 2,228,651, although the car mileage decreased by 66,929. A decrease of 4,499 units was recorded in the energy used. In the receipts there was an increase of 1·862d. per car-mile, while the cost of energy per car-mile increased by ·945d. The general manager advises that a charge should be made for parcels, other than luggage, exceeding 28 lbs.

Madras Electric Tramways, Limited.—Presiding at the annual meeting, Mr. A. M. Quill stated that for the year 1915 there was an increase of 6·4 per cent. in traffic receipts and an advance of 5 per cent. in passengers. The special renewals of permanent way had been practically completed. Recently a resolution was passed by Madras Corporation praying the Government to increase the track rent paid by the company. If this petition were granted it would be a breach of faith. The fares were much lower than they were entitled to charge. The dividend, which the directors recommended should be increased to 6 per cent., could not be regarded as extravagant. The average return since the company was incorporated was only 3·3 per cent. The directors were awaiting the decision of the Government regarding the proposed extensions of the tramways. The Corporation had approved of the routes.

Mansfield and District Tramways.—Mr. A. R. Holland, who presided at the annual meeting, said the business had continued steadily to increase, and this gradual building up of the position enabled them to recommend a dividend of 7 per cent. on the ordinary shares, and to carry forward practically the same amount that was brought in. This result had been obtained after providing for maintenance, repairs, and renewals. The results for the year to date showed a slight increase. In connection with colliery developments, the directors had the matter of possible extensions under consideration. Meantime temporary arrangements had been made for the convenience of troops and for the large number of colliers. During the year they carried 5,000,000 passengers, and the cars ran more than 560,000 miles. The reserve account, with the additions during the year, amounted to £13,500, and a portion had been invested in war loan stock.

Walsall Corporation Tramways.—For the year ended December 31 last, the passenger receipts were £39,551, equal to 12·908d. per car mile. The total revenue was £40,291 (13·217d. per car mile). Passenger receipts showed an increase of £6,040, and were the highest on record. Compared with the first year of the undertaking the increase was £14,427. The car mileage was 731,640, and the passengers 7,886,190, exclusive of over 8,000 soldiers who were carried free. The working expenses were £22,955 (7·530d. per car mile), an increase of £1,133. Alderman J. Cope, chairman of the Tramways Committee has informed the Council that the amount paid in wages was £12,526, equal to 5s. 11d. of every sovereign received. Allowances had been made to the dependents of employees serving with the colours to the extent of £854. The profit for the year was £7,886. Nearly half the capital borrowed in respect of the undertaking had been repaid.

Tramways Light and Power Company.—The report for 1915 states that the receipts, including £1,712 brought in, amount to £32,213, and after providing for administration, loan and debenture interest, the profit is £19,324. The directors propose a dividend on preference shares for year of 6 per cent., less tax, and carry forward £3,348. Viscount Chilston presided at the third annual meeting. In proposing the adoption of the report, the chairman said the earnings were derived from the Derbyshire and Nottinghamshire Electric Power Company, Nottinghamshire and Derbyshire Tramways Company, Leamington and Warwick Electrical Company, Leicestershire and Warwickshire Electric Power Company, Midland Electric Light and Power Company, Limited, and Cheltenham and District Light Railway Company. The various undertakings had only to continue the present rate of earnings to show a considerable increase during the current year. During the year additional consumers for power had been obtained to about £10,000 per annum. The total sum to be dealt with was £32,214. After meeting general expenses and debenture and loan interest, there was a balance of £19,324, compared with £18,329 the preceding year, although £2,000 more had been paid in debenture and loan interest.

Torquay Tramways Company.—The report for the year ended December 31 last showed a profit of £13,691, and after deducting debenture interest and allowance to dependents of employees who had joined the colours, there remained a balance of £6,510. To this has to be added £897 carried forward at December 31, 1914. The directors recommended that the total balance of £7,407 be dealt with as follows:—Reserve and renewals account, £2,500 (bringing this account up to £13,000), depreciation on furniture, fittings, plant and tools, £93, dividend of 3¼ per cent. on ordinary shares, £3,900, carry forward, £914. For the previous year the dividend was also 3¼ per cent. Mr. W. B. Cownie, managing director, who presided at the annual meeting, said the traffic revenue afforded a good testimony to the stability of the undertaking, notwithstanding the withdrawal of all railway facilities for excurison traffic. The receipts for the present year, to February 9, showed an increase of £253. Prior to the outbreak of the war the directors placed an order for two motor omnibuses to act as feeders, particularly during the summer months, when they could have earned a good profit. Owing to non-delivery the order was cancelled. The total operating cost per car mile was 6·09d. as compared with 6·36d. for 1914.

The United Electric Tramways of Monte Video.—Mr. G. A. Touche, M.P., presiding at the twelfth annual meeting, said that the directors had again to report a year of difficulties and troubles. The shortage of tonnage had increased freight rates enormously, and the coal situation had occasioned much anxiety. Failing British coal, it had become necessary to rely on American, although it was not of the same steaming qualities as Welsh coal. The cost delivered in Monte Video would be approximately 105s. per ton, of which 85s. represented freight. This compared with the pre-war price of 40s. 6d. In the circumstances the directors felt unable to recommend the payment of any dividend on the ordinary shares. As to the proposal to acquire the undertaking by the Municipality, they had informed the authorities that if they were prepared to make a definite offer on a fair and reasonable basis of valuation, the directors would give the offer consideration. A cablegram had been received stating that the Government had made a proposal, and that information was being sent by mail as to its terms. The report gave the net revenue for the year as £120,220, and the sum receivable from La Sociedad Comercial de Monte Video in respect of revenue was £111,413. After providing for debenture interest, etc., £51,692 remained, while £12,973 was brought forward. Dividends amounting to 6 per cent. are proposed on the preference shares, appropriating £26,062 for redemption and contingencies, and carrying forward £13,103.

Imperial Tramways Company.—The report for 1915 states that the gross receipts of the Middlesbrough, Stockton and Thornaby tramways amount to £66,529, as compared with £63,562 for the preceding year, an increase of £2,967. The number of passengers was 12,299,280, against 12,261,624, an increase of 37,656. The net profit is £15,432, as compared with £17,604 for the corresponding year. The traffic receipts have continued to develop in spite of the difficult conditions prevailing throughout the districts served by the tramways and omnibuses. Since the beginning of the war 84 per cent. of the employees have joined the forces or attested.

Digitized by Google

The special allowances granted to dependents of employees on active service amounted to £1,531. The Corris Railway Company shows a decrease in receipts of £428, almost wholly due to the absence of tourist traffic, but the working expenses have been further reduced, the decrease being £780. The Imperial Tramways Company holds 122,230 5 per cent. cumulative preference shares of £1 each and 112,451 ordinary shares of £1 each in the London and Suburban Traction Company, and has received the full dividend for the past year on the preference shares, but the revenue of that company for the year 1915 was not sufficient to permit the payment of any dividend on the ordinary capital. The company's net revenue account for the year shows an available balance of £25,760, and after payment of interest on the debenture stock for the year and an interim dividend on the preference shares in respect of the half-year to June 30 last, amounting together to £17,075, it is proposed to appropriate the balance as follows:—Dividend at 6 per cent. per annum on the preference capital (less income-tax) paid January 1 last, £5,025; dividend for the year at 2 per cent. on the ordinary capital (less income-tax), £3,467; carrying forward £194.

Birmingham and District Power and Traction Company.—At the annual meeting the chairman (Mr. C. S. B. Hilton) said the net revenue from tramways was £56,545, or £6,963 better than in the previous year, while interest and dividends on investments showed £7,179 increase. The entire revenue of £106,024 showed the substantial increase of £14,202, while on the expenses side there was very little increase. Too much importance, however, must not be attached to that small increase in expenses, as it had been impossible during the war to spend as much as is usual in repairs and maintenance. The final result was that, after making a provision of £9,000 for renewals, or £5,000 more than in 1914, placing £5,000 to reserve, as against £2,000, and providing the full 6 per cent. dividend on the preference shares to December 31, the company was able to pay an increased dividend of 1 per cent., or 4½ per cent. for the year on the 7 per cent. preferred ordinary shares, and to increase the carry forward by £1,591 to £2,551. In referring to the scheme for capital reduction, the chairman said that the experience of the past twelve years had shown that tramway undertakings operating on the modern low fare basis were incapable of carrying the burden of capital represented by displaced systems of traction. There was an insufficiency of profits. The directors proposed therefore to cancel £325,000 of deferred ordinary shares and to convert the remaining 25,000 deferred ordinary shares and the whole of the £350,000 preferred ordinary shares into ordinary shares. The British Electric Traction Company, which held all the deferred shares, would become entitled to participate at an earlier date to a small extent in such distribution of profits as in future might be made after payment of debenture charges and preference dividend. Alluding to the omnibus undertaking, the chairman remarked that it had for the first time paid a dividend on the ordinary shares, after making full provision for depreciation.

Newcastle Chairman's Review of the Year.—Councillor R. Mayne, chairman of the Tramways Committee, in presenting the annual statement of accounts to the Town Council, said that owing to the abnormal conditions the figures showed very different comparisons with those of former years. The traffic expenses amounted to £93,831, an increase of £14,503, of which 87·40 per cent. was incurred in wages, the remainder being due to war bonuses. Uniforms had cost more owing to the employmentof women conductors, the men they displaced having been already equipped during the year. General expenses amounted to £34,745, an increase of £9,165, of which £6,000 was due to the rates; the balance to third party claims and insurance against aircraft. Working expenses, at £38,055, were £6,935 higher, mainly owing to the increased cost of maintenance of cars. Power expenses amounted to £17,436, an increase of £3,946, due to the increased cost of fuel. The total expenses were £192,049, an increase of £32,191. The total income was £324,695, an increase of £31,431. The gross profit at £132,046, compared with £132,805. Adding interest, there was a total of £135,764, as compared with £136,003. This sum will be disposed of as follows:—Special rents, etc., £1,697 (last year £1,559), income-tax £10,834 (last year £5,412), interest and redemption of the loan capital £75,000 (last year £72,930), interest and redemption on old horse tramways £1,418 (last year £1,381), contribution to rates out of profits £8,164 (last year £18,000), purchase of motor omnibuses and other items £117 (last year £3,599), war service allowances to men on active service and to their dependents £13,144 (last year £4,365), claims reserve to £2,000 (last year £935), making a total of £112,375 (last year £111,181), leaving a net surplus to be appropriated towards the reserve and renewals funds of £23,389 (last year £24,822). The expenditure on renewals to permanent way, additions to plant and cables provided to meet the increased load due to the workmen's traffic, amounted to £16,643. The purchase of land at £4,400 brought the expenditure to £21,652. The whole of the surplus money was practically absorbed, with the exception of about £2,000 which would be carried to the reserve and renewals fund, raising it to £77,000. In the preceding year the renewals and reserve fund had been drawn upon to the extent of £19,682, while in the year under review they had fully covered all their outgoings out of income, which Councllor Mayne regarded as highly satisfactory.

Record Receipts at Birmingham.—The result of the increased fares instituted last August is seen in the accounts of the tramways committee for the year ended March 31 last. The traffic receipts amounted to £765,036, which is a record, the previous highest being £640,091 in 1915. The total increase is £124,945, or 19·5 per cent. in excess of the previous highest; £2,480 of the increase is in respect of the Warwick Road tramway, which was opened in February. The miles run were 14,151,000, as against 14,232,000. On the expenditure side the figures are again abnormally high, due to the increased cost of labour and materials, the total increase in the expenses being £60,000, or 12·7 per cent. in excess of the previous year's figures. After paying interest and sinking fund charges the surplus is £107,749, as against £47,596, of which £57,749 has been carried to reserve fund account, and the balance, £50,000, is transferred in relief of the rates. The latter sum, which shows an increase of £20,000, is the largest amount received from any of the trading undertakings. During the year £53,543 has been charged against the reserve fund in respect of reconstruction of permanent way. It has also been considered advisable to charge against this account the cost of the omnibus undertaking. The capital expenditure on the tramways during the year was £17,523. The following is a summary of the results for the year in comparison with the two previous years:—

	Year ended March 31.		
	1916.	1915.	1914.
Capital expenditure	£2,489,431	£2,472,938	£2,334,437
Amount outstanding	£1,934,790	£1,940,158	£1,913,559
Traffic revenue	765,036	640,091	628,016
Total revenue	771,117	647,014	635,471
Working expenses	534,080	473,879	445,507
Gross balance	237,037	173,135	189,964
Net profit	50,000	47,596	75,972
Passengers carried	163,258,584	149,443,199	146,930,986
Fare per passenger	1·12d.	1·03d.	1·03d.
Car mileage	14,151,683	14,232,902	14,268,244
Units per car-mile	1·9	1·7	1·7
Power cost per car-mile... ...	2·17d.	1·912d.	1·913d.
Traffic receipts per track-mile	£6,204	£5,384	£5,482
Traffic receipts per car-mile ...	12·974d.	10·793d.	10·564d.
Expenses per car-mile ...	9·057d.	7·991d.	7·494d.
Ratio of working expenses ...	69%	73%	70%
Total track mileage	123 miles	118 miles	114 miles

Manchester Corporation Tramways.—The report for the year ended March 31 was adopted by the Tramways Committee on June 27. Mr. J. M. McElroy, general manager, states that in the early stages of the war the undertaking was adversely affected, but during the past year a remarkable recovery took place. The ordinary working expenses show a decrease on the figures of previous years, but the total expenditure was increased consequent upon the large payments made for war service allowances, etc., which amounted to £92,808, mainly in respect to 2,174 men who had joined the colours up to the close of the financial year. The net result shows that after paying £100,000 in relief of the rates, it was only possible to pay £21,181 to the reserve, renewals and depreciation account, as against £99,000 which would have been provided in normal times. The department had paid over £1,000,000 in relief of the rates since 1902. The following is a summary of the results of the past three years:—

	Year ended March 31.		
	1916.	1915.	1914.
Capital expenditure	£2,231,548	£2,216,009	£2,130,904
Amount outstanding	£1,626,583	£1,648,183	£1,616,131
Traffic revenue	£925,301	£887,763	£911,223
Total revenue	£939,469	£901,875	£925,310
Working expenses	£654,247	£604,205	£585,224
Gross balance	£285,222	£297,670	£340,086
Net profit	£100,000	£100,000	£103,090
Passengers carried	209,877,667	202,768,420	205,608,741
Fare per passenger	1·06d.	1·06d.	1·06d.
Car-mileage	18,486,440	19,155,051	19,463,646
Units per car-mile	1·553	1·562	1·543
Power cost per car-mile ...	1·687d.	1·608d.	1·597d.
Traffic receipts per track mile	£5,032	£4,835	£5,054
Traffic receipts per car-mile ...	12·013d.	11·123d.	11·236d.
Expenses per car-mile ...	8·494d.	7·570d.	7·216d.
Ratio of working expenses ...	59·76	63·47	63·25
Total track mileage	203·31	203·31	202·48
Number of cars in stock ...	685	683	662

The total revenue per car-mile was 12·197d., as against 11·300d., while the working expenses for the two past years were 7·289d. and 7·172d., the balance for the year 1915-16 being 4·908d., as against 4·128d. for the preceding year. The main items of the working expenses were as follow:—Traffic, 3·398d. (decrease, ·022d.); general, 1·143d. (increase, ·068d.); repairs and maintenance, 1·061d. (decrease, ·008d.); power, 1·687d. (increase, ·079d.); total, 7·289d., or an increase of ·117d. The increase in the general expenses is due to the greater amount paid in local rates, and the increase in power expenses is owing to the advance in the price of electrical energy, consequent upon the increased coal costs. The motor omnibus accounts, showing a balance of £1,083 carried to the tramways account, are given elsewhere in this issue.

Digitized by Google

CONTRACTS AND ORDERS.

The Stirling Boiler Company have received an order from West Hartlepool for a water-tube boiler.

Southampton Council have placed a contract with Jenkins and Company for a coal-breaker, at £147 15s.

Wolseley Motors, Limited, have supplied a number of motor cars to the stores department of the India Office.

W. C. Yuille and Company have received a contract for the supply of wall plug sockets, etc., for Glasgow Tramways Committee.

Clayton and Shuttleworth, Limited, of Lincoln, have received a contract to supply a number of steam vehicles to the War Office.

The Motor Rail and Tramcar Company, Lombard Street, E.C., have supplied petrol tractors and parts to the War Department.

Hadfields, Limited, have received an order from Bradford Tramways Committee for 100 special steel wheels and tires with axles, at £19 11s. 6d. per set.

The Victorian Railways Department have accepted the tender of the British Insulated and Helsby Cables, Limited, for three-core cables for Newport workshops.

The Brush Electrical Engineering Company, Limited, have received an order for two 150 k.v.a. and one 250 k.v.a. three-phase transformers from Bradford Corporation.

Willans and Robinson have an order for a turbo-alternator with condenser and auxiliary plant from Wolverhampton Corporation. The amount of the contract is £19,000.

The Z Electric Lamp Manufacturing Company have obtained a contract for twelve months for the supply of Z drawn-wire metal filament lamps from the Great Northern Railway.

Jowett Motor Manufacturing Company have received an order from Bradford Corporation for two General Vehicle electric trucks for coal and ash conveyance at the electricity works.

Briggs, Jones and Gibson, Limited, Manchester, have received a contract from Salford Council for the supply of women tramway inspectors' and conductors' uniform clothing during the year ending March 31, 1917.

Portsmouth Council have accepted the following tenders for the supply of uniforms for the women tramcar conductors :—J. Canton and Company, London, clothing ; C. Dillingham and Son, Luton, caps ; Beng Brothers, Portsea, caps.

Rawtenstall Council have accepted the following tenders :—The British Westinghouse Company, transformer and switch panel ; British Thomson-Houston Company, switchgear ; W. T. Glover and Company, cables ; Oates and Green, conduits.

Wolverhampton Electricity Committee have recommended the acceptance of the tender of the Stirling Boiler Company for two water-tube boilers and superheaters at £6,606, and with the Underfeed Stoker Company for two sets of mechanical stokers at £1,907.

Glasgow Council have accepted the offers of MacKinlay, Limited, and R. M. Easdale and Company, for the purchase of scrap materials in the tramways department, and have placed a contract with Babcock and Wilcox, Limited, for four sets of water-tube boilers, at £10,632.

Rochdale Council have awarded the appended contracts for extensions at the electricity works :—E. Green and Sons, Wakefield, economisers ; Sturtevant, Limited, London, induced-draught plant ; R. and T. Howarth, Rochdale, chimney ; Dempster and Sons, Elland, ash-handling plant.

Walthamstow Council have placed the following contracts :—Paterson Engineering Company, Limited, water-softening plant for the electricity works, £750 ; Cammel, Laird and Company, eighteen tramcar axles, £5 16s. each ; P. R. Jackson and Company, Limited, twenty-four commutators, £5 10s. each.

Shepherd's Parging Block Company, Limited, of Milkstone, Rochdale, write that among recent users are included the Dunfermline, the Scarborough, and the East Ham Corporation Tramways, and the Midland Railway Company. Sixth and seventh repeat orders from various customers are being supplied, and there is very satisfactory evidence of the economy which can be obtained from the use of the company's block parging.

Salford Council have ordered a permanent way wagon body from the United Electric Car Company, and have placed the following contracts :—British Westinghouse Company, Limited, auxiliary steam turbine ; G. and J. Weir, Limited, two roto-feed pumps ; William Gornall, erection of sub-station building and construction of machine foundations ; British Westinghouse Company, Limited, three-phase e.h.t. switchboard ; Stewarts and Lloyds, Limited, mild steel pipes and separator ; Stanton Ironworks Company, Limited, cast-iron pipes and valves. These contracts are in connection with a 5,000 KW. turbo-alternator to be supplied by Willans and Robinson, Limited.

PERSONAL.

Councillor Kensett has been appointed chairman of West Ham Corporation Tramways Committee.

Mr. R. H. Wilkinson, general manager, Huddersfield Corporation Tramways, has been granted an increase in salary from £400 to £500.

Alderman J. H. Corke, Mayor of Portsmouth, one of the King's birthday knights, was for some years chairman of the tramways committee.

Mr. E. W. Moir, one of the new baronets, and a partner in S. Pearson and Son, Limited, contractors, is the representative of the Ministry of Munitions in the United States.

Mr. F. Dudley Docker, C.B., chairman of the Metropolitan Carriage, Wagon and Finance Company, Limited, has joined the committee of the Council for the Organisation of British Engineering Industry.

Mr. F. C. Harrison has been appointed a representative of the London County Council on the Permanent Way and Building Conciliation Board, in place of Mr. Cooper Rawson, who has resigned.

Mr. A. B. Mountain, borough electrical engineer, Huddersfield, has resigned, but is to be retained as consulting engineer. Mr. J. W. Turner, who has been Mr. Mountain's chief assistant, has been appointed borough electrical engineer.

The Hon. Arthur Stanley, M.V.O., M.P., was one of fifteen civil recipients of C.B., Order of the Bath, on the occasion of the King's birthday. The honour is a well-merited recognition of Mr. Stanley's arduous labours on behalf of the Red Cross organisation.

Mr. A. R. Owen, tramways and marine claims superintendent in the tramways department of the London County Council, has been employed on work under the Admiralty since the outbreak of the war. The Council on May 30 approved of the grant of leave of absence to the officer without pay and on the conditions reported on May 11, 1915.

Mr. J. S. Brodie, the new president of the Institution of Municipal and County Engineers, has been borough engineer of Blackpool since the year 1900. From 1877 to 1884 he was engaged as an assistant on the Liverpool Corporation tramway works. Elsewhere we report a reference that he made in his presidential address to the tramway and petrol omnibus controversy.

Mr. William Marsh, general manager and engineer, Brighton Corporation Tramways, and the staff were highly complimented by Councillor Martin, chairman of the Tramways Committee, when he submitted to the Council the report on the past year's trading. The manager and the employees, observed the chairman, had carried on the undertaking in a highly creditable manner under abnormal conditions.

Mr. Robert Watson has resigned the post of manager of Musselburgh Electric Tramways Company, which he had held for three years. Prior to that he was for ten years secretary of the National Electric Construction Company, Limited, and of its subsidiary companies, including the Musselburgh Company. The new manager at Musselburgh is Mr. E. J. Walsh, at present engineer of the local company, who will act as manager and engineer.

Mr. David James, general manager, Swansea Improvements and Tramways Company, and the whole of the staff and employees, received the thanks of Mr. C. G. Tegetmeier, chairman of the company at the annual meeting. The chairman remarked that the difficulties in carrying on the business with a very much depleted staff had been considerable, and had involved very much increased work, which had been cheerfully given by those who had had to remain.

Mr. F. A. McCarty has been appointed general manager and engineer to Melbourne Tramways Board, which will take over the undertakings of the Tramways Company on July 1. The questions of revision of fares and the advisability of electrifying the cable lines will then be considered. The Brunswick and Coburg Tramways have applied to the Board for permission to make an extension to Lonsdale Street, substituting electric for cable traction on half a mile of the route.

Mr. E. Cross, electrical engineer and tramways manager of Rotherham, has been granted an increase in salary of £50 per annum, and he will be entitled to a further increase of £50 in January next. Alderman Winter, chairman of the Electric Light and Tramways Committee, in moving the recommendation, spoke highly of the services of Mr. Cross. Up to 1904 they had employed a consulting engineer, but since then the work has been done entirely by Mr. Cross, and he had saved the Corporation thousands of pounds. Mr. Cross had been with them fifteen and a half years, and since 1905 had controlled both the tramways and the electricity undertakings.

Mr. Percy Priestley, on leaving Rawmarsh to take up the position of general manager, Oldham Corporation Tramways, has been presented with a solid silver tea-service bearing the following inscription :—" Presented to Mr. P. Priestley, engineer and manager of Mexbro' and Swinton Tramways, by the employees, staff, and a few friends, on his leaving to take up the position of general

Digitized by Google

manager of Oldham Corporation Tramways." Alderman D. L. Winter, J.P., the local director, presided, supported by Mr. W. Mitchell (commercial manager), Mr. M. McLeod (traffic superintendent), etc. The chairman said he became local director in 1908, a year after Mr. Priestley joined the company, and he could affirm that that gentleman had acted as a friend to every one of them. During the war he had had to contend with the difficulties imposed by scores of the employees joining the forces. Since its inception the company had never had any troubles with the men, and Mr. Priestley was leaving with the goodwill of all who knew him. He asked him to accept the present as a token of great esteem and affection. Inspector Long, Councillor E. J. Twigg (Rotherham), and several employees also spoke. In reply, Mr. Priestley said if he could take his present staff to Oldham he would not have the slightest thing to fear.

Mr. George Kidd, general manager, British Columbia Electric Railway Company, Limited, is the subject of the portrait gallery in a recent issue of the *Brill Magazine*, issued by the J. G. Brill Company, Philadelphia, and 110, Cannon Street, London. Mr. Kidd was born in Sheffield, England, in 1874, and his first position in business life was with a firm of chartered accountants at Nottingham. In 1907 he became connected with the electric railway business as secretary of the company for which he now acts as general manager. Subsequently he was appointed comptroller, and later he left the London office and took charge at Vancouver. Mr. Kidd held that position until May 6, 1914, when he became general manager of the company. We may add that his arduous labours during the past two years of retrenchment and negotiation with local authorities, necessitated by the depression, won praise from the chairman of the company at the last annual meeting. Mr. Kidd's view of the position may be gathered from the following observations attributed to him :—" The days have gone past when a public company could afford to ignore public opinion as expressed by the popularly elected bodies. I believe that the general sense of fairness that always ultimately prevails in enlightened communities will eventually adjust the balance properly between the needs of the people and the rights of the investors. The period of transition may be a very trying time for many companies, and it is important that officials of companies should, while doing all they can to please the patrons of the utility, also lose no opportunity of pressing for fair treatment for their investors."

Mr. James Pearson, whose death is reported at the age of sixty-five years, was for some years chairman of the Blackpool Lighting and Tramways Committee.

Mr. Charles Challiner, joint managing director of the Shrewsbury and Challiner Tire Company, Limited, of Manchester, London, Birmingham, and Sydney, died suddenly on June 10 at Manchester. Mr. Challiner, who was 67 years of age, was trained as an engineer, and thirty years ago he started business in fitting rubber tires to hansom cabs. In 1900 the firm was amalgamated with the Shrewsbury and Talbot Cab and Noiseless Tire Company. With the development of the motor industry the business has assumed great dimensions. Mr. Challiner was the inventor of the cross-ribbed tire for the prevention of skidding by fire engines. Three sons of the late Mr. Challiner are engaged in the motor tire trade, Mr. C. S. Challiner being secretary of the company.

WITH THE FORCES.

Mr. Shepherd, assistant engineer, Mexborough and Swinton Tramways Company, is serving with the British Force at Salonika.

Mr. H. G. Wigzell, assistant secretary to the Automobile Association and Motor Union, has been gazetted to the mechanical transport section of the A.S.C.

Mr. E. E. Sharp, of Messrs. Chamberlain and Hookham, and Venner Time Switches, has been granted a commission, and is at present at the Ordnance College, Woolwich.

Bombardier W. Bates, a Halifax tramcar conductor, has received the military medal for gallant conduct at the front. He was a reservist, and went to France at the outbreak of the war.

Mr. C. W. Hill, a director of Messrs. Scholey and Company, Limited, who was formerly general manager of Bournemouth Corporation Tramways, has become an Engineer-Lieutenant in His Majesty's Navy.

Corporal C. Angulatta, who was a conductor on the Cardiff Corporation Tramways, and joined the army in September, 1914, has been awarded the military medal for bravery whilst throwing bombs.

Lewis Q. Verlander, who was for eight years a conductor on the Brighton Corporation Tramways before his enlistment, and is now second yeoman of signals in the Royal Naval Reserve, has been awarded the D.S.M.

Lance-Corporal H. Williams, of the 7th King's Own Lancaster Regiment, who was a conductor on the Salford Corporation tramways, has been awarded the new military medal for bravery in the field. Corporal Williams saw service in South Africa during the Boer War.

Professor J. H. Dobson, general manager of the electric supply, tramways and gas departments of Johannesburg Corporation, has been appointed major in command of two Pioneer Companies for service in East Africa. The corps will comprise men who are familiar with the use of explosives.

Mr. H. E. Ellis, borough electrical engineer of South Shields, has been refused permission by the Electricity Committee to join His Majesty's Forces. While appreciating very highly the patriotic action of Mr. Ellis, the committee regrets that in view of the responsible position which he holds, it is unable to give him leave of absence.

Glasgow Employees' Patriotism.—According to the report of the Tramways Committee for the year ended May 31, 2,811 members of the staff had joined the Forces, inclusive of 633 Territorials and Reservists who were called up directly war was declared. The committee regret to state that intimation has been received of the deaths of 113 employees.

Leeds Employees' War Distinctions.—At the end of the past financial year there were 473 employees of Leeds Tramways department on active service. Motorman J. Band has been awarded the D.C.M., and Inspector R. Dalby and Conductor W. Geldard have been mentioned in despatches. Ten men, including Inspector Dalby, have lost their lives.

Sergeant J. W. Smith, 1-5th Royal Scots, has been awarded the Military Medal. He was mentioned in Sir Ian Hamilton's despatches for having extinguished a fire caused by the enemy which had broken out in a stack of ammunition, thereby preventing a serious explosion. Sergeant Smith was before the war a driver with the Edinburgh and District Tramways Company.

Mr. A. H. Seabrook, electrical engineer and general manager, Marylebone Corporation electricity undertaking, having completed the duties upon which he has been engaged for the Metropolitan Munitions Committee, has been given leave of absence by the Council in order that he may take up a commission. He will serve in a department where his experience in munitions work will be utilised.

Hull Conductors' Medals for Gallantry.—Sergt. H. Brien, East Riding Field Company, R.E., has been awarded the D.C.M. for conspicuous bravery, devotion to duty, and coolness under continuous heavy shell fire. Lance-Sergt. F. F. Robson, 2nd Grenadier Guards, has gained the Military Medal for gallantry in the field. Both soldiers were conductors on the Hull tramcars, and the Tramways Committee have directed the manager to write to them and compliment them.

Sergeant E. Mann, King's Royal Rifles, who has been for ten years in the employ of Manchester Tramways Committee, has been awarded the D.C.M. for rescuing wounded comrades in France and holding wire entanglements against the enemy on two occasions. He has thrice been mentioned in dispatches. The medal was handed to him by Alderman J. Bowes, chairman of the tramways committee, on July 2, when Alderman A. W. Chapman (vice-chairman), Alderman Pogson, Councillor Day, and Mr. J. M. McElroy also complimented the gallant recipient.

Mr. C. W. Goodman, elder son of Mr. W. G. T. Goodman, chief engineer and general manager of the Adelaide Municipal Tramways, enlisted for active service immediately he had completed his engineering course at Adelaide University, where he was graduated with the degree of B.E. He is now a lieutenant in the Engineers, and was recently in command of the Engineers in camp, but he expects to go to the front shortly. Mr. R. G. Goodman, a younger son, a medical student, who went to Egypt last November in the A.M.C., has now been given a commission in the A.I.F., and is in France.

Motorman W. Middleton, South Shields Corporation Tramways, who was serving on a warship that took part in the battle off Jutland, has been presented with a silver watch and a silver cigarette case by the employees and staff of the tramways department. Alderman W. G. Wylie, chairman of the tramways committee, in handing the gifts to the recipient, expressed the pride felt by all connected with the tramways in having a representative engaged in the fight. They hoped he would be spared to take up his former position amongst them. Mr. W. Bunting, who presided, said they were following out a custom of giving a hearty welcome to one who had returned to them on leave from active service, and of giving to him a slight token of their high regard and admiration. There was a large attendance of the employees and their wives and friends, Mr. J. C. Whiteley, the general manager, being one of the supporters of the chairman.

Private A. A. Chattock, Royal Warwickshire Regiment, who was killed in France on June 4, was the only son of Mr. R. A. Chattock, city electrical engineer of Birmingham.

Sergeant J. J. Stephenson, signalling instructor in the South Lancashire Regiment, and formerly a motorman on the Nelson Corporation Tramways, has been killed in action. He was mentioned in Sir John French's despatch of January last, and he also served in the South African war.

Digitized by Google

TRAMWAY AND LIGHT RAILWAY NOTES.

ASHTON.

THE CORPORATION TO ACQUIRE TRAMWAYS.

Ashton Town Council have decided to promote a Bill in the next session of Parliament to obtain powers for the acquisition of the tramways of the Oldham, Ashton, and Hyde Tramways Company within the areas of Waterloo and Bardsley. The Corporation already have powers to purchase the lines in the borough, and by acquiring the lines mentioned, they will be able to reach Oldham.

BIRMINGHAM.

FUEL DIFFICULTIES AND CURRENT INTERRUPTION.

Owing to the difficulty experienced in increasing the plant at the power station of the Birmingham Corporation, tramway traffic has had to be temporarily suspended four times during the past eight months. On the last occasion, on June 24, suspension occurred for 40 minutes, from 9.40 a.m., while on May 29 there were two cessations of the car services. The first was from 9.25 a.m. to 9.45 a.m. The cars then restarted only to stop for a longer period a short time later. The cutting off of the supply of energy was due to the great demands upon the electric supply department, especially by munition works. Owing to the low grade of the fuel at the generating station more boilers have to be utilised than would be the case if better quality coal could be obtained. The result is that the steam pressure fails, and as there are no spare boilers available, the supply of energy to the tramways has to be cut off.

BRISTOL.

REDUCED EARLY FARE FOR ALL CLASSES.

The Tramways Company have given notice that from July 1 passengers who reach their destinations before 8 a.m. will have the privilege of riding at workmen's fares. In making this concession the directors have been influenced by the fact that there are many travelling to and from the city in the early morning on business or work connected with the war. In notifying the directors' decision Mr. C. Challenger, the manager, says: "These fares are on a very low scale, the usual fare for the long routes to the outskirts of the city being one penny, with two halfpenny sections."

EDINBURGH.

THE COUNCIL'S DEMANDS ON THE TRAMWAYS COMPANY.

Edinburgh Tramways Committee have reported that orders under the tramway lease have been served on the tramway company and Messrs. Dick, Kerr and Company for the renewal and repair of 33½ miles of tramway track, for the repair and overhaul of Shrubhill and Henderson Row power stations, and for the renewal and repair of the whole pulley ways. Inasmuch as the lease of the company does not expire until July, 1919, the committee have deferred a motion recently submitted to them for the appointment of a tramway manager and also of an engineer.

GLASGOW.

TRACK EXTENSION IN SHIPBUILDING WORKS—TOP COVERS AND VESTIBULES—THREE YEARS' COMPARISON OF REPAIRS—TRAFFIC BY-LAW—ROUTE NUMBERS.

An additional junction was made during the past year with the tramway lines in the works of the Fairfield Shipbuilding Company, Govan. The report of the tramways department for the year ended May 31 shows that the city possesses 857 cars, of which number 819 have been fitted with top covers, while 386 are provided with vestibules. In 1914, when the Tramways Committee decided to build 150 additional top-covered cars, the total number of cars was 852, those with top covers numbering 811, and those with vestibules 350. In 1914 43 converted horse cars were sold; the number of such vehicles left is seven. An examination of the reports of the past three years shows an evenness in the amount annually expended for the inspection and repair of cars at the depots and car works. For the past year the total was £55,709, while £41,212 was charged against revenue to meet depreciation. For 1914-15 the figures were £55,965 and £41,192, and for 1913-14, £55,308 and £47,841. The amounts spent on ordinary repairs to the power plant and sundry machinery in each of the three years was £6,678 in 1915-16, £8,138 in 1914-15, and £7,805 in 1913-14, the sums charged against revenue to meet depreciation being £23,045, £23,567, and £32,048. The war has not caused a great fall in the outlay on the upkeep of the track. For the past year the total was £62,175, while £68,681 was set aside to meet the cost of renewal of the track. The respective figures for the two preceding years were £65,875 and £68,228 in 1914-15, and £77,797 and £85,438 in 1913-14. During the three years £18,079, £33,768, and £41,238 were deducted from the permanent way renewals fund to meet the expenditure on renewals. Numerous horse drivers have been fined for failing to observe the new traffic by-law. The previous by-law, which is superseded by the new regulation, referred only to streets where tramways had been laid down, and under it obstruction had to be proved. Under the new order it is an offence for slow-going vehicles to take the centre of any street, whether the road is clear or not, unless there is sufficient reason for doing so. Owing to the war no progress has been made with the scheme for placing route numbers on the cars, but a number of cars have been fitted with transparencies on the upper deck to facilitate checking. Measured as double track, there are 98 miles of tramways in the city, and 149 as single track. In outside districts the Corporation own 47 miles measured as single track.

ILKESTON.

LEASING OF THE TRAMWAYS AND ELECTRICITY WORKS.

Ilkeston Council have decided by 14 votes to 4 to lease the tramways and electricity undertakings for 42 years to the Notts and Derbyshire Tramways Company, who intend to link them up with their tramways, etc. Since their opening in 1903 the tramways have resulted in an average annual loss of £2,500, the total being £32,498. The total length of route is 3·8 miles, and of track 4·3 miles.

LEEDS.

HUGE WAITING LIST OF WOMEN CONDUCTORS—FARES PAID BY BOARD OF GUARDIANS.

It was stated at a recent meeting of the Corporation that the conditions under which women work as conductors were so attractive that there was a waiting list of 1,250 women ready to accept positions. Alderman Wilson said that the conditions offered were relatively good, and it was only through the professional agitators that they were worrying the Council for more money. He did not agree that they should receive the same wages as the men, especially as the Council were paying the wages of the enlisted men. The Children's Committee of Halifax Board of Guardians has considered a letter from Mr. P. H. Bagenal, Local Government inspector, stating that when inspecting the Children's Home, he was informed that one child walked twice a day to and from the Catholic school. At Leeds the Guardians paid tramcar fares, and he suggested that the Board should consider similar action. The clerk was instructed to write inquiring what other Boards of Guardians did in similar cases.

LONDON.

EFFECT OF THE WAR ON TRACK MAINTENANCE—COMPLAINTS IN OUTER SUBURBS—WEST HAM FARE SETTLEMENT.

In the interest of their own traffic, to say nothing of the importance of maintaining safe user of streets by other vehicles, the London County Council's tramways department have managed during the war to maintain their policy of giving prompt attention to the rail and permanent way repairs. Among the items of work recently undertaken in one district was the replacement of rails at a place where a double line is merged into a single line on account of a narrowing of a thoroughfare. The wear on the point of junction is so great that cars, if not very carefully driven, are occasionally thrown off the metals. This particular thoroughfare is one of several in which no harm would have resulted if Parliamentary Committees had been induced to allow double tracks to be laid. In the outer suburbs the problem of maintenance is causing some anxiety to the companies concerned. Ealing Council have been informed by the London United Tramways Company that owing to the shortage of labour and material they are unable to carry out extensive reparation of the track. The company will, however, do their best to keep it in the best state of repair under the circumstances. Brentford Council have resolved to call the attention of the Board of Trade and the Commissioner of Police to the noise created by tramcars owing to the worn condition of the tracks. West Ham Council have at last agreed to the changes in fares recommended by their tramways manager, Mr. J. S. D. Moffet. There will be a universal penny fare—*i.e.*, a penny will be charged for any single journey on any car. All halfpenny fares, except for children, will be abolished. Workmen's return fares will be 1½d. It is hoped that the new arrangement will put the undertaking on a sound basis, and at the same time enable a convenient and adequate service to be maintained.

MANCHESTER.

PROGRESS OF THE DEPARTMENT—DECREASED WORKING EXPENSES AND MILEAGE—CAR CONSTRUCTION SUSPENDED—PARCELS TRAFFIC—FREE CONVEYANCE TO A PARK—ROYAL SHOW TRAFFIC.

The accounts relative to the working of the tramways and motor omnibuses of Manchester Corporation in 1915-16 are reproduced elsewhere in this issue. It will be of interest here to mention some of the items given in the general manager's report: 782 yards of siding and new lines were opened during the year, and 701 yards of track were taken up in Lamb Lane, Parker Street, and North Road. The aggregate length of single track (including lines over which the Corporation are exercising running powers) is 195 miles. The working expenses show a decrease, the total being £561,438, as against £572,441 for 1914-15, but to those figures sums of £92,808 and £31,763 have to be added for allowances made to enlisted employees' families. Fewer car miles, of course, were run, the total being 18,486,440, as compared with 19,155,051 and 19,463,646 in the two preceding years. There was an increase of seven million passengers over 1914-15 and four million beyond the total in 1913-14; 66·92 per cent. of the 209,877,667 passengers were carried for a penny fare, the next fare in popularity being the three halfpenny, at which 10·06 per cent. were carried. It was only by cutting down, from £99,000 to £21,181, the amount paid to the reserve, renewals, and

Digitized by Google

depreciation account, that the committee were able to pay the £100,000 required by the City Council in relief of the rates. Of the 685 cars in stock, 351 are single truck, 284 double truck, while 50 are described as combination. Two new cars were put in service and six double truck cars were fitted with covered tops. Consequent upon the Treasury restriction as regards capital expenditure, the construction of car bodies and covers has been suspended. From the conveyance of 1,225,718 parcels, the total receipts were £14,185, the net receipts being £3,405. During the summer holidays the school children are to be conveyed free of charge on the cars to Heaton Park. In its report of the Royal Agricultural Show, the *Manchester Guardian* remarked that on June 30 to July 1 "many complimentary comments were heard about the excellence of the tramway service to the show ground and the cheapness of the fares. The speed with which the cars were filled and despatched citywards during the busiest period of the evening was an agreeable surprise to those who were anxious about catching trains."

NEWCASTLE-ON-TYNE.

INCREASED WORKMEN'S FARES—WOMEN EMPLOYEES' THOUGHTFULNESS—RENEWALS FUND—LATER SERVICES.

Smooth working is attending the increase in the fares charged to workmen on the Corporation cars, which came into force on May 21. The increase is threepence in the shilling and eighteenpence books, and twopence on the sixpenny books. Special offices have been opened for some time for the sale of the coupons, and all workmen and workwomen who do not tender coupon tickets have to pay the full ordinary fare. With this regulation all cars hitherto labelled "workmen's car" will be abolished. The women employed on the Newcastle Corporation Tramways have formed a committee to provide comforts for wounded soldiers in the hospitals. The women are subscribing one penny per week each, and collections are also made at the depots. Gifts are also received from the public. Councillor Mayne, chairman of the Tramways Committee, in his annual review of the general manager's report, announced that renewals on a much larger scale than during the past year must be faced as soon as labour and materials become available. The committee aimed at building up a fund of £100,000 to meet accumulated needs. It at present stood at £77,000. The management on June 11 restored the hour by which the services had been curtailed owing to the shortness of labour and the restricted lighting.

PLYMOUTH.

UNIVERSAL PENNY FARE.

The Town Council have adopted the recommendation of the Tramways Committee to institute a universal penny fare when through running of cars to Devonport is established. The recommendation was made on the advice of the manager, Mr. C. R. Everson, whose report on the subject was summarised in our issue of June 10. Mr. Everson estimates that if no additional passengers are carried the loss, based on the previous year's figures, will amount to £617. Alderman S. H. Phillips, chairman of the Tramways Committee, in advocating the proposal in the Council, said that profit was not the object of corporation tramways. Two things had to be borne in mind by a tramway committee: first, making ends meet, and second, the convenience of the public.

SHEFFIELD.

AUTOMATIC TROLLEY CHANGERS—TRANSFER OF THE POWER STATION.

Several automatic trolley changers are being tried at Sheffield as a relief for women conductors. The changers work well as they have done wherever installed, and they should be more generally used. On dark and stormy nights they are a great boon to conductors of either sex, and they save much time. The Local Government Board have introduced a Bill to confirm a Provisional Order granted by the Board to Sheffield Corporation, providing that Kelham Island power station, with the plant, cables, tunnel, etc., used for generating power for the tramways, shall in future cease to be part of the tramway undertaking, and shall be deemed to be part of the electrical undertaking.

SOUTHAMPTON.

CORROSION OF STANDARDS—A PRELIMINARY TO UNIVERSAL PENNY FARE—MANAGER'S FORESIGHT AS REGARDS RAILS.

As the result of an inspection of the tramway standards, serious corrosion was discovered underneath the clips and brackets on one route. These appendages have been removed, and the standards thoroughly scaled. Alderman Dunsford, chairman of the Tramways Committee, has stated that through the foresight of the manager the committee a considerable time ago laid in large stocks of rails, thus saving large sums of money. Rails they bought at £7 10s. per ton he did not suppose could be obtained now. The Council have agreed to a scheme presented by the committee for revision of the penny stages on the basis of equal distances. This scheme, Alderman Dunsford observed, was suggested by the manager, and it was estimated that 20 per cent. of 2d. passengers might be reduced to 10 per cent. The latter number of 2d. fares would be sufficient to keep the finances on the right side. The chairman added that he was not keen on making profits to hand over to the rates, but he was desirous that the balance sheet should be sound. The next move the committee would ask the Council to make would be the manager's scheme for the universal penny fare. Replying to pleas for the working classes who were forced to live away from the town, the chairman said the committee had given them the boon of extended return tickets in the morning.

YORK.

COST OF PERMANENT WAY MAINTENANCE.

A report recently presented to the Corporation by a committee who had investigated the work of the various municipal departments shows that for the tramways permanent way the average cost in 71 other towns per mile for maintenance is £168, and per car mile ·52d. In York the cost per mile for maintenance is £30 and ·12d. per car mile. The low figure for York is accounted for to some extent by the greater age of the tramways in other towns. The cost of road maintenance in York is £149 per mile, or 2s. 9d. per head of population, against an average of £162 and 3s. 7d. per head in 34 similar towns.

PATENT LIST.

Specially abstracted for "The Tramway and Railway World" from the Official Journal of Patents

*** If the inventions have been communicated the names of the communicators are given below in italics.

APPLICATIONS FOR LETTERS PATENT.

Radiators for motor cars (7,586)—L. N. Anderson.
Support for detachable wheels of motor vehicles (7,692)—T. P. Barnes.
Variable speed gear (7,574)—H. W. Barras.
Securing railway rails in chairs (7,900)—R. Bowen.
Electric motor control systems (7,652)—British Thomson-Houston Company (*General Electric Company*).
Trolley heads for electric tramways (7,595)—W. H. Cottee.
Electrical signalling (7,730)—W. C. Davey.
Lifting jacks (7,800)—J. S. Drewry.
Trailers for carrying long loads (7,801)—J. S. Drewry.
Resilient tires (7,795)—W. T. Clifford Earp.
Trolley heads for electric tramways (7,595)—R. H. Hollingsbee.
Converting pleasure vehicles into commercial trucks (7,739)—W. F. Hudson.
Automatic emergency brakes (7,729)—D. I. Hullett.
Lifting jacks (7,800)—Lacre Motor Car Company.
Trailers for carrying long loads (7,801)—Lacre Motor Car Company.
Electric signalling apparatus (7,616)—F. Ritchie.
Carburettors for petrol engines (8,249)—A. L. Bird.
Prevention of splashing by motor vehicle wheels (8,227)—S. Bowker.
Electric motor control systems (8,128)—British Thomson-Houston Company (*General Electric Company*).
Electric trucks (8,199)—F. J. Decker.
Tramway tracks (7,962)—A. Devrin.
Electric generators for road vehicles (8,232)—A. F. Evans.
Operating levers of motor vehicles (7,957)—C. W. Gudgeon.
Water-cooled internal combustion engines, particularly petrol motors of road vehicles (8,253)—S. H. Hole; also (8,253)—E. Sharman.
Reinforced-concrete railway sleeper (7,982)—F. C. H. Rings.
Means for controlling and varying the speed and power of internal-combustion engines for propelling vehicles (8,137)—J. D. Roots.
Continuous railway tie or sleeper (8,182)—H. A. Rugeroni.
Resilient tires (8,107)—F. C. Shardlow.
Electric traction systems (8,166)—Soc. Anon. dite Ateliers de Constructions Electriques du Nord et de l'Est.
Tires for motor vehicles, etc. (7,987)—J. E. Spagnoletti.
Carburettors for petrol engines (8,249)—G. I. Taylor.
Seats (8,420)—J. G. Brill Company.
Control systems for electric motors (8,360)—British Westinghouse Electric and Manufacturing Company (*Westinghouse and Manufacturing Company*).
Pneumatic tires for vehicles (8,337)—T. Dunn.
Propulsion of motor cars (8,575)—J. B. Edlington.
Rail joint (8,295)—F. E. Harris.
Driving belt or track belt for motor vehicles (8,463)—A. Kegresse.
Conductor's seat for tramcars (8,265)—J. M. McElroy.
Bonnets for motor vehicles (8,432)—J. Weller.
Propulsion of motor cars (8,575)—W. H. Wilkinson.
Extensible car steps (8,763)—A. Arnt.
Radiators of motor vehicles (8,624)—H. H. Clark.
Motor vehicles (8,895)—W. E. Clarke; also (8,895)—C. H. Crawley.
Automobile construction (8,746)—Hayes Diefenderfer Company.
Steering of automobiles (8,799)—E. Massis.
Adjustment of trolley pole of tramcar (8,669)—R. Mercer.
Side-skid preventer for motor cars, etc. (8,774)—A. R. Pilkington.
Clutches and brakes (8,707)—H. S. Hele Shaw.
Motor tire (8,822)—A. Spedding.
Motor vehicles (8,895)—M. E. Starkey.
Rail-joint inspection box (8,595)—R. J. Wright.

Digitized by Google

Specifications Published.

1915.

Securing pads to the treads of motor-vehicle brake levers (7,115)—McClure.
Automatic coupling for railway vehicles, etc. (7,217)—Cloud.
Vacuum brake apparatus for railway vehicles (7,318)—Luard.
Electrical transmission for automobile vehicles (7,366)—Daimler Company, Lanchester and Milligan.
Detachable wheels for motor road vehicles (8,558)—Crawley, Clarke, and Starkey.
Resilient tires (12,858)—Pancera.
Fluid-pressure braking apparatus for railways (12,925)—Westinghouse Brake Co.

FOR HIGH-CLASS
CONDENSING PLANT
WRITE TO
THE MIRRLEES WATSON CO., LTD.,
SCOTLAND STREET, GLASGOW.

ORIENTAL
TUBES — for every need
Before placing orders for steel tubes consult us. Our prices are right, and we can promptly meet your every need.
Our Specialities include Seamless Steel Tubes, Electric Welded, Butt Welded, and Close Joint Steel Tubes. Consult us NOW.
ORIENTAL Tube Co., Ltd., West Bromwich.
'Phone: 45, West Bromwich. Wires: "Tubes, West Bromwich."
For Immediate Delivery

Brake-operating mechanism for street cars (14,741)—McWhirter.
Passenger registers for vehicles (17,698)—Priestman.
Differential or balance gearing for motor vehicles (7,557)—Wolseley Motors, Limited, and Leeding.
Automatic car couplers (7,587, 7,588, 7,589)—Willison.
Brakes for road vehicle wheels (9,655)—McMillen and Connolly.
Fittings for enabling additional wheels to be added to the existing wheels of motor vehicles (9,900)—Smith and Hudlass.
Means of obtaining the weight of railway rails, girders, beams, or similar sectional lengths (10,076)—Henry Pooley and Son, Limited, and Dobson.
Apparatus for use in distributing railway, omnibus, and tramway tickets (12,144)—Bishop, Kitson, and Mottershead.
Motor vehicles (16,757)—Bell and Jones.
Spring suspensions for vehicles (3,348)—Soc. des Etablissements Malicet and Blin.
Controlling mechanism for automobiles (6,197)—British Thomson-Houston Company (*General Electric Company*).
Anti-rolling devices for motor vehicles (6,202)—Brophy.
Mounting for wheels of road vehicles (8,044)—Collins.
Mechanism for operating electrically-worked tramway and railway track points (8,318)—Murray.
Vacuum brake apparatus for railway vehicles (9,856)—Gresham.
Puncture-proof band for pneumatic vehicle wheel tires (10,041)—Jorgensen.
Buffers for vehicles (10,567)—Brown Bayley's Steel Works, Limited, and Sanders.
Lifting jack (11,685)—Page.
Change-speed gear (11,781)—Bynoe, Jeffryes, and Sheen.
Actuating signals on and communicating with trains (12,228)—Thompson.
Metallic vehicle wheels (17,208)—Mellersh-Jackson (*Detroit Pressed Steel Company*).
Electric railway systems (2,897)—Brettell (*Leffler*).
Wheels for motor vehicles (11,582)—Jelly.
Fluid-pressure braking apparatus (11,626)—Westinghouse Brake Company.
Railway indicators (13,865)—Benn and Taylor.
Tires of motor cars (16,579)—Blakoe.
Metallic tire for motor cars (17,816)—Sotomayor and Marcenaro.

1916.

In the following list the numbers in *italics* are those that the specifications will finally bear and under which they will be indexed and abridged before acceptance and finally printed. The application numbers should, however, still be used for correspondence purposes.
Lubricators and particularly lubricators for the pivot pins of the stub-axles of motor vehicle steering wheels (5,855—*100,374*)—Daimler-Motoren-Ges.
Railway rail braces (125—*100,429*)—L. A. Mundwiller and H. A. Noedel.
Anti-friction car wheels (1,601—*100,467*)—Chevalier.
Tire-making machines (4,444—*100,209*)—Goodyear Tire and Rubber Company).

Colonial and Foreign Tramways Traffic Returns.

NAME OF COMPANY.	1915. WEEKS ENDED.					1916. WEEKS ENDED.					AGGREGATE.		
	May 29	June 5	June 12	June 19	June 26	May 27	June 3	June 10	June 17	June 24	Wks.	1916.	Increase or Decrease.
	£	£	£	£	£	£	£	£	£	£		£	£
Anglo-Argentine	53,580	51,984	50,398	50,758	49,296	52,770	50,805	48,644	49,888	48,580	26	1,279,333	– 5,200
Auckland	(28 days)	20,511	...	...	...	(28 days)	21,152	...	...	...	48	253,058	+ 4,949
Burma... ... ... Rs.	4,060	4,087	4,516	4,156	4,224	3,612	3,706	4,155	4,125	3,718	47	—	+ 5,944
Calcutta ... ... Rs.	62,827	62,871	64,889	62,820	66,574	62,775	62,995	65,311	63,851	66,443	26	1,674,594	+ 85,028
Madras ... ... Rs.	29,228	(2 weeks)	2,7340	(2 weeks)	...	29,191	(2 weeks)	30,277	(2 weeks)	...	23	341,092	+ 27,437

Companies Issuing Monthly Statements.

	1915. Jan.	Feb.	March.	April.	May.	June.	1916. Jan.	Feb.	March.	April.	May.	June.	Wks.	AGGREGATE. 1916.	+ or -
	£	£	£	£	£	£	£	£	£	£	£	£		£	£
Brazilian Street Mlrs.	...	...	...	...	...	...	...	...	...	...	...	...	—	—	—
Brazilian Traction Mlrs	5996190	5797500	6294910	6333460	6670110	...	6430000	6079000	6711000	6678000	7091000	...	22	32,989,000	+1,896,830
Brisbane	29,620	34,050	30,740	29,890	...	...	32,280	30,320	34,275	32,575	...	...	18	129,450	+ 12,610
British Columbia $	640,495	558,512	557,135	540,861	...	...	591,949	572,935	577,117	549,046	...	...	43	5,531,193	– 764,709
Buenos Aires Pt. & C.	...	...	...	...	...	...	...	...	...	...	...	...	—	—	—
Buenos Ayres Lacroze	43,301	38,877	44,332	41,765	44,480	40,421	40,596	39,137	42,219	40,220	41,503	36,213	52	490,818	– 15,324
Cape Town	15,660	...	...	...	...	...	16,030	...	14,994	...	...	...	—	—	—
Carthagena & Herrerias	904	1,882	2,436	1,496	1,931	2,059	2,841	1,585	2,991	2,513	2,927	3,512	26	16,369	+ 5,721
Cordoba	11,945	11,534	12,746	13,609	...	...	12,329	11,831	13,598	14,053	...	...	4	14,053	+ 444
East India	1,914	1,649	1,846	1,864	2,119	2,194	2,015	1,863	2,196	2,116	2,161	2,283	48	23,150	+ 1,597
Kalgoorlie	2,372	2,352	2,638	...	...	...	2,236	2,248	2,479	...	...	...	13	6,963	– 399
La Plata	4,540	4,016	4,582	4,269	4,489	3,875	4,533	4,346	4,613	4,354	4,343	3,735	26	25,925	+ 160
Lima	33,043	30,164	34,185	31,633	...	...	34,014	32,900	34,159	33,556	...	...	18	134,629	+ 5,614
Manaos	...	...	...	...	...	...	...	...	157,156	...	...	...	—	—	—
Manila ... ... $	...	...	119,984	117,450	...	...	...	...	124,750	124,350	...	...	—	505,381	+ 16,765
Melbourne	62,729	59,086	...	...	...	...	69,879	69,395	69,542	...	...	...	—	—	—
Mexico ... $	...	...	...	...	...	...	...	...	...	...	...	...	—	—	—
Monte Video	32,459	30,008	29,716	26,786	27,771	24,266	34,252	32,502	31,956	28,997	28,349	25,300	34	241,068	+ 14,376
Port Elizabeth ...	...	...	...	...	...	...	4,193	3,857	...	...	...	...	—	—	—
Puebla ... $	...	...	...	...	...	...	...	...	...	...	...	...	—	—	—
Rangoon	4,689	4,991	5,217	4,964	4,887	4,997	4,763	4,674	5,501	4,849	4,589	4,205	26	28,581	– 1,164
Toronto ... $	843,351	767,326	820,750	795,816	...	...	906,350	846,256	910,969	883,209	...	...	18	3,546,784	+ 319,541
Winnipeg ... $	350,681	314,658	303,209	264,856	...	...	297,560	293,250	296,500	282,498	...	...	18	1,169,808	– 63,597

(Continued on page 48)

Digitized by Google

TRAFFIC RETURNS—*continued.*

Tramways and Omnibus Undertakings in the United Kingdom.

NAME OF COMPANY OR CORPORATION.	1915. WEEKS ENDED.					1916. WEEKS ENDED.					AGGREGATE.		
	May 29	June 5	June 12	June 19	June 26	May 27	June 3	June 10	June 17	June 24	Wks	1916.	Increase or Decrease.
	£	£	£	£	£	£	£	£	£	£		£	£
Aberdare	465	362	335	348	331	367	357	351	447	390	12	4,428	+ 246
Aberdeen Corporation	1,763	1,369	2,258	1,866	1,832	1,818	2,088	1,855	1,785	1,840	3	5,680	− 276
Accrington Corporation	594	543	551	559	...	555	565	676	639	...	12	7,001	+ 232
Ayr Corporation	322	336	365	440	407	359	356	380	435	462	6	2,151	+ 45
Bath Electric	*	...	...	...	...	...	...	...	...	...	—	—	—
Birkenhead Corporation	1,526	1,371	1,412	1,401	1,385	1,501	1,465	1,534	1,585	1,598	12½	18,327	+ 1,336
Birmingham Corporation	14,955	12,729	13,202	13,160	13,281	16,601	16,404	15,953	16,984	16,250	12	198,620	+ 35,251
Birmingham Corp. Motor Omnibuses	1,141	819	892	916	898	1,015	989	869	1,050	1,007	12	11,331	+ 1,088
Blackburn Corporation	2,007	1,245	1,294	1,370	1,352	1,404	1,272	1,124	1,567	1,345	12½	16,256	− 497
Blackpool and Fleetwood	1,479	879	623	1,543	681	524	648	545	648	1,025	25	12,530	+ 924
Blackpool Corporation	1,547	2,277	1,116	1,202	1,214	964	1,338	892	2,555	2,293	12	17,459	+ 2,329
Bolton Corporation	2,605	2,818	2,832	2,824	2,741	2,878	2,723	2,795	3,182	2,957	13	35,816	+ 2,433
Bournemouth Corporation	2,005	2,004	2,079	2,009	1,953	2,169	1,945	2,310	2,267	2,216	13	28,280	+ 695
Bradford Corporation	8,639	6,400	6,772	6,524	6,381	6,664	6,515	6,200	7,729	6,725	12	82,850	− 340
Brighton Corporation	1,290	1,030	1,122	1,130	1,121	1,201	1,103	1,143	1,259	1,230	12½	14,054	+ 788
Bristol	13,767	10,246	9,737	9,904	9,802	10,584	10,293	9,558	11,071	10,541	25	238,932	+ 8,855
Burnley Corporation	1,957	1,565	1,543	1,528	1,498	1,680	1,694	1,525	2,057	1,627	13	22,424	− 790
Burton-on-Trent Corporation	314	281	295	282	281	254	266	273	269	264	12	3,179	− 403
Bury Corporation	1,664	1,488	1,394	1,390	1,358	1,445	1,336	1,361	1,815	1,561	13½	18,159	+ 556
Cardiff Corporation	3,250	2,644	2,825	2,776	2,701	2,962	2,852	2,700	3,170	2,931	12	35,162	+ 1,590
Chatham and District	1,473	1,183	1,316	1,243	1,208	1,329	1,294	1,183	1,235	1,334	25	28,213	+ 1163
Chesterfield Corporation	352	255	262	263	264	285	270	257	298	272	12	3,323	+ 120
Colne Corporation	395	241	262	258	234	290	276	243	366	264	—	—	—
Cork Electric	618	536	555	571	559	517	550	508	544	585	25	11,849	− 225
Croydon Corporation	2,252	1,719	1,966	1,980	1,987	...	...	...	...	...	—	—	—
Derby Corporation	1,326	1,017	1,071	1,031	1,046	1,163	1,108	1,065	1,174	1,134	12½	13,698	+ 565
Dover Corporation	360	300	308	301	317	323	325	293	318	318	12	3,740	− 2
Dublin and Lucan	249	187	160	190	183	150	179	154	179	190	25	3,208	− 375
Dublin United	7,472	6,226	6,389	6,643	6,766	6,208	6,508	6,092	6,558	6,890	25	138,398	− 9,806
Dundee City	1,359	1,350	1,385	1,398	1,367	1,393	1,445	1,392	1,369	1,398	5½	7,360	+ 179
East Ham Corporation	1,434	1,200	1,362	1,369	1,356	1,394	1,346	1,298	1,341	1,367	12½	15,967	− 194
Exeter Corporation	498	373	416	394	387	392	385	364	407	396	12	4,534	− 144
Gearless Motor 'Buses	*	...	...	...	...	...	...	...	...	...	—	—	—
Glasgow Corporation	22,819	22,821	22,802	22,930	21,998	24,079	24,328	23,559	24,672	24,389	3½	84,129	+ 6,413
Glasgow Subway	1,035	1,050	1,012	1,008	1,020	1,182	1,120	1,110	1,061	1,054	25	30,043	+ 3,085
Glossop (Urban Elec. Supply Co.)	157	130	136	131	129	143	141	127	158	139	26	3,474	+ 410
Halifax Corporation	3,321	2,060	2,208	2,262	2,288	2,350	2,202	2,102	2,600	2,353	11½	26,379	− 499
Halifax Corp. Motor Omnibuses	77	46	49	46	49	50	49	45	54	49	11½	541	− 65
Hastings and District	1,315	940	957	1,010	1,010	1,049	1,041	923	1,029	1,038	25	21,315	+ 301
Huddersfield Corporation	3,883	2,587	2,768	2,673	2,640	2,920	2,928	2,654	3,718	2,810	12	35,726	+ 2,940
Hull Corporation	3,311	3,001	3,406	2,960	2,920	3,139	3,106	3,074	3,158	3,163	12	37,542	− 773
Ilford U.D. Council	801	643	690	673	675	723	700	645	692	690	12	8,394	+ 430
Ilkeston Corporation	119	135	132	138	135	140	130	141	134	140	13	1,743	+ 66
Ipswich Corporation	680	539	588	571	607	568	608	548	599	601	12	6,366	+ 233
Isle of Thanet	588	413	414	408	432	348	337	309	355	366	38	10,471	− 1,955
Kilmarnock Corporation	159	169	165	173	176	161	161	161	170	188	5½	964	− 50
Lanarkshire	2,093	1,945	2,093	2,105	2,109	2,371	2,336	2,310	2,357	2,574	25	54,969	+ 8,807
Lancashire United	2,102	2,115	1,777	1,892	1,830	1,942	1,819	1,652	1,892	2,111	25	42,493	+ 1,539
Leeds City	11,651	8,808	9,383	9,188	8,875	9,914	9,651	9,169	10,481	9,832	13	118,415	+ 8,975
Leicester Corporation	*	...	...	...	...	...	...	...	...	...	—	—	—
Leith Corporation	798	787	815	791	795	876	843	843	862	882	5½	4,934	+ 369
Leyton U.D. Council	1,846	1,324	1,625	1,635	1,683	1,764	1,724	1,554	1,618	1,749	12	19,590	− 33
Liverpool Corporation	15,371	13,562	13,929	13,934	13,776	14,471	14,296	13,645	14,792	14,468	25½	341,788	+ 14,924
Llandudno and Colwyn Bay	541	392	358	390	267	307	323	339	571	448	29½	7,438	− 367
London County Council	12,610	23,586	41,087	44,012	44,897	...	...	47,603	47,611	48,867	11½	558,906	+ 86,588
London General Omnibus	*	...	...	...	...	...	...	...	...	...	—	—	—
London United	*	...	...	...	...	...	...	...	...	...	—	—	—
Lowestoft Corporation	213	170	188	...	...	139	140	132	...	...	35½	4,642	− 1,379
Maidstone Corporation	275	196	212	203	204	210	206	192	194	203	12	2,568	− 76
Manchester Corporation	21,197	18,493	18,348	18,405	18,317	19,094	18,886	17,617	20,852	19,339	12	228,607	+ 8,704
Metropolitan Electric Tramways	*	...	...	...	...	...	...	...	...	...	—	—	—
National Steam Car	*	...	...	...	...	...	...	...	...	...	—	—	—
Nelson Corporation	280	174	197	185	177	210	220	180	252	203	12½	2,665	+ 257
Newcastle-on-Tyne Corporation	6,531	6,269	6,451	6,546	6,564	6,548	6,698	6,487	6,663	6,824	12	77,346	+ 1,856
Newport (Mon.) Corporation	1,043	803	870	852	843	924	892	897	992	897	12	11,104	+ 672
New St. Helens and District	1,578	1,054	1,018	1,129	1,069	1,094	1,005	892	1,139	1,126	51	50,896	+ 2,774
Northampton Corporation	1,074	734	787	774	779	712	700	640	755	665	12	8,332	− 1,007
Nottingham Corporation	4,473	3,495	3,768	3,718	3,783	3,946	3,852	3,663	3,924	3,896	12	45,469	+ 1,115
Oldham Corporation	2,712	2,428	2,323	2,402	2,338	2,513	2,302	2,447	2,908	2,591	13	33,280	+ 1,793
Portsmouth Corporation	3,177	2,548	2,631	2,679	2,707	2,850	2,802	2,472	2,757	2,727	13	32,631	—
Preston Corporation	1,249	888	932	939	943	1,144	1,069	1,032	1,340	1,037	11½	12,771	+ 1,353
Provincial	2,957	2,302	2,375	2,438	2,461	2,509	2,441	2,182	2,507	2,468	38	81,812	+ 4,151
Reading Corporation	978	733	802	817	811	841	837	761	827	826	11½	9,623	+ 359
Rhondda Tramways	1,506	1,263	1,160	1,218	...	1,282	1,233	1,192	1,557	...	24	29,033	+ 1,476
Rochdale Corporation	2,255	1,897	1,706	1,772	1,677	1,806	1,753	1,609	2,202	1,924	12½	22,456	+ 561
Rotherham Corporation	1,126	1,147	1,143	1,139	1,126	1,416	1,392	1,571	1,539	1,573	12½	18,275	+ 4,012
Salford Corporation	6,306	5,205	5,439	5,402	5,398	5,569	5,311	5,374	6,416	5,575	12½	68,504	+ 2,908
Sheffield Corporation	9,678	8,648	8,824	8,767	8,680	10,573	10,133	10,226	10,981	10,685	13½	134,806	+ 22,120
Southampton Corporation	1,800	1,414	1,477	1,526	1,479	1,672	1,638	1,503	1,629	1,712	11½	18,446	+ 1,049
Southend-on-Sea Corporation	1,134	754	750	737	728	839	836	797	873	849	12	9,321	− 469
South Metropolitan Tramways	*	...	...	...	...	...	...	...	...	...	—	—	—
South Shields Corporation	931	766	799	888	884	807	818	783	809	819	12½	9,662	+ 122
Sunderland Corporation	1,678	1,429	1,558	1,501	1,504	1,575	1,563	1,563	1,607	1,618	12	19,130	+ 697
Sunderland District	870	528	543	578	588	664	611	592	650	606	34	19,655	+ 4,025
Swindon Corporation	241	197	206	214	206	221	204	182	207	206	11½	2,335	+ 7
Torquay Tramways	759	581	535	554	557	609	565	511	655	597	25	12,236	+ 23
Tramways (M.E.T.) Omnibus Co.	*	...	...	...	...	...	...	...	...	...	—	—	—
Tyneside Tramways and Tramroads	878	610	659	808	...	699	624	602	620	...	—	—	—
Wallasey Corporation	1,668	1,271	1,323	1,347	1,283	1,322	1,285	1,236	1,512	1,417	12½	16,131	+ 324
Walsall Corporation	1,028	692	742	756	765	819	800	796	954	798	26	20,120	+ 2,381
Walthamstow U.D. Council	1,259	893	993	1,025	1,037	1,193	1,152	926	1,049	1,106	12	12,915	+ 1,608
Warrington Corporation	492	455	458	461	448	482	478	466	491	474	12	5,700	+ 417
West Ham Corporation	3,483	2,837	3,205	3,212	3,183	3,436	3,403	3,176	3,228	3,306	11½	38,664	+ 1,563
Wigan Corporation	1,822	1,492	1,473	1,546	1,521	1,686	1,617	1,703	1,790	1,654	12	19,832	+ 1,203
Wolverhampton Corporation	1,022	1,075	1,076	1,085	1,089	1,178	1,128	1,382	1,196	1,198	13	15,478	+ 1,388
Yorkshire (West Riding)	2,372	1,643	1,602	1,605	1,567	1,729	1,631	1,761	2,058	1,718	26	43,749	+ 3,747

* TRAFFIC RETURNS SUSPENDED.

Owing to the European war, the Government have taken over the railways of Great Britain as from August 4, 1914, and the issue of traffic returns has been suspended. Consequently the traffic returns of the electric railways which usually appear on this page cannot be given.

The Publication of the Traffic Returns of the Tramways marked with an asterisk in the above table have also been suspended during the war.

TRAMWAY DIRECTORIES.

A useful feature of this issue is the directory of electric railways and electric tramways which will be found among the advertising pages. This directory contains the names of the chief officals and the principal particulars relating to each undertaking.

THE TRAMWAY AND RAILWAY WORLD

can be obtained, post free, at the following rates :

For the United Kingdom—
Twenty-five Shillings per annum (including 64 issues, of which 12 are large illustrated numbers).

For Places Abroad—
Thirty Shillings per annum.

Tel. No.: **2948** Gerrard.
Telegraphic Address: **"Tramigro," London.**

Amberley House, Norfolk St., W.C.

Digitized by Google

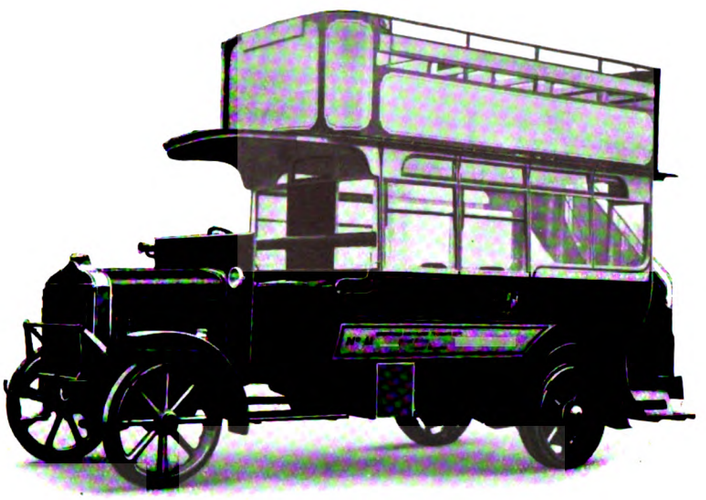

As supplied to Birmingham Corporation

Daimler

Commercial Vehicles

RECENT CONTRACTS INCLUDE:

18	Vehicles	for	...	Birmingham
9	,,	,,	...	Walsall
11	,,	,,	...	Manchester
5	,,	,,	...	Sheffield
3	,,	,,	...	Rotherham
3	,,	,,	...	Halifax
2	,,	,,	...	Chesterfield.
2	,,	,,	...	Harrogate.

The Daimler Company, Ltd., Coventry

Depots at London, Manchester, Nottingham, Bristol, Leeds, Cardiff, Birmingham, and Newcastle.

11

Digitized by Google

BRITISH NAPIER BUILT

BUSINESS VEHICLES

Railway Delays!

These are **Acute** now. Be Independent by Purchasing a

3½ TON NAPIER BUSINESS VEHICLE.

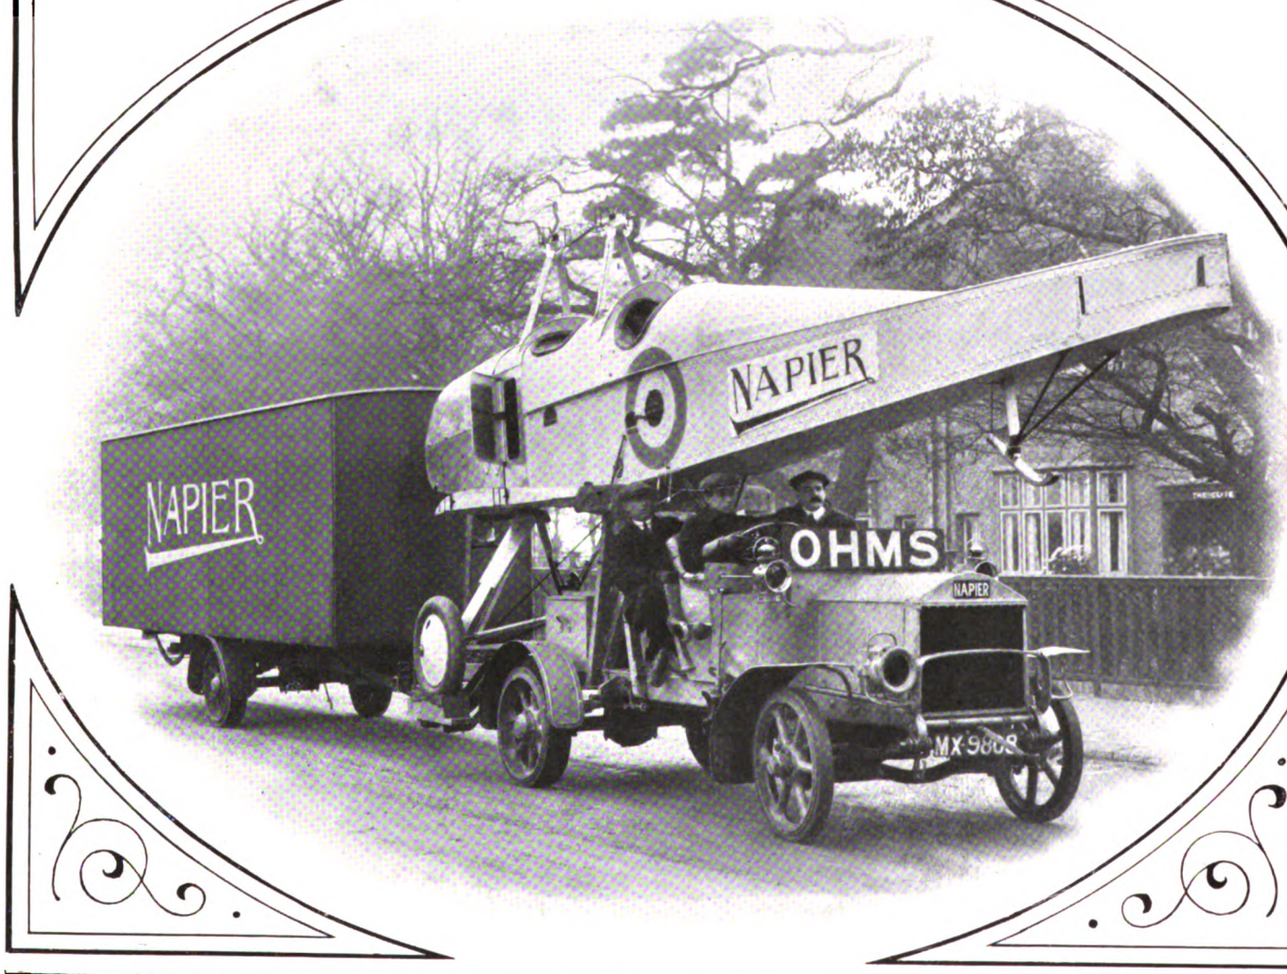

Full particulars from

D·NAPIER & SON, LTD.,

WORKS:-
ACTON, LONDON, W.

14, NEW BURLINGTON STREET, LONDON, W.

Digitized by Google

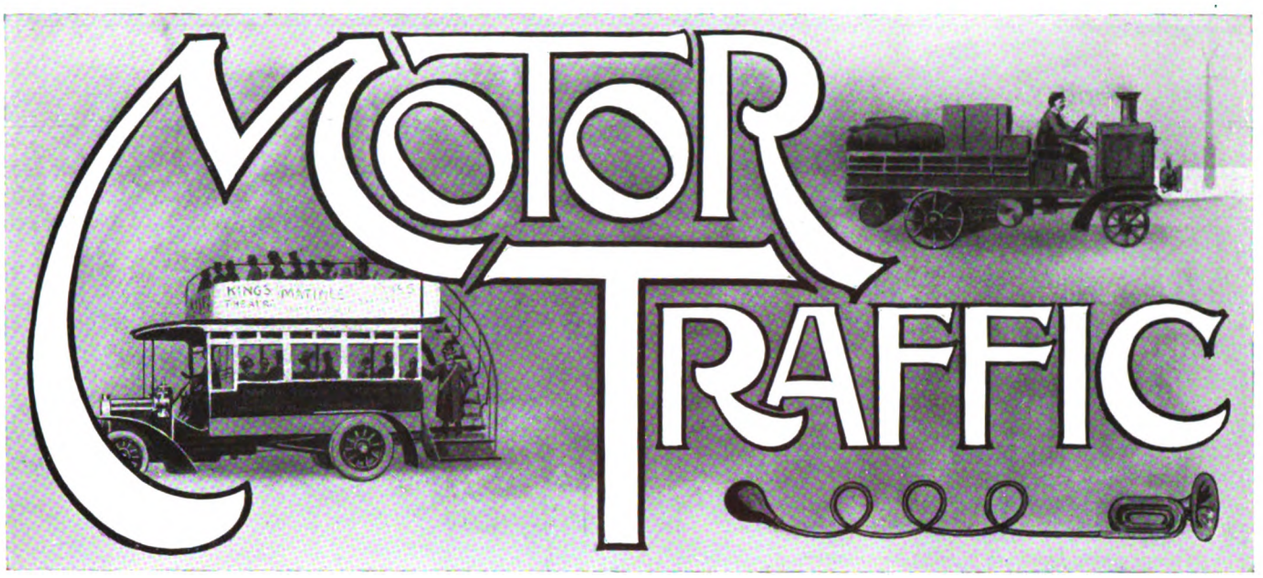

The past few weeks has been a period of no little uncertainty for all who have to deal with motor transport. The question of petrol supplies has loomed very largely, and is still somewhat crucial. In the course of a very few days during last month, owners of utility motors had a particularly trying time. They started in the first place with the position created by the Budget, which, with its new scale of license duties, left the commercial car on exactly the same footing as before. The next development was the petrol census, and the classification scheme, whereby motor users were divided into three broad classes, with various categories under each, and an order of priority as regards available fuel supplies laid down. The scheme cannot be described as entirely satisfactory, but possibly it was defensible as a rough-and-ready method of meeting an emergency, which, by the way, is not even now certain to arise. This classification was still being actively discussed, when there arose another development that relegated it forthwith to the background. Yielding to the many and bitter protests occasioned by the proposed revised scale of license duties—applied, of course, only to private cars—the Chancellor of the Exchequer suddenly announced its abandonment, and the substitution of a species of super-tax on petrol, which would bring something to the revenue and restrict consumption of the precious spirit, thus achieving a double purpose. But, whereas no part of the proposed new license duties would have fallen upon trade or utility vehicles, under the new plan, as first put forward, they had to take their share of the extra petrol tax—on private cars it was to be 6d. per gallon, and on commercial cars half that figure. Motor trading concerns were, naturally, taken aback, but before the storm of protest had time to assert itself, there was another *volte face*, and within about forty-eight hours of the announcement of the new petrol tax it was decided not to impose it at all on spirit to be used in commercial vehicles. The Government, however, was said to have "made up its mind" to insist upon the rationing scheme, which, rumour says, it may never be necessary to enforce. Thus, those who own and run motor vehicles "for purpose of trade or husbandry, etc.," were able to breathe freely once more, and to go about their business in the hope that the energies in this direction of the Treasury, or whoever else may be responsible, are exhausted.

* * * * * *

One more event, however, in a truly eventful month. A decision—which many consider should have been taken long ago—to prohibit the import of foreign-made commercial vehicles was published on June 27. The terms permit of the entry of what may conveniently be called "spares," but not of parts for assembling purposes, and in addition there is a proviso to the effect that the prohibition may be modified in special cases, if it appears desirable in the national interests. This proviso, it must be remarked, is somewhat vague, and it leaves the way open for unpleasant incidents of a character upon which it is not necessary to dwell. Presumably, it will be construed so that, for instance, a municipality requiring road sweepers or vehicles of similarly essential character, and being unable to obtain them from any British maker, would be able to import them. These cases, however, are likely to be exceptional. The difficulties of Corporations and Councils in regard to vehicles are assuming quite another and more critical form.

* * * * * *

The supply of drivers for motor vehicles is becoming not only restricted, but seriously inadequate. Public authorities in the London area are having the utmost difficulty in maintaining the services in which motor transport figures at even the barest minimum of sufficiency. One of them has a considerable proportion of its fleet of steam wagons lying idle, simply because there are no drivers to be had, and in varying degree this condition is being reproduced elsewhere. The problem can be met, it is true, to some extent by cutting down every service to the last degree. Dust collections can, at a pinch, be confined to once in ten days instead of once a week, or possibly the interval can be stretched to a full fortnight. Minor streets can be left unwatered, only the most important being dealt with. Internal organisation and co-operation between adjoining areas can effect general economies in time, labour, and vehicle mileage, but the driver question remains. There is, of course, a limit beyond which these measures cannot possibly be carried without dire risks to the public health, and in the opinion of many more than competent to judge that limit has already been over-reached. What the Government recognises in connection with petrol supplies—the need of absolute priority for public health services over most others—must be realised by the community in general. Before laying-up vehicles that in the ordinary course should be, and would be, at work, even with measures of economy in force, an authority should certainly exhaust all possible resources before coming to the conclusion that it cannot find drivers. What is there to be said

Digitized by Google

MOTOR TRAFFIC.

against the use of volunteers? To drive a dust cart, for instance, might not be a very attractive form of service, but there are motorists who would do it, in an emergency, if asked, and it is not less patriotic than driving an ambulance. There is no record of any efforts being made to this end, but the precedent of labour troubles in the past, in which men of the professional classes have kept a town's gas supply going by acting as stokers, is apposite and helpful. Where there are steam wagons, engine drivers either locomotive or stationary might easily be coached, and afterwards utilised to carry things on. It should not be impossible to arrange matters on a spare-time basis. Once an appeal for assistance of this kind were made and a list of names obtained, some sort of rota could be devised, and the services arranged accordingly. The drawbacks of having to carry out municipal work on such lines as these, of course, are obvious enough, but they are preferable to not carrying them on at all.

* * * * * *

In a recent issue we made a brief reference to the satisfactory results obtained by the motor omnibus services of the Eastbourne Corporation and the Sheffield Corporation Tramways Department. The former have now issued the accounts relating to the working of their motor omnibuses during the year ended March 31 last. Notwithstanding the difficulties that have to be encountered at such a period as the present, there remains a net profit of nearly £4,000. Besides the financial side of the question, there are other considerations of equal importance in the interests of the future of omnibus development. It may therefore be worth while to consider briefly the comparative advantages of municipal and private ownership of local public motor services. For purposes of comparison with Eastbourne, one might instance the neighbouring town of Brighton. Here, the untrammelled development of the motor omnibus has been made impossible as a result of local political influences, this in turn resulting from the fact that the omnibus services in the past have been owned by a company and not by the Corporation. The organisation and management have been good, but the mere fact that any profits accruing have not found their way into the pockets of the ratepayers has brought trouble. The Corporation have been anxious to dispose of electrical power to advantage. They have therefore leant strongly towards the use of some form of electrical traction. Electric omnibuses have been tried, and there has been much talk about the use of trackless trolley cars, as well as about possible extensions of tramway lines. We have here, in fact, an instance of a comparative disadvantage of private ownership due to no fault on the part of the owners. In other districts other disadvantages make themselves felt.

* * * * * *

Returning for a moment to Eastbourne, we find the motor omnibus services admirably controlled by a public official, who exercises constant supervision in order to secure exact punctuality and perfect interconnection of the omnibuses plying on the various routes. Many little things are done for the comfort and convenience of the public. At certain stopping points shelters are erected, and at all such points there are clock faces indicating the time at which the next omnibus will arrive. The whole organisation is perfectly dependable. If a certain omnibus is due to reach the railway station at a certain time, it is perfectly safe to assume that it will do so, and that there is no risk of missing a train with which it ought to connect. In many localities local services are in the hands of private owners, who originally started out only with the operation of chars-a-bancs engaged in country trips. In some such instances the organisation reveals certain faults from the point of view of the public. The services which are supposed to connect with one another only do so in a haphazard way, resulting in frequent delays, overcrowding of vehicles, and uncertainty as to the time of arrival at the destination of the passengers. Particularly at those times when the work of the vehicles is very heavy, proprietors are inclined to place the possibilities of high profit before the interests of their patrons, and in so doing to indulge in a state of comparative chaos, contriving, perhaps, to deal with the maximum number of passengers, but to do it in such a way as to cause a great deal of annoyance and inconvenience. Even those who are firmly of the opinion that private enterprise may be expected to gain better economical results than municipal ownership, cannot fail to appreciate the importance of this side of the question. The ordinary chars-a-banc or coach trip is certainly a matter for private local enterprise, but if regular services are entrusted to the same management, regulations ought to be devised and enforced prescribing the frequency of the services. Some payment should be made to the local authorities in return for the monopoly or share of the business, and fines or termination of agreements should result from anything in the nature of frequent failure to maintain punctual and satisfactory services.

WAR LEGISLATION.

Prohibition of Commercial Motor Imports.

The Board of Trade direct attention to a Proclamation, published in the *London Gazette* of June 27, by virtue of which the importation of commercial motor cars and chassis, accessories, and parts of such cars (other than tires) is prohibited as from July 6. Licenses to import will be granted in cases where the goods were either en route for the United Kingdom or actually paid for at the date of the Proclamation. Licenses will also be given where it can be shown that the importation is desirable in the national interests, or where the motor car (being a commercial car) is urgently required for any of the purposes specified in Class A of the order of priority for the distribution of motor spirit (see p. 462, Tramway and Railway World, June 8), or for agricultural purposes, or for the conveyance of essential goods. Licenses will further be issued for the importation of spare parts for imported commercial vehicles which are already in the United Kingdom.

GOVERNMENT PURCHASES OF LONDON OMNIBUSES.

Dr. Macnamara (Secretary to the Admiralty), replying in the House of Commons on June 22 to Mr. Ashley, said that the sum already paid by the Admiralty to the London General Omnibus Company since the outbreak of war was £40,400. Thirty omnibuses were purchased at a price which was estimated at £27,270, this amount being included in a larger sum which covered hire and so on for a certain period before purchase. No chassis had been purchased separately. As to what sum was still owing, the outstanding liabilities were estimated at about £3,000, but claims had not yet been received for the greater part of the items.

In reply to a further question by Mr. Ashley, the Financial Secretary to the War Office said that since the outbreak of war the approximate payments made to the London General Omnibus Company to date had amounted to £750,000, of which £714,000 represented the cost of motor vehicles, bodies, spare parts, etc. Accounts awaiting payment amounted to £15,000.

Digitized by Google

MOTOR TRAFFIC.

ALBION TIPPING WAGON IN BELFAST.

The photograph on this page depicts a 32 H.P. Albion 3-ton hydraulic tipping wagon recently delivered from the Albion Works, Glasgow, under special release permit from the War Department, to the Belfast Harbour Commissioners. The Albion hydraulic tipper since its introduction in the market some time ago has met with every success. It is primarily intended for heavy loads of three and four tons, for which the ordinary type of hand-operated mechanism presents many difficulties.

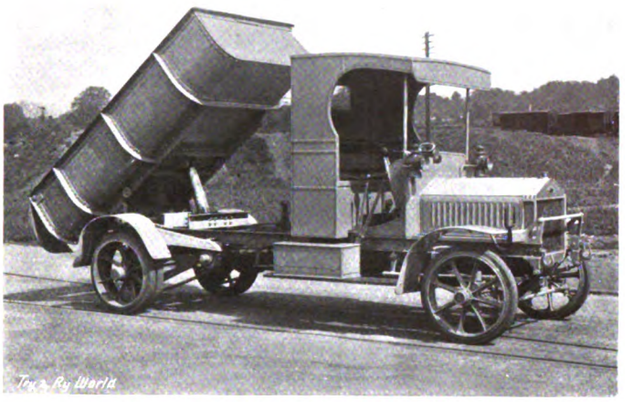

Hydraulic Tip of the Albion Wagon.

The Albion hydraulic tipping gear uses a medium light machinery oil, which is forced by means of a pump situated underneath the driver's seat on the left-hand side of the chassis, directly to the rear of the gear box. The cylinder of this ram is carried on trunnion brackets fixed to strong steel cross channels. The trunnions allow ram and cylinder to accommodate themselves to the inclination of the body while tipping. The oil is introduced into the cylinder through the centre of the near-side trunnion. The hydraulic pump is driven by means of a worm and worm wheel from the propeller shaft of the vehicle. This gear is entirely enclosed and runs in an oil bath. The pump is brought into operation by means of a hand lever placed at the left-hand side of the driver's seat, which connects the worm shaft of the pump with the propeller shaft of the vehicle through the medium of dog clutches.

A regulator valve is fitted to the system, and is situated at the driver's left-hand side. It is so arranged that when the valve is open the pump forces the oil back to the reservoir. To bring the tipping ram into operation the regulating valve is closed down and the oil is thus forced direct to the cylinder. Hence by means of this regulator valve, the body is not necessarily being tipped although the pump may be running. A safety valve is fitted to the pipe between the pump and the tipping cylinder, so that no harm is done to the installation when the ram is forced up to the top of the cylinder, the pressure escaping by means of the safety valve.

To lower the body the regulator valve is opened, when the weight of the body acting on the ram forces the oil back from the tipping cylinder to the reservoir. The load can be completely tipped in about one and a quarter minutes, the body returning to its horizontal position in about three-quarters of a minute. The body is built of strong steel plates, rigidly braced and strengthened. The tail-board is hinged at the top with special clips, which are automatically freed after the body has been slightly raised, and the clips automatically fasten the tailboard when the body is lowered.

SEATS FOR OMNIBUS CONDUCTORS.

The London General Omnibus Company announce that the Chief Commissioner for Police has sanctioned the fitting of seats for conductors on the London motor omnibuses. The seats, which will be fitted on the back platform of the omnibuses, will be of neat design and so constructed as to fold up when not in use. It is hoped that in a very short time every London General omnibus will be equipped with one of the new seats, which will add to the comfort and well-being of the large numbers of women conductors who are filling the places of male conductors now on war service.

At the meeting of the London County Council on July 4, Mr. G. H. Hume, Chairman of the Tramways Committee, in reply to a question said that the Committee proposed to make similar provision on the tramway cars.

NAPIER VANS IN RAILWAY WORK.

An interesting photograph is appended of a Napier 3½ ton business vehicle, taken alongside one of the latest type of the Great Central Railway engines, which is named after the late lamented Earl Kitchener of Khartoum. This magnificent engine is a 4-6-0 tender engine designed by Mr. John G. Robinson, chief mechanical engineer of the Great Central Railway, and was built in 1914 in the company's workshops at Gorton. The cylinders are 21½ in. diameter by 26 in. stroke, and fitted with the Robinson superheater, piston valves, and pressure release valves. One of the chief objects of both rail and road transport is the saving of fuel, and Mr. Robinson's superheater has undoubtedly gone a long way in this direction.

Napier 3½-Ton Van alongside a Great Central Locomotive.

It is often assumed that the keenest competition exists between the railways and motor transporters, but it is now well known that the two services work in friendly alliance, the business vehicles being used to feed the railways and for delivery of goods. Napier business motor lorries have been engaged on this class of work for some time, and they are spoken of very highly for their efficiency and reliability, by the great carrying companies, in communications that reach the company's head office at 14, New Burlington Street, London, W.

Digitized by Google

MOTOR TRAFFIC.

THE EDISON BATTERY.

ITS CONSTRUCTION AND WORKING.

The great prominence that is being given to the subject of electric accumulator traction by the Electric Vehicle Committee of the Incorporated Municipal Electrical Association must result in an increasing number of people, especially of those concerned in municipal enterprise, turning their attention to the battery-driven automobile. The crux of this subject is the battery. The electric motor, the controller, the transmission gear, the wheels, and the body of the vehicle can all be readily provided; the requirements are known and the methods of meeting them are equally well known. In past times it has been the battery that has made shipwreck of many promising schemes. The batteries could do the work required, but the cost of maintenance was so high that the electric vehicle was found to be impracticable, especially in the rough-and-ready work required in public service. Those were the days of the comparatively unimproved lead battery—a collection of lead plates treated with oxides and immersed in a bath of sulphuric acid and water. Within recent years, however, the lead battery has been very much improved, chiefly in America, by alterations in mechanical details, so that it is now much stronger and is better able to withstand the severe stresses associated with traction work. The cost of maintenance, once prohibitive, has been so reduced that the lead cell is quite a commercial proposition, and it is now largely and increasingly used in America for commercial vehicles. Its favourable features are moderate first cost and high electrical efficiency (the ratio of output to input being 70 or 75 per cent.). Against it are its great weight, its very moderate length of life, and the great care and numerous precautions which have to be observed in dealing with it if damage is to be avoided.

The lead battery in various types has been well known for many years. We here propose to give a general description of the Edison nickel-iron battery, which is a comparatively recent introduction in this country, and from which great things, if we may judge from experience already obtained, may be expected. Though this battery has been described in papers read before technical societies from time to time, it is only now that general attention is being directed to it. The purpose here is to set out its main points of construction and characteristics, as well as to attempt an outline in plain language of the theory of its action.

As a preliminary, and by way of comparison with the points of the lead battery noted above, it may be said that the nickel-iron cell is comparatively light, that it has an enormously long life, and that the cost of maintenance is very low. On the other hand, its first cost is higher than that of a corresponding lead battery, and its efficiency is lower, ranging from 50 to 60 per cent. The latter disadvantage is becoming of less importance as the cost of electricity for charging goes down.

THE MECHANICAL CONSTRUCTION.

It is many years since Edison began his researches on other combinations than lead and sulphuric acid, and in 1901 he produced a cell which was the forerunner of the present one. The latter dates from 1908, and in America, and more recently in this country, it has proved of great excellence for traction work. As in all other electric accumulators, what is called the storage action is really a transformation of electrical energy (provided by the charging current) into chemical activity, which on reversal produces an electric current. In each cell there are the positive and negative plates suitably insulated and mounted and immersed in a conducting liquid called the electrolyte. Metallic bridges connect all positives and negatives respectively together, and form the seating for terminal posts to which are attached the wires for charging and discharging. When cells are in series the positives of the first are connected with the negatives of the second, and so on.

Fig. 1.

Fig. 2.

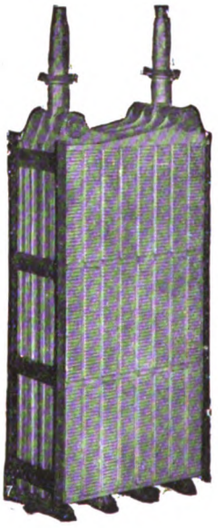

Fig. 3.

Fig. 4.

Fig. 5.

THE POSITIVE PLATE.

In addition to great mechanical strength, one of the fundamental advantages of the nickel-iron cell is that it is impossible to dislodge active material from the positive plate. This plate (Fig. 1) is built up of a series of finely perforated nickel-steel tubes. Each tube is made from a thin strip of steel coiled round in a spiral of a quarter of an inch diameter. The edges are lapped over to prevent re-opening, and the tube is further strengthened by eight steel bands encircling it at equal distances apart. Each tube (Fig. 2) is filled with hundreds of fine alternate layers of green nickel oxide and thin flake metallic nickel, the whole being rammed down tightly. The function of the metallic nickel flakes is purely one of conducting, as it is necessary to improve the rather poor conductance of nickel oxide. A complete positive element is composed of two rows one above the other, each of 15 tubes, assembled in a stamped frame of nickel steel, as shown in Fig. 1. This unit has a capacity of about 40 ampere-hours.

THE NEGATIVE PLATE.

The negative plate (shown mounted in Fig. 3) is built up of rectangular pockets made of very thin nickel-steel strip finely perforated. These pockets are assembled in a light steel retaining case. Each pocket (Fig. 4) is filled with finely divided iron oxide with which is incorporated a small proportion of mercury for the purpose of reducing specific resistance. The pocket is subjected to heavy die pressure which internally consolidates the active substance, and corrugates the face of the pockets, thus making them elastic yet rigid. By means of the die pressure also the edges of the pockets are swaged over so as to associate them effectively and permanently with the steel frame. It is thus impossible for vibration or shock to impair either conductivity or mechanical unity.

The plates are grouped alternately, insulated from each other by fine ebonite strips, in a welded steel case (Fig. 5). Metallic contact between the plates and the case is prevented by ebonite strips. The terminal posts are insulated by means of stuffing-box glands mounted in the welded-in top of the container. The gland is made of compressed paper with a soft rubber ring on the top. The cover of the cell is fitted with a gravity valve to allow of filling up with the electrolyte or with water. The valve is incorporated in a snap lid. When complete, the cell is watertight and airtight, except that the valve allows the escape of gas though it prevents the entrance of air.

The electrolyte, forming the bath for the plates, consists of a 21 per cent. solution of potassium hydrate (containing also lithium hydrate) in distilled water. It has been proved, apart from its effectiveness otherwise, that this solution has a preservative action on steel, and thus terminal corrosion is impossible. The whole construction is shown diagramatically in Fig. 6.

The complete cell is so designed that it is impossible for any internal movement or bumping to take place. This, of course, is of great importance in traction work. For this reason, and because

Digitized by Google

MOTOR TRAFFIC.

of its great strength, the cell is practically immune from the effects of mechanical abuse. No buckling of plates nor shedding of active material can occur, and neither is any injury caused by severe overcharging or discharging, whether as to duration or degree. Prolonged shaking and bumping tests have failed to show any deterioration either mechanically or electrically. The absence of sulphuric acid also means the elimination of disagreeable fumes.

In regard to the mounting of the cells in crates, as the containers are metallic it is necessary to prevent adjacent cells from coming into contact. Accordingly each cell is mounted in a steel cradle supported by a strong crate made of hardwood. A large battery can thus be handled in easily liftable sections.

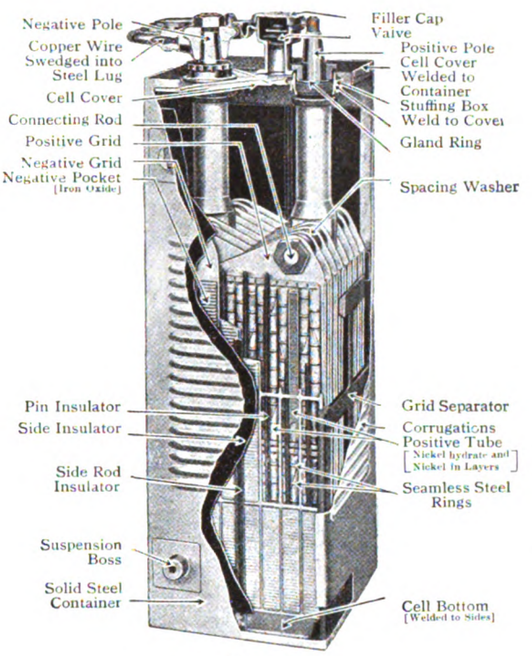

Fig. 6.

ADVANTAGES.

The battery is guaranteed to show an undiminished output at the end of four years' all-day service in traction work. The makers in fact consider that it is difficult to assign a probable duration to the life of the cell, as the results of artificial ageing tests indicate a minimum period of ten years' all-day service without any renewals or repairs being necessary. In use the battery slowly appreciates in output, and it has been found that a battery rated at 150 ampere-hours gives 180 ampere-hours in everyday service.

The following are among the advantages put forward for the Edison battery, in addition to those already dealt with :—

It may be discharged at any rate or even short-circuited many times without injury.

It is improved by occasional overcharging ; in emergency an overcharge will give an extra output of nearly 30 per cent.

It may be charged only once a year or it may be left idle in any state of charge or discharge for any time without resultant deterioration.

It is not injured by high-rate charging. In emergency it may be charged fully from total exhaustion in three hours. It may also be boosted at five times the normal rate for half an hour. This proves of great value where there is a demand for a vehicle to continue running for some time after the battery has become exhausted. A short intense boost will give the power required for the remaining distance instead of the battery having to go to the depot for a full charge extending over several hours.

The specific gravity of the electrolyte needs no attention ; it does not alter.

The electrolyte needs renewing at only long intervals ; at other times merely a little distilled water has to be added.

These advantages will be specially appreciated by those who have had experience of lead batteries, particularly of older types.

Any engineer who examines the construction of the plates and cells will at once be impressed with their remarkable perfection as a mechanical job. The process of manufacture seems perfect, though obviously it must be complicated, and even with special machinery expensive. Strength, compactness, lightness, and perfect fitting are clearly manifest. It is interesting also to note the perforations both in the positive tubes and in the negative pockets. They are innumerable, but so small that good eyes and a good light are necessary for seeing them.

By way of some set-off against the advantages, the lower efficiency of the cell as compared with one of lead (already referred to) is sometimes pointed out. It is also noted that the saving in weight is not so great as at first apparent, because the electric pressure per Edison cell is only 1·2 volts, or not much more than half that obtainable from the lead cell. Therefore for any given voltage required more cells must be used. The advantage in weight still lies, however, with the nickel-iron combination.

Space does not permit of details being given of the electric characteristics of the battery ; tables and graphic curves will be supplied by the makers to all inquirers. It may, however, here be noted that the ampere-hour output per cell varies according to size from 42 to 504 on a seven-hours charge, and that the watt-hour output is from 50 to 605. The output per pound weight of cell is from 11 to 14·8 watt-hours. The internal resistance is from ·012 to ·001 ohm, and the watt-hour efficiency is from 55 to 60 per cent. The volume of the cell is about ·85 cubic ft. per kilowatt-hour of available output, corresponding to a weight of 75 lb.

THE ELECTROLYTIC ACTION.

We now come to the part of the subject which is more difficult but in which those who like to get at fundamentals must take a special interest. That is the question of the electrolytic action of the battery ; what is it that goes on in its interior during charging and discharging—what are the chemical reactions ? The further question how electric energy changes into chemical reactions and *vice versa* must remain unanswered. Many descriptions of the battery fight shy of the whole of this subject, but an attempt is here made to indicate the theory.

In regard to the chemical changes, though a good deal is known much remains uncertain and some things remain mysterious. This is not surprising when one bears in mind that the theory of the lead battery, which has been studied for so many years by electrochemists, is still abstruse and puzzling. By way of a rough engineering approximation it may be said that the action in the nickel-iron cell during discharge is a transference of oxygen to the iron plate, which therefore becomes reoxidised, the nickel plate being meanwhile reduced by the hydrogen from the electrolyte. This statement may be elaborated as under, but even so it is only an indication of a series of complicated reactions.

To any reader unversed in the necessary chemistry, a few explanations may here be useful. Thus, a hydrate—so frequently referred to—is a compound formed of some substance with a hydrate molecule. This molecule consists of one atom of oxygen and one of hydrogen. For example, potassium hydrate—the substance dissolved in water which forms the electrolyte in the battery—has a proportion of one atom of potassium and one molecule of hydrate (OH), and having the formula KOH. Hydrated iron oxide has a molecule of black iron oxide (Fe_3O_4) combined with hydrate molecules, the exact proportion of which is uncertain and they are accordingly expressed by $(OH)n$. As water consists of two of hydrogen to one of oxygen (H_2O), hydrate is formed by the replacement of one of the atoms of hydrogen by its equivalent of the substance hydrated.

Considering now the cell during charging, we have one plate containing a low oxide of nickel in a hydrated condition. This is the anode or current-entering plate. The other plate contains hydrated iron oxide, probably of a formula analogous to $Fe_3O_4(OH)n$. During the passage of the current from one plate to the other through the electrolyte, two principal reactions are proceeding. The electrolytic dissociation of the water causes its oxygen atoms to flow against the current, and they attack the nickel oxide and cause it to assume a higher state of oxidation. The hydrogen atoms from the water flow with the current and attack the iron plate, thus reducing the iron oxide gradually to a state of chemically pure iron. This occurs because the nascent hydrogen evolved by the electrolysis of the water absorbs the oxygen from the iron oxide, thus producing water afresh. When the two processes are about complete, the cell is said to be in a charged condition.

The first charge of an Edison cell is different from all succeeding charges, so far as the nickel plate is concerned. In the new nickel plate the active material is a green nickel oxide, and this substance becomes permanently oxidised up, even after discharge, as compared with its initial state.

On discharge of the cell, an action which is almost the exact opposite of that already described occurs. Current is now flowing from the iron plate towards the nickel plate, hydrogen being carried

Digitized by Google

MOTOR TRAFFIC.

in that direction and attacking the extra oxygen atoms which the charging process had carried over to the nickel plate, while the oxygen—travelling against the current—slowly oxidises the iron plate until this plate becomes almost completely oxidised. Meanwhile the nickel plate has become reduced not to the state represented by green nickel oxide, but probably to a state one degree higher. This chemical process proceeds till completed, when the discharging electric current ceases to flow and the cell is said to be discharged.

There is a secondary reaction occasioned by the splitting up of the potassium hydrate molecules of the electrolyte. The potassium atoms tend to travel with the current, and the oxygen and hydrogen atoms against the current. This tendency, however, is practically neutralised in effect by secondary reactions which occur between the potassium and the water, and the OH group and the hydrogen, at the negative or positive plate, as the case may be.

The main process accordingly, both in charging and discharging, is a transfer of oxygen backward and forward between the plates. The electrolyte acts as a liquid conductor and itself remains unimpaired. Its specific gravity changes only slightly and never to an extent which entails readings of its value being taken.

In regard to the watt-hour efficiency of the cell, put by the makers at about 60 per cent., part of the loss occurs during charging, and this is attributable to a heat effect due to the internal resistance of the cell. The rest of the loss is explained by a sort of chemical inertia in the active material which manifests what may be called an endothermic reaction—that is a heat (energy) absorbing condition.

With regard to the use of potassium hydrate in the electrolyte, it, of course, reduces the electric resistance of the water, though other substances also would have a similar effect. As already noted, potassium hydrate has also a preservative action on steel. It is, further, probable that the secondary reactions caused by the potassium hydrate (alluded to above) and possibly other reactions of an obscure nature are of value in producing the total result. In any event, the use of KOH is the outcome of innumerable experiments and represents the final conclusion reached from them.

STANDARDISED VEHICLES FOR TRADERS.

Dennis Brothers, Limited, of Guildford, recently delivered to the Failsworth Industrial Society one of the War Department type of lorry, of which they have supplied so large a number to the War Office, and to private firms under the release arrangement. Unless the service requirements are very exceptional in character, there

Dennis War Department Lorry.

is considerable advantage in purchasing a standardised lorry, as so many traders have lately been doing, inasmuch as by so doing they secure a vehicle in the design of which every detail has been thought out with the utmost care with a view to obtaining the maximum of reliability and life in operation.

London Motor Ambulance Service.—The number of calls received at motor ambulance stations of the London County Council during June was 597. No less than 590 injured persons were conveyed to hospital. Sixty-four accidents were caused by vans, 41 by motor cars, 48 by motor and pedal cycles, 27 by motor omnibuses, 27 by tramcars, and 12 by taxi-cabs.

FRONT ENTRANCE OMNIBUS.

A Brill Novelty in America.

For one-man operation in the United States the use of the front entrance and exit on single-deck omnibuses is universal. Now the J. G. Brill Company, of Philadelphia and 110, Cannon Street, London, E.C., have introduced a near side double-deck conveyance for operation entirely by the driver. An illustration of the vehicle is given on this page.

Ordinarily a 40 passenger omnibus would be beyond the power of one man to drive, collect fares, and see that the passengers alight safely, but with the arrangements devised by the Brill Company it is stated that such a vehicle can be handled with comparative ease. The entrance and exit doors are of the two-leaf folding type, and are operated separately or simultaneously by a mechanism located in front of the driver. The doors work in conjunction with double folding steps, and are panelled their full length with narrow lights of wire glass. These panels, together with the wide front and side windows, allow the driver a clear three-way view.

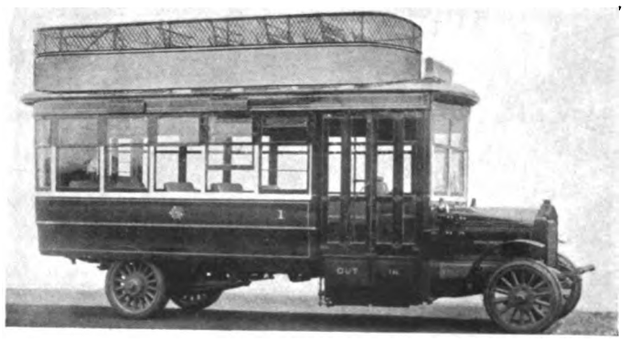

Brill Front Entrance Omnibus.

When the omnibus is at a standstill, the driver can devote his entire attention to the movements of the passengers and the collection of fares. Incoming and outgoing passengers are separated by an iron pipe railing. The driver's seat is in the forward left-hand corner, and to the rear of this is a short longitudinal seat. The remainder of the seating space on the lower deck is taken up by eight Brill stationary-back transverse seats, upholstered in woven rattan, except the driver's seat, which is covered with leather. Windows are arranged five on the right and seven on the left-hand

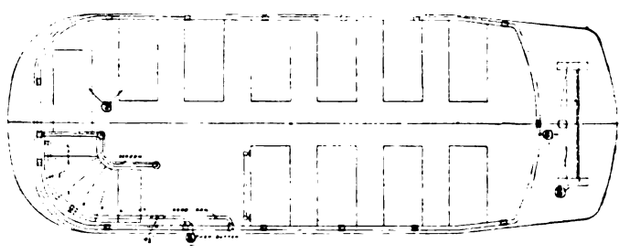

Plan of Brill Omnibus.

side. These are of the square top, double sash type, with the lower sashes arranged to raise, while the upper sashes are stationary. The front of the vehicle has two broad windows that drop into pockets.

The stairway to the upper deck is on the right-hand side of the rear of the car, separated from the lower compartment by a bulkhead with a sliding door, forming a vestibule. The rear end of the omnibus is rounded and is fitted with three double-sash windows, the lower sashes being arranged to raise. The stairway is of the semi-spiral type, with broad treads and an extremely easy curve. It projects only very slightly into the passenger compartment and in such a manner as not to interfere in any way with the head room of the passengers occupying the right-hand rear seat. In fact, the entire stairway occupies body space that is practically negligible when compared with the advantages of this arrangement.

On the upper deck the seats are arranged four on the right and seven on the left-hand side. Around the entire deck there is a sheet iron skirting, surmounted by a wire mesh screen guard carrying an

Digitized by Google

MOTOR TRAFFIC.

iron railing. At the head of the stairway is a push button for signalling to the driver.

The omnibus is mounted on a 5-ton Pierce-Arrow chassis. The side sills are of yellow pine with a heavy angle reinforcement along the under side. Crossings are formed of channels, and additional strength is secured by means of three channels bolted through the side sills and angles and running underneath the chassis frame, to which they are secured by bolts running through the steel outrigger plates. The exterior is finished in olive green and gold striping.

It is of interest to note that the use of the front door on tramcars as an exit is coming largely into use in the United States. Recently the President of the Kentucky Traction Company defended it in the interest of safety and the reduction of hazard. Since this plan has been adopted on that company's undertaking there has been a marked decrease in the number of mishaps classed as step accidents. Chicago and Philadelphia, he observes, are among other cities where this practice prevails.

seats, two longitudinal seats holding two passengers each, and one four-passenger seat extending the width of the body in the rear. There are five windows on each side, the top being stationary and the bottom being arranged to raise, while a rain vision shield is provided for the driver. The cars are lighted from an 80 ampere-hour storage battery, which is charged from a 20 ampere Appleco generator, and they are heated by the exhaust from the motor, a valve being provided for turning the heat on or off as desired. The front wheels have 39 in. by 6 in. non-skid pneumatic tires, and the rear wheels 36 in. by 5 in. dual blocks. The cars are capable of a speed of 25 miles per hour.

CONVOY OF NAPIERS IN THE EAST.

As is well known, Napier business vehicles have been sent to all the Allied fronts in large numbers. Mr. H. T. Vane, the managing director of D. Napier and Son, Limited, 14, New Burlington Street,

Views of Part of a Napier Convoy Shipped to India.

AN AUTOBUS LINE ON THE PACIFIC COAST.

The Washington Autobus Company, a subsidiary of the Puget Sound Traction, Light, and Power Company, are now running a regular service from Seattle to Bothell, a distance of 16 miles, at a fare of 1s. 10½d., or 3s. for the return journey. The cars used have a tramcar body built by the J. G. Brill Company, and mounted on a 2-ton "Mack" chassis. The entrance is at the front, and the car is capable of seating twenty passengers. There are six cross

W., informs us that he has received nothing but praise of their behaviour under the most strenuous conditions. The accompanying photographs give two views of part of a convoy recently shipped to the order of the Indian Government for use in the East, where they will be subjected to the arduous conditions there at present prevailing.

Napier business vehicles are specially suitable for this class of work, combining as they do smooth and easy transit with absolute reliability, which is characteristic of British products.

Digitized by Google

MOTOR TRAFFIC.

EASTBOURNE CORPORATION OMNIBUSES.

The accounts of this undertaking for the year ended March 31 last show a total income of £15,242, of which £13,913 was from fares, including £2,278 from the sale of books of tickets. Old chassis fitted with lorry bodies and hired out to other departments brought in £568. The total expenditure was £10,857. The number of omnibuses is 17, including four single-deck Milnes-Daimler, eight double-deck Milnes-Daimler, and four double-deck De Dion vehicles. Notwithstanding the increased working costs, there remains a net profit of £3,940, the gross profit being £4,384. In 1914-15 six of the best vehicles were acquired by the War Office. The average passenger receipts were 15·34d. per mile, as against 13·46d. in 1914-15. The working costs were just under 12d. per mile, excluding interest and loan repayments, and payments on account of omnibuses purchased out of revenue. Appended is the statement of accounts :

EXPENDITURE.

1915. £ s. d.		£ s. d.	1916. £ s. d.
RUNNING—			
	Wages of –		
188 11 3	Inspectors	226 14 1	
1,580 17 3	Drivers	1,356 7 5	
1,102 15 9	Conductors ...	992 3 8	
363 17 2	Cleaners	370 8 7	
80 14 6	Lampmen	92 17 3	
			3,038 11 0
£3,316 15 11			
2,769 14 7	Petrol and lubricating oil		2,741 1 2
68 17 4	Cleaning materials		54 4 9
55 9 7	Tickets, notices, stationery ...		56 3 7
1 0 0	Conductors' boxes, bags, punches, etc.		23 17 6
194 4 7	Carbide, lamps, repairs, etc. ...		80 15 9
228 7 0	Insurance (accident and fire) ...		187 0 0
12 10 0	Water for omnibuses		9 10 0
92 12 7	Uniforms		54 11 0
61 6 0	Licenses and registration		40 19 0
16 7 2	Time dials, time-table cases, destination boards, etc.		9 5 10
23 11 8	Waterproof aprons		33 7 9
33 7 4	Sundries		24 0 11
TIRES—			
1,537 1 6	Charge for use of tires		1,431 11 1
26 0 0	Tires taken by War Office		—
£8,437 5 3			£7,784 19 4
REPAIRS AND MAINTENANCE—			
1,811 4 8	Repairing and repainting, wages of fitters, materials, machinery, etc.		1,749 12 9
3 15 0	Tools		37 19 5
40 19 6	Carriage		19 1 0
45 14 8	Electricity supply (power)		37 8 0
1 0 0	Spare engine and wheels (depreciation of)		13 10 0
—	Miscellaneous		4 11 5
£1,902 13 10			£1,862 2 7
DEPOT—			
66 2 10	Electric light, gas, and water ...		65 7 10
30 14 10	Coal and coke		71 3 8
30 2 0	Fittings, repairs, etc.		21 1 9
118 9 5	Rates, taxes, and insurance ...		103 17 2
HIGHWAYS DEPARTMENT—			
8 17 7	General works account for repairs...		29 19 9
£254 6 8			£291 10 2
MANAGEMENT—			
400 0 0	Salary of general manager		400 0 0
192 19 11	Wages of clerks		204 3 5
125 0 0	Proportion salaries borough accountant and staff		125 0 0
46 11 9	Petty cash and postage		52 3 6
49 10 11	Advertising, printing, etc.		30 18 10
2 2 0	Office fittings and furniture ...		0 7 6
18 0 6	Telephone rent, etc....		17 16 10
£834 5 1			£830 10 1
GENERAL EXPENSES—			
16 17 2	Insurance of staff against accident		18 2 4
14 13 3	Compensation		20 0 0
7 13 9	Sundries		5 14 0
44 0 4	National Insurance Act, employers' contribution		44 17 6
50 0 0	Contribution to Borough Advertising Association		—
£133 4 6			£88 13 10
£11,561 15 4	Total expenditure		£10,857 16 0
4,975 5 2	Balance, being gross profit carried to net revenue account		4,384 4 8
£16,537 0 6			£15,242 0 8

INCOME.

1915. £ s. d.		1916. £ s. d.
RUNNING—		
15,075 3 4	Passenger fares	13,913 8 1
458 13 0	Advertising on omnibuses	490 12 2
59 6 9	Hire of omnibuses	13 11 9
677 13 2	Hire of lorries	568 4 6
21 15 8	Sale of empty barrels, etc. ...	48 1 4
5 18 5	Miscellaneous	11 9 3
14 2 5	Conductor's overs	28 9 8
11 5 10	Sale of carbide to Highways and Drainage Committee	0 10 6
44 11 8	Conveying petrol by road	—
26 0 0	Tires taken by War Office	—
£16,394 10 3		£15,074 7 3
REPAIRS AND MAINTENANCE—		
13 0 8	Sale of old fittings, etc.	30 11 0
14 17 1	Pressing tires	15 14 0
—	Damage to omnibus repaid ...	4 5 0
25 19 3	Preparing chars-a-bancs for transport service	—
84 0 0	Lamps purchased by War Office ...	—
£137 17 0		£50 10 0
DEPOT—		
—	Transfer to Munitions Account – Proportion of charges	£97 3 5
GENERAL EXPENSES—		
4 13 3	Repayment of compensation by insurance company, etc.	20 0 0
£16,537 0 6	Total income	£15,242 0 8

NET REVENUE ACCOUNT.

1915. £ s. d.	EXPENDITURE.	£ s. d.	1916. £ s. d.
744 8 3	Interest and repayment of loans raised by mortgage	258 19 9	
85 11 0	Mortgage redemption fund (one year's contribution)	85 11 0	
7 15 6	District fund (proportion of capital charges on land occupied by depot ...	7 15 6	
20 9 4	Income tax	116 0 8	
1 2 1	Bank interest	—	
1,144 11 1	Instalment of cost of De Dion and Leyland 'buses	210 0 0	
			678 6 11
£2,003 17 3			
3,078 4 3	Balance, being net profit carried to profit appropriation account ...		3,940 9 5
£5,082 1 6			£4,618 16 4

Digitized by Google

MOTOR TRAFFIC.

INCOME.

1915. £ s. d.		1916. £ s. d.
4,975 5 2	Gross profit from revenue account ...	4,384 4 8
105 0 7	Bank interest	234 11 8
1 15 9	Repaid income tax	—
£5,082 1 6		£4,618 16 4

PROFIT APPROPRIATION ACCOUNT.

EXPENDITURE.

Transfer to depreciation fund	3,078 4 3
Balance unappropriated, March 31, 1916	3,940 9 5
	£7,018 13 8

INCOME.

Balance at April 1, 1915	3,078 4 3
Profit for year brought down	3,940 9 5
	£7,018 13 8

DEPRECIATION AND RESERVE FUND.

EXPENDITURE.

Balance of fund, March 31, 1916	8,358 14 0
	£8,358 14 0

INCOME.

Balance of fund at April 1, 1915, as per last abstract	5,280 9 9
Transfer from profit appropriation account	3,078 4 3
	£8,358 14 0

THE CONTINENTAL TYRE COMPANY.

The House of Lords on June 30 allowed the appeal, Daimler Company (Limited) *v.* Continental Tyre and Rubber Company (Great Britain), Limited, which raised the question whether, having regard to the enemy character of the shareholders and directors of the Continental Company, payment could be enforced by the company during the war of debts owing to them. Mr. Justice Scrutton decided that being registered as an English company the respondent company could sue, and the Court of Appeal (Lord Wrenbury, then Lord Justice Buckley, dissenting) upheld the judgment. The hearing of the appeal occupied several days in the House of Lords before Easter, when judgment was reserved.

The Earl of Halsbury, in moving that the appeal be allowed, said that in his opinion the whole discussion was solved by a very simple proposition—that in our law when the object to be obtained was unlawful, the indirectness of the means by which it was to be obtained would not get rid of the unlawfulness, and in this case the object of the means adopted was to enable thousands of pounds to be paid to the King's enemies. It seemed to him too monstrous to suppose that for an unlawful, because after a declaration of war, a hostile purpose, the forms of limited liability should be used and enemies of the State, while actually at war with us, be allowed to continue trading, and to sue for their profits in trade in an English Court of Justice.

Lord Parker said that the directors of the plaintiff company were the King's enemies, and as such were incapable of exercising any of the powers vested in them as directors of a company incorporated in the United Kingdom. They were incapable, therefore, of authorising the institution of this action.

Lord Atkinson concurred on the question of the authority of the secretary to issue the writ, but on the main question said that, the question of residence of the company apart, he did not think the legal entity of the company could be so identified with its shareholders, or the majority of them, as to make their nationality its nationality, or their status its status.

Lords Shaw and Parmoor agreed in the decision of the Court of Appeal on the main question, but thought the appeal should succeed on the question of the secretary's authority.

The appeal was accordingly allowed, but without costs.

A PETROL SUBSTITUTE.—The city engineer of Hull has reported favourably on the use of a petrol substitute which he has obtained at 1s. 6d. per gallon on a six months' contract. The fuel is produced by a local firm.

MOTOR VEHICLES FOR MUNICIPALITIES

LEEDS GAS COMMITTEE have purchased two motor wagons.

NEWTON ABBOT COUNCIL have resolved to purchase a steam lorry at a cost of £727.

ROCHDALE COUNCIL propose to obtain a motor wagon for the cleansing department.

BLACKPOOL GAS COMMITTEE have agreed to obtain a motor lorry for the delivery of coke.

CROYDON WATER DEPARTMENT have the purchase of a motor wagon under consideration.

STEPNEY COUNCIL have agreed to purchase a petrol-driven sweeping machine for £620.

CROYDON ELECTRICITY COMMITTEE have placed an order with Edison Accumulators, Limited, for a wagon fitted with a tipping body.

ILFORD COUNCIL have decided upon the purchase of a Laffly road sweeper and a petrol motor chassis with water-tank holding 800 gallons.

SHEFFIELD TRAMWAYS COMMITTEE have placed a contract with the Steel Barrel Company, of Uxbridge, for two petrol storage installations.

LOUGHBOROUGH COUNCIL have authorised the purchase of a 2-ton electric truck at a cost of £600, to be used for the cartage of coal between the railway siding and the electricity works.

WALSALL TRAMWAYS COMMITTEE have placed an order for four further Daimler omnibus chassis, with single-deck bodies, in order to carry the employees of a firm engaged on Government work.

BRADFORD ELECTRICITY COMMITTEE have ordered two electric vans from the Jowett Motor Manufacturing Company, of Bradford, for the conveyance of coal. The vehicles will have chassis of the General Electric Vehicle Company's manufacture. Each will have a capacity of five tons, and will be fitted with electrically-operated tipping gear, one wagon being equipped with Edison cells and the other with an ironclad exide battery. The power-station is situated about 500 yards from the railway siding where the coal is received, and it is estimated that each wagon will be able to handle 100 tons of coal daily. It is expected that the wagons will be able to do the day's work on a single charge, effecting a saving of £500 per annum as compared with horse traction.

BRITISH AUTOMOBILE TRACTION.

The report of this company for the year ended December 31, 1915, shows that the net traffic receipts and other revenues, after providing for depreciation, amounted to £18,011. After deducting general expenses and other items chargeable to revenue there is a surplus of £9,438, making, with £4,249—the balance brought forward from the previous year—a total of £13,687, which the directors propose to appropriate as shown in the accounts, viz. :—To reserve, £2,000 ; to dividend on the ordinary shares at the rate of 8 per cent. per annum, £7,279 ; to be carried forward, £4,408 ; total, £13,687. The rolling stock and plant have been maintained in good working order and repair. On October 28, 1915, the capital of the company was increased to £150,000 by the creation of 67,825 additional ordinary shares of £1 each ; 61,375 shares have since been issued, making the total issued capital of the company as at December 31, 1915, £138,273. During the year the operations of the company have been carried on under exceptionally trying conditions due to the difficulty of obtaining rolling stock and sufficient skilled labour ; the directors nevertheless consider the results satisfactory.

STEVENS PETROL-ELECTRIC VEHICLES, LTD.

This new private company was registered on June 27, the capital being £3,000 in £1 shares (1,500 "A" and 1,500 "B") to carry into effect an agreement dated August 19, 1915, between W. A. Stevens and Joseph Sankey and Sons, Limited, and to carry on the business indicated by the title and that of agents for the sale of motor and other vehicles, etc. The subscribers are :—W. A. Stevens, "Castlemaine," London Road, Maidstone, engineer ; F. O. Collis, 72, King Street, Maidstone, solicitor. The number of directors is not to be less than two or more than five. Mr. W. A. Stevens is the managing director, and two others will be nominated by the holders of "A" shares.

Digitized by Google

MOTOR TRAFFIC.

The company, which is one of the British Electrical Federation group, paid a similar dividend for 1914, absorbing £5,076. The net profit in that year was £11,000, and £2,000 was placed to reserve. In 1914 a large number of vehicles belonging to the company and to other undertakings in which the company was interested were impressed by the military authorities, prior to which the operations of the company were considerably enlarged by the extension of existing services and by acquiring interests in new districts.

OMNIBUS DEPRECIATION AND INCOME TAX.

A Joint Committee of the Municipal Tramways Association, the Tramways and Light Railways Association, the London Omnibus Owners' Federation, the Provincial Omnibus Owners' Association, and the Institute of Municipal Treasurers and Accountants, submitted a report to the chief inspector of taxes on October 1, 1915, asking that a uniform method be arrived at for determining depreciation allowances for income tax purposes. The Joint Committee were requested to furnish the department with the evidence available bearing upon the question, with a view to a deputation being received at a later date. Mr. A. de Turckheim, secretary of the Tramways and Light Railways Association, has informed the members of the Association that further and detailed evidence was sent in on May 3, and the matter is now under consideration.

ELECTRIC VEHICLE COMMITTEE.

At the June meeting of the Electric Vehicle Committee, Mr. A. C. Cramb presided in the absence of Mr. R. A. Chattock. It was announced that, for the present year, the following had been nominated by their respective Associations to act as their representatives on the committee :—Society of Motor Manufacturers and Traders Mr. T. C. Pullinger, of Arrol-Johnston, Limited, Heathhall, Dumfries ; Tramway and Light Railways Association—Mr. W. T. Robson, general manager, Corporation Tramways, Southampton ; Incorporated Association of Electric Power Companies—Mr. J. S. Highfield, chief engineer, Metropolitan Electric Supply Company. It was decided to issue an invitation to the Royal Automobile Club of Great Britain to nominate a representative. Arrangements were decided upon with a view to further increasing the circulation of *The Electric Vehicle* the subscribers for which number upwards of 2,000. It was decided to inquire from the electric supply undertakings as to whether they could make use of a poster if the committee had one printed. The matter of a standard insurance policy for electric vehicles was deferred until the next meeting. A subcommittee, consisting of Mr. E. S. Shrapnell-Smith, Mr. E. W. Curtis, and the honorary secretary (Mr. F. Ayton, Ipswich Electrical engineer and tramway manager), was appointed to draft a letter to the Board of Trade with a view to excluding electric commercial vehicles from any prohibition of the import of foreign-made commercial motor vehicles. The committee's attention has been drawn to the fact that industrial electric trucks imported into the country are not being provided with the standard charging plug. The committee is unanimously of the opinion that these trucks ought to be provided with the standard fitting, and the secretary has been instructed to write to the manufacturers to that effect. The date of the next meeting was fixed for July 28, at 2.45 p.m.

MOTOR TRAFFIC NOTES.

Burton Corporation's Omnibus Powers.—A Provisional Order has been obtained by Burton Corporation removing the restrictions imposed by their Act of 1901 in respect to the running of motor omnibuses in connection with the tramways.

Manchester Omnibus Service.—The Tramways Committee on June 19 started a half-hourly motor omnibus service between Slade Lane, Longsight, and Palatine Road, Withington. Omnibuses will run along Burnage Road, Fog Lane, and Lapwing Road, to the tramway terminus in Palatine Road.

Erith Omnibus Project Abandoned.—In consequence of the arrangements made with the Ministry of Munitions and the omnibus companies, Erith Urban Council have informed Woolwich Corporation that they have abandoned the application for a Provisional Order to enable their tramways department to run motor omnibuses.

Increased Fares at Newcastle.—Owing to the increased cost of petrol, the Newcastle Corporation Tramways Committee have decided to increase the fares on motor omnibuses. The increase will range from a halfpenny to a penny. Soldiers will be charged full fare on the omnibuses and children half fares, but no fare will be less than a penny.

Omnibus Restriction in Croydon.—Under the Local Government (Emergency Powers) Act, the Croydon Corporation have passed the following resolution :—" The use by any omnibus of any route that has not been used within two years prior to March 1, 1916, without the consent of the Corporation, or if unreasonably withheld, of the Local Government Board, is forbidden under penalties."

Women Motor Drivers. With the calling to the colours of married men a considerable increase is taking place in the number of women engaged in driving private and commercial motor cars. Lady Randolph Churchill, in an interview with the representative of a New York journal, has stated that " one woman, because of sheer ability, has been given general charge of all the motor cars connected with the great arsenal at Woolwich."

Motor Vehicles in Municipal Work.—The Institute of Cleansing Superintendents will meet at Cardiff on July 17-20 for their annual conference. Mr. W. Harper, the city engineer, will present a paper on the results attained by the use of steam tractors in cleansing work ; Mr. J. Terry, of Nottingham, will describe the work of electric vehicles in the removal of house refuse ; Mr. W. Greig, of Glasgow, will deal with " Street Cleansing by Motors " ; and Mr. J. Bee, of Liverpool, will submit a paper on " Street Watering with Electric Vehicles."

Reliability of Straker and Squire Vehicles.—On the purchase by Southwark Council of a motor gulley van from Straker and Squire, Limited, in 1913, the company agreed to maintain the vehicle for a period of five years for £90 per annum. The borough engineer reported on May 31 that it is unnecessary to continue the agreement for five years, and that the company were willing to cancel the contract two years from the date of execution, and to supply during the two years the necessary parts coming within the contract, provided the Council undertook the fitting. The authority have adopted that course.

The Zenith Carburettor.—An important point about the Zenith carburettor is that, once set, it is not affected by climatic changes. A Weston-super-Mare motorist has just tested this under trying conditions. His outward journey to Oxford was accomplished through mud, rain, fog, hail, and wind. His consumption for the 100 miles was exactly two gallons of No. 2 spirit. The return journey was made in much finer weather, although there were some storms, and the consumption worked out just under two gallons of No. 1 spirit. Allowing for the slight gravity difference in the spirit, this makes the performance as nearly as possible equal, although one was with a heavy atmosphere and the other with a much more rarefied one.

Brighton Omnibus Licence Question.—At a meeting of the Brighton Town Council, on June 15, Alderman Stringer, referring to the application made by Thomas Tilling, Limited, for licenses for 14 omnibuses, and also to that of the Brighton, Hove, and Preston Omnibus Company, said that in his opinion the time had not come to grant licenses to Messrs. Tilling. The Watch Committee were still of the opinion that the roads were too narrow for competition between omnibus companies. Councillor Tindall, taking the opposite view, said that 12,000 signatures had been obtained by Messrs. Tilling to the petition which they had put in. The proposal that Messrs. Tilling should be granted licenses was rejected by a large majority, but the license to the other company was renewed. Before these decisions were arrived at the Hove Council renewed the licenses to both companies for two months. No announcement has yet been made of the result of the company's offer to take over the business of Messrs. Tilling, Limited.

No Petrol License Duty on Trade and Hackney Carriages.—In connection with the issue of licenses to restrict the use of petrol, and the imposition of an additional tax of 6d. per gallon, Mr. Montagu (Secretary to the Treasury) announced in the House of Commons on June 26 that the Government had intended to impose half duty on trade cars. Representations had been received by the Government, and although they proposed to issue licenses, there would be no duty charged on the petrol for trade cars. Mr. Montagu moved a clause providing that a motor car shall not as a hackney carriage be exempt from license duty unless the car is used solely as a hackney carriage. The clause was agreed to. A clause entitling to relief from the license duty persons whose cars are used exclusively for any Government service was agreed to. On June 27, the House adopted a resolution, proposed by Mr. McKenna (Chancellor of the Exchequer), providing that motor-car owners, except the owners of commercial vehicles, should take out a license authorising them to be supplied with petrol, upon which they should pay a duty of 6d. per gallon, qualified medical practitioners and registered veterinary surgeons to get licenses at half rates.

Digitized by Google



Registered Trade Mark

WORKS

675, Commercial Road
London, E.

which is now their . . .

ONLY ADDRESS

THERMIT LTD.

Entirely British

Owned and Managed

THERMIT LIMITED
675, Commercial Road
LONDON, E.

Telegrams:—
"FULMEN STEP LONDON"

Telephone:—EAST 4157

Digitized by Google

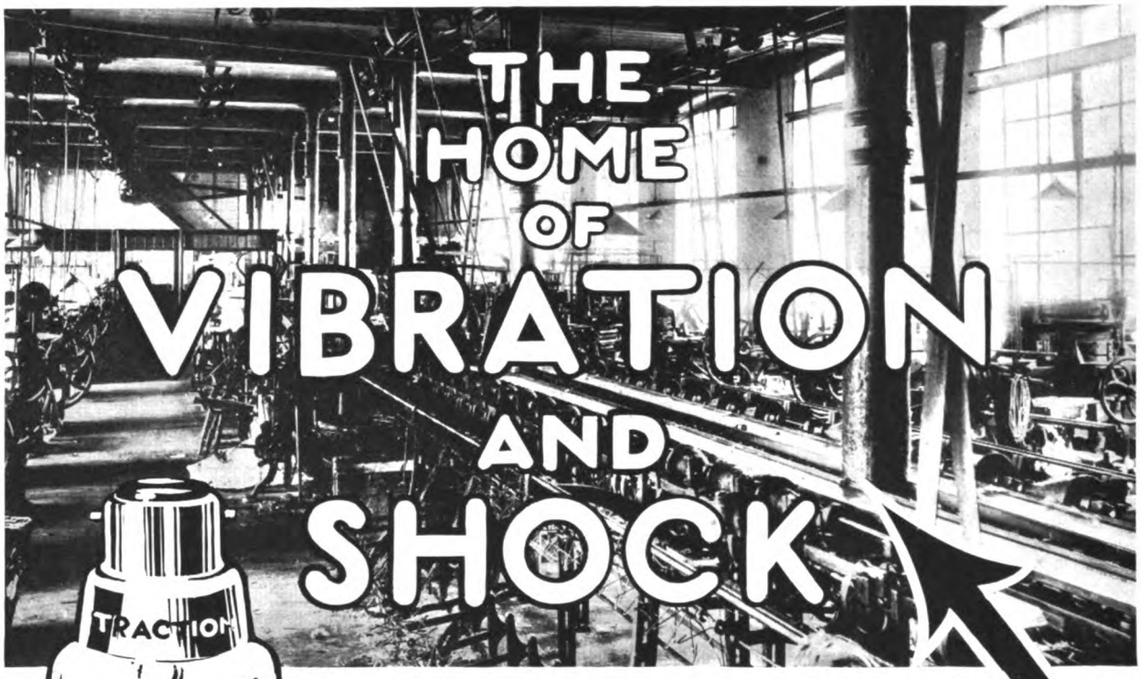

THE HOME OF VIBRATION AND SHOCK

IDEAL FOR INDUSTRIAL INSTALLATIONS

VIBRATION and accidental shocks are fatal to most ordinary types of Metal Filament Lamps, and renewal costs increase accordingly. This fact was chiefly responsible for the introduction of

SIEMENS WOTAN Drawn Wire TRACTION TYPE LAMPS

THESE Lamps have Tungsten Filaments and combine high efficiency with great mechanical strength. The filament is in one continuous length helical wound, and mounted in loop formation on a special support. This arrangement prevents "sagging," and the short-circuiting of adjacent lengths of filament. The distance between the top and bottom supports is in no case greater than $\frac{3}{4}$", and sharp bends are avoided. Maximum strength is thus obtained, and the lamps are therefore ideal for the local lighting of individual machines, work-benches, &c.

SIEMENS BROTHERS DYNAMO WORKS LIMITED. Lamp and Supplies Dept.: 38 & 39, Upper Thames St., E.C.

Digitized by Google

Telegrams:
"THOUGHTFUL, LONDON."

THE

Telephone
8186 LONDON WALL

LORAIN STEEL CO.

36-38, New Broad Street, London, E.C.

Highest Possible Recognition

Awarded at the Panama-Pacific International Exposition for the general excellence of Girder, Groove, Guard and High Tee Rails and Special Track Work products; the greatest merit being recognised in the following special products exhibited as representing the highest development of the Art:—

"Tadpole" Tongue Switch
Tongue-Holding Device
Electrically Welded Rail Joints

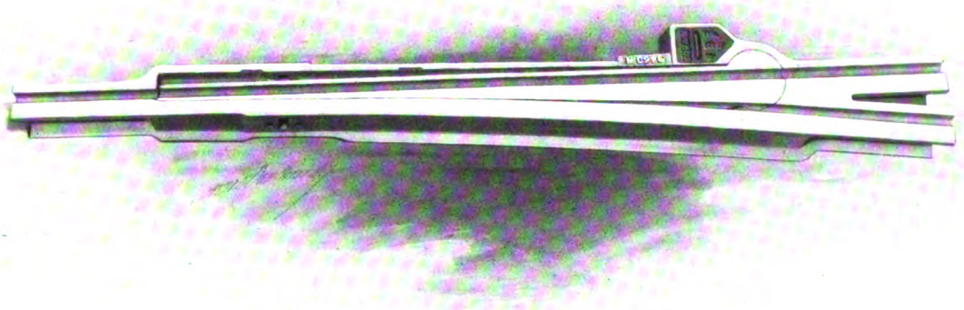

SOLID MANGANESE TADPOLE TONGUE SWITCH
Made with either grooved or plain Tongue

Digitized by Google

Large D.C. Generators

for

Electric Lighting *and* Power Stations.

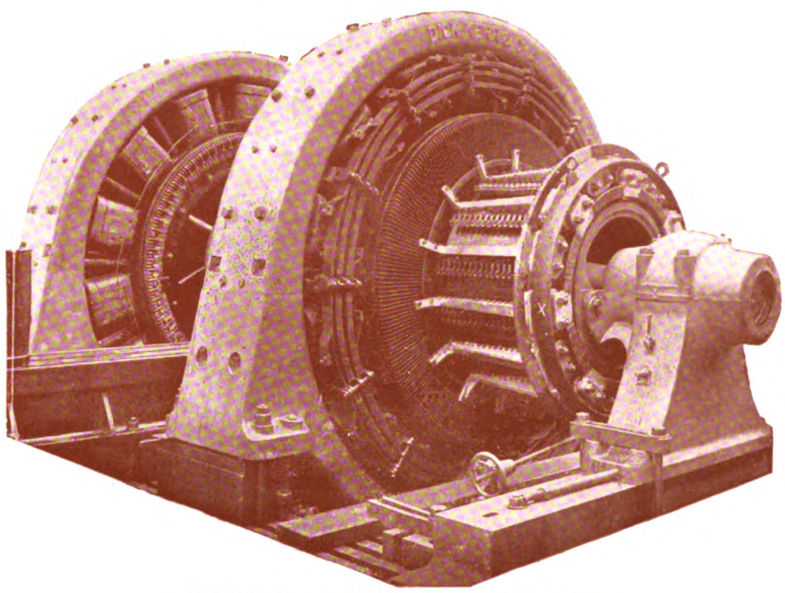

Two D.C. Compound Wound Interpole Generators
1000 K.W., 14/14 Poles, 300 R.P.M. 215/235 Volts.

D.K. Generators merit your consideration through the following features:—Skilled workmanship, strong mechanical construction, sound electrical design, subjected to thorough and exacting tests during the various stages of construction, efficient and economical in service.

DICK, KERR

& CO., LIMITED.

Head Office: ABCHURCH YARD, CANNON ST., LONDON, E.C.

Branch Offices: Manchester, Newcastle, Tokyo, Sydney, Johannesburg, Buenos Aires, Rio de Janeiro, and Milan.

Digitized by Google

Traction Controllers

with Metallic Shield Blow-out.

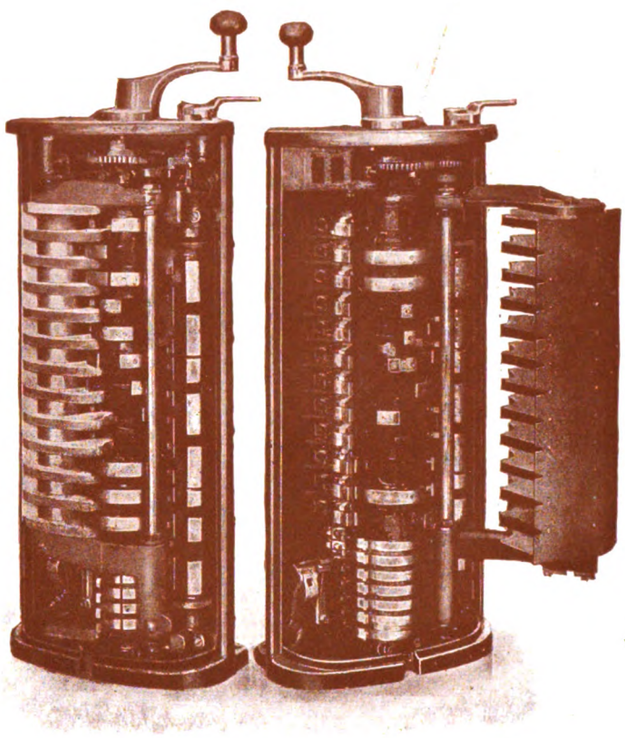

THE success which has been gained by our Metallic Shield Blow-out Controller during recent years has abundantly proved the soundness of the principles involved in its design.

In our latest standard controllers the blow-out has been made particularly powerful, securing cleaner contacts and thereby reducing the maintenance costs.

DICK, KERR

& CO., LIMITED.

Head Office: ABCHURCH YARD, CANNON ST., LONDON, E.C.

Branch Offices: Manchester, Newcastle, Tokyo, Sydney, Johannesburg, Buenos Aires, Rio de Janeiro, and Milan.

Digitized by Google

THE LINE OF LONG LIFE.

WEARS 2½-3 TIMES AS LONG AS H.D. COPPER.

IN USE ON SOME OF THE LARGEST SYSTEMS IN THE U.K.

Trolley Wire

Manufactured by Bridgeport Brass Co.

Booklet giving full particulars and data of tests post free on application.

THE EQUIPMENT & ENGINEERING CO.

2 & 3, NORFOLK STREET, STRAND, W.C.

TELEPHONE: 1088, CITY (2 LINES). **TELEGRAMS: "KHARPARTS, LONDON."**

Digitized by Google

The STANDARD INSULATING VARNISHES & COMPOUNDS

are used regularly by the principal TRAMWAY COMPANIES of the U.K., by the leading Electrical Manufacturing Firms, Lighting and Power Stations, etc.—an *every-day-service* proof of their *practical utility.*

Traction Motors particularly are subject to severe wear and tear, and it is here that the wonderful durability as well as the perfect efficiency of STANDARD materials prove how far they are in advance of the "next best."

Why experiment with UNKNOWN and UNPROVED materials when STANDARD SPECIALITIES are at your command?

Catalogue and Expert Advice where necessary from

PINCHIN, JOHNSON & CO., LTD.,

Minerva House, Bevis Marks, London, E.C.

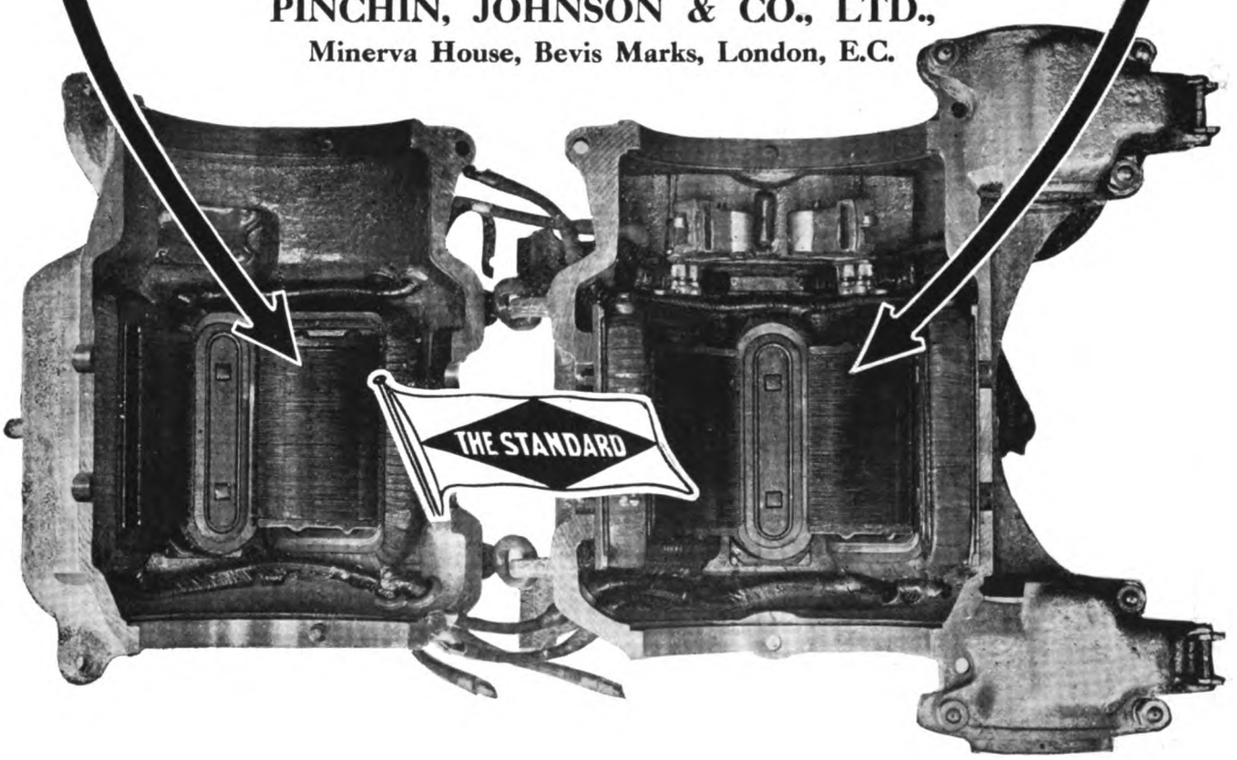

Digitized by Google

HADFIELDS LTD

WORKMEN EMPLOYED OVER 6000

Hecla & East Hecla Works, SHEFFIELD.

WORKS AREA 110 ACRES

CAST IRON GOOD!

150 Years Ago

CAST IRON was used for rails for the transportation of heavy loads on wheels, and for fifty years was considered good enough.

WROUGHT IRON BETTER!!

100 Years Ago

WROUGHT IRON had become extensively used for this purpose and for half a century was the universal material for Railway Track-work.

STEEL BETTER STILL!!!

50 Years Ago

STEEL owing to cheaper methods of manufacture was adopted by many, and ultimately by all of the Railways for their Permanent-way.

To Day

'ERA' MANGANESE STEEL BETTER THAN ALL!!!

HADFIELD'S PATENT 'ERA' MANGANESE STEEL is the only material that will withstand the enormous wear caused by the great increase in weight and speed of modern traffic at the Crossings and Curves of Tramways and Railways. For this purpose it is absolutely unequalled.



1795
POINT AND CROSSING OF CAST IRON

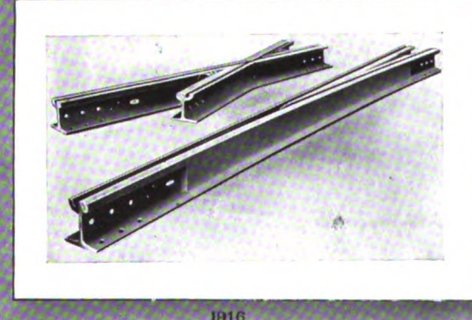

1916
POINT AND CROSSING OF 'ERA' MANGANESE STEEL

SPECIALISTS IN DESIGNING AND CONSTRUCTING
COMPLETE LAY-OUTS AND JUNCTIONS
OF EVERY DESCRIPTION FOR ELECTRIC RAILWAYS AND TRAMWAYS.

Digitized by Google

CONTENTS

	Page
Electric Traction on the Italian State Railways (Illus.)	93
Railways, Tramways, and the Defence of the Realm Act	101
Rail Design, Wear and Corrugation (Illus.)	101
Overhead Trolley Risks (Illus.)	104
Resilient Track and Rail Corrugation (Illus.)	105
Editorial Comments—London Tramway Finance	106
Tramway Services after Two Years of War	106
Differential Gears and Corrugation	107
Municipal Tramways Association	108
Trade after the War	108
Manchester Traffic Problem	109
Increased Fares	110
London County Council Tramways	112
London Traffic Report	113
Expediting Traffic in London	114
Mr. J. S. D. Moffet Appointed General Manager of Belfast Tramways (Illus.)	115
Edinburgh and Electrification	115
Financial Reports and Meetings	116
Dividends	118
An Experiment in Fuel Economy	118
Contracts and Orders	119
Personal	119
Tramway and Light Railway Notes	120
Glasgow Tramway Battalion (Illus.)	121
Barrett Jacks (Illus.)	122
London Traffic Group	122
Patent List	122
MOTOR TRAFFIC SECTION	127
Electric Vehicle Committee	128
Motor Traction in the War (Illus.)	129
Automobile Experiences in the War	130
Dennis Fire Engines for Russia (Illus.)	132
Motor Vehicles for Municipalities	132
New Omnibus Routes	133
Dennis Ambulance for Blackpool (Illus.)	133
An Ally of the Railway (Illus.)	133
Blackpool's Municipal Motor Vehicles	134
Refuse Removal by Electric Wagons	135
Edison Wagon at Southampton (Illus.)	136
Motor Traffic Notes	136
Traffic Returns	123-124
Directories of Electric Tramways and Railways	xxiii-xxx
Municipal Tramways	xxiii-xxiv
Company Tramways	xxiv-xxvi
Particulars of Track and Equipment	xxvii-xxx
Buyer's Guide	xvi-xx
Index to Advertisements	xiii

WE ARE ADDING ALL THE TIME TO OUR LIST OF TRAMWAYS WHICH USE

TOOL STEEL GEARS and PINIONS

but most of our orders are now from systems which have used T. S. material for some time. Experience is better than statements, and to-day we offer records and not promises

SCHOLEY & CO. LIMITED
56, Victoria Street
WESTMINSTER
LONDON, S.W.

Digitized by Google

The RIGHT TICKET

Skefko SKF ball bearings are "the right ticket" among bearings for tramway systems. Their absolute reliability even under abnormal conditions is one of their most favourable qualities, and is the result of their unique design combined with remarkable uniformity, hardness and elasticity. For rolling stock they are undoubtedly superior to any other bearings—proof of which remark may be found in the fact that the number of Skefko equipped trams is constantly increasing.

SKEFKO.SKF

(PATENTED) MADE IN ENGLAND.

SELF-ALIGNING DOUBLE ROW **BALL BEARINGS**

THE SKEFKO BALL BEARING CO., LTD.,

Head Office and Works - - - - - LUTON, ENGLAND.
London Office - - - - - - - 28, Victoria Street, Westminster, S.W.
Glasgow Office - - - - - - - - - - - 45, Bothwell Street.

FLOWER BRAND.

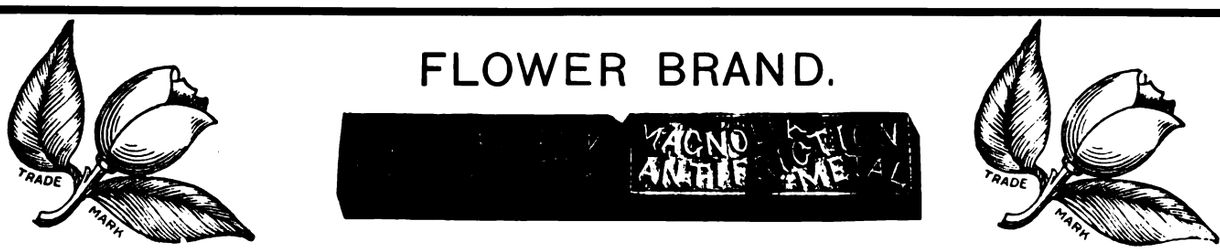

MAGNOLIA METAL

THE D. H. STOLL COMPANY, INC.
MANUFACTURERS OF PRESSES, SHEARS, DIES AND SPECIAL SHEET METAL WORKING MACHINERY.

Buffalo, N.Y., April 7, 1914

Gentlemen:—We have used your metal for the past few years in all our Power Presses and Shears, both large and small, with the most satisfactory results.

This applies both to the equipment, which we have manufactured here for our own use, and the many carloads shipped to some of the largest manufacturers in both the United States, Canada and abroad, in which was the entire plant equipment for many large plants.

As above stated, we have used this metal in both large and small machines and some machines running as high as 60 to 70 tons for heavy sheet metal drawing work.

Yours very truly,
THE D. H. STOLL COMPANY.

MAGNOLIA ANTI-FRICTION METAL COMPANY OF GREAT BRITAIN, LTD.

Tel. No.: City 6596. **49, Queen Victoria Street, LONDON, E.C.** Teleg.: "Magnolier, London."
Tel. No.: 254-01. **LA MAGNOLIA, 21, Rue de Petrograd, PARIS.** Teleg.: "Metamagno, Paris."

Digitized by Google

INDEX TO ADVERTISEMENTS.

	PAGE
Allen, Edgar, & Co., Ltd., Sheffield	146
Auto-Ticket Printing Co., Ltd., Liverpool	xxiv
Avon India Rubber Co., Ltd., Melksham	129
Baker, John, & Co. (Rotherham) Ltd., Rotherham	xxii
Beckett, Laycock & Watkinson, Ltd., Willesden	xx
Bell Punch & Printing Co., Ltd., London, E.C.	144
Brill Company, J. G., London, E.C.	xxxv
British Insulated & Helsby Cables, Ltd., Prescot	xxxi
British Thomson-Houston Co., Ltd., Rugby	—
British Westinghouse Electric & Manufacturing Co., Ltd., Manchester	xix
Brockhouse, J., & Co., Ltd., West Bromwich	147
Bruce Peebles & Co., Edinburgh	—
Carbic Limited, 51, Holborn Viaduct, London, E.C.	—
Clayton & Co. (Huddersfield), Ltd., Huddersfield	132
Cleveland Metal Co., Stockton-on-Tees	—
Clough, Smith, & Co., Ltd., London, E.C.	—
Coan, R. W., 219, Goswell Road, London, E.C.	xviii
Commercial Cars, Ltd., Luton	136
Courtenay, J. W., Ltd., London, W.C.	143
Coventry Chain Co., Ltd., Coventry	xiv
Daimler Co., Ltd., Coventry	125
Dennis Bros., Guildford	141
Dick, Kerr & Co., Ltd., London, E.C.	vi, vii, 148
Docker Brothers, Ltd., London, E.C.	144
Dunlop Rubber Co., Ltd., Aston Cross, Birmingham	135
Edison Accumulators, Ltd., London, S.W.	—
Edison & Swan United Electric Light Co., Ltd., Ponders End	xxi
Electric Construction Co., Ltd., London, E.C.	—
Equipment & Engineering Co., London	viii, xxxviii
Firestone Tyre and Rubber Co. Ltd., London, W.	132
Fodens, Ltd., Sandbach	138
Garrould, E. & R., Edgware Road, London, W.	—
General Electric Co., Ltd., London, E.C.	i
General Seating Co., Ltd., London, E.C.	ii
Glasgow Numerical Ticket Printing Co., Glasgow	xxxii
Goodyear Tyre and Rubber Co., Ltd., London, W.C.	137
Green, Geo. W., & Co. (Feltham), Ltd., Feltham	xxxii
Grover & Co., Ltd., Wharf Road, London, N.	xxxii
Hadfields, Ltd., Sheffield	x
Halley's Industrial Motors, Ltd., Glasgow	130
Henley's Telegraph Works Co., Ltd., London	xix, 139
Herbert Frood Co. Ltd., Chapel-en-le-Frith	xxxiv
Hurst, Nelson & Co., Ltd., Motherwell	xxxvii
International Truck and Car Co., Ltd., London	xvi
Johnson & Phillips, Ltd., London, S.E.	xxxviii
Lacre Motor Car Co., 78, York Road, London	133
Leyland Motors (1914), Ltd., Leyland	131
"L'Industrie des Tramways et Chemins de Fer," Paris	144
Lorain Steel Co., London, E.C.	v
Macintosh, Chas., & Co., Ltd., Manchester	140
Magnolia Anti-Friction Metal Co., London, E.C.	xii
Maudslay Motor Co., Ltd., 4, Parkside, Coventry	130
Millars' Timber & Trading Co., Ltd., London, E.C.	—
Mirrlees Watson Co., Ltd., Glasgow	123
"Motor Traction," 20, Tudor Street, London, E.C.	xviii
Napier, D., and Son, London, W.	126
Oriental Tube Co., Ltd., West Bromwich	123
Patent File and Tool Co., Ltd., London, E.C.	xiv
Pease & Partners, Ltd., Middlesbrough	xxii
Peckham Truck & Engineering Co., Ltd., London	xv
Pinchin, Johnson & Co., Ltd., London, E.C.	ix
R.E.T. Construction Co., Ltd., London, E.C.	xxxii
Scholey & Co., Ltd., London, E.C.	xi
Shepherd's Parging Block Co., Milkstone, Rochdale	xiii
Shrewsbury & Challiner Tyre Co., Ltd., Manchester	—
Siemens Bros. Dynamo Works, Ltd., London, S.W.	iv
Skefko Ball Bearing Co., Ltd., Luton	xii
Smith, Frederick, & Co., Ltd., Salford, Manchester	xxxvi
Standard Underground Cable Co., London, E.C.	xviii
Stewarts & Lloyds, 41, Oswald Street, Glasgow	147
Straker & Squire, Ltd., London, S.E.	128
Thermit, Ltd., London, E.C.	iii
Thornycroft, John I. & Co., London, S.W.	134
Tilling-Stevens, Ltd., 26, Victoria Street, S.W.	127
Titan Trackwork Co., Ltd., Sheffield	xv
"Tramway and Railway World"	xiv, xvi
Tramway Supplies, Ltd., Leeds	147
Tudor Accumulator Co., Ltd., London, S.W.	xxxiv
Turner-Smith, W., 78, 80, and 82, Brompton Road	—
Tyne Metal Co., Ltd., Newcastle-upon-Tyne	147
Underground Electric Railways Co., Ltd., London	xxxiii
United Electric Car Company, Preston, Lancs.	xxxiii
Walter Scott, Ltd., Leeds Steel Works, Leeds	145
Watlington & Co., Ltd., London	—
Waygood-Otis, Ltd., London, S.E.	xviii
White Motors and Accessories, Ltd., London, S.W.	xvii
Willans & Robinson, Ltd., Rugby	—
Williamson, Alfred, Ashton-under-Lyne	xiv
Wilson Rolling Shutter Co. (1914) Ltd., London, S.W.	xvi
Wood-Milne, Ltd., Preston	142
Vandervell, C. A. & Co. Ltd. London, W.	134
Zenith Carburetter Co., London, W.	xxxiv

fill it in with a Solid Block

REQUIREMENTS OF A RAIL FILLER—A satisfactory Filler must

1. Be handy and convenient to use.
2. It must not deteriorate in stock.
3. Must fix to present a solid upright vertical wall against which to pave.
4. Must not liquify and run with heat.
5. Must be unaffected by frost during the operation of laying and when fixed in position.
6. Must bear the pressure and vibration of heavy surface traffic.
7. Must be able to be used in rail after rail.
8. Must fix so that it absolutely prevents the adjoining paving from dipping below the rail to expose the rail edge and become dangerous to users of the road.



SHEPHERD'S PARGING BLOCK CO. LTD.
MILKSTONE, ROCHDALE. Telephone: 912 and 721 Rochdale
No. 11

BLOCK PARGING

Digitized by Google

Dreadnought Rail Files

are the most efficient and economical tools for track work, and they cost but a few pence more than the inferior ordinary article.

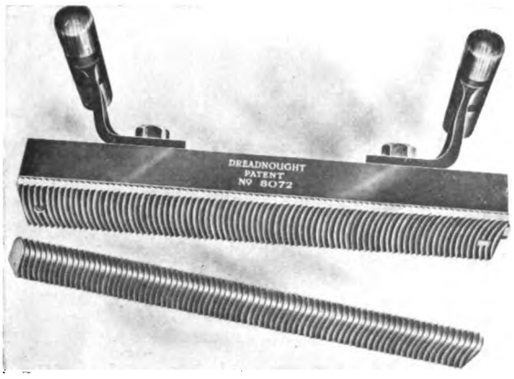

Illustration of FLAT and GROOVE Dreadnought Rail Files.

BRITISH MAKE **SPECIAL SHEFFIELD CRUCIBLE STEEL**

The Patent File & Tool Co. Ltd., 8, WHITE STREET LONDON, E.C.

THE COVENTRY CHAINS

Suit every variety of British and American —Service Vehicle—

Catalogue D/6 post free.

"THE COVENTRY" CHAIN CO., LTD., COVENTRY, ENGLAND.

LONDON: 47, Victoria Street, S.W. MANCHESTER: 233, Deansgate.

ALFRED WILLIAMSON

TRAMWAY & RAILWAY TICKET PRINTER,
ASHTON-UNDER-LYNE.

THE 'WILLIAMSON' REGISTERING TICKET BELL PUNCH

TICKETS & **Supplied on the** **PUNCHES** **Very Best Terms.**

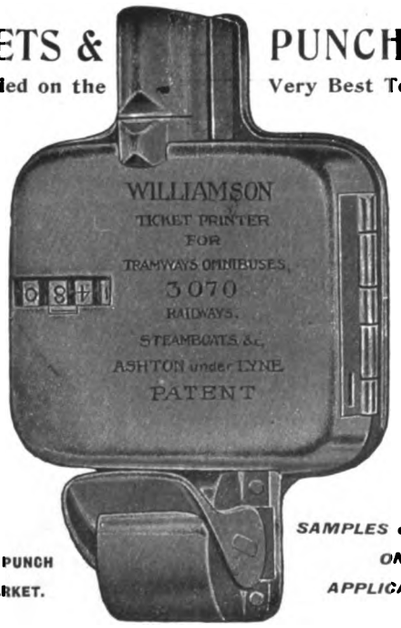

ESTABLISHED 1835.

Telephone: 320 Ashton under Lyne.

THE STRONGEST PUNCH ON THE MARKET.

SAMPLES & PRICES ON APPLICATION.

PUNCHES ON SALE OR HIRE.

THE AUTOBUS IN THE TRAMWAY WORLD.

Motor Traffic Section.

When "The Tramway and Railway World" was founded in 1892, motor traction was, of course, scarcely dreamt of, but the avowed object of the paper was to encourage all new methods that gave promise of usefulness.

In pursuance of that policy the progress of motor traction received early attention. Commenting on the historic motor parade to Brighton in 1896, "The Tramway and Railway World" predicted that

> "It would give a prodigious impulse to transport both by road and rail."

Within a decade this prophecy was abundantly fulfilled and so much space had been devoted to the new industry that in 1906 a special

MOTOR TRAFFIC SECTION

was added. Every illustrated issue thus contains a section devoted especially to motor cars for Public Service, and includes articles on current topics, illustrated descriptions of new types of vehicles and accessories, and the latest news.

Public Service Motor Cars.

The importance of this section will be gathered from the fact that an increasing number of the leading municipal authorities, railway and transport companies, now own and operate large fleets of motor vehicles, including omnibuses, chars-a-bancs, motor lorries for the transport of goods, parcel delivery vans, tower wagons, motor street sweepers, and a variety of other types.

Digitized by Google

ALL TYPES OF TRAMWAY POINTS

Made of
"TITAN"
MANGANESE STEEL

TITAN TRACKWORK CO.
Rutland Works, Rutland Road, SHEFFIELD LTD.

A GOOD THING IS SURELY WORTH A TEST!!

YOU CAN INCREASE THE SPEED OF YOUR CARS WITHOUT FEAR OF DERAILMENT

SEND FOR PARTICULARS, DRAWINGS ETC.

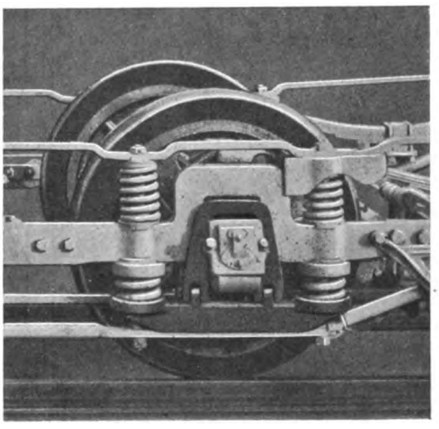

THIS GEAR RELIEVES THE CAR AND MOTORS FROM SIDE SHOCKS, ETC.

THE PECKHAM PENDULUM GEAR HAS STOOD THE SEVEREST TESTS ON OVER 35 TRAMWAYS IN THIS COUNTRY WITH ENTIRE SATISFACTION

CAN BE FITTED TO ANY EXISTING TRUCKS

THE PECKHAM TRUCK & ENGINEERING CO., LTD.

Telephone City 3,294
Telegrams "TRUXENPECK, CANNON, LONDON"

26, BUDGE ROW,
CANNON STREET,
LONDON, E.C.

3

Digitized by Google

THE
INTERNATIONAL
TRUCK & CAR
CO. LTD.

MANUFACTURERS OF

ROLLING STOCK FOR
ELECTRIC RAILWAYS
AND TRAMWAYS

PATENT RADIAL AXLE TRUCKS
FOR SHARP CURVES a Speciality

59-61, New Oxford Street, LONDON

WILSON
ROLLING SHUTTER CO. (1914) LTD.



SHUTTERS of every description in Steel, Bronze, Wood

66, VICTORIA ST., LONDON, S.W.
'PHONE 104 VICTORIA.

"To all engaged upon track construction and even to those engaged in road engineering we can strongly recommend this work." *The Surveyor.*

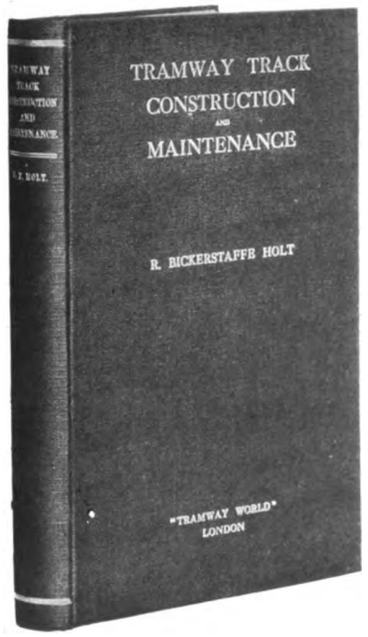

250 pages, 10 × 6½ × 1 in., with over 150 illustrations—Price 10s. 6d.

TRAMWAY & RAILWAY WORLD OFFICES
Amberley House, Norfolk Street, London, W.C.

BUYER'S GUIDE

The Names of Advertisers whose announcements appear in consecutive issues of THE TRAMWAY AND RAILWAY WORLD are inserted free of charge, under such headings as may be desired.

ACCUMULATORS, ELECTRICAL.
Edison Accumulators, Ltd., London.
Tudor Accumulator Co., London, S.W.

ADVERTISING, TRAMWAY AND RAILWAY.
J. W. Courtenay, Ltd., London.

AIR BRAKES. (See Brakes.)

ALUMINIUM.
British Aluminium Co., Ltd., London, E.C.

AMMETERS. (See Voltmeters.)

ANCHOR CHAIRS.
Blackwell & Co., London.

ANGLE IRON BUFFERS.
Brill Company, J. G., London, S.W.

ANTI-FRICTION METAL.
Magnolia Anti-Friction Metal Co., Ltd., E.C.

AUTOMATIC BRAKE ADJUSTERS. (See Brake Adjusters.)

AXLE BOXES.
Brill Company, J. G., London, E.C.
Peckham Truck and Eng. Co., London, S.W.

AXLES AND TYRES.
Anger Mfg. & Supply Co., Ltd., Preston, Lancs.
Baker, John, & Co., Rotherham.
Equipment & Engineering Co., London, W.C.

BALL BEARINGS.
Skefko Ball Bearing Co., Ltd., Luton.

BATTERIES, STORAGE. (See Accumulators.)

BEARINGS.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
Skefko Ball Bearing Co., Ltd., Luton.
Watlington & Co., Ltd., London, E.C.

BELLS AND GONGS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Watlington & Co., Ltd., London, E.C.

BLINDS AND CURTAINS.
Beckett, Laycock & Watkinson, Ltd., London.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.

BOILERS.
Babcock & Wilcox, Ltd., London, E.C.

BOLTS.
Allen, Edgar & Co., Ltd., Sheffield.
Bayliss, Jones, & Bayliss, Wolverhampton.
Brockhouse J., & Co., Ltd., West Bromwich.
Hadfields, Ltd., Sheffield.
Peckham Truck and Eng. Co., London, S.W.
"The Coventry" Repetition Co., Coventry.
Titan Trackwork Co., Ltd., Nottingham.

BOND PAINTS.
Ruberoid Co., Ltd., London, E.C.

BOXES, JOURNAL.
Anger Mfg. & Supply Co., Ltd., Preston, Lancs.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
Watlington & Co., Ltd., London, E.C.

BRACKETS AND CROSS ARMS. (See Poles.)

BRAKE ADJUSTERS.
Anger Mfg. & Supply Co., Ltd., Preston, Lancs.

BRAKES, CAR.
Brill Company, J. G., London, E.C.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Electric Co.
Dick, Kerr, & Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peacock Brake Co., London, E.C.
Peckham Truck and Eng. Co., London, S.W.

BRAKE HANDLES.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peacock Brake Co., London, E.C.
United Electric Car Co., Ltd., Preston.

BRAKE SHOES.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
Hadfields, Ltd., Sheffield.
Hurst, Nelson & Co., Ltd., Motherwell.
Peacock Brake Co., London, E.C.
Peckham Truck and Eng. Co., London, S.W.
Tyne Metal Co., Ltd., Newcastle-on-Tyne.
United Electric Car Co., Ltd., Preston.

BROOMS, TRACK.
Brush Elec. Engineering Co., Ltd.
Hurst, Nelson & Co., Ltd., Motherwell.
Watlington & Co., Ltd., London, E.C.

BRUSHES, DYNAMO AND MOTOR.
British Westinghouse Co., Ltd., London.
Electric Construction Co., Ltd., London.
Watlington & Co., Ltd., London, E.C.

CABLES, ELECTRIC TRAMWAY AND LIGHTING.
British Aluminium Co., Ltd., London, E.C.
British Westinghouse Co., Ltd., London.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.
Henley's Telegraph Works Co., Ltd., London
Macintosh & Co., Ltd., Chas., London, E.C.

CABLE PULLEYS.
Tyne Metal Co., Ltd., Newcastle-on-Tyne.

CABLE TRAMWAYS.
Dick, Kerr & Co., Ltd., London, E.C.

CARBON BRUSHES. (See Dynamo & Motor Brushes.)

CARBURETTORS.
Green, Geo. W., & Co., Ltd., Feltham.

CAR CURTAINS.
Beckett, Laycock & Watkinson, Ltd., London.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.

CAR JACKS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs
Watlington & Co., Ltd., London, E.C.

CAR ROOF COVERINGS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

CAR SEATS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
United Electric Car Co., Ltd., Preston, Lancs.

CAR STEPS. (See Movable Car Steps.)

CAR STOVES.
Brill Company, J. G., London, E.C.

CAR TRIMMINGS.
Brill Company, J. G., London, E.C.
General Seating Co., Ltd., London, E.C.

CARS, TRAMWAY.
Brill Company, J. G., London, E.C.
Dick, Kerr & Co., Ltd., London.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

CAR TRUCKS.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
United Electric Car Co., Preston.

CASTINGS.
Allen, Edgar & Co., Ltd., Sheffield.
Hadfields, Ltd., Sheffield.
Hurst, Nelson & Co., Ltd., Motherwell.
Stewarts & Lloyds, Glasgow.
Titan Trackwork Co., Ltd., Nottingham.

CHAINS.
Coventry Chain Co., Ltd., Coventry.

CHARS-A-BANCS.
Commercial Cars, Ltd., Luton.
Clayton & Co. Huddersfield, Ltd., Huddersf'ld.

CIRCUIT BREAKERS.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Electric Construction Co., Ltd., London.
Watlington & Co., Ltd., London, E.C.

COLOURS. (See Paint.)

COMMERCIAL MOTORS.
Clayton & Co. Huddersfield, Ltd., Huddersf'ld.

COMMERCIAL VEHICLES.
Commercial Cars, Ltd., Luton.

COMMUTATORS & COMMUTATOR SEGMENTS.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

Digitized by Google

JACKS FOR TRAMCARS & MOTOR VEHICLES



"Barrett" Ball and Cone Bearing Screw Jacks
Capacity - 10 Tons

BARRETT Jacks have a world-wide reputation for Durability, Safety and Quality. They are easy to operate, and the "lift" is quick. Types are made for every conceivable purpose, and the name is a guarantee of efficiency. Let us know your requirements.

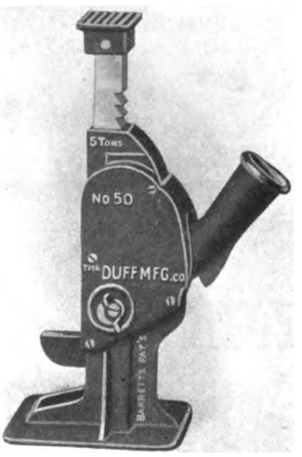

"Barrett" Automatic Lowering Jack
Capacity - 5 Tons

SOLE BRITISH AGENTS

White Motors and Accessories, Limited,

Concanon Works, Concanon Road, Acre Lane, Brixton,
(Close to Lambeth Town Hall)
LONDON, S.W.

Telephones: 565 & 566 Brixton
Telegrams: Yenisean, London

Cables: Yenwalt, London

DIRECTORY OF MANUFACTURERS OF AND DEALERS IN SUPPLIES (*continued*).

CONDENSING PLANT.
Belliss & Morcom, Ltd., Birmingham.
Mirrlees Watson Co., Ltd., Glasgow.

CONDUITS.
Doulton & Co., London.

CONTROLLER FINGERS.
Anger Mfg. & Supply Co., Ltd., Preston, Lancs.
Equipment & Engineering Co., London, W.C.

CONTROLLERS, ELECTRIC CAR.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Dick, Kerr, & Co., Ltd., London.

CONVERTIBLE CARS.
Brill Company, J. G., London, E.C
Hurst, Nelson & Co., Ltd., Motherwell.

CONVEYING AND ELEVATING MACHINERY.
Allen, Edgar, & Co., Ltd., Sheffield.
Hadfields, Ltd., Sheffield.

CROSSINGS. (See Points and Crossings).

CRUCIBLES.
Doulton & Co., Ltd., London

DESTINATION INDICATORS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.

DESTINATION SCREENS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.

DESTINATION SIGNS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.

DOG SPIKES.
Bayliss, Jones & Bayliss, Ltd., Wolverhampt'n

DROP FORGINGS.
Smethwick Stamping Co., Smethwick.

DYNAMOS.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Dick, Kerr & Co., Ltd., London.

ECONOMISERS.
Green, E., & Son, Ltd., Wakefield.

ELECTRIC BRAKES.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Electric Co., Ltd., Manchester.

ELECTRIC CABLES.
Henley's Telegraph Works Co., Ltd., London.
Macintosh & Co., Ltd., Chas., London, E.C.

ELECTRIC HEATERS.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.
Watlington & Co., Ltd., London, E.C.

ELECTRIC LAMPS.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.
Watlington & Co., Ltd., London, E.C.

ELECTRIC TRAMWAY SUPPLIES.
Allen, Edgar, & Co., Ltd., Sheffield.
Brill Company, J. G., London, E.C.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Co., Ltd., London.
Consolidated Accessories Co., London.
Dick, Kerr, & Co., Ltd., London.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.
Hadfields, Ltd., Sheffield.
Henley's Telegraph Works Co., Ltd., London.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
Titan Trackwork Co., Ltd., Nottingham.
United Electric Car Co., Ltd., Preston, Lancs.
Watlington & Co., Ltd., London, E.C.

ELECTRIC TRAMWAYS.
Allen, Edgar, & Co., Ltd., Sheffield.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Dick, Kerr, & Co., Ltd., London.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

ELECTRICAL ACCESSORIES.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.

ENGINES.
Belliss & Morcom, Ltd., Birmingham.

FANS, ELECTRIC
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.

FARE REGISTERS.
Bell Punch & Printing Co., Ltd., London.
Brill Company, J. G., London, E.C.

FENCES AND GATES.
Bayliss, Jones, & Bayliss, London, E.C.

FENDERS, TRAMCAR.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

FISHBOLTS.
Allen, Edgar, & Co., Ltd., Sheffield.
Bayliss, Jones & Bayliss, Ltd., Wolverhampt'n

FISHBOLTS AND PLATES.
Anger Mfg. & Supply Co., Ltd., Preston, Lancs.

FOLDING GATES.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.

FORGINGS.
Baker, John, & Co., Rotherham.
Brill Company, J. G., London, E.C.
Brockhouse, J., & Co., Ltd., West Bromwich.
Hurst, Nelson & Co., Ltd., Motherwell.
Smethwick Stamping Co., Smethwick.

FUEL ECONOMISERS.
Green, E., & Son, Ltd., Wakefield.

GEAR CASES.
British Thomson-Houston Co., Ltd., Rugby.
Equipment & Engineering Co., London, W.C.
Peckham Truck and Eng. Co., London, S.W.
Watlington & Co., Ltd., London, E.C.

GEARS.
British Thomson-Houston Co., Ltd., Rugby.
Hadfields, Ltd., Sheffield.
Scholey and Co., Ltd., London, E.C.
Watlington & Co., Ltd., London, E.C.

GEARS AND PINIONS.
British Thomson-Houston Co., Ltd., Rugby.
Equipment & Engineering Co., London, W.C.
Peckham Truck and Eng. Co., London, S.W.
Watlington & Co., Ltd., London, E.C.

GEAR WHEELS.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

GENERATORS. (See Dynamos.)

GLASSWARE.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.

GRINDING MACHINES.
Equipment & Engineering Co., London, W.C.

GRINDING MACHINES, CAR WHEEL.
Thermit, Ltd., London, E.C.
Watlington & Co., Ltd., London, E.C.

GUARD WIRE.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

Digitized by Google

WIRE & RODS

COPPER
BRASS
COPPER CLAD
PHOSPHOR BRONZE
SILICON BRONZE
TROLLEY WIRE

Standard Underground Cable Co.
DOCK HOUSE, BILLITER ST., LONDON

Telegrams: KRANKASES, ISLING-LONDON. Telephones: 4879 CENTRAL, 3846 CITY.

ALUMINIUM CASTINGS

COAN CASTS CLEAN CRANK CASES

MADE AND REPAIRED.
FOR ALL TRADES. LARGE AND SMALL. PURE AND HARDENED
Inquiries invited. Estimates given.

Contractor to Admiralty and War Office.

R. W. COAN, THE ALUMINIUM FOUNDRY,
219, Coswell Road, London, E.C.

ESTABLISHED 1833
WAYGOOD-OTIS, LTD.

Lift Makers — To H.M. The King.
By Appointment

WAYGOOD-OTIS LIFTS

of all kinds and for all purposes.

FALMOUTH ROAD, LONDON, S.E.

MOTOR TRACTION
DEALING WITH MOTOR VEHICLES for BUSINESS ☐ PURPOSES ☐
GIVES
Practical information and reliable data regarding all types of Motor Vehicles for the transport of passengers or goods, municipal purposes, etc.
Every Wednesday. *One Penny.*
Specimen Copy Post Free.
ILIFFE & SONS Ltd., 20, Tudor St., London, E.C.

DIRECTORY OF MANUFACTURERS OF AND DEALERS IN TRAMWAY AND RAILWAY SUPPLIES (*continued*).

GUARDS.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.

HEADLIGHTS.
Brill Company, J. G., London, E.C.
Watlington & Co., Ltd., London, E.C.

HEATERS, ELECTRIC.
Watlington & Co., Ltd., London, E.C.

HYDRAULIC PRESSES.
Hadfields, Ltd., Sheffield.

IGNITION LEADS (FOR MOTOR CARS).
Henley's Telegraph Works Co., Ltd., London.

INDICATORS.
Brill Company, J. G., London, E.C.
Consolidated Accessories Co., London.
Equipment & Engineering Co., London, W.C
General Seating Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

INSTRUMENTS.
Edison & Swan United Electric Light Co.

INSULATING MATERIAL.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

INSULATING VARNISHES.
Equipment & Engineering Co., London, W.C.

INSULATORS, TRAMWAY.
Blackwell, R. W., & Co., Ltd., London, E.C.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Co., Ltd., London.
Consolidated Accessories Co., London.
Doulton & Co., Ltd., London.
Equipment & Engineering Co., London, W.C.
Henley's Telegraph Works Co., Ltd., London.
Watlington & Co., Ltd., London, E.C.

IRONWORK FOR CAR BODIES.
Brockhouse, J., & Co., Ltd., West Bromwich.

JACKS.
Equipment & Engineering Co , London, W.C

JAPANS.
Kearsley & Co., Ripon.

JOINT BOXES.
Henley's Telegraph Works Co., Ltd., London.

JOINT PLATES.
Allen, Edgar, & Co., Ltd., Sheffield.
Hadfields, Ltd., Sheffield.

JOINTS, RAIL.
Allen, Edgar, & Co., Ltd., Sheffield.
Thermit, Limited, London, E.C.

JOURNAL BOXES.
Brill Company, J. G., London, S.W.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
United Electric Car Co., Ltd., Preston, Lancs.

JOURNAL BOX PACKING.
Beckett, Laycock & Watkinson, Ltd., London.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.
Peckham Truck and Eng. Co., London, S.W.

LAMPS, ELECTRIC.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Electric Construction Co., Ltd., London.
Watlington & Co., Ltd., London, E.C.

LEATHERS (UPHOLSTERY).
General Seating Co., Ltd., London, E.C.

LIFE GUARDS.
Hurst, Nelson & Co., Ltd., Motherwell.

LIFTING JACKS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Glasgow.

LIGHTNING ARRESTERS.
Blackwell, R. W., & Co., Ltd., London, E.C.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

LINCRUSTA WALTON.
General Seating Co., Ltd., London, E.C.

LINE MATERIAL, ELECTRIC TRAMWAY
British Thomson-Houston Co., Ltd., Rugby.
Clough, Smith, & Co., Ltd., London, E.C.
Consolidated Accessories Co., London.
Dick, Kerr, & Co., Ltd., London.
Electro-Mechanical Brake Co., West Brom.
Equipment & Engineering Co., London, W.C.
Henley's Telegraph Works Co., Ltd., London.
Tramway Supplies, Ltd., Leeds.
Watlington & Co., Ltd., London, E.C.

LOCK WASHERS (Palnut Patent).
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

LOCOMOTIVES.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Co., Ltd., London.
Dick, Kerr, & Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.

LORRIES.
Clayton & Co. Huddersfield, Ltd., Huddersf'ld.
Commercial Cars, Ltd., Luton.

LUBRICANTS.
Wakefield, C. C., & Co., London, E.C.

METALS
Magnolia Anti-Friction Metal Co. of Great Britain, Ltd., London, E.C.

MILLBOARDS—"PANELLIUM."
General Seating Co., Ltd., London, E.C.

MOTOR OMNIBUSES.
Clayton & Co. Huddersfield, Ltd., Huddersf'ld.
Commercial Cars, Ltd., Luton.

MOTOR TRUCKS (See Trucks).

MOTOR VANS.
Clayton & Co Huddersfield, Ltd., Huddersf'ld.
Commercial Cars, Ltd., Luton.

MOTOR VEHICLES.
Clayton & Co Huddersfield, Ltd., Huddersf'ld.
Commercial Cars, Ltd., Luton.

MOVABLE CAR STEPS.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.

MUNICIPAL VEHICLES.
Clayton & Co. Huddersfield, Ltd., Huddersf'ld.
Commercial Cars, Ltd., Luton.

OILS.
Wakefield, C. C., & Co., London, E.C.

OILSKINS.
Ailsa Oilskin and Rubber Co., Dalry.

OVERHEAD TROLLEY EQUIPMENT. (See Line Mat'l.

OVERHEAD LINE MATERIAL.
British Thomson-Houston Co., Ltd., Rugby.
Green, Geo. W., & Co., Ltd., Feltham.
Watlington & Co., Ltd., London, E.C.

OVERHEAD LINE TOOLS.
M. & G. Truck & Engineering Co., Ltd.
Watlington & Co., Ltd., London, E.C.

PAINT.
Kearsley, Robert, & Co., Ltd., Ripon, Yorks.

PAINTS, INSULATING.
Ruberoid Co., Ltd., London, E.C.

PANELS, ALUMINIUM.
British Aluminium Co., Ltd., London, E.C.

PANELS, MAHOGANY, etc.
Brill Company, J. G., London, S.W.

PANELS, 3-PLY, etc.
General Seating Co., Ltd., London, E.C.

PERMANENT WAY TOOLS.
Allen, Edgar, & Co., Ltd., Sheffield.

POINTS AND CROSSINGS.
Allen, Edgar, & Co., Ltd., Sheffield.
Dick, Kerr, & Co., Ltd., London.
Hadfields, Ltd., Sheffield.
Lorain Steel Company, London.
Titan Trackwork Co., Ltd., Sheffield.

POINT CONTROLLERS.
Clay & Atkinson, Bradford.
Equipment & Engineering Co., London, W.C.

POLES, METAL.
Clough, Smith, & Co., Ltd., London, E.C.
Dick, Kerr, & Co., Ltd., London.
Equipment & Engineering Co., London, W.C.
Peckham Truck and Eng. Co., London, S.W.
Stewarts & Lloyds, Ltd., Glasgow.
Watlington & Co., Ltd., London, E.C.

PORTABLE RAILWAYS.
Hurst, Nelson & Co., Ltd., Motherwell.

PRESSES, HYDRAULIC.
Youngs, Ryland St. Works, Birmingham.

PUBLIC SERVICE VEHICLES.
Clayton & Co Huddersfield, Ltd., Huddersf'ld.

PULLEY BLOCKS.
Youngs, Ryland St. Works, Birmingham.

PULLEYS, CABLE.
Dick, Kerr, & Co., Ltd., London.
Hadfields, Ltd., Sheffield.
Tyne Metal Co., Ltd., Newcastle-on-Tyne.

PULLEYS, SHAFTING, COUPLINGS, etc.
Allen, Edgar, & Co., Ltd., Sheffield.
Brown Bayley's Steel Works, Ltd., Sheffield.
Hadfields, Ltd., Sheffield.

PUNCHES, TICKET.
Auto-Ticket Printing Co., Ltd., Liverpool.
Bell Punch & Printing Co., Ltd., London.
Ticket Punch & Register Co., Ltd., London.
Williamson, Alfred, Ashton-under-Lyne.

RAIL BENDERS.
Equipment & Engineering Co., London, W.C.
Hadfields, Ltd., Sheffield.

(Continued on page xx.)

Digitized by Google

WESTINGHOUSE
Tramway Controllers

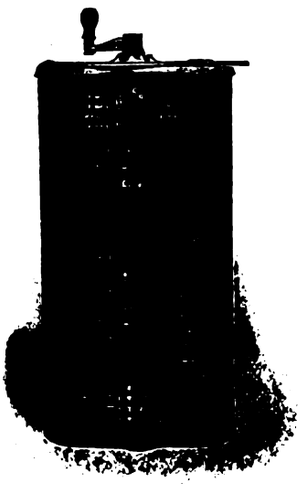

Strong and simple mechanism.
Liberal rating of current carrying parts.
Low maintenance.
All parts made to gauge and strictly interchangeable, therefore all wearing parts are quickly and cheaply renewable.
Maximum accessibility for inspection and repairs.
Constant finger tension irrespective of wear and finger springs specially designed to prevent stubbing.
Simple method of cutting out either motor when required.
Powerful magnetic controller blow-out.
Ample space for incoming cables.

Westinghouse Manchester

The British Westinghouse Electric and Manufacturing Company, Limited, Trafford Park, Manchester.

Henley's Solid Rubber Cables

Also known as "Cab Tyre Sheathed." ***Patent 3996/11.***

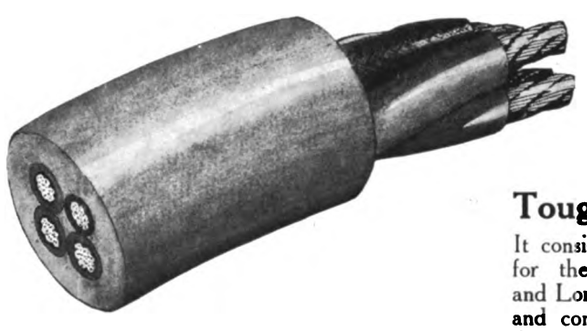

HENLEY'S tough, resilient, SOLID Rubber Cables will resist destructive action over periods covered by several replacements of cables having other forms of protection.

THE sheathing used on these Cables is that referred to in the Wiring Rules of the Institution of Electrical Engineers, Seventh Edition, March, 1916, page 14, Section 65, as

Tough Rubber Compound Protection

It consists of tough, resilient, *solid* rubber of the type used for the tyres of heavy motor vehicles, such as 'Buses and Lorries. We are manufacturers of Solid Band Tyres, and consequently know the type of Rubber Compound that will withstand the greatest amount of rough usage.

Therefore we can recommend our Solid Rubber Protection for Trailing Cables in Collieries, Wharves, Docks, Shipbuilding Yards, Manufactories, Railway Sheds and Tunnels, and all situations in which a wear-resisting sheathing is necessary; and for general wiring in Chemical Works, Breweries, Bleach and Dye Works, &c.

ASK FOR A SAMPLE.

W. T. HENLEY'S TELEGRAPH WORKS CO., LTD.,
Blomfield Street, London, E.C.

Digitized by Google

DIRECTORY OF MANUFACTURERS OF AND DEALERS IN SUPPLIES *(continued)*.

RAIL BONDS.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

RAIL CLEANERS.
Brill Company, J. G., London, E.C.
Consolidated Accessories Co., London.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Watlington & Co., Ltd., London, E.C.

RAIL GRINDERS.
Consolidated Accessories Co., London, E.C.
Equipment & Engineering Co., London, W.C.
Thermit, Ltd., London, E.C.

RAIL JOINTS.
Bayliss, Jones & Bayliss, Ltd., Wolverhampton
Continuous Rail Joint Co., Ltd., London, E.C.
Hadfields, Ltd., Sheffield.
Thermit, Limited, London, E.C.

RAILLESS ELECTRIC SYSTEMS.
R.E.T. Construction Company, London, E.C.
Watlington & Co., Ltd., London, E.C.

RAIL LIFTERS
Equipment & Engineering Co., London, E.C.

RAIL PLANES.
Thermit, Ltd., London, E.C.

RAILS, TURNOUTS, CURVES, etc.
Allen, Edgar, & Co., Ltd., Sheffield.
Dick, Kerr, & Co., Ltd., London.
Hadfields, Ltd., Sheffield.
Lorain Steel Company, London.
M. & G. Truck & Engineering Co., Ltd.
Titan Trackwork Co., Ltd., Sheffield.
Walter Scott, Ltd., Leeds.

RAILWAY AND TRAMWAY MOTORS, ELECTRIC.
Brill Company, J. G., London, S.W.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Co., Ltd., London.
Dick, Kerr, & Co., Ltd., London.
Electric Construction Co., Ltd., London.

RAILWAY STORES.
General Seating Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.

RATTAN.
Brill Company, J. G., London, E.C.
General Seating Co., Ltd., London, E.C.

ROLLER BEARINGS.
Hurst, Nelson & Co., Ltd., Motherwell.

SANDING DEVICES.
Equipment & Engineering Co., London, W.C.
Taylor, John, Liverpool.

SAND BOXES.
Brill Company, J. G., London, S.W.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

SEATS AND SEATING MATERIALS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.

SIDE GUARDS.
Equipment & Engineering Co., London, W.C.

SIMPLEX TACKS.
Equipment & Engineering Co., London, W.C.

SLACK ADJUSTERS.
Peckham Truck and Eng. Co., London, S.W.

SLEEPING BERTHS.
Beckett, Laycock & Watkinson, Ltd., London.
General Seating Co., Ltd., London, E.C.

SNOW PLOWS.
Brill Company, J. G., London, S.W.
Hurst, Nelson & Co., Ltd., Motherwell.

SPRINGS.
Allen, Edgar, & Co., Ltd., Sheffield.
Brill Company, J. G., London, E.C.
Hadfields, Ltd., Sheffield.
Hurst, Nelson & Co., Ltd., Motherwell.
M. & G. Truck & Engineering Co., Ltd.
United Electric Car Co., Ltd., Preston, Lancs.

SPRINGS (LAMINATED AND SPIRAL.)
Brockhouse, J., & Co., Ltd., West Bromwich.

SPRINGS (UPHOLSTERY, etc.).
General Seating Co., Ltd., London, E.C.

SPRINKLING CARS.
Brill Company, J. G., London, S.W.
Hurst, Nelson & Co., Ltd., Motherwell,
M. & G. Truck & Engineering Co., Ltd.
United Electric Car Co., Ltd., Preston, Lancs.

STEAM TURBINES.
Belliss & Morcom, Ltd., Birmingham.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Dick, Kerr, & Co., Ltd., London.

STEEL.
Allen, Edgar, & Co., Ltd., Sheffield.
Baker, John, & Co., Rotherham.

STEEL FORGINGS.
Allen, Edgar, & Co., Ltd., Sheffield.
Baker, John, & Co., Rotherham.
Brill Company, J. G., London, E.C.
Brockhouse, J., & Co., Ltd., West Bromwich.
Hadfields, Ltd., Sheffield.

STEEL STRUCTURAL WORK.
Allen, Edgar, & Co., Ltd., Sheffield.

STEPS. (See Movable Car Steps.)

STONEBREAKERS.
Allen, Edgar, & Co., Ltd., Sheffield.
Hadfields, Ltd., Sheffield.

STRAIN WIRE
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd, London, E.C.

SWEEPERS.
Brill Company, J. G., London, S.W.
Hurst, Nelson & Co., Ltd., Motherwell.

SWITCHBOARDS AND GEAR.
British Thomson-Houston Co., Rugby.
British Westinghouse Co., London.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.
Tramway Supplies, Ltd., Leeds.

SWITCHES, ELECTRICAL.
British Thomson-Houston Co., Ltd., Rugby.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.
Watlington & Co., Ltd., London, E.C.

TANK AND GIRDER WORK.
Allen, Edgar, & Co., Ltd., Sheffield.

THIRD-RAIL INSULATORS.
Doulton & Co., Ltd., London.
Watlington & Co., Ltd., London, E.C.

THREE-PLY VENEER.
Equipment & Engineering Co., London, W.C.

TICKET PUNCHES. (See Punches).

TIME INDICATORS.
General Seating Co., Ltd., London, E.C.

TIRES.
Allen, Edgar, & Co., Ltd., Sheffield.
Baker, John, & Co., Rotherham.
British Griffin Co., Ltd., London, E.C.
Equipment & Engineering Co., London, W.C.
Hadfields, Ltd., Sheffield.
Macintosh & Co., Ltd., Chas., London, E.C.
Peckham Truck and Eng. Co., London, S.W.

TOP COVERS.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

TOWER WAGONS.
Clayton & Co. Huddersfield, Ltd., Huddersf'ld.
Commercial Cars, Ltd., Luton.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

TRACK BRAKES.
Brill Company, J. G., London, S.W.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.

TRACK SANDERS.
Brill Company, J. G., London, S.W.
Hurst, Nelson & Co., Ltd., Motherwell.

TRACK TOOLS AND APPLIANCES.
Allen, Edgar, & Co., Ltd., Sheffield.
Watlington & Co., Ltd., London, E.C.

TROLLEY CORD.
Anger Mfg. & Supply Co., Ltd., Preston, Lancs.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

TROLLEY HANGERS.
British Westinghouse Co., Ltd., London.
Consolidated Accessories Co., London.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

TROLLEY STANDARD EARTHING DEVICE.
Consolidated Accessories Co., London.

TROLLEY TENSION INDICATOR.
Consolidated Accessories Co., London.

TROLLEY WHEELS AND HEADS.
British Aluminium Co., Ltd., London, E.C.
British Thomson-Houston Co., Ltd., Rugby
Tramway Supplies, Ltd., Leeds.
Watlington & Co., Ltd., London, E.C.

TROLLEY WIRE.
Equipment & Engineering Co., London, W.C.
Frederick Smith & Co., Salford, Manchester.
Watlington & Co., Ltd., London, E.C.

TRUCK BRAKES.
Brill Company, J. G., London, E.C.
Peckham Truck & Eng. Co., London, S.W.

TRUCKS, CAR.
Brill Company, J. G., London, S.W.
Dick, Kerr, & Co., Ltd., London.
Hurst, Nelson & Co., Ltd., Motherwell.
Lorain Steel Company, London.
Peckham Truck and Eng. Co., London, S.W.
United Electric Car Co., Preston.

VARNISHES.
Pinchin, Johnson, & Co., Ltd., London, E.C.

WELDED JOINTS.
Thermit, Limited, London, E.C.

WHEELS AND AXLES.
Allen, Edgar, & Co., Ltd., Sheffield.
Baker, John, & Co., Rotherham.
Brill Company, J. G., London, S.W.
British Griffin Co., Ltd., London.
Equipment & Engineering Co., London, W.C.
Hadfields, Ltd., Sheffield.
Hurst, Nelson & Co., Ltd., Motherwell.

WHEELS WITH WROT IRON CENTRES.
Baker, John, & Co., Rotherham.
Hurst, Nelson & Co., Ltd., Motherwell.

WHITE METAL FOR BEARINGS.
Magnolia Anti-Friction Metal Co., London.

WIRE, COPPER.
Henley's Telegraph Works Co., Ltd., London.
Smith, Frederick, & Co., Salford, Manchester.
Watlington & Co., Ltd., London, E.C.

WIRE ROPES.
Watlington & Co., Ltd., London, E.C.

BECLAWAT

(Reg. Trade Mark).

Balanced Frameless Window

The window illustrated is a plain polished plate running in our Silent Window Channel and operated by Window Balance.

Weatherproof.
. No Rattling .

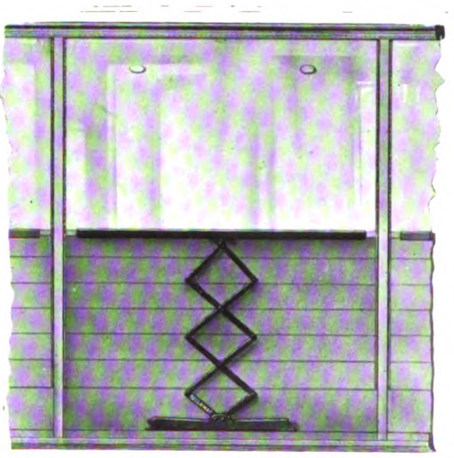

BECKETT, LAYCOCK & WATKINSON, Ltd.

Patentees and Manufacturers,

Willesden, LONDON, N.W.

AGENTS ALL OVER THE WORLD.

Tel. No. 1558 Willesden.

Tel. Add. "BECLAWAT"

Digitized by Google

STRONG & ECONOMICAL.

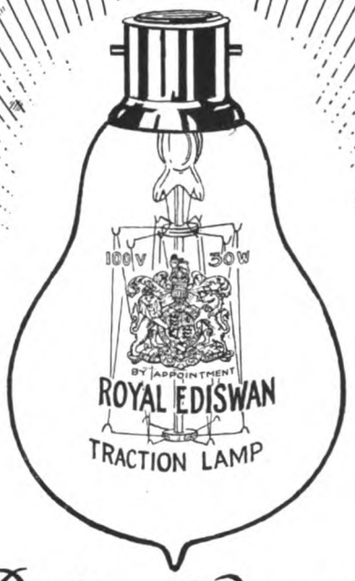

VIBRATION-RESISTING.

Designed & made to stand vibration

WHICH IS, OF COURSE, AS A TRACTION LAMP SHOULD BE. SPECIAL CARE IS TAKEN IN MANUFACTURE WITH THE GLASS STEMS TO ASSURE THAT THEY ARE PERFECT IN EVERY DETAIL

ROYAL

EDISWAN

DRAWN WIRE TRACTION LAMPS

HAVE SHORT RIGID FILAMENTS AND EVERY LAMP IS SEPARATELY AND RIGIDLY TESTED BEFORE BEING ALLOWED TO LEAVE THE WORKS

Will you favour us with your enquiries regarding "Traction" Lamps for any "Vibration Area?"

THE
Edison & Swan United Electric Light Co. Ltd.
PONDERS END, MIDDLESEX
'Phone - 520 ENFIELD

FULLY LICENSED UNDER BRITISH PATENTS Nos:- 21513/06 - 27712/03 AND OTHERS.

Digitized by Google

JOHN BAKER & CO.

(ROTHERHAM), LTD.

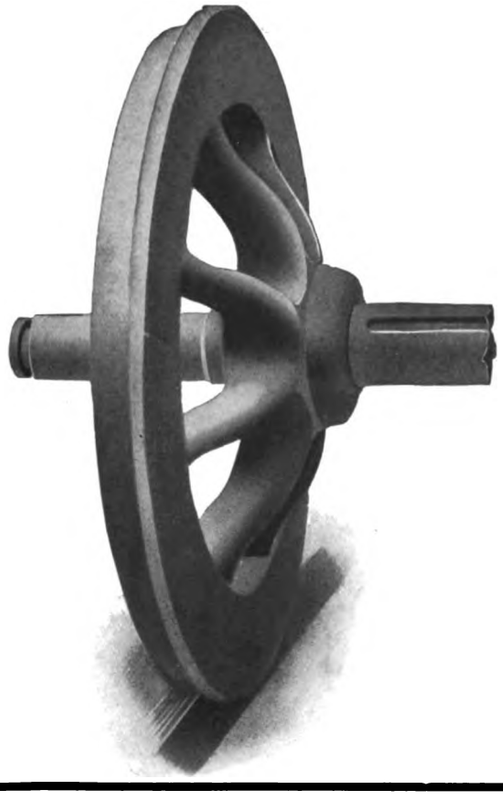

Brinsworth Iron & Wheel Works, ROTHERHAM
Kilnhurst Steel Works, near SHEFFIELD.

WHEELS WITH WROUGHT-IRON CENTRES.

AXLES TO BRITISH STANDARD SPECIFICATION FOR ORDINARY SERVICE.

Special (T) Brand Axles
— for Heavy Service. —

If you are troubled with Axle Breakages, try our Special Steel.

Tyres of Chrome Steel for High Mileage Results.

PEASE & PARTNERS, LTD.

WORKS:

TEES IRONWORKS, MIDDLESBRO'.

LICENSEES

OF THE

STEEL BACK

BRAKE BLOCK

FOR

RAILWAYS AND TRAMWAYS.

SOLE ENGLISH AGENTS:

ALFRED INGRAM & CO., Queen Annes Chambers, Westminster.

Digitized by Google

DIRECTORIES OF ELECTRIC TRAMWAYS

IN THE UNITED KINGDOM.

NAMES OF PRINCIPAL OFFICERS,

POSTAL ADDRESS, TELEGRAPHIC ADDRESS, AND TELEPHONE NUMBERS.

MUNICIPAL TRAMWAYS, pp. xxiii-xxiv. COMPANY TRAMWAYS, pp. xxiv-xxvi. PARTICULARS OF TRACK AND EQUIPMENT, pp. xxvii-xxx.

TRAMWAY ASSOCIATIONS, p. xxvi.

Aberdare Urban District Tramways, Gadlys Estate, Aberdare. [T.A., Tramways, Aberdare: T.N., 17.] *Gen. Manager and Elec. Engineer*, A. J. Abraham; *Traffic Supt.*, H. King; *Chairman Try. Com.*, Coun. E. Stonelake.

Aberdeen Corporation Tramways, Municipal Buildings, Union Street, Aberdeen. [T.A., Trams, Aberdeen; T.N. 826.] *Gen. Manager and Eng.*, R. S. Pilcher; *Per. Way Eng.*, J. Gordon; *Chairman Try. Com.*, Coun. Robertson.

Accrington Corporation Tramways, Market Hall, Accrington. [T.A., Trams, Accrington; T.N., 2212.] *Gen. Manager and Eng.*, H. Pilling; *Per. Way Eng.*, W. J. Newton; *Chairman Try. Com.*, Ald. T. E. Higham; *Vice-Chairman*, Coun. Morley.

Ashton-under-Lyne Corporation Tramways, Tramway Depot, Mossley Road, Ashton. [T.A., Tramways, Ashton; T.N., 325.] *Gen. Manager*, Ernest Holt; *Elec. Eng.*, N. Appelbee; *Chairman Try. Com.*, Ald. R. S. Oldham; *Vice-Chairman*, Ald. Waterhouse.

Ayr Corporation Tramways, Town Building, Ayr. [T.A., Trams, Ayr; T.N., 123.] *Gen. Manager and Eng.*, William Grant; *Burgh Elec. Eng.*, R. Marshall; *Per. Way Eng.*, John Young; *Rolling Stock Supt.*, Alf. Somerville; *Convener Try. Com.*, Coun. J. R. Learmont; *Vice-Chairman*, Bailie Murray.

Bacup Corporation Tramways.—Town Hall, Bacup, Lancs. [Lines leased to and worked by Rochdale Corporation.] *Town Clerk*, J. Entwistle; *Boro' Eng.*, W. H. Elce; *Chairman Try. Com.*, Ald. Sir H. Maden; *Vice-Chairman*, Coun. J. H. Lord (Mayor).

Barking Town Urban District Tramways, East Street, Barking. [T.N., 156 East Ham.] *Eng. and Manager*, W. Holmes; *Acting Engineer and Manager*, W. E. Kidner; *Chairman Try. Com.*, Coun. D. Gordon.

Barton-upon-Irwell District Council Light Railways, Barton-upon-Irwell.

[Line leased to and worked by the Lancashire United Tramways Co., *q.v.*]

Batley Corporation Tramways, Batley, Yorks. *Engineer*, S. D. Jones; *Chairman Try. Com.*, Coun. J. W. Turner; *Vice-Chairman*, Coun. F. W. H. Auty.

[Lines leased to and worked by the Yorkshire (Woollen District) Electric Tramways, Ltd., *q.v.*]

Belfast City Tramways, Tramways Office, Sandy Row, Belfast. [T.A., Nance, Tramway, Belfast; T.N., 2444.] *Gen. Manager*, Andrew Nance; *Traffic Manager*, R. McMaster; *City Elec. Eng.*, T. W. Bloxam; *Per. Way Eng.*, E. S. Pinkerton; *Chief Eng.*, A. A. Blackburn; *Chairman Try. Com.*, Coun. J. McCaughey; *Vice-Chairman*, Coun. J. Warwick.

Bexley Urban District Council Tramways, Car Sheds, Bexleyheath, Kent. [T.A., Stokes, Tramways, Bexleyheath; T.N., 79.] *Gen. Manager and Elec. Eng.*, H. P. Stokes; *Rolling Stock Supt.*, A. Williams; *Chairman Try. Com.*, Coun. E. T. Coote; *Vice-Chairman*, Coun. E. F. Reid.

Birkenhead Corporation Tramways, Laird Street, Birkenhead. [T.A., Tramways Manager, Birkenhead; T.N., 1110.] *Gen. Manager*, C. Clarke; *Borough Sur. and Eng.*, C. Brownridge; *Rolling Stock Supt.*, R. Chadwick; *Chairman Try. Com.*, Coun. H. Halsall; *Vice-Chairman*, Coun. R. Frame.

Birmingham Corporation Tramways, The Council House, Congreve Street, Birmingham. [T.A., Trams, Birmingham; T.N., Central 7,000.] *Gen. Manager*, A. Baker; *City Elec. Eng.*, R. A. Chattock; *Traffic Supt.*, J. McDonnell; *Per. Way Eng.*, C. E. S. Bill; *Rolling Stock Supt.*, R. H. Dickinson; *Chairman Try. Com.*, Coun. H. Barrow, J.P.; *Vice-Chairman*, Coun. A. G. Ellaway.

Blackburn Corporation Tramways, Tramways Office, Blackburn. [T.A., Tramways, Blackburn; T.N., 547.] *General Manager*, J. H. Cowell; *Elec. Eng.*, P. P. Wheelwright; *Traffic Manager*, E. Greek; *Car Shed Supt.*, H. W. Seymour; *Chairman Try. Com.*, Ald. W. Thompson; *Vice-Chairman*, Coun. C. Higham.

Blackpool Corporation Tramways, West Caroline Street, Blackpool. [T.N., 67.] *Gen. Manager*, C. Furness; *Traffic Supt.*, C. J. Baker; *Resident Eng.*, F. Field; *Chairman Try. Com.*, Ald. J. Brodie, J.P.; *Vice-Chairman*, Ald. R. Holt (Mayor).

Bolton Corporation Tramways, Bradshawgate, Bolton. [T.A., Manager, Tramways, Bolton; T.N., 490.] *General Manager*, J. Barnard; *Elec. Eng.*, W. J. H. Wood; *Per. Way Eng.*, E. Ll. Morgan; *Rolling Stock Supt.*, C. Beech; *Chairman Try. Com.*, Ald. J. Miles; *Vice-Chairman*, Coun. P. Higson.

Bootle Corporation Tramways, Electricity Works, Pine Grove, Bootle. [T.N., 424.] *Elec. Eng.*, T. D. Clothier; *Chairman Try. Com.*, Ald. Booth; *Vice-Chairman*, Coun. Pennington.

[Lines worked by Liverpool Corporation Tramways.]

Bournemouth Corporation Tramways, Tramways Offices, Lansdowne Crescent, Bournemouth [T.A., Tramways, Bournemouth; T.N., 1701.] *General Manager*, I. Bulfin; *Chief Assistant & Elec. Eng.*, H. Vickers; *Traffic Supt.*, R. O. Baldwin; *Chairman Try. Com.*, Coun. Bell; *Vice-Chairman*, Coun. McCabe.

Bradford Corporation Tramways, Central Office, 7, Hall Ings, Bradford. [T.A., Tramways, Bradford; T.N., 2381 and 2382.] *Gen. Manager*, C. J. Spencer; *Asst. Elec. Eng.*, J. W. Dawson; *Traffic Supt.*, T. Stirk; *City Elec. Eng.*, T. Roles; *Chairman Try. Com.*, Coun. Enoch Priestley; *Vice-Chairman*, Coun. J. Lund.

Brighton Corporation Tramways, Lewes Road, Brighton. [T.A., Tramways, Brighton; T.N., 353 P.O.] *Eng. & Manager*, William Marsh; *Traffic Supt.*, W. N. Brooks; *Rolling Stock Supt.*, W. Orchard; *Per. Way Eng.*, F. N. Hudson; *Chairman Try. Com.*, Coun. Martin.

Burnley Corporation Tramways, Queen's Gate, Burnley. [T.N., 46.] *Gen. Manager*, Henry Mozley; *Boro. Elec. Eng.*, J. E. Starkie; *Boro. Surveyor*, G. H. Pickles; *Chairman Try. Com.*, Coun. E. Heap; *Vice-Chairman*, Coun. Irving.

Burton-on-Trent Corporation Tramways, Guild Street, Burton-on-Trent. [T.N., 202.] *Manager*, A. B. Slater; *Engineer*, T. Hall; *Chairman Try. Com.*, Ald. J. S. Rowland (Mayor); *Vice-Chairman*, Ald. T. E. Lowe.

Bury Corporation Tramways, Market Place, Bury. [T.N., 26.] *Gen. Manager*, William Clough; *Boro. Elec. Eng.*, S. J. Watson; *Chairman Try. Com.*, Ald. T. S. Collinge; *Vice-Chairman*, Coun. Hargreaves.

Cardiff Corporation Tramways, Central Offices, The Hayes, Cardiff. [T.A., Tramways, Cardiff; T.N., 1211, 1240, 1350, and 377.] *Gen. Manager and Elec. Eng.*, A. Ellis; *Deputy Manager*, C. G. M. New; *Traffic Manager*, H. David; *Per. Way Eng.*, W. Harpur; *Rolling Stock Supt.*, Jas. Preston; *Chairman Try. Com.*, Ald. Sir J. W. Courtis, J.P.; *Vice-Chairman*, Coun. A. J. A. Stone.

Chester Corporation Tramways, Station Road, Chester. [T.N., 166.] *Traffic Supt.*, W. H. Ellis; *Elec. Eng.*, S. E. Britton; *Per. Way Eng.*, W. M. Jones; *Chairman Try. Com.*, Ald. J. Jones; *Vice-Chairman*, Coun. A. S. Dutton.

Chesterfield Corporation Tramways, Chatsworth Road, Chesterfield. [T.A., Tramways, Chesterfield; T.N., 78.] *Gen. Manager and Elec. Eng.*, R. L. Acland; *Traffic Manager*, F. Root; *Per. Way Eng.*, C. E. Crossley; *Chairman Try. Com.*, Ald. E. Shentall (Mayor); *Vice-Chairman*, Coun. Woodhead.

Colchester Corporation Tramways, Magdalen Street, Colchester. [T.A., Tramways, Colchester; T.N., 92.] *Gen. Manager and Engineer*, R. C. Bullough; *Chairman Try. Com.*, Coun. A. M. Jarmin; *Vice-Chairman*, Coun. J. T. Bailey.

Colne Corporation Tramways, Colne, Lancashire. *General Manager and Engineer*, T. G. Richardson; *Chairman Try. Com.*, Coun. R. Knight (Mayor).

Coventry Corporation Tramways, Priestley's Bridge, Coventry. [T.A., Tramways, Coventry; T.N., 1014.] *Engineer and General Manager*, T. R. Whitehead; *Assistant Engineer*, W. M. Milnes; *Chairman*, Coun. C. V. Pugh; *Vice-Chairman*, Coun. H. W. Wale.

Croydon Corporation Tramways, Tramways Office, Thornton Heath, Surrey. [T.A., Tramways, Croydon; T.N., 406, Croydon.] *Tramways Manager*, T. B. Goodyer; *Chairman Try. Com.*, Ald. G. J. Allen; *Vice-Chairman*, Coun. A. A. Thomson.

Darlington Corporation Tramways, Haughton Road, Darlington. [T.A., Tramways, Darlington; T.N., 2435.] *General Manager and Elec. Eng.*, J. R. P. Lunn; *Traffic Supt.*, J. Fraser; *Chairman Try. Com.*, Ald. C. W. Starmer.

Dartford Urban District Council Tramways, Dartford. *Chairman Try. Com.*, Coun. R. Bennett; *Vice-Chairman*, Coun. J. B. Walton.

[Leased. See Dartford Tramways in list of Tramway Companies.]

Darwen Corporation Tramways. Lorne Street, Darwen. [T.N., 104.] *Gen. Manager and Eng.*, F. J. S. Hosken; *Boro. Elec. Eng.*, C. H. Garnett; *Chairman Try. Com.*, Ald. Jas. Tomlinson.

Derby Corporation Tramways, 4, Victoria Street, Derby. [T.N., 410.] *Gen. Manager*, F. Harding; *Elec. Eng.*, T. P. Wilmshurst; *Per. Way Eng.*, J. Ward; *Chairman Try. Com.*, Coun. J. Dean.

Doncaster Corporation Tramways, Grey Friar's Road, Doncaster. [T.A., Rayner, Doncaster, T.N., 43.] *Manager & Elec. Eng.*, E. S. Rayner; *Chairman Try. Com.*, Coun. P. Stirling (Mayor); *Vice-Chairman*, Coun. Balmforth.

Dover Corporation Tramways, Town Hall, Dover. [T.A., Trams, Dover; T.N., 294.] *Gen. Manager*, E. Carden; *Per. Way Eng.*, W. C. Hawke (Boro. Surveyor); *Chairman Try. Com.*, Coun. Barwick; *Vice-Chairman*, Coun. Norman.

Dundee Corporation Tramways, Town House Buildings, Dundee. [T.N., 1340]; *Gen. Manager and Eng.*, Peter Fisher; *Elec. Eng.*, H. Richardson; *City Eng.*, J. Thomson; *Chairman Try. Com.*, Coun. G. A. Johnston.

East Ham (County Borough of) Corporation Tramways, Nelson Street, East Ham. [T.N., 611 and 100, East Ham.] *Gen. Manager and Elec. Eng.*, W. C. Ullmann; *Chairman Try. Com.*, Ald. M. Oakes.

Eccles Corporation Tramways, Eccles. *Elec. Eng.*, H. W. Angus; *Per. Way Eng.*, T. S. Picton; *Chairman Try. Com.*, Ald. W. J. Nuttall, J.P.; *Vice-Chairman*, Coun. Alexander.

[Lines worked by Salford Corporation.]

Erith Urban District Council Tramways, Tramway Depôt, Walnut Tree Road, Erith. [T.A., Tramways, Erith; T.N., 36.] *Gen. Manager and Elec. Engineer*, J. C. Williams; *Chairman Try. Com.*, Coun. G. C. Humphreys.

Exeter Corporation Tramways, Paris Street, Exeter. *Manager*, H. C. Bartlett; *Elec. Eng.* H. D. Munro; *Per. Way Eng.*, T. Moulding; *Chairman Try. Com.*, Ald. H. B. Varwell; *Vice-Chairman*, Coun. F. G. Towill.

Farnworth Urban District Council Tramways, Albert Road, Farnworth. *Chairman Try. Com.*, Coun. S. C. Steele; *Vice-Chairman*, Coun. Stanley.

[Lines leased to the South Lancashire Tramways Co.]

Glasgow Corporation Tramways, 46, Bath Street, Glasgow. [T.A., Trams, Glasgow; T.N., 1040, Douglas.] *Gen. Manager*, J. Dalrymple; *Traffic Supt.*, L. Mackinnon; *Chief Eng.*, J. Ferguson; *Elec. Eng.*, E. T. Goslin; *Sec.*, J. N. Wilson; *Chairman Try. Com.*, Coun. Montgomery; *Vice-Chairman*, Bailie Kelly.

Gloucester Corporation Light Railway, Bristol Road Depôt, Gloucester. [T.A., Tramways, Gloucester; T.N. 155.] *Gen. Manager and Elec. Eng.*, F. H. Corson; *Chairman Try. Com.*, Coun. J. O. Roberts; *Vice-Chairman*, Coun. C. J. Ramstedt.

Great Yarmouth Corporation Tramways, Caister Road, Great Yarmouth. [T.N. 265.] *Gen. Manager*, F. L. Turner; *Elec. Eng.*, Gordon Bryant *Per. Way. Eng.*, J. W. Cockrill (Borough Surveyor); *Chairman Try. Com.*, Coun. J. T. C. Salmon.

Halifax Corporation Tramways, Skircoat Road, Halifax. [T.N., 36 and 382.] *Traffic Manager*, Jas. D. Caird; *Try. Eng.*, J. W. Galloway; *Per. Way Eng.*, J. Lord (Boro. Eng.); *Chairman Try. Com.*, Ald. C. F. Spencer; *Vice-Chairman*, Ald. A. Fawcett.

Haslingden Corporation Tramways, John Street, Haslingden. *Gen. Manager and Elec. Eng.*, Barnes Kay; *Per. Way Eng.*, J. S. Green (Borough Surveyor); *Chairman Try. Com.*, Coun. Waddington; *Vice-Chairman*, Coun. Haworth.

Herne Bay Pier Tramway (owned and worked by Herne Bay U.D.C.), Herne Bay. [T.N., 22.] *Res. Eng. and Manager*, H. C. Dufton.

Heywood Corporation Tramways, Heywood, Lancs. [T.N., 47.] *Gen. Manager*, R. B. Leach; *Per. Wa Eng.*, J. B. Nuttall; *Chairman Try. Com.*, Coun. J. Ashworth; *Vice-Chairman*, Ald. T. Popple, J.P.

Huddersfield Corporation Tramways, Northumberland Street, Huddersfield. [T.N., 698 and 398.] *Gen. Manager & Elec. Eng.*, R. H. Wilkinson; *Assist. Engineer*, A. P. Quilliam; *Traffic Supt.*, T. Hartley; *Borough Eng.*, K. F. Campbell; *Chairman Try. Com.*, Coun. E. H. Sellers; *Vice-Chairman*, Coun. T. Canby.

Hull Corporation Tramways, Alfred Gelder Street, Hull. [T.N., 444, Corporation.] *Manager*, Wm. J. McCombe; *Elec. Eng.*, J. Wilkinson; *Per. Way Eng.*, F. W. Bricknell (*City Engineer*); *Chairman Try. Com.*, Coun. W. Wheatley; *Vice-Chairman*, Coun. Hakes.

Ilford Urban District Council Tramways, Ley Street, Ilford. [T.N., 684.] *Manager and Engineer*, L. E. Harvey; *Chairman Try. Com.*, Coun. W. J. T. Cullis; *Vice-Chairman*, Coun. Owen Waters.

Ilkeston Corporation Tramways, Park Road Ilkeston. [T.A., Bellamy Ilkeston; T.N., 26.] *Manager and Elec. Eng.*, L. C. F. Bellamy; *Chairman Try. Com.*, Coun. J. E. Bestwick; *Vice-Chairman*, Coun. Kane.

Ipswich Corporation Tramways, Constantine Road, Ipswich. [T.A., Ayton, Tramways, Ipswich; T.N., 354.] *Gen. Manager and Elec. Eng.*, Frank Ayton; *Traffic Supt.*, A. Butler; *Rolling Stock Supt.*, W. A. Fairhead; *Chairman Try. Com.*, Coun. E. C. Ransome; *Vice-Chairman*, W. P. Burton.

Kearsley Urban District Council Tramways, Council Office, Kearsley, Farnworth, S.O. *Clerk U. D. C.*, H. Martin.

[Lines leased to and worked by the South Lancashire Tramways Co.]

Keighley Corporation Tramways, South Street, Keighley. [T.A., Tramways, Keighley; T.N., 17.] *Gen. Manager and Elec. Eng.*, H. Webber; *Chairman Try. Com.*, Coun. A. Smith.

Kilmarnock Corporation Tramways Electricity Works, Kilmarnock. [T.N., 95.] *Elec. Eng. and Manager*, W. C. Bexon; *Consulting Engineers*, Kennedy and Jenkin; *Convener Try. Com.*, Bailie Jones.

Digitized by Google

ELECTRIC TRAMWAYS IN THE UNITED KINGDOM.

Kirkcaldy Corporation Tramways, Electricity Works Victoria Road, Kirkcaldy. [T.A., Tramways, Kirkcaldy. T.N., 124, 174, and 175.] *Manager & Elec. Eng.*, O. F. Francis; *Traffic Manager*, Jas. Fisher; *Chairman Try. Com.*, Coun. G. Fergusson.

Lancaster Corporation Tramways, Electricity Works, Lancaster. [T.A., Milnes, Tramways, Lancaster; T.N., 1, L.] *Gen. Manager & Elec. Eng.*, G. C. Milnes; *Traffic Manager*, W. T. Charlton; *Chairman Try. Com.*, Coun. T. Wilkinson.

Leeds City Tramways, Swinegate, Leeds. [T.A., Tramways, Leeds; T.N., 44 and 169; *General Manager*, J. B. Hamilton; *Traffic Supt.*, A. Daggett; *Elec. Eng.*, John Burbridge; *Per. Way Eng.*, R. B. Holt; *Car Works Supt.*, G. E. Watmough; *Chairman Try. Com.*, Ald. R. A. Smithson; *Vice-Chairman*, Ald. H. Brown.

Leicester Corporation Tramways, 20 and 22, Humberstone Gate, Leicester. [T.N., 2177.] *Manager & Sec.*, A. F. Lucas; *Boro. & Try. Eng.*, E. G. Mawbey; *Boro. Elec. Eng.*, T. R. Smith; *Cons. Engs.*, Kincaid, Waller & Manville; *Chairman Try. Com.*, Ald. S. Flint, J.P.; *Vice-Chairman*, Ald. G. Banton, J.P.

Leith Corporation Tramways, 165, Leith Walk, Leith. [T.N., 415.] *Gen. Manager*, F. A. Fitzpayne; *Per. Way Eng.*, J. R. Findlay (*Burgh Eng.*); *Chairman Try. Com.*, Judge Hall.

Leyton District Council Tramways, Car Depot, Lea Bridge Road, Leyton, E. [T.A., Tramways, Leyton; T.N., 17 Walthamstow.] *Manager*, F. Schofield; *Elec. Eng.*, F. Harman Lewis; *Per. Way Eng.*, E. H. Essex; *Chairman Try. Com.*, Coun. J. A. Hennah.

Lincoln Corporation Tramways, Brayford Side North, Lincoln. [T.A., Stanley Clegg, Lincoln; T.N., 109]. *General Manager and Elec. Eng.*, Stanley Clegg; *Chairman Try. Com.*, Ald. W. S. White; *Vice-Chairman*, Coun. M. A. Ashley.

Liverpool Corporation Tramways, 24, Hatton Garden, Liverpool. [T.A., Tramways, Liverpool; T.N., 6054 and 7701, Central.] *General Manager*, C. W. Mallins; *Per. Way Eng.*, J. A. Brodie (*City Engineer*); *City Electrical Engineer*, Harold Dickinson; *Rolling Stock Supt.*, T. Ridyard; *Chairman Try. Com.*, Coun. E. Russell Taylor; *Vice-Chairman*, Ald. F. Smith, J.P.

London County Council Tramways, 62, Finsbury Pavement, London, E.C. [T.A., Lotram Ave., London; T.N., 3321, 3322, and 3323 London Wall.] *Chief Officer*, A. L. C. Fell; *Deputy Chief Officer*, J. K. Bruce; *Traffic Assist.*, L. Slattery; *Rolling Stock Supt.*, W. E. Ireland; *Per. Way Eng.*, J. Welling; *Chairman Highways Com.*, G. H. Hume; *Vice-Chairman*, T. Prestige.

Lowestoft Corporation Tramways, Norwich Road, Lowestoft. [T.N., 87.] *Gen. Manager*, H. H. Saunders; *Elec. Eng.*, W. R. May; *Chairman Try. Com.*, Coun. F. Spashett.

Maidstone Corporation Tramways, Tramway Offices, Tonbridge Road, Maidstone. [T.A., Lambert, Tramways, Maidstone; T.N., 448] *Gen. Manager and Elec. Eng.*, A. T. Lambert; *Chairman Try. Com.*, Coun. D. T. J. Lyle; *Vice-Chairman*, Coun. Green.

Manchester Corporation Tramways, 55, Piccadilly, Manchester. [T.A., Tramways, Manchester; T.N., 7800 City.] *Gen. Manager*, J. M. McElroy; *Traffic Sup.*, J. T. Oakes; *Elec. Eng.*, J. J. McMahon; *Chief Civil Eng.*, H. Mattinson; *Rolling Stock Supt.*, G. R. Blackburn; *Chairman Try. Com.*, Ald. J. Bowes; *Vice-Chairman*, Ald. A. W. Chapman.

Middlesex County Council Light Railways, Middlesex Guildhall, Westminster, London, S.W. *County Eng.*, H. T. Wakelam, M.I.C.E.; *Chairman of Light Railways Com.*, County Ald. H. Burt; *Vice-Chairman*, County Coun. F. Goodyear.

Middleton Corporation Tramways. *Consulting Engs.*, Lacey, Sillar, and Leigh; *Chairman Try. Com.*, Ald. W. Wood, J.P. (Mayor); *Vice-Chairman*, Ald. Bentley, J.P.
[Worked by Manchester Corporation Tramways.]

Nelson Corporation Light Railways, Charles Street, Nelson. [T.N., 115.] *Manager and Elec. Eng.*, G. F. Nayler; *Per. Way Eng.*, W. Shackleton; *Chairman Try. Com.*, Coun. W. F. Cooke.

Newcastle-upon-Tyne Corporation Tramways, Manors, Newcastle. [T.A., Traction, Newcastle; T.N., 913 and 914 Central.] *Gen. Manager & Engineer*, Ernest Hatton; *Traffic Supt.*, T. Chalder; *Per. Way Eng.*, W. J. Steele; *Chairman Try. Com.*, Coun. R. Mayne; *Vice-Chairman*, Coun. A. M. Sutherland.

Newport (Mon.) Corporation Tramways, Town Hall, Newport, Mon. [T.A., Dynamo, Newport, Mon.; T.N., 990 L., Nat.] *Gen. Manager*, N. J. Young; *Boro. Elec. and Per. Way Eng.*, A. Nichols Moore; *Chairman Try. Com.*, Coun. J. Moxon; *Vice-Chairman*, Ald. F. Phillips.

Northampton Corporation Tramways, St. James', Northampton. [T.N., 279 & 280.] *Gen. Manager and Elec. Eng.*, J. F. Cameron; *Chairman Try. Com.*, Coun. T. D. Lewis; *Vice-Chairman*, Coun. W. Beale.

Nottingham Corporation Tramways, Beastmarket Hill, Nottingham. [Tramways, Nottingham; T.N., 225.] *General Manager & Elec. Eng.*, John Aldworth; *Traffic Supt.*, H. Morley; *Per. Way Eng.*, Arthur Brown (*City Eng.*); *Rolling Stock Supt.*, W. Boot; *Chairman Try. Com.*, Coun. R. H. Swain, J.P.; *Vice-Chairman*, Ald. F. R. Radford, J.P.

Oldham Corporation Tramways, Wallshaw Depot, Oldham. [T.A., Tramways, Oldham; T.N., 1495.] *Gen. Manager & Eng.*, P. Priestley; *Traffic Supt.*, J. Brierley; *Chairman Try. Com.*, Ald. F. G. Isherwood; *Vice-Chairman*, Coun. F. Elliot.

Perth Corporation Tramways, 128, High Street, Perth. [T.N., 226 & 101.] *Tramways Manager*, W. G. Snell; *Elec. & Tramways Eng.*, John Lambert; *Per. Way Eng.*, R. McKillop (*Burgh Surv.*); *Chairman Try. Com.*, Coun. Calderwood.

Plymouth Corporation Tramways, 15, Ebrington Street, Plymouth. [T.N. 518, Plymouth.] *General Manager*, C. R. Everson; *Elec. Eng.*, E. J. Okell; *Chairman Try. Com.*, Ald. S. H. Phillips, J.P.; *Vice-Chairman*, Coun. J. Moon.

Pontypridd Urban District Tramways, Generating Station, Treforest, Pontypridd. [T.N. 33.] *Gen. Manager and Elec. Eng.*, J. E. Teasdel; *Traffic Inspector*, W. May; *Per. Way Eng.*, W. E. Lowe (*Surveyor*); *Chairman Try. Com.*, Coun. M. L. Jones.

Portsmouth Corporation Tramways, Town Hall, Portsmouth. [T.N., 110 Corporation.] *Gen. Manager*, W. R. Spaven; *Elec. and Per. Way Eng., and Rolling Stock Supt.*, V. G. Lironi; *Traffic Supt.*, W. Munford; *Chairman Try. Com.*, Coun. J. Timpson; *Vice-Chairman*, Ald. R. Payne.

Preston Corporation Tramways, Holmrook Road, Preston. [T.A., Corporation Tramways, Preston; T.N., 273.] *Gen. Manager and Elec. Eng.*, J. F. Simpson; *Traffic Supt.*, C. H. Manning; *Chairman, Try. Com.*, Ald. J. Ormrod; *Vice-Chairman*, Coun. T. Parkinson.

Radcliffe Urban District Council Tramways, Council Offices, Radcliffe, Lancs. *Res. Eng.*, H. Wilkinson; *Per. Way Eng.*, W. L. Rothwell; *Clerk*, S. Mills; *Chairman Try. Com.*, Coun. Walker Allen, J.P.
[These tramways are worked as part of the Bury system.]

Rawtenstall Corporation Tramways, Bacup Road, Rawtenstall. [T.N., 81 and 85.] *Gen. Manager and Elec. Eng.*, C. L. E. Stewart; *Chairman Try. Com.*, Ald. H. Coupe, J.P.; *Vice-Chairman*, Coun. J. W. Stansfield.

Reading Corporation Tramways, Mill Lane, Reading. [T.A., Tramways Manager, Reading; T.N., 330.] *Gen. Manager & Elec. Eng.*, G. F. Craven; *Chairman Try. Com.*, Ald. C. G. Field, J.P. (Deputy Mayor).

Rochdale Corporation Tramways, Mellor Street, Rochdale. [T.A., Tramways, Rochdale; T.N., 48.] *Gen. Manager & Eng.*, G. Webster; *Traffic Manager*, R. Bentley; *Per. Way Eng.*, S. S. Platt; *Rolling Stock Supt.*, E. Sidgwick; *Chairman Try. Com.*, Ald. Taylor.

Rotherham Corporation Tramways, Rawmarsh Road, Rotherham. [T.A., Cross, Rotherham; T.N., 138, 152, and 241.] *General Manager & Elec. Eng.*, E. Cross; *Deputy Elec. Eng.*, J. R. Lilleker; *Traffic Superintendent*, H. Jagger; *Per. Way Eng.*, T. P. Collinge; *Rolling Stock Supt.*, C. A. Walker; *Chairman Try. Com.*, Ald. D. L. Winter; *Vice-Chairman*, Coun. T. Reeves.

St. Helens Corporation Tramways, Town Hall, St. Helens, Lancs. *Chairman Try. Com.*, Ald. Sir J. Beecham; *Vice-Chairman*, Coun. W. N. Pilkington.
[Lines worked by the New St. Helens and District Tramways Co.]

Salford Corporation Tramways, 32, Blackfriars Street, Salford. [T.A., Tramways, Salford; T.N., 5367 and 5368 Central.] *Gen. Manager*, Geo. W. Holford; *Elec. Eng.*, J. A. Robertson; *Traffic Supt.*, J. W. Blakemore; *Per. Way Supt.*, E. B. Martin; *Rolling Stock Supt.*, R. Chadwick; *Chairman Try. Com.*, Ald. H. Linsley, J.P.; *Vice-Chairman*, Coun. W. H. Barrett.

Sheffield Corporation Tramways, 8, Division Street, Sheffield. [T.A., Tramways, Sheffield; T.N., 4600.] *General Manager*, A. R. Fearnley; *Traffic Supt.*, A. Handford; *Per. Way Eng.*, W. J. Hadfield; *Rolling Stock Supt.*, J. Smith; *Chairman Try. Com.*, Ald. Sir W. Clegg, J.P.; *Vice-Chairman*, Coun. A. T. Bescoby, J.P.

Shipley Urban District Tramway, Dockfield, Shipley. [T.A., Electricity Works, Shipley; T.N., 190.] *Elec. Eng.*, Wm Redman; *Chairman Try. Com.*, H. Pitts.
[Lines leased to Bradford Corporation.]

Southampton Corporation Tramways, 161, Above Bar, Southampton. [T.A., Tramways, Southampton; T.N., 301.] *Gen. Manager*, W. T. Robson; *Boro. Elec. Engineer*, H. F. Street; *Traffic Manager*, C. G. Simpson; *Chairman Try. Com.*, Ald. F. A. Dunsford, J.P.

Southend-on-Sea Corporation Tramways, London Road, Southend-on-Sea. [T.N., 96.] *Gen. Manager and Elec. Eng.*, R. Birkett; *Traffic Manager*, J. Daniells,; *Per. Way Eng.*, E. J. Elford (*Boro. Surveyor*); *Rolling Stock Supt.*, J. Dobson; *Chairman Try. Com.*, Ald. A. Martin.

Southend Pier Electric Railway, (owned and worked by Southend-on-Sea Corporation), [T.A., Piermaster, Southend; T.N., 91.] Southend-on-Sea. *Elec. Eng.*, C. R. Norton; *Piermaster*, Capt. N. E. Hucker; *Chairman*, Coun. H. Dowsett.

Southport Corporation Tramway, 44, Chapel Street, Southport. [T.N., 116.] *Gen. Manager*, T. J. Kendrew; *Boro' Elec. Eng.*, A. S. Black; *Chairman Try. Com.*, Ald. Griffiths, J.P.; *Vice-Chairman*, Coun. Clayton.

South Shields Corporation Tramways, Dean Road, South Shields. [T.A., Tramways, South Shields; T.N., 157.] *Gen. Manager & Elec. Eng.*, J. C. Whiteley; *Boro. Elec. Eng.*, H. S. Ellis; *Chairman Try. Com.*, Ald. W. G. Wylie; *Vice-Chairman*, Ald. J. W. Henderson.

Stalybridge Hyde, Mossley, and Dukinfield Tramways and Electricity Board, Waterloo Road, Stalybridge. [T.N., 311.] *Commercial Manager*, F. Schofield; *Chief Eng.*, R. Blackmore; *Chairman Try. Com.*, Ald. R. Wood; *Vice-Chairman*, Coun. S. C. Homer.

Stockport Corporation Tramways, Mersey Square, Stockport. [T.N., 232 and 237.] *Manager*, A. T. Eardley; *Elec. Eng.*, R. Lomax; *Chairman Try. Com.*, Ald. Chas. Sharples; *Vice-Chairman*, Ald. W. E. Hamnett.

Sunderland Corporation Tramways, Tramway Offices, Monkwearmouth, Sunderland. [T.A., Trys. Manager, Sunderland; T.N., 948.] *Gen. Manager and Elec. Eng.*, A. R. Dayson; *Chairman Try. Com.*, Coun. G. New, J.P.; *Vice-Chairman*, Coun. W. Walker, J.P.

Swindon Corporation Tramways, Electricity Works, Swindon. [T.A., Tramways, Swindon; T.N., 4.] *Manager*, T. Medcalf; *Elec. Eng.*, A. Dimmack; *Consulting Engs.*, Lacey, Sillar, & Leigh; *Chairman Try. Com.*, Coun. A. D. Richards; *Vice-Chairman*, Coun. A. Bull.

Wallasey Corporation Tramways, Seaview Road, Wallasey. [T.A., Tramways, Liscard; T.N., 1431, Liscard.] *General Manager*, R. R. Greene; *Elec. Eng.*, J. H Crowther; *Per. Way Eng.*, W. H. Travers; *Chairman Try. Com.*, Coun. F. E. Howse; *Vice-Chairman*, Coun. H. W. Griffin.

Walsall Corporation Tramway, St. Paul's Buildings, The Bridge, Walsall. [T.A., Tramways, Walsall; T.N., 238 & 559.] *Gen. Manager*, R. L. Horsfield; *Elec. Eng.*, H. A. Howie; *Per. Way Eng.*, J. Taylor (*Boro. Surveyor*); *Chairman, Try. Com.*, Ald. J. Cope; *Vice-Chairman*, Ald. J. Williams.

Walthamstow Urban District Council Tramways, Chingford Road, Walthamstow, [T.A., Tramways, Walthamstow; T.N., 20.] *Tramways Manager*, W. Murray; *Elec. Eng.*, G. R. Spurr (Priory Avenue, Walthamstow); *Per. Way Eng.*, G. W. Holmes; *Chairman Trys. Com.*, Coun. Clarke; *Vice-Chairman*, Coun. R. J. Bishop.

Warrington Corporation Tramways, Mersey Street, Warrington. [T.N., 196] *Gen. Manager*, J. Telfer; *Elec. Eng.*, F. V. L. Mathias; *Chairman Try. Com.*, Coun. Dr. G. W. Joseph; *Vice-Chairman*, Coun. J. Wilkinson.

West Bromwich Corporation Tramway, Electricity Works, West Bromwich. [T.N., 100.] *Boro. Eng.*, A. D. Greatorex; *Boro. Elec. Eng.*, W. A. Jackson; *Chairman Try. Com.*, Ald. A. G. Turley, J.P. (Mayor); *Vice-Chairman*, Coun. G. Garratt.
[These tramways are leased to the South Staffs. (Lessee) Co., Ltd.]

West Ham Corporation Tramways, Greengate Street, Plaistow, London, E. [T.A., Trameurs, Plais., London; T.N., 868 East.] *General Manager*, J. S. D. Moffet; *Boro' Elec. Eng.*, J. W. Beauchamp; *Chairman Try. Com.*, Coun. Kensett.

West Hartlepool Corporation Tramways, Cleveland Road, West Hartlepool. [T.N., 6073.] *Gen. Manager & Eng.*, Chas. Burgess; *Chairman Try. Com.*, Ald. Martin; *Vice-Chairman*, Coun. Charlton.

Wigan Corporation Tramways, Market Place, Wigan; [T.N., 226.] *Gen. Manager*, F. Buckley; *Per. Way Eng.*, A. T. Gooseman; *Chairman Try. Com.*, Ald. R. T. Fletcher; *Vice-Chairman*, Coun. J. Walkden.

Wolverhampton Corporation Tramways, Municipal Tramway Offices, Cleveland Road, Wolverhampton. [T.N., 324.] *Gen. Manager and Engineer*, C. O. Silvers; *Boro. Elec. Eng.*, S. T. Allen; *Per. Way Eng.*, George Green; *Chairman Try. Com.*, Ald. Sir C. T. Mander, Bart., J.P.; *Vice-Chairman*, Ald. S. Craddock, J.P.

York Corporation Tramways, 8, Clifford Street, York. [T.N., 302]. *Gen. Manager and Elec. Eng.*, J. W. Hame; *Traffic Supt.*, J. W. Horton; *Per. Way Eng.*, F. W. Spurr (City Surveyor); *Chairman Try. Com.*, Ald. S. W. Meyer; *Vice-Chairman*, Coun. W. H. Sessions.

COMPANY TRAMWAYS.

Aberdeen Suburban Tramways Company, 15, Golden Square, Aberdeen. [T.A., Judicial, Aberdeen; T.N., 447.] *Manager & Per. Way Eng.*, A. Wilkie; *Sec.*, G. Duncan; *Chairman*, James Mearns; *Directors*, W. Jackson, Dr. Christie, Jas. Sellar.

Airdrie and Coatbridge Tramways Company. Tramway Depôt, Main Street, Coatbridge [T.N., 105], and Electrical Federation Offices, Kingsway, London, W.C. *Gen. Manager*, A. Robertson; *Sec.*, P. N. Gray; *Chairman*, W. L. Madgen; *Directors*, H. S. Day, A. C. Miles, G. J. Somerville.

Barnsley and District Electric Traction Company, Ltd., Car Depot, Sheffield Road, Barnsley. [T.A., Tramways, Barnsley; T.N., 159.] *Acting Manager*, W. E. Nicoll; *Acting Sec.*, P. N. Gray; *Chairman*, E. Garcke; *Directors*, Col. Sir Thomas Pilkington, Bart., E. A. Paris.

Barrow-in-Furness Tramways, Salthouse Road Depot, Barrow, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Barrow; T.N., 125.] *Manager*, W. F. Bladon; *Sec.*, F. J. Cursons; *Acting Sec.*, J. S. Bowker; *Chairman*, H. S. Day; *Directors*, J. V. Kitchener, E. R. Soames.

Bath Electric Tramways Company, Ltd., Walcot Street, Bath, and 119-125, Finsbury Pavement, London, E.C. [T.A., Trams, Bath; T.N., 1214.] *Gen. Manager and Eng.*, W. E. Hardy; *Traffic Supt.*, E. Seckington; *Sec.*, H. J. Almond; *Chairman*, Hon. Sir J. Sivewright, K.C.M.G.; *Directors*, H. F. Clutterbuck, E. H. R. Trenow, A. A. C. Swinton, E. Callaird.

Bessbrook and Newry Tramway Company, Bessbrook, Co. Armagh. [T.A., Tramways, Bessbrook.] *Manager*, Robert Caven; *Elec. Eng.*, J. L. D. Meares; *Chairman*, J. N. Richardson; *Directors*, C. H. Richardson, R. T. Scott, T. W. Richardson, T. McGreggor Greer.

Birmingham District Power and Traction Company, Power Station, Downing Street, Smethwick, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Power Station, Smethwick; T.N., 65 Smethwick.] *Gen. Manager*, W. G. Bond; *Secretary*, B. Kingsford; *Chairman*, C. Shirreff Hilton; *Directors*, J. A. Lycett, W. L. Madgen, S. R. Blundstone, R. J. Howley.

Digitized by Google

ELECTRIC TRAMWAYS IN THE UNITED KINGDOM.

Blackpool and Fleetwood Tramroad Company, Ltd., Bispham, near Blackpool. [T.A., Cameron, Blackpool; T.N., 121.] *General Manager and Secretary*, J. Cameron; *Elec. Eng.*, A. Cameron; *Chairman*, John Greenwood; *Directors*, R. H. Prestwich, R. B. Barningham, R. S. Boddington, G. Richardson, G. Readman.

Blackpool and Fylde Light Railway Company, 5, Clifton Street, Blackpool. (No appointment of engineer or officials yet made.) *Secretary*, R. Bibby; *Chairman*, John Greenwood; *Directors*, T. Fisher, J.P., John Platt, J.P., W. Hardman, J.P., R. H. Mabbott.

Blackpool, St. Anne's, and Lytham Tramways Company, Ltd., Squires Gate, and 30, Birley Street, Blackpool. [T.N., 327 and 22]. *Gen. Manager and Elec. Eng.*, H. W. Laing; *Traffic Manager*, G. W. Wood; *Rolling Stock Supt.*, J. Partington; *Secretary*, Chas. E. Riding; *Chairman*, G. Nicholson; *Directors*, T. M. Smith, T. Preston.

Bray and Enniskerry Railway Company, 52, Westland Row, Dublin. *Sec.*, M. F. Keogh; *Chairman*, A. Killingley; *Director*, F. M'Crea.

Brighton Beach Electric Railway, Madeira Road, Brighton. [T.A., Volk, Brighton; T.N., 14 P.O.] *Manager and Eng.*, Magnus Volk; *Traffic Superintendent*, H. Sheppard; *Per. Way Eng.*, J. Barker; *Secretary*, A. Volk; *Chairman*, Magnus Volk; *Directors*, M. H. Volk, B. W. Symonds, A. Volk.

Bristol Tramways and Carriage Company, Ltd., Clare Street House, Bristol. [T.A., Cab, Bristol; T.N., 74 & 3074 Nat.] *Manager*, Chas. Challenger; *Assist. Manager*, S. E. Smith; *Electrical Engineer*, W. H. Munton; *Permanent Way Engineer*, G. T. C. Edwards; *Secretary*, H. F. Cooper; *Chairman*, Sir G. White, Bart.; *Directors*, W. G. Verdon Smith (*Managing*), S. White, J.P., J. H. Howell, J.P., G. Stanley White.

British Electric Traction Company, Ltd., Electrical Federation Offices, Kingsway, London, W.C. E. Garcke (*chairman*); *Directors*, C. Shirreff B. Hilton, W. L. Madgen, Sir Charles Ollivant, A. Shepherd, G. T. Symons, C. G. Tegetmeier, P. D. Tuckett; *Joint Managers*, C. H. Dade and R. J. Howley; *Acting Secretary*, T. Bower; *Accountant*, C. Walmsley.

This company is interested in the following tramways, particulars of which are given under their respective names:

Airdrie & Coatbridge.	Merthyr.
Barnsley & District.	Middleton.
Barrow-in-Furness.	Oldham, Ashton, & Hyde.
Birmingham & District Power & Traction Co.:	Peterborough.
	Potteries.
Birmingham & Midland	Rothesay.
Dudley, Stourbridge, & District.	Sheerness & District.
	South Metropolitan.
South Staffordshire.	Southport.
Wolverhampton Dist.	Swansea.
Devonport & District.	Taunton.
Gateshead & District.	Tynemouth & District.
General Elec. Tramways.	Weston-super-Mare & District.
Gravesend & Northfleet.	
Greenock & Port Glasgow.	Worcester.
Jarrow & District.	Wrexham & District.
Kidderminster & District.	Yorkshire (Woollen Dist.)

Burton and Ashby Light Railways, Power Station, Swadlincote, nr. Burton-on-Trent. [T.A., Toulmin, Swadlincote; T.N., 1.] *Manager and Eng.*, Jas. Toulmin; *Secretary*, A. L. Charles; *Chairman*, G. Murray Smith.

[The line is owned and worked by the Midland Railway Company.]

Camborne and Redruth Tramways, Elec. Works, Carn Brea, R.S.O., Cornwall. [T.N., 3, Camborne.] (Owned by Urban Elec. Supply Co.) *Manager and Eng.*, L. A. Hards; *Sec.*, C. H. Jones; *Chairman*, P. D. Tuckett; *Directors*, E. Charrington, H. B. Grotian, Douglas Owen.

Carlisle Tramways Company, Ltd., City of, Depot and Offices, London Road, Carlisle. [T.A., Tramways, Carlisle; T.N., 0180.] *Engineer and Manager*, R. L. McCulloch.

Chatham and District Light Railways Company, Luton Road, Chatham, and 83, Cannon Street, London, E.C. [T.A., Tramways, Chatham; T.N., 51.] *General Manager*, W. Jensen; *Assist. Manager*, A. J. Bousfield; *Traffic Manager*, W. G. Davies; *Secretary*, A. Clements; *Chairman*, A. R. Monks; *Directors*, H. C. Levis, J. F. Nauheim, W. B. H. Martindale.

Cheltenham and District Light Railway Company, Cheltenham. [T.N., 341.] *Directors*, A. H. Beatty (*Chairman*), W. Shearer, H. L. Williams, A. S. Guinness, H. J. McCormick; *Sec.*, Wm. C. Bryden, C. A., 66, Queen Street, London, E.C.; *Local Eng. and Manager*, Henry J. McCormick, St. George's Road, Cheltenham.

Clontarf and Hill of Howth Tramroad Company, 39, Dame Street, Dublin. [T.A., c/o Railways, Dublin; T.N., 917.] *Secretary*, J. P. Chapman; *Chairman*, W. L. Murphy; *Directors*, E. Anderson, J. J. Dudley.

Cork Electric Tramways and Lighting Company, Ltd., Albert Street, Cork. [T.A., Tramways, Cork; T.N., 78 and 535.] *Manager and Engineer*, H. H. Nalder; *Traffic Manager*, H. G. Whiting; *Per. Way Engineer*, H. Mack; *Secretary*, A. Clements; *Chairman*, A. R. Monks; *Directors*, E. Anderson, W. M. Murphy, Capt. W. Martindale, H. C. Levis.

Dartford Urban District Council Light Railways, Car Depot, Priory Road, Dartford. [T.N., 31 Dartford.] (Leased to and worked by Balfour, Beatty, & Co., Ltd., 66, Queen Street, London, E.C.) *Acting Manager*, F. A. Kincaid Fergusson.

Devonport and District Tramways Company, Electrical Federation Offices, London, W.C. [T.A., Head Office, Devonport c/o Tramway, London; T.N., Head Office, Holborn 2686. *Manager and Eng.*, George Cardwell; *Secretary*, S. M. Wright; *Acting Sec.*, P. N. Gray; *Chairman*, C. S. B. Hilton; *Directors*, J. S. Raworth, E. R. Soames, C. G. Tegetmeier, R. J. Sutcliffe.

[The Company's undertaking has been sold to Plymouth Corporation.]

Dewsbury, Batley, and Birstall Tramways Company, Ltd., Electrical Federation Offices, Kingsway, London, W.C.

[Lines worked by Yorkshire (Woollen District) Electric Tramways, Ltd., *q.v.*]

Dewsbury and Ossett Corporation and Soothill Nether Urban District Council Tramways, (Lessees: The National Elec. Construction Co., Ltd., 3, Laurence Pountney Hill, London, E.C.) [T.A., Overhauled, London; T.N., 5329 and 5330 Bank.] *Manager*, W. MacGibbon.

Douglas—Ramsey. (The Manx Elec. Rly. Company), 1, Strathallan Crescent, Douglas. (See Manx Electric Railway Company).

Douglas Southern Electric Tramways, Ltd., Marine Drive, Douglas, Isle of Man, and 24, Brazennose Street, Manchester. [T.A., Traffic, Douglas.] *Manager and Eng.*, R. Orton; *Sec.*, J. E. Sharples; *Chairman*, T. J. Hutchinson; *Directors*, I. E. Winslow, E. A. Hopkins.

Dublin and Lucan Electric Railway Company, 15, Conyngham Road, Dublin. [T.A., Lucan Tramway, Dublin; T.N. 2282 and 4006 Dublin, and 5 Lucan.] *Manager, Elec. Eng., and Sec.*, D. McDowall Grosart, J.P.; *Chairman*, J. W. Hill, J.P.; *Directors*, E. Anderson, A. B. Coyle, J.P., G. N. Murphy.

Dublin United Tramways Company (1896) Ltd., 9, Upper Sackville Street, Dublin. [T.A., Tramways, Dublin; T.N., 58 and 59.] *Gen. Manager*, G. Marshall Harriss; *Elec. Eng.*, R. Tanham; *Con. Eng.*, H. F. Parshall; *Per. Way Eng.*, P. F. O'Sullivan; *Secretary*, W. McHugh; *Chairman*, W. M. Murphy, J.P.; *Directors*, W. F. Cotton, J.P., J. Mooney, Rt. Hon. L. A. Waldron, P.C.

Dudley, Stourbridge and District Electric Traction Company, Ltd. (Section of The Birmingham and Midland Tramways Joint Committee), Power Station, Downing Street, Smethwick, Brierley Hill, Staffs., and Electrical Federation Offices, Kingsway, London, W.C. [T.N., 65 Smethwick.] *General Manager*, W. G. Bond; *Secretary*, E. H. Woodhall; *Chairman*, S. R. Blundstone; *Directors*, J. A. Lycett, R. J. Howley.

Dumbarton Burgh and County Tramways Company, Tramway Depot, Dumbarton, and 23, Rutland Street, Edinburgh. [T.A., Tramways, Dumbarton; T.N., 119.] *Gen. Manager and Elec. Eng.*, J. P. McMahon; *Secretary*, A. Dishart; *Chairman*, G. Balfour; *Directors*, K. Sanderson, K. A. Scott Moncrieff.

Dundee, Broughty Ferry & District Tramways Company, Milton, Monifieth, N.B. [T.N., 24 Monifieth.] *Gen. Manager & Engineer*, Daniel Fisher; *Secretary*, E. Cowan; *Chairman*, George Balfour; *Directors*, Edward Cowan, David Hynd.

Dunfermline and District Tramways Company, Tramway Depot, Cowdenbeath, Fife, and 8, New Row, Dunfermline. *Manager and Engineer*, J. H. Shepherd; *Secretary*, G. A. Nicolson; *Cons. Engs.*, Hawtayne & Zeden; *Directors*, Wm. Low, G. Balfour (*managing*), K. Sanderson, D. Hynd.

Falkirk & District Tramways Company, Larbert Road, Larbert, Stirlingshire. [T.A., Tramways Co., Falkirk; T.N., 154 Falkirk.] *Gen. Manager and Engineer*, D. Hays; *Chairman*, G. M. Brown; *Directors*, A. W. Tait, R. Hunter, G. Balfour, C. D. Geddes.

Felixstowe Pier Railway, Felixstowe. (The Coast Development Corporation, Ltd.) *Elec. Eng.*, E. A. Lambert.

Gateshead and District Tramways Company, Tramway Depôt, Sunderland Road, Gateshead, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramway Depôt, Gateshead; T.N., 125 & 408 Gateshead.] *General Manager*, William Morrison; *Secretary*, H. W. Davis; *Chairman*, H. S. Day; *Directors*, H. A. Stagg, C. R. Greene, Judge L. A. Atherley-Jones, K.C.

Giant's Causeway and Portrush Electric Tramway Company, Portrush. *Manager & Sec.*, W. McCurdy; *Elec. Eng.*, W. A. Traill; *Chairman*, F. J. S. Moore; *Directors*, C. M'D. Stuart, W. A. Traill.

Glossop Tramways, Electricity Works, Glossop (owned by the Urban Electric Supply Co.) [T.N., 34, Glossop.] *Manager and Res. Eng.*, C. E. Knowles; *Rolling Stock Supt.*, A. W. Bullough; *Secretary*, C. H. Jones; *Chairman*, P. D. Tuckett; *Directors*, E. Charrington, F. E. Gripper, H. B. Grotrian, D. Owen.

Gosport and Fareham Tramways, Tramways and Lighting Office, Gosport, Hants., and Moorgate Station Chambers, London, E.C. [T.A., Tramways, Gosport; T.N., 3, Post Office, Gosport.] *Eng. and Manager*, J. Fereday Glenn; *Sec.*, J. Barber Glenn; *Chairman*, A. Beattie, J.P., D.L.; *Directors*, J. Barber Glenn (*managing*), S. Hern.

Gravesend & Northfleet Electric Tramways, Ltd., Tramway Depot, Northfleet, Kent, and Electrical Federation Offices, Kingsway, London, W.C. [T.N., 958, Gravesend.] *Manager*, J. R. Groves; *Sec.*, H. C. Walter; *Chairman*, W. L. Madgen; *Directors*, P. N. Gray, W. S. Wreathall.

Great Crosby Tramways, 31, James Street, Liverpool.

[This tramway is worked by the Liverpool Overhead Railway Company.]

Great Grimsby Street Tramway Co., Southampton House, Cleethorpes, and Moorgate Station Chambers, London, E.C. [T.A., Blanco, Cleethorpes; T.N., 16.] *Manager and Eng.*, H. L. White; *Elec. Eng.*, H. O. White; *Managing Director and Secretary*, J. B. Glenn; *Chairman*, A. Beattie, J.P., D.L.; *Director*, S. Hern.

Greenock and Port Glasgow Tramways Company, Ladyburn, Greenock, and Electrical Federation Offices, Kingsway, London, W.C. [T.A. Tramways, Greenock; T.N., 562]. *Manager*, A. Robertson; *Secretary*, P. N. Gray; *Chairman*, W. L. Madgen; *Directors*, G. J. Somerville, A. C. Miles, H. S. Day.

Guernsey Railway Company, Ltd., Hougue-à-la-Perre, Guernsey. *Manager and Elec. Eng.*, Arthur G. Bird; *Sec.*, J. de Mouilpied; *Chairman*, G. F. Peek; *Directors*, W. D. Murdoch, E. Valied, J. B. Collings, Q. Le Pelley.

Hampshire Light Railway (Electric) Company, Ltd., Moorgate Station Chambers, London, E.C. *Secretary*, J. B. Glenn; *Chairman*, A. Beattie, J.P.; *Directors*, J. Barber Glenn (*managing*), S. Hern.

[This company works the Portsdown and Horndean Light Railway.]

Hastings Tramways Company, Ltd., Beaufort Road, Silverhill, St. Leonards-on-Sea, and 1, Queen Victoria Street, London, E.C. [T.A., Tramways, Hastings, and Enshrine, London; T.N., 90 Hastings, and 3465, City]. *General Manager and Elec. Eng.*, W. Vincent Edwards; *Secretary*, W. R. Elston; *Cons. Engs.*, Kincaid, Waller, Manville, and Dawsen; *Chairman*, G. Kitchen; *Directors*, E. C. Morgan, J. C. Williamson, Dr. Moody.

Imperial Tramways Company, Ltd., Clare Street House, Bristol. *Secretary*, W. G. Verdon Smith; *Manager*, F. Freshwater; *Chairman*, Sir George White, Bart.; *Directors*, H. C. Godfray, J. H. Howell, S. White.

Isle of Thanet Electric Tramways and Lighting Company, Ltd., St. Peter's, Kent, and Moorgate Station Chambers, London, E.C. [T.A., Tramways, St. Peters, Kent; T.N., 29 Broadstairs]. *Gen. Manager and Elec. Eng.*, J. A. Forde; *Traffic Supt.*, ——————; *Secretary*, J. Barber Glenn; *Chairman*, A. R. Monks; *Directors*, Lord Arthur Butler, W. M. Murphy, H. Brown.

Jarrow and District Electric Traction Company, Ltd., Electrical Federation Offices, Kingsway, London, W.C. [T.A., Jarrow, c/o Tramway, London; T.N., 2686 Holborn.] *Traffic Manager*, G. McClelland; *Secretary*, C. W. Francis; *Acting Sec.*, H. A. Stagg; *Chairman*, G. J. Somerville; *Directors*, W. Morrison (*managing*), H. S. Day.

Kidderminster & District Electric Lighting and Traction Co., Ltd., Kidderminster and Electrical Federation Offices, Kingsway, London, W.C. [T.N., 108]. *General Manager*, W. G. Bond, *Secretary*, B. Kingsford; *Chairman*, E. Garcke; *Directors*, J. A. Lycett, H. S. Day, W. L. Madgen.

Kinver Tramway, Kinver, and Electrical Federation Offices, Kingsway, London, W.C., *q.v.*, Dudley, Stourbridge, and District Elec. Traction Co., Ltd.

Lanarkshire Tramways Company, Edinburgh Road, Motherwell, N.B., and 83, Cannon Street, London, E.C. [T.A., Tramways, Motherwell; T.N., 64.] *Gen. Manager and Eng.*, G. F. Moller; *Elec. Eng.*, E. H. Glennie; *Per. Way Eng.*, R. Foster; *Traffic Supt.*, J. L. White; *Sec.*, A. Clements; *Chairman*, A. R. Monks; *Directors*, Sir B. Cunard, H. C. Levis, W. H. Whaite, G. Franklin, J. F. Nauheim.

Lancashire United Tramways Limited, Atherton, Lancs. [T.A., Tramways, Atherton; T.N., 36, Atherton.] *Gen. Manager and Engineer*, E. H. Edwardes; *Secretary*, H. P. Conibear; *Chairman*, Hon. A. Stanley M.P.; *Directors*, J. M. Henderson, M.P., Sir J. Beecham, J.P., R. Watson, J.P., A. Adam, J. S. Austen.

Liverpool and Prescot Light Railway.—This line, which with the St. Helens Tramways forms the connecting link between the City of Liverpool and South Lancashire Tramways, is owned and worked by the Lancashire United Tramways, Ltd.

Liverpool Overhead Railway Company, 31, James Street, Liverpool. [T.A., Motor, Liverpool; T.N., 5463 Central.] *Gen. Manager and Eng.*, E. J. Neachell; *Secretary*, W. H. Alexander; *Chairman*, H. C. Woodward; *Directors*, J. E. Anderson, G. D. Killey J. U. Hodgson, M. H. Maxwell.

Llandudno and Colwyn Bay Electric Railway, Limited, Tramway Depôt, Rhôs-on-Sea, Colwyn Bay, and Basildon House, Moorgate Street, London, E.C. *Gen. Manager*, Alex. G. Balfour; *Secretary*, A. W. R. Lovering; *Directors*, G. Balfour, A. W. Tait, T. Stoker.

Llanelly and District Electric Lighting and Traction Company, Ltd., Llanelly, and 66, Queen Street, London, E.C. *Engineer and Manager*, J. E. Stewart; *Secretary*, G. D. Prince; *Chairman*, A. R. Holland; *Directors*, A. V. Anderson, M. A. Edwards, A. H. Beatty.

London United Tramways Ltd., Electric Railway House, Broadway, Westminster, London, S.W. [T.N., 6800, Victoria.] *Managing Director*, J. Devonshire; *Secretary*, A. L. Barber; *Gen. Manager and Eng.*, A. H. Pott; *Chairman*, W. M. Acworth; *Directors*, Rt. Hon. Viscount Knutsford, Sir A. H. Stanley, F. V. Schuster.

Luton Corporation Tramways (leased to and worked by Balfour, Beatty & Co., Ltd., 22a, College Hill, London, E.C.), Tramway Offices, Park Street, Luton. [T.N., 230.] *Engineer and Manager*, A. E. Wray.

Mansfield & District Light Railway Co., Sutton Road, Mansfield. [T.A., Cars, Mansfield, T.N., 107.] *Gen. Manager and Sec.*, Stanley Dudman, *Chairman*, A. R. Holland; *Directors*, W. J. Chadburn, A. H. Beatty, G. Balfour.

Digitized by Google

ELECTRIC TRAMWAYS IN THE UNITED KINGDOM.

Manx Electric Railway Company, Ltd., 1, Strathallan Crescent, Douglas, Isle of Man, and 3, Finch Lane, London, E.C. [T.A., Electric, Douglas, Man.; T.N., 61.] *Gen. Manager & Eng.*, F. Edmondson; *Secretary*, C. A. Huni; *Chairman*, Col. Sir A. Griffith Boscawen; *Directors*, Sir W. H. Vaudrey, B. E. Greenwell, E. Remnant.

Merthyr Electric Traction and Lighting Company, Ltd., 53, Pontmorlais Circus, Merthyr, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramway Company, Merthyr; T.N., 0180, Merthyr Tydfil.] *Managing Eng.*, L. W. Dixon; *Secretary*, S. J. Clements; *Chairman*, G. J. Somerville; *Directors*, C. G. Tegetmeier, W. L. Madgen, E. R. Soames.

Metropolitan Electric Tramways, Limited, Electric Railway House, Broadway, Westminster, London, S.W. [T.A., Metrolito, London; T.N., 6800, Victoria.] Manor House Offices, Seven Sisters Road, N. [T.A., Lentiscus, London; T.N., 77 Tottenham.] *Gen. Manager and Eng.*, A. H. Pott; *Traffic Manager*, W. E. Hammond; *Secretary*, A. L. Barber; *Chairman*, E. Garcke; *Directors*, Sir E. Spencer, W. L. Madgen, C. G. Tegetmeier, J. Devonshire (*Managing Director*).

Mexborough and Swinton Tramways Company, Electricity Works, Rawmarsh, Yorks. [T.N., 266], and 3, Laurence Pountney Hill, Cannon Street, London, E.C. *Manager and Eng.*, G. H. Browne; *Cons. Elec. Eng.*, F. E. Stanley; *Commercial Manager*, Wm. T. Mitchell; *Traffic Supt.*, M. McLeod; *Secretary*, L. D. H. Jacobs; *Chairman*, L. B. Schlesinger; *Director (Managing)*, W. B. Cownie, C.A.

Middlesbro, Stockton, and Thornaby Electric Tramway, Bridge Road, Stockton-on-Tees, and Clare Street House, Bristol. [T.A., Tramways, Stockton; T.N., 129.] *Manager*, F. Freshwater; *Secretary*, W. G. Verdon Smith; *Chairman*, Sir Geo. White, Bart.; *Directors*, H. C. Godfray, S. White, H. C. Doggett.

Middleton Electric Traction Company, Ltd., Hiltonfold Lane, Middleton, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramway Depot, Middleton; T.N., 37 Middleton.] *Gen. Manager*, W. F. Endean; *Secretary*, G. R. Oliphant; *Acting Secretary*, J. S. Bowker; *Chairman*, Lord Vaux of Harrowden; *Directors*, J. V. Kitchener, W. S. Wreathall.

Morecambe Tramways Company, Heysham Road, Morecambe, and 62, Market Street, Lancaster. [T.N. 1, Morecambe, and 71, Lancaster.] *Secretary and Manager*, G. H. Petty; *Chairman*, W. H. Pickles; *Directors*, J. Stott, S. Wright, O. Carr.

Musselburgh and District Electric Light and Traction Co., Ltd., High St., Musselburgh, N.B. [T.A., Tramways, Musselburgh; T.N., 115.] (Registered Office, 3, Laurence Pountney Hill, London, E.C. [T.N., 5329 and 5330, Bank.]) *Manager*, E. J. Walsh; *Resident Engineer*, E. J. Walsh; *Traffic Inspector*, W. Mittell; *Secretary*, L. D. H. Jacobs; *Chairman*, L. B. Schlesinger; *Directors*, B. Burnham, J. Anderson, W. B. Cownie, R. Watson.

New General Traction Company, Ltd., 8, Crosby Square, London, E.C. *Managing Director*, E. A. Hopkins; *Secretary*, J. G. Mills; *Chief Engineer*, I. E. Winslow; *Chairman*, Baron E. B. d'Erlanger. [This company controls the Norwich and the Douglas Southern Electric Tramways Companies.]

New St. Helens and District Tramways Company, Ltd., Atherton, Lancs. [T.A., Tramways, Atherton; T.N., 36 Atherton.] *Engineer and Manager*, C. D. Stanley; *Secretary*, H. P. Conibear; *Chairman*, Hon. Arthur Stanley, M.P.; *Directors*, J. Hunter, J.P., H. Martin, J.P., J. M. Henderson, M.P., J. S. Austen, and E. H. Edwardes (*Managing*).

North Shields Tramway Company owned and worked by Tynemouth and District Elec. Trac. Co. *q.v.*

Norwich Electric Tramway Company, 5, Orford Hill, Norwich, and 8, Crosby Square, London, E.C. [T.A., Tramways, Norwich; T.N., 475.] *Manager and Engineer*, F. W. Ketley; *Consulting Eng.*, I. E. Winslow; *Sec.*, J. G. Mills; *Directors*, E. A. Hopkins, Hon. A. G. Brand, F. FitzGerald, G. M. Chamberlin, and C. Pakeman.

Nottinghamshire and Derbyshire Tramways Company, Tramway Depot, Langley Mill, Derbyshire, and 66, Queen Street, London, E.C. [T.A., Tramways, Langley Mill; T.N., 53, Langley Mill.] *Manager*, C. R. Walker; *Secretary*, Wm. C. Bryden; *Directors*, A. R. Holland, A. H. Beatty, A. V. Anderson, and M. A. Edwards.

Oldham, Ashton and Hyde Electric Tramway, Ltd., Tramway Depot, Denton, Lancs., and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Denton: T.N., 265 Ashton.] *Supt.*, A. Anderson; *Secretary*, F. J. Cursons; *Acting Secretary*, J. S. Bowker; *Chairman*, E. Garcke; *Directors*, Judge L. A. Atherley Jones, K.C., W. S. Wreathall, J. V. Kitchener (*Managing Director.*)

Paisley District Tramways Company, Tramway Depôt, Paisley, and 88, Cannon Street, London, E.C. [T.N., 218 Paisley.] *Gen. Manager and Elec. Eng.*, Fred Coutts; *Traffic Supt.*, E. Jeffs; *Secretary*, A. Clements; *Con. Eng.*, H. F. Parshall; *Chairman*, O. H. Smith; *Directors*, Lord Arthur Butler, D. Johnston Smith, John Young.

Peterborough Electric Traction Company, Ltd., Lincoln Road, Peterborough, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Peterborough; T.N., 224.] *Gen. Manager*, T. G. Clabburn; *Secretary*, S. M. Wright; *Acting Sec.*, P. N. Gray; *Chairman*, Lord Vaux of Harrowden; *Directors*, E. A. Paris, R. J. Howley.

Plymouth, Stonehouse and Devonport Tramways Co., 16, Edgcumbe Street, Stonehouse, Devon, and Moorgate Station Chambers, London, E.C. [T.N. 53.] *Manager*, G. H. Moreton; *Elec. Eng.*, J. Graham Pearce; *Sec.*, J. Barber Glenn; *Chairman*, Andrew Beattie, J.P., D.L.; *Directors*, S. Hern, J. B. Glenn (*Managing*).

Portsdown and Horndean Light Railway, Cosham, Hants.; Tramways and Lighting Office, Gosport, Hants., and Moorgate Station Chambers, London, E.C. [T.A., Tramways, Gosport; T.N., 3, Post Office, Gosport.] *Engineer and Manager*, J. Fereday Glenn; *Secretary*, J. Barber Glenn; *Chairman*, A. Beattie, J.P., D.L.; *Directors*, J. Barber Glenn (*Managing*), S. Hern.

Potteries Electric Traction Company, Tramway Depôt, Stoke-on-Trent, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Stoke-on-Trent; T.N., 141.] *Gen. Manager and Eng.*, W. Thom; *Power and Rolling Stock Supt.*, F. J. Chapple; *Traffic Manager*, F. Hatch; *Secretary*, B. Kingsford; *Chairman*, R. J. Howley; *Directors*, F. W. Chanter, S. Mear, J. V. Kitchener.

Rhondda Tramways Company, Ltd., Tramway Depot, Porth, Rhondda, and Laurence Pountney Hill, Cannon Street, London, E.C. [T.A., Tramways, Porth; T.N., 118.] *Manager and Engineer*, H. Holliday; *Secretary*, L. D. H. Jacobs; *Chairman*, L. B. Schlesinger; *Directors*, J. C. Saunders, W. B. Cownie, J. T. Jervis, H. T. Barnett.

Rothesay Tramways Company, Ltd., Point House, Rothesay, and Electrical Federation Offices, Kingsway, London, W.C. *Manager*, A. Robertson; *Sec.*, P. N. Gray; *Chairman*, A. C. Miles; *Directors*, W. L. Madgen, H. S. Day.

Ryde Pier Company, Ryde, Isle of Wight. *Manager*, W. D. Stanney; *Elec. Eng.*, C. Harrison; *Chairman*, G. E. Mears.

Scarborough Tramways Company, Scalby Road, Scarborough. [T.A., Electric Tramways, Scarborough; T.N., 294.] *Gen. Manager and Elec. Eng.*, J. V. Moinet; *Chairman*, F. E. Gripper; *Directors*, V. Fowler, M. T. Whittaker, J. C. Wigham.

Sheerness and District Electric Power and Traction Company, Ltd., Electricity Works, Sheerness East, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Sheerness; T.N., 45.] *Manager & Eng.*, A. Charlton; *Sec.*, H. A. Stagg; *Chairman*, G. J. Somerville; *Directors*, R. J. Howley, E. R. Soames.

Snaefell Mountain Railway (See Manx Electric Railway Company).

South Metropolitan Electric Tramways and Lighting Company, Ltd., 114, Church Street, Croydon, 30, High Street, Sutton, and Electric Railway House, Broadway, Westminster, London, S.W. [T.N., 304 Croydon, 14 Sutton and 6800, Victoria.] *Gen. Manager and Engineer*, A. V. Mason; *Secretary*, W. M. Wright; *Chairman*, C. G. Tegetmeier; *Directors*, J. Devonshire (*managing*), E. Garcke, A. L. Barber.

Southport Pier Co., Ltd., Southport. [T.A., Pier, Southport; T.N., 174.] *Manager*, A. T. Faiers; *Chairman*, A. Skinner; *Directors*, J. R. Haworth, S. J. Fane, G. Duckworth, J. Duckworth.

Southport Tramways Company, Ltd., The Depôt, Churchtown, Southport, and Electrical Federation Offices, Kingsway, London, W.C. *Manager*, J. Lloyd; *Secretary*, H. A. Stagg; *Chairman*, C. S. Hilton; *Directors*, J. S. Raworth, Lord Vaux of Harrowden, J. V. Kitchener, G. R. Hulme.

South Staffordshire Tramways (Lessee) Company, Ltd., Electrical Federation Offices, Kingsway, London, W.C. [T.N., 65 Smethwick.] *General Manager*, W. G. Bond; *Secretary*, E. H. Woodhall; *Chairman*, W. S. Schuster; *Directors*, J. A. Lycett, S. R. Blundstone, R. J. Howley, B. Kingsford.

Sunderland District Electric Tramways, Ltd., Fence Houses, co. Durham. [T.A., Trams, Philadelphia, Shiney Row; T.N., 21, Houghton-le-Spring.] *Resident Manager and Engineer*, G. Stratton; *Traffic Manager*, E. A. Pearman; *Secretary*, H. J. Almond; *Directors*, H. R. Hogg, Hon. R. Parker, R. Tayler, A. Counter, C. Eves.

Sutton and Howth Electric Tramway Company (owned by the Great Northern Railway, Ireland), Sutton, county Dublin, and Amiens Street Station, Dublin. [T.A., Railroad, Dublin; T.N., 171, Dublin, and 16 Sutton.] *Gen. Manager*, John Bagwell; *Elec. Eng.*, A. W. Whieldon; *Chief Eng.* F. A. Campion; *Locomotive Eng.*, G. T. Glover; *Sec.*, T. Morrison; *Chairman*, F. Vernon; *Directors*, W. P. Cairnes (*Deputy Chairman*), W. B. Carson, H. S. Guinness, J. T. Reade, Capt. W. L. A. Goulding, Lt.-Col. J. C. W. Madden, R. A. Gradwell, J. Milne Barbour, T. F. Cooke, W. H. B. Moorhead, Lt.-Col. H. Plews, G. S. Clark.

Swansea Improvements and Tramways Company, 2, Rutland St., Swansea, and Electrical Federation Offices. Kingsway, London, W.C. [T.A., Tramway, Swansea; T.N., 268 Swansea.] *Gen. Manager*, D. James; *Elec. Eng.*, A. Johnston; *Secretary*, S. J. Clements; *Chairman*, C. G. Tegetmeier; *Directors*, G. J. Somerville, S. E. Garcke, E. R. Soames.

Taunton Electric Traction Company, Ltd., East Reach, Taunton, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Taunton, c/o "Tramways," London.] *Manager*, B. H. Griffith; *Acting Manager*, L. Marshall; *Secretary*, S. M. Wright; *Acting Sec.*, P. N. Gray; *Chairman*, G. J. Somerville; *Directors*, E. Garcke.

Torquay Tramways Co., Ltd., St. Marychurch Road, Torquay. [T.A., Carsheds, Torquay; T.N., 167 Torquay.] *Registered Office*, 3, Laurence Pountney Hill, Cannon Street, E.C. *Manager and Eng.*, H. J. Nisbett; *Secretary*, L. D. H. Jacobs; *Managing Director*, W. B. Cownie.

Trafford Park Company (Tramways), Trafford Park, Manchester. [T.A., Developing, Manchester; T.N., 61, Trafford Park.] *Secretary*, C. A. Grundy; *Chairman*, Marshall Stevens; *Directors*, Sir J. Lyons, H. McNiel, J. H. Balfour Browne, K.C.

[Lines worked by the Manchester and Salford Corporations.]

Tynemouth and District Electric Traction Company, Limited, John Street, Cullercoats, Northumberland, and Electrical Federation Offices. Kingsway, London, W.C. [T.A., Tram Co., Cullercoats; T.N., 17 Whitley.] *Gen. Manager*, H. J. Smith *Sec.*, C. W. Francis; *Acting Sec.*, H. A. Stagg; *Chairman*, H. S. Day; *Directors*, J. H. Robinson, J. B. Williamson, R. J. Howley, Geo. J. Somerville.

Tyneside Tramways and Tramroad Company, Ltd., Neptune Bank, Wallsend. [T.A., Tramways, Wallsend; T.N., 84.] *Secretary & Res. Manager*, J. C. Little; *Elec. Eng.*, F. H. Briggs; *Cons. Eng.*, W. McLellan; *Chairman*, J. T. Merz; *Directors*, Lord Armstrong, J. H. Armstrong, G. E. Henderson, S. Hunter.

Wakefield and District Light Railway Company, Belle Isle, Wakefield.

[This company has been amalgamated with the Yorkshire (West Riding) Electric Tramways Co., Ltd.]

Walton-on-the-Naze Pier Tramway (Coast Development Corporation, Ltd.), The Pier, Walton-on-the-Naze. [T.A., Electricity Works, Walton-on-Naze.] *Eng.*, E. A. Lambert, A.M.I.E.E.

Wemyss and District Tramways Company, Ltd., Car Depot. Aberhill, Methill, N.B. [T.A., Tramways, Methill; T.N., 38 Leven.] *Gen. Manager*, W. T. Dawson; *Sec.*, J. O. Shepherd; *Chairman*, G. Balfour; *Directors*, W. Shepherd, G. Balfour, J. H. Guild.

Weston-super-Mare and District Electric Supply Co., Ltd., Locking Road, Weston-super-Mare, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Weston-s.-Mare; T.N., 79 & 181.] *Manager and Elec. Eng.*, G. Charlton; *Sec.*, H. A. Stagg; *Chairman*, G. J. Somerville; *Directors*, C. G. Tegetmeier, E. R. Soames.

Wolverhampton District Electric Tramways, Limited, Tramway Depot, Bilston, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Bilston; T.N., 56, Bilston.] *General Manager*, W. G. Bond; *Sec.*, E. H. Woodhall; *Chairman*, S. R. Blundstone; *Directors*, J. A. Lycett, R. J. Howley, B. Kingsford.

Worcester Electric Traction Company, Ltd., St. John's, Worcester, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Worcester; T.N., 81.] *Engineering Manager*, R. Simpson; *Secretary*, C. W. Francis; *Acting Sec.*, H. A. Stagg; *Chairman*, H. S. Day; *Directors*, J. A. Lycett, B. Kingsford, W. S. Wreathall.

Wrexham and District Transport Co., Ltd., 6, Lord Street, Wrexham, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Wrexham; T.N., 182. Wrexham.] *Manager*, A. A. Hawkins; *Sec.*, J. R. Oliphant; *Acting Sec.*, J. S. Bowker; *Chairman*, J. V. Kitchener; *Directors*, G. J Somerville, W. S. Wreathall.

Yorkshire (West Riding) Electric Tramways Co., Ltd., Belle Isle, Wakefield. [T.A., England, Belle Isle, Wakefield; T.N., 213.] *Gen. Manager and Sec.*, H. England: *Elec. Engs.*, C. J. Jewell and E. A. Wood; *Traffic Supt.*, W. J. McDonald; *Chairman*, Sir Herbert S. Leon, Bart.; *Directors*, B. Newgass, G. E. Leon, E. Remnant, W. Murray.

Yorkshire (Woollen District) Electric Tramways, Limited, Frost Hill, Liversedge, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Heckmondwike; T.N., 8 Heckmondwike.] *Secretary*, P. N. Gray; *Chairman*, E. Garcke; *Directors*, Sir Thos. Pilkington, E. A. Paris (*managing*).

TRAMWAY ASSOCIATIONS.

MUNICIPAL TRAMWAYS ASSOCIATION.

President:
PETER FISHER
(General Manager, Dundee Corporation Tramways).

Vice-President:
HENRY MOZLEY
(General Manager, Burnley Corporation Tramways).

Hon. Secretary and Treasurer:
C. J. SPENCER
(General Manager, Bradford Corporation Tramways), 7, Hall Ings, Bradford.

TRAMWAYS AND LIGHT RAILWAYS ASSOCIATION.

President:
The Rt. Hon. VISCOUNT CHILSTON.

Chairman:
The Hon. ARTHUR STANLEY, M.P.

Vice-Chairman:
HARRY ENGLAND.

Hon. Solicitor: W. MORRIS, Junr.

Hon. Auditor: A. W. CHAMBERS, A.S.A.A.

Secretary:
A. DE TURCKHEIM.

Offices: Caxton House, Westminster, London, S.W
Telephone No. 2110 Victoria.

Digitized by Google

LIST OF ELECTRIC TRAMWAYS & RAILWAYS.

PARTICULARS OF TRACK AND EQUIPMENT.

TRAMWAYS, pp. xxvii-xxx. RAILWAYS, p. xxx.

Location of Line and Name of Operating Company.	Date of Opening of First Section.	Length of Route.	Total length of Track.	Gauge.	Weight and Type of Rail.	Maximum Gradient.	Sharpest Curve.	No of Motor Cars.	No of Dynamos	No. of Engines	Type of Engines	Total Capacity Traction, kw.	Principal Contractors for Electrical Equipment.
TRAMWAYS.				ft. in.	lbs.	1 in	ft. rad.						
ABERDARE Urban District Trys. ..	Oct., 1913	2·9	3·3	3 6	96 G	13	45	14	2	2	V. Cp. C.	400	Lanc. Dynamo Co.
ABERDEEN Corporation	Dec., 1899	14·4	27·75	4 8½	96 G	13	42·5	83	*14	14	V. Cp. C.	4,610	British T-H. Macartney & Co.
ABERDEEN Suburban Trys. Co. ..	June, 1905	5	5	4 8½	95 G	28	90	9	..	..	..	..	J. G. White & Co. Brush Co.
ACCRINGTON Corporation	Aug., 1907	7·53	10·53	4 0	95 G	14	..	32	*8	8	..	1,888	Brush Co.
AIRDRIE & COATBRIDGE Tramway Co.	Feb., 1904	3·63	4·94	4 8½	94 G	14	210	15	..	..	..	..	Brush Co.
ASHTON-UNDER-LYNE Corporation ..	Aug., 1902	7	8·15	4 7¾	96 G	10	40	25	5	5	..	400	Dick, Kerr, & Co. Siemens Bros.
AYR Corporation	Sept., 1901	6	7·612	4 8½	90 G	21	45	24	*8	8	..	400	British T-H.
BACUP Corporation	1910	1·50	2	4 8½	103 G	9	40	..	..	..	..	..	
BARKING Town Urban District ..	Dec., 1903	2·6	3·125	4 8½	100 G	25	44	9	4	3	V. Cp. C.	200	Blackwell & Co.
BARNSLEY & DIST. Elec. Traction Co.	Nov., 1902	3·06	4·25	4 8½	97 G	10	60	13	*	..	..	..	J. G. White & Co. Brush Co.
BARROW-IN-FURNESS	Feb., 1904	6·9	10·32	4 0	90 G	13	50	24	*8	..	..	..	Brush Co. Dick, Kerr, & Co.
BATH Electric Tramways, Ltd. ..	Jan., 1904	14·7	19·3	4 8½	95 G	10·7	38	40	4	4	H.T. Cp.	675	Westinghouse
BATLEY Corporation	Aug., 1903	6·536	10·47	4 8½	104 G	9	40	15	6	4	H. Cp.	240	B. I. W. Co. British Elc. Cr. Co
BELFAST City	Dec., 1905	49·65	98·54	4 8½	105 G	15	35	291	3	3	Tri. Exp.	3,000	J. G. White & Co. Westinghouse
BESSBROOK—NEWRY (1) .. .. Bessbrook and Newry Try. Co.	Oct., 1885	3	3	3 0	41 V	80	55	2 M 2 T	2	1	Hyd. Turb.	..	Mather & Platt
BEXLEY Urban District	Oct., 1903	5·25	6·5	4 8½	90 G	14	40	21	3	3	V. Cp.	600	Dick, Kerr, & Co.
BIRKENHEAD Corporation	Feb., 1901	13·8	24·09	4 8½	100 G	13½	40	65	6	6	V. Cp.	..	Blackwell & Co. British T-H.
BIRMINGHAM Corporation	Jan., 1904	65·56	114·55	3 6	105 G	13	40	586	..	..	..	1,475	Dick, Kerr, & Co.
BIRMINGHAM and Midland Trys. Co.	Nov, 1904	10·32	16·45	3 6	85 & 94 G	15	31	62	6	6	Cp.	..	Brush Co.
BLACKBURN Corporation	March, 1899	14·67	24·75	4 0	92 G	15	30	61	*4	4	V. Cp. C.	..	British T-H. Blackwell & Co.
BLACKPOOL Corporation	Oct., 1885	14·75	21·38	4 8½	96 G	20	36	84	5	..	Turb.	3,250	Elwell-Parker British T-H.
BLACKPOOL & FLEETWOOD Tramrd. Co.	July, 1898	7·9	15	4 8½	70 V 98 G	26	80	41	5	5	V. Cp.	600	Mather & Platt D.K.&Co.-B.T-H.
BLACKPOOL and FYLDE Light Ry. Co.	Under cons.	14	14·5	4 8½	..	..	..	..	..	..	..	..	
BLACKPOOL—St. Anne's & Lytham ..	May, 1903	7·47	14·03	4 8½	92 G	22	35	40	..	..	..	..	British T-H.
BOLTON Corporation	Nov., 1899	26	47·21	4 8½	90G	14	35	112	*12	12	V. Cp. C.	3,800	Dick, Kerr, & Co. Blackwell & Co.
BOOTLE Corporation	May, 1900	4·125	7·75	4 8½	95 G	20	40	55	*8	8	..	4,000	Blackwell & Co.
BOURNEMOUTH Corporation	July, 1902	21·66	31·75	3 6	100 G 66 slot	10	40	91	5	4	V. Cp.	1,200	J. G. White & Co.
BRADFORD Corporation	July, 1898	59	108·75	4 0	102 G	9·8	40	‡272	11	11	V. Cp. C.	..	Westinghouse Blackwell & Co.
BRAY and ENNISKERRY Railway Co.	Under cons.	3·25	5	3 6	..	..	..	..	..	..	..	..	
BRIGHTON Corporation	Nov., 1901	9·48	17·18	3 6	105 B.S. No. 4	9	40	53	5	5	Turb.	1,000	Macartney & Co. Westinghouse Blackwell & Co.
BRIGHTON BEACH (1)	Aug., 1883	1·75	2	2 8½	35 V	100	80	9	2	..	..	..	Siemens Bros.
BRISTOL—Bristol Trys. Co.	Oct., 1895	31	57·5	4 8½	92½ G	10	30	232	6	4	V. Cp. C.	..	British T-H. and Blackwell & Co.
BURNLEY Corporation	Dec., 1901	12·50	22·16	4 0	102 & 107 G	9·8	35	67	*8	6	H. Cp. C.	1,500	British T-H.
BURTON and ASHBY Light Railway ..	July, 1906	10·2	12·3	3 6	90 G	11	51	20	2	2	Diesel	330	Dick, Kerr & Co. Brush Co.
BURTON-ON-TRENT Corporation ..	Aug., 1903	6·67	9·75	3 6	90 & 100 G	11·7	40	20	3	3	V. Cp.	400	Dick, Kerr, & Co. Blackwell & Co.
BURY Corporation	June, 1903	22·5	34·42	4 8½	102¾ G	12	40	54	6	6	..	1,500	Westinghouse
CAMBORNE and REDRUTH	Nov., 1902	3·75	4	3 6	83 G	15	40	8	7	7	Cp.	1,525	Dick, Kerr, & Co. British T-H.
CARDIFF Corporation	May, 1902	17·25	31·82	4 8½	100 G	23	35	130	9	9	V. Cp. C&T	2,200	British T-H. Dick, Kerr, & Co.
CARLISLE, City of, Elec. Try. Co. ..	June, 1900	7·25	8·5	3 6	83 G	14	23	12	..	..	..	..	D.K.& Co.-B.T-H.
CAVEHILL & WHITEWELL Try. Co...	Feb., 1906	3·29	4·31	4 9	105 G	31	75	10	..	..	..	..	J. G. White & Co.
CHATHAM & DISTRICT Light Rly. Co.	June, 1902	14·98	26	3 6	92½ & 105 G	9	35	50	5	4	H. Cp.	675	British T-H. Co. Brush Co.
CHELTENHAM and DISTRICT ..	Aug., 1901	10·22	12·25	3 6	80 & 90 G	8·9	37	20	2	2	V. Cp.	..	Westinghouse
CHESTER Corporation	April, 1903	3·59	6·4	3 6	94 & 100 G	23	40	18	*7	6 1	V. Cp. C. V. Tri. Ex C.	240	Blackwell & Co. British T-H.
CHESTERFIELD Corporation	Dec., 1904	3·6	5·1	4 8½	96 & 101 G	20	40	17	4	4	V. Cp. C.	800	Milnes & Co. Westinghouse Brush
CLONTARF and HILL OF HOWTH ..	July, 1900	5·5	6·5	5 3	90 & 60 G	13	34	12	..	..	..	..	W.M. Murphy & Co.
COLCHESTER Corporation	July, 1904	6	7·94	3 6	95 G	12	43	18	8	8	V. Cp.	1,140	Dick, Kerr & Co. J. G. White & Co.
COLNE Corporation Tramways ..	Nov., 1903	5·2	6·7	4 0	102 G	13	60	13	*	..	..	..	Blackwell & B.T-H. Glover & Co.
CORK Elec. Try. & Lighting Co. ..	Dec., 1898	10	15	2 11½	83 G	14	26	35	*9	9	H. Cp. C.	570	British T-H. Blackwell & Co.
COVENTRY Corporation Tramways ..	Dec., 1895	12·88	15·81	3 6	65 G 81 G	16	35	51	5	3	H. & V. Cp.	1,500	Westinghouse Blackwell & Co.
CROYDON Corporation	Sept., 1901	11·87	19·12	4 8½	96·5 G	16	40	75	*13	13	..	2,000	British T-H. Co.
DARLINGTON Corporation	June, 1904	4·875	8·88	3 6	90 G	14	52·8	18	1	..	..	250	Westinghouse

* Current from combined lighting and traction station. (1) Third rail system. † Includes 1·25 miles railless trolley line. ‡ Includes 20 railless cars.
M—Motor Cars. T—Trail Cars.

Digitized by Google

ELECTRIC TRAMWAYS & RAILWAYS.—Particulars of Track and Equipment.

Location of Line and Name of Operating Company.	Date of Opening of First Section.	Length of Route.	Total Length of Track.	Gauge.	Weight and Type of Rail.	Maximum Gradient.	Sharpest Curve.	No. of Motor Cars	No. of Dynamos	No. of Engines	Type of Engines.	Total Capacity Traction, kw.	Principal Contractors for Electrical Equipment.
TRAMWAYS—*continued.*				ft. in.	lbs.	1 in	ft. rad.						
Dartford U. D. C.	Feb., 1906	6·5	8·5	4 8½	100 G	12	35	12	4	..	..	..	British I. W.
Darwen Corporation	Oct., 1900	4·36	7·16	4 0	95 G	9	35	19	*4	4	H. Cp.	..	British T-H.
Derby and Ashbourne	..	14·5	..	4 8½									
Derby Corporation	July, 1904	13	22·06	4 0	95 G	14	46	50	3	3	Turb.	..	J. G. White & Co. / Brush & B.T-H.
Devonport Corporation	June, 1901	..	7	3 6	97 G	10	50	12	..	..	..	..	Blackwell & Co.
Doncaster Corporation	June, 1902	8·25	12·52	4 8½	94 G	16	45	32	8	8	..	1,000	Blackwell & Co.
Dover Corporation	Sept., 1897	4·75	7	3 6	87 & 90 G	10	44	24	*2	2	H.CC.	..	D. K. & B. T-H
Douglas—Port Soderick / Douglas Southern Elec. Trys. Co.	Aug., 1896	3·25	3·75	4 8½	65 V	12	45	8 M / 8 T	2	2	H. Cp.	200	Westinghouse / British T-H.
Dublin & Lucan Elec. Railway Co.	March, 1900	6·5	7	3 6	50 V	20	27	9 M / 5 T	2	2	H.Cp.C.	240	Dick, Kerr, & Co.
Dublin United Tramways Co.	May, 1896	49·8	95·26	5 3	105 G	12·3	22	365	8	8	Cp & Tur	5,500	Dick, Kerr, & Co. / Blackwell & Co. / British T-H.
Dudley and Stourbridge Trys. / British Electric Traction Co.	July, 1899	22·88	30·97	3 6	90 G	11	50	59	4	4	H. Cp.	..	British T-H. / Blackwell & Co.
Dumbarton	Feb., 1907	13	17	4 7¾	90 & 96	14	60	30	3	3	..	..	Dick, Kerr, & Co.
Dundalk	Under cons.	6	6·25	3 6	97 G	10	50	12					White & B.T-H.
Dundee, Broughty Ferry, and District	Dec., 1905	4·125	7·25	4 8½	90 G	16·5	30½	14	3	3	V.Cp.C.	..	J. G. White & Co / British T-H. Co.
Dundee Corporation	July, 1900	16·3	30·25	4 8½	90 & 100 G	10	35	76	5	5	..	..	Blackwell & Co.
Dunfermline (Fife Try. & Power Co.)	Nov., 1909	14·6	17·4	..	90 G	10	25	28	..	..	..	..	British T-H.
East Ham Corporation	June, 1901	7·58	14·20	4 8½	90 & 105 G	25	40	45	*5	5	H. Cp.	750	Dick, Kerr, & Co.
Eccles Corporation	May, 1902	5	7·75	4 8½	100 G	..	..	..	..	..	..	..	
Edinburgh and District	June, 1910	1·25	1·5	4 8½	100 G	21	54	4	..	..	..	..	Dick, Kerr, & Co.
Erith Urban District Council	Aug., 1905	4·7	8·4	4 8½	100 G	17	40	17	3	5	..	..	Brush Co. / WestinghouseCo.
Exeter Corporation	April, 1905	4·875	7	3 6	90 G	11·5	35	24	*4	4	H. Cp.	..	Dick, Kerr, & Co.
Falkirk and District	Oct. 1905	7·81	10·5	4 0	90 G.	11·3	48	18	*	..	..	..	Bruce Peebles & Co. / British T-H.
Farnworth Urban District	Jan., 1902	4·33	7·16	4 8½	98 G	29	36	..	..	..	..	..	
Felixstowe Pier	Aug., 1905	0·5	0·5	3 6	36	..	..	3	..	..	..	..	
Gateshead and District	May, 1901	12·38	20·02	4 8½	90 G	8	35	55	*	..	..	..	Dick, Kerr, & Co. / Blackwell & Co.
Giant's Causeway Elec. Try. Co.	Sept., 1883	8	9	3 0	42 V / 75 G	24	30	5 M / 21 T	2	2	Hyd. Turb.	..	Siemens Bros. / British T-H.
Glasgow Corporation	Oct., 1898	99·26	198·13	4 7¾	110 G	11·93	30¾	857	8	8	V.Cp. & T	21,700	British T-H. / Westinghouse
Glossop Urban District	Aug., 1903	4·56	5·6	4 8½	90 G	13	40	8	4	4	V. Cp.	200	British T-H.
Gloucester Corporation Light Rly.	May, 1904	9	15	3 6	90 G	25	40	30	*2	2	Cp.	750	Brush Co. / Dick, Kerr, & Co
Gosport & Fareham Trys. Co.	Jan., 1906	7·5	11·5	4 7¾	96 G	16	37½	22	3	3	V.Cp.C.	750	Dick, Kerr, & Co. / Brush Co.
Gravesend and Northfleet	Aug., 1902	6·5	9	4 8½	87 G	11	45	18	*				
Great Crosby	June, 1900	2·5	2·5	4 8½	92½ G	..	40	14	*7	7	H. & V.Cp.	160	Dick, Kerr, & Co. / Blackwell & Co.
Great Grimsby	Dec., 1901	6	11	4 8½	90 G	15	26	32M / 6 T	3	3	..	400	Dick, Kerr, & Co.
Greenock and Port Glasgow	Oct., 1901	7·425	14·05	4 7¾	90 G	11	60	42	*	..	..	..	
Guernsey Railway Co.	Nov., 1892	3	3	4 8½	74 V / 84 G	60	60	9 M / 8 T	2	1	H. & V.Cp.	160	Siemens Bros. / British T-H.
Halifax Corporation	June, 1898	37·53	55·5	3 6	95½ G	9·5	38·6	101	*7	7	H. & V.Cp. & T.	3,000	Electric Cons. Co. / British T-H.
Hampshire Light Railway (Elec.) Co.	March, 1903	6	9	4 8½	..	..	..	10	*	..	..	..	
Haslingden Corporation	July, 1908	3	3	4 0	100 G	10	30	..	..	..	..	45	Dick, Kerr, & Co.
Hastings and District	July, 1905	19·33	34	3 6	90 G	8	30	65	6	6	V. Cp.	2,100	Dick, Kerr, & Co.
Herne Bay Pier (1)	March, 1899	·75	·75	3 0	60	..	..	3	1	1	Gas	50	British T-H.
Heywood Corporation	Dec., 1905	4·25	4·25	4 8½	90 G	17	..	..	1	1	..	300	Blackwell & Co. / B.I. & H.C. Co.
Houghton-le-Spring (See Sunderland Dist. Elec. Trys.)													
Huddersfield Corporation	Feb., 1901	34·50	56	4 7¾	98 G	11	35	106	4	4	V.Cp.C.	2,200	British T-H.
Hull Corporation	July, 1899	13·46	30·5	4 8½	94 G	20	30	180	7	7	V.Cp.C.	2,560	British T-H. / Westinghouse
Ilford Urban District	Mar., 1903	7·42	12·62	4 8½	95 G	13	33·3	28	*7	7	..	1,600	British T-H. / Dick, Kerr, & Co.
Ilkeston Corporation	May, 1903	3·8	4·3	3 6	90 G	12	28	13	..	..	..	..	Dick, Kerr, & Co.
Ipswich Corporation	Nov., 1903	10·8	14·87	3 6	90 G	11·5	40	36	*10	10	Enclos'd	1,175	Westinghouse
Isle of Man— Manx Elc. Rly. Co. Douglas to Ramsey	July, 1893	18	35·75	3 0	62½ V	24	90	34M / 29 T	8	9	H. Cp.	1,300	Mather & Platt
Manx Elc. Rly. Co. Snaefell Mountain	Aug., 1895	4·5	9·5	3 6	56 V	12	90	6	5	4	H. Cp.	390	
Isle of Thanet Trys. & Ltg. Co.	April, 1901	11	20·67	3 6	90 & 100 G	11	38	59	*6	6	3 V. Cp. / 3 H. Cp.	800	British T-H. / Blackwell & Co.
Jarrow and District	Nov., 1906	2·54	3·42	4 8½	95 G	12·5	50	10	..	..	..	..	Brush Co. / B.I. & H.C. Co.
Kearsley Urban District	Jan., 1902	1·75	1·75	4 8½	95 G	20	..	..	..	..	..	..	Westinghouse
Keighley Corporation	Oct., 1904	3·5	6·11	4 0	95 G	25	60	12	*4	4	V.	200	Blackwell & Co. / Brush & B.T-H.
Kidderminster—Stourport / British Electric Traction Co.	May, 1898	4·6	4·87	3 6	75 G	14	45	13	*5	5	Stm Turb.	..	Brush Elc. Eg. Co
Kilmarnock Corporation	Dec., 1904	4·18	5·5	4 8½	90 G	24	45	14	*3	3	..	250	Blackwell & Co.
King's Norton & Northfield U. D.	May, 1904	5·25	8·25	3 6	105 G	15&21	100&145	..	..	..	..	..	Blackwell & Co.
Kinver	April, 1901	4·25	6	3 6	63 & 90 G	..	..	6					
Kirkcaldy Corporation	Feb., 1903	6·11	8·56	3 6	100 G	11	40	26	*10	6	Cp.H.T.	2,290	British T-H. Co.
Lanarkshire Tramway Co.	July, 1903	28·431	43·120	4 7¾	96 & 101 G	9·4	37	76	4	4	3 H. Cp. / 1 V. Cp.	825	British T-H. Co.
Lancashire United Tramways Co.	Oct., 1902	39	54	4 8½	90 G	15	50	82	*8	8	V.Cp.C&T	7,000	B. I. W. Co.
Lancaster Corporation	Jan., 1903	4	4·81	4 8½	90 G	8	30	12	4	4	V. Cp.	200	Greenwood & Batley, Ltd.
Leamington & Warwick Elec. T. Co.	July, 1905	3·04	6·1	3 6	65 G	12	47	12	3	3	Cp.	..	Brush Co.
Leeds City	Aug., 1897	69·02	114·62	4 8½	105 & 111 G	8·4	32	345	5 / 3	5 / 3	H. Cp.C. / Stm. Tur	6,150	Elec. Con. Co. / Greenwood & Batley, British T-H. / Blackwell & Co.

* Current from combined lighting and traction station. (1) Third Rail system. M—Motor Cars. T—Trail Cars.

Digitized by Google

ELECTRIC TRAMWAYS & RAILWAYS.—Particulars of Track and Equipment.

Location of Line and Name of Operating Company.	Date of Opening of First Section.	Length of Route.	Total length of Track.	Gauge.	Weight and Type of Rail.	Maximum Gradient.	Sharpest Curve.	No. of Motor Cars.	No. of Dynamos	No. of Engines	Type of Engines.	Total Capacity Traction, kw.	Principal Contractors for Electrical Equipment
TRAMWAYS—*continued.*				ft. in.	lbs.	1 in	ft. rad.						
Leicester Corporation	May, 1904	20·25	38	4 8½	100 G	16	35	160	7	7	V.Cp.C&T	9,250	Dick, Kerr, & Co. / Blackwell & Co.
Leith Corporation	Aug., 1905	9·08	17·9	4 8½	106·7 G	19	54	37	*11	11	..	1,600	Brush & B.T-H.
Leyton Urban District	Dec., 1906	8·95	17·694	4 8½	105 & 111 G	24	45	60	*4	4	Cp.T.E&T	2,040	..
Lincoln Corporation (1)	Nov., 1905	1·75	2·96	4 8½	100 G	..	36	8	*9	9	..	120	Blackwell & Co.
Liverpool Corporation	Nov., 1898	70	127	4 8½	95, 123 & 134 G	13	30	599	*42	42	Trip.Ex.	44,600	British T-H. / Dick, Kerr, & Co. / Westinghouse
Liverpool Overh'd Ry. (Trol.Ln.Ex.)	June, 1900	2·5	2·5	4 8½	92½ G	Nil	40	14	7	7	H.&V.Cp.	160	Dick, Kerr, & Co.
Llandudno and Colwyn Bay ..	Oct., 1907	8·37	13·60	3 6	90 G	11·5	45	18	*	..	..	..	Bruce Peebles & Co.
Llanelly and District	July, 1911	6·25	6·75	4 8½	90 G	11·2	60	12	*2	2	Trip.Ex.	..	British T-H.
London County Council (2) ..	May, 1903	148·56	287·35	4 8½	105 G	10·6	45	1725M 150T	8	8	V. Cp. C. Turbine	43,000	Dick, Kerr, & Co. / Westinghouse
London United Tramways Co. ..	April, 1901	55·25	102·45	4 8½	92½ & 100 G	18	28	339	7	5	V. Cp.	3,500	British T-H. / Westinghouse. / Blackwell & Co.
Lowestoft Corporation	July, 1903	4·75	5·07	3 6	100 G	27	36	19	*5	5	Cp.	..	Blackwell & Co.
Luton Corporation Tramways .. (Leased to J. G. White & Co., Ltd.)	Feb., 1908	5·25	6·25	4 8½	95 G	11	35	12	*1	1	..	..	J. G. White & Co. / British T-H.
Maidstone Corporation	July, 1904	5·5	7·04	3 6½	96 G	9	35	19	3	3	..	750	Dick, Kerr & Co.
Manchester Corporation	June, 1901	120·05	244	4 8½	105 G	14·9	35	685	*22	22	Turb'nes	45,300	British T-H. / Dick, Kerr, & Co.
Mansfield and District Co. ..	July, 1905	10	12·25	4 8½	90 G	17	50	24	*3	3	..	..	
Merthyr	April, 1901	3·69	4·81	3 6	96 G	11	66	16	*4	4	H.S.V.	..	D. K. & B. T-H
Metropolitan Electric Trys., Ltd.	July, 1904	56·25	112·5	4 8½	100 G.	12	40	312	5	5	1 Stm.Tur	..	British T-H. / Brush Co.
Mexborough & Swinton Trys. Co.	Feb., 1907	7·75	10·75	4 8½	90 G	8·5	55	20	4	4	Turb.	700	Brush & B.T-H.
Middlesbro', Stockton, & Thornaby Electric Tramways Co.	July, 1898	10·5	15·825	3 6	92½ G	17	35	60	3	4	H.&V.Cp.	900	British T-H. / Blackwell & Co.
Middlesex County Council.. ..	Aug., 1904	25·5	51	4 8½	..	..	..	..	..	..	..	..	
Middleton Corporation	March, 1902	2·5	5	4 8½	..	..	..	..	..	..	..	..	
Middleton Electric Traction Co. ..	March, 1902	8·5	10·53	4 8½	90 G	15	49½	28	3	3	..	500	Glover & Co.
Morecambe	Jan., 1912	1·20	..	4 8½	96 G	18	..	4	..	..	..	..	
Musselburgh and District ..	Dec., 1904	6·5	8·125	4 8½	90 G	34	45	16	4	3	..	400	B. T-H. Co., Nat. Elec. Cons. Co.
Nelson Corporation	Feb., 1903	2·74	3·86	4 0	106 G	11	41	11	*4	4	..	400	Blackwell & Co. / British T-H. Co. / Brush Co.
New St. Helens & District Trys. Co.	July, 1899	18	20	4 8½	95 G	13	35	36	*4	4	V.Cp.C.	..	Westinghouse / British T-H.
Newcastle Corporation	Dec., 1901	32·75	62·875	4 8½	101 G	11	37	220M 2 T	6	6	V.Cp.Trip. Ex.&Turb.	11,000	Westinghouse / British T-H.
Newport (Mon.) Corporation ..	April, 1903	7·5	14·35	4 8½	98 G	10·5	40	44	5	5	V. Cp.	1,750	Westinghouse
Northampton Corporation	July, 1904	6·5	11·16	3 6	90 & 96 G	18	50	33	4	4	V.C.C.&T	1,020	Dick, Kerr, & Co. / Brush Co.
North Shields Tramways Co. ..	March, 1901	..	7·75	3 6	90 G	10	36	22					
North Staff. Trys. (*vide* Potteries)													
Norwich Electric Tramways Co. ..	July, 1900	14·5	19·25	3 6	65½ & 90 G	12·6	38	42	6	5	H.TCp&T	1,000	Westinghouse / Blackwell & Co.
Nottingham Corporation	Jan., 1901	21·5	41·5	4 8½	107 G	11·5	40	155	*3	3	..	..	British T-H. / Dick, Kerr, & Co.
Nottinghamshire & Derbyshire Tramways Co.	Aug., 1913	12·8	16·10	4 8½	G	..	..	24	*	..	..	..	British T-H.
Oldham, Ashton & Hyde Trys. Co.	June, 1899	9·12	11·75	4 8½	97 G	11	28	46	*3	3	V.Cp.C.	..	British T-H.
Oldham Corporation	Dec., 1900	24	37	4 8½	100 & 105 G	10·5	40	109	*4	4	..	2,220	Dick, Kerr, & Co.
Paisley & District Tramways Co.	June, 1904	18·25	32·50	4 7¾	90 G	10	34	60	..	..	..	..	British T-H.
Perth Corporation	Oct., 1905	4·846	6·75	3 6	90 G	16	25	12	5	5	Cp.	500	Blackwell & Co.
Peterborough Elec. Traction Co...	Jan., 1903	5·33	6·71	3 6	94 G	31	35	14	..	..	..	..	Blackwell & Co. / Dick, Kerr, & Co.
Plymouth Corporation	Sept., 1899	7·75	15	3 6	92 G	9	35	42	3	3	V. Cp.	..	Elec. Cons. Co. / Westinghouse
Plymouth, Stonehouse, and Devonport	Nov., 1901	1·5	3·62	3 6	84 G	11	34	15	..	..	..	..	Blackwell & Co. / Dick, Kerr, & Co.
Pontypridd Urban District ..	March, 1905	5·5	8·6	3 6	96 & 100 G	10	27·6	26	4	5	V.C.Cp.	450	B.I.W. & B.T-H. / Blackwell & Co.
Portmadoc & South Snowdon Rly.	Under cons.	13·25	15	1 11½	41	28	200	6	..	..	..	..	
Portsdown & Horndean Tramway	March, 1903	6	7·5	4 7¾	96 G	16	40	16	2	2	Oil	200	Dick, Kerr, & Co. / Brush Co.
Portsmouth Corporation	Sept., 1901	17·65	34·63	4 7¾	96 & 100 G	17	35	100	5	4	V.& H.Cp.	2,075	Macartney & Co. / Dick, Kerr, & Co.
Potteries Electric Traction Co. ..	May, 1899	31·67	41·48	4 0	87, 90, 100, & 110 G	11	45	110	8	8	H.Cp. / V.Cp.	2,275	Dick, Kerr, & Co. / Blackwell & B.T-H.
Preston Corporation..	June, 1904	10·54	17·2	4 8½	B.S.S.No.2	16	28	39	2	2	H.Cp.	600	Dick, Kerr, & Co.
Radcliffe Urban District ..	April, 1905	5	6·5	4 8½	100 G	15	40	..	*4	4	V. Cp.	600	Mather & Platt
Rawtenstall Corporation	May, 1909	12	15·9	4 0	100 G	15	38	24	*3	3	..	850	Westinghouse
Reading Corporation	July, 1903	7·44	13·175	4 0	96 G	16	35	36	4	4	V. Cp.	400	Blackwell & Co. / Dick, Kerr, & Co / Westinghouse
Rhondda Tramways Co.	July, 1908	21	28·75	3 6	95 G	9	38½	54	7	4	Trip.Ex.	1,230	British T-H. / Brush
Rochdale Corporation	May, 1902	19·58 (A)	22·74 (A)	4 8½	103½ G	11·7	30	69	*	..	..	..	British T-H. / Dick, Kerr, & Co / Brush Co.
Rotherham Corporation	Jan., 1903	10	12	4 8½	100 G	9·5	45	36	*6	6	H.S.Cp.	1,485	Dick, Kerr, & Co.
Rothesay	June, 1902	4·81	9·68	3 6	94 G / 77 G	24	34	20	3	3	V. & Oil	350	Dick, Kerr, & Co. / Westinghouse
Ryde Pier, Isle of Wight Ryde Pier Co. (3) ..	March, 1886	·5	1	4 8½	30 & 34 V	..	..	4	2	2	Gas	..	Siemens Bros.
Salford Corporation	Oct., 1901	41·90	75·79	4 8½	103 G	20	42·5	220	*7	7	C. & Turb.	3,000	Westinghouse / Mather & Platt
Scarborough Tramways Co. ..	May 1904	5	7·75	3 6	90 G	10·5	35	22	2	2	Stm.Turb.	..	Brush & B.T-H.
Sheerness and District	April, 1903	2·5	2·704	3 6	94 G	43	40	8	6	5	V.Cp.C.	100	Siemens & Halske / Brush Co.
Sheffield Corporation	Sept., 1899	40	77·84	4 8½	110 & 120	9·5	35	339	..	..	..	..	British T-H

* Current from combined lighting and traction station. (1) G.B. surface contact system. (2) Mainly Conduit system, but there are now several Trolley lines.
Besides the electric lines the London County Council has also 4·45 route miles of horse tramways. (3) Third rail system. (A) Not including 17·1 miles track leased.
M—Motor Cars. T—Trail Cars.

Digitized by Google

ELECTRIC TRAMWAYS (contd.).	Date of Opening of First Section.	Length of Route.	Total Length of Track.	Gauge.	Weight and Type of Rail	Maximum Gradient.	Sharpest Curve.	No. of Motor Cars.	No. of Dynamos	No. of Engines	Type of Engines.	Total Capacity Traction, kw.	Principal Contractors for Electrical Equipment.
				ft. in.	lbs.	1 in	ft. rad.						
Shipley Urban District	May, 1902	6	10	4 0	98 G	15	..	..	6	6	Turbine	1,800	British T-H.
Soothill Nether U.D.C. & Dewsbury & Ossett Corporations ..	Nov., 1908	3·125	4·45	4 8½	90 G	13	50	8	*	..	..	..	Nat. Elec. Cons. Co.
Southampton Corporation	Jan., 1899	10·25	18·75	4 8½	{96 G & 105 B.S. No. 4}	13	40	73	6	6	H. Cp. C.	1,000	Westinghouse
Southend Corporation	July, 1901	7·01	13·52	3 6	90 G	18	48	42	*6	7	V. Cp.	2,075	British T-H.
Southend Pier (1) Southend Corp.	Aug., 1890	1·25	1·25	3 6	60 G	Lev.	..	28	..	..	..	..	British T-H.
South Metropolitan Elec. Try. Co.	Feb., 1906	13·09	26	4 8½	95 G	16	42	51	*8	6	Stm Tbs	1,650	{Dick, Kerr & Co. Brush Co.
Southport Corporation (5)	July, 1900	13·5	10·75	4 8½	87 & 90 G	25	45	30	*3	3	H. Cp.	600	Dick, Kerr, & Co.
Southport Electric Tramway Co. ..	July, 1901	8·17	12·52	4 8½	87 G	Nil	40	21	*				
Southport Pier	1905	..	·75	4 0	..	..	..	1 M 2 T	..	..	..	..	Westinghouse
South Shields Corporation ..	March, 1906	5·7	10·25	4 8½	95 G	15	35	40	2	2	V. Cp. C.	1,100	Dick, Kerr & Co.
South Staffordshire	Jan., 1893	16·90	26·87	3 6	97 & 90 G	17	46	46	3	3	C. H. Cp.	..	{Blackwell & Co. E. C. C.
Stalybridge, Hyde, Mossley, and Dukinfield	May, 1904	21·186	27·75	4 8½	99 G	9	27½	59	8	..	Turb.	1,000	Dick, Kerr, & Co.
Stockport Corporation	Aug., 1901	16	27·62	4 8½	96 G	10·8	35	50	*5	5	Cp.	1,000	Dick, Kerr, & Co.
Sunderland Corporation	Aug., 1900	10·92	20·35	4 8½	96 G	12	36	70	*	..	..	936	Dick, Kerr, & Co.
Sunderland District Electric Trys.	June, 1905	14·27	15·97	4 8½	90 G	11	40	33	*	..	..	..	British T-H.
Sutton & Howth (G.N.R., Ireland)	June, 1901	5·3	6	5 3	72 B	16·7	300	11	3	3	V. Cp.	500	{British T-H. Westinghouse
Swansea Tramways Company ..	June, 1900	13·02	20·38	4 8½	84 & 86 G	14	45	75	3	3	H. Cp. C.	620	British T-H.
Swindon Corporation	Sept., 1904	3·7	4·4	3 6	105 G	14	37	12	5	4	..	600	Dick, Kerr & Co.
Taunton Electric Traction Co.	Aug., 1901	1·66	2	3 6	90 G	25	35	6	*	..	..	..	Blackwell & Co.
Torquay Tramways	April, 1907	9·76	17·04	3 6	90 G	10	31	33	*	..	..	..	British T-H.
Trafford Park Estates, Ltd. (Trys.)	July, 1903	2·5	2·75	4 8½	100 G	Nil	35	..	..	..	..	..	
Tynemouth and District	March, 1901	4·21	7·83	3 6	90 G	10	30	21	*3	3	..	..	Blackwell & B.T-H.
Tyneside Tramways & Tramroads Co.	Sept., 1902	10·97	16·23	4 8½	95 G	10	40	24	*				
Wallasey Corporation	March, 1902	12	20	4 8½	98 G	11	40	67	*1	1	Turbine	1,000	Blackwell & Co.
Walsall Corporation	Jan., 1904	13·5	19·5	3 6	90 & 92 G	18·5	32	39	*7	7	V & Tur.	2,490	British T-H.
Walthamstow U.D.C. Light Rly. ..	June, 1905	9·14	12·53	4 8½	100 G	18	40	38	*15	12	{Gas & Turb's}	1,560	Westinghouse
Walton-on-Naze Pier	Aug., 1898	·5	·5	3 6	36 V	..	..	3	3	2	..	100	{Blackwell & Co.
Warrington Corporation	April, 1902	6·5	9·6	4 8½	90 G	27	50	21	*6	6	V.C.	500	{British T-H.
Wemyss and District	Aug., 1906	7·5	13	3 6	{95 & 97 G}	18	85	17	3	3	2 V. Cp.	..	BrucePeebles & Co
West Bromwich Corporation ..	Dec., 1902	7	12·5	3 6	98 G	20	49	29	8	8	Turb'nes	750	{Dick, Kerr, & Co. B. I. W. Co.
West Ham Corporation	Feb., 1904	16·8	30·0	4 8½	100 G	18	40	118	*3	3	V. C. Cp.	1,500	Brush & B.T-H.
West Hartlepool Corporation ..	May, 1896	6·72	8.3	3 6	87 & 90 G	15	35	25	*	..	..	..	{Elec. Cons. Co. Dick Kerr & Co.
Weston-super-Mare	May, 1902	2·92	3·53	4 8½	90 G	25	40	12	5	4	Cp. & T.	..	{Blackwell & Co. British T-H. Brush Co.
Wigan Corporation	Jan., 1901	30·9	45·42	{3 6 4 8½}	105 G	12	45	73	*8	8	..	740	Blackwell & Co.
Wolverhampton Corporation (3) ..	April, 1902	13·5	22	3 6	91 G	15	37·5	52	*10	10	{H. & V. C. & Turb's}	2,900	{British T-H. Electric Cons. Co.
Wolverhampton District	Oct., 1900	15·51	22·72	3 6	90 G	20	40	30	*4	..	..	..	B.I.W. & B.T-H.
Worcester Electric Traction Co. ..	Feb., 1904	5·86	8·58	3 6	94 G	13	45	15	*3	3	...	..	{Westinghouse Brush Co. Dick, Kerr, & Co.
Wrexham and District	April, 1903	4·44	6·16	3 6	96 G	9·11	50	10	*6	..	..	..	British T-H.
Yarmouth Corporation	June, 1902	10	14·4	3 6	90 & 95 G	27	48	35	3	3	Comp.	..	{Brush Co. B.I.W. Co.
York Corporation	Jan., 1910	6	9·9	3 6	100	18	40	3 M. 4 T.	*8	8	V.C.	..	{Dick, Kerr, & Co.
Yorkshire (West Riding)	Aug., 1904	24·69	40·382	4 8½	96 G	15·5	40	69	9	6	..	1,800	{Brush & B.T-H. Dick Kerr & Co.
Yorkshire Woollen District ..	Feb., 1903	22·25	36	4 8½	{94 & 100 G}	8	30	69	*	..	..	..	{Brush Co. Dick, Kerr, & Co.
RAILWAYS.													
LONDON AND VICINITY:													
Central London Rly. Co. (1) ..	July, 1900	6·5	13	4 8½	100 V	30	..	68 M. 172 T.	6	6	H. Cp. C.	..	British T-H
City & South London Rly. Co. (1	Dec., 1890	7·25	14·75	4 8½	{60 V 80 V}	30	120	52 L. 142 T.	(a)	..	..	..	{Mather & Platt. Elec. Cons. Co.
East London Railway (2) ..	April, 1913	5·75	11·5	4 8½	90 B	..	..	(c)	..	..	..	..	British T-H.
Gt. Northern & City Rly. Co. (2)	Feb., 1904	3·5	7·75	4 8½	85 V	52	660	35 M 45 T	6	..	..	..	British T-H.
Great Western Railway .. (Hammersmith and City line.)	Nov., 1906	4·9	10·5	4 8½	97½ B	60	400	46 M. 80 T	10	10	V. Cp.	..	{British T-H. Elec. Con. Co.
London & North Western Rly. (Euston-Watford line in progress) (2)	May, 1914	41·5	80	4 8½	..	..	..	..	..	..	Turbine	..	{Siemens Works Westinghouse
London & South Western Rly.	Nov., 1915	47	150	4 8½	..	..	168	84	..	..	Turbine	..	{Dick, Kerr & Co. British T-H.
London, Brighton, and South Coast Railway (4) .. .. (Extensions in progress)	Dec., 1909	22	70	4 8½	..	..	..	16 M. 9 T.	*(d)	..	..	..	{Westinghouse British T-H. Blackwell & Co.
London Electric Railway Co.: Baker St. & Waterloo Ry. (2)	March, 1906	7	14·0	4 8½	90 B	60	330	36 M. 72 T.	(a)	..	..	..	{Westinghouse British T-H.
Charing Cross—Hampstead Railway (2)	June, 1907	8	16·5	4 8½	90 B	33	330	60 M. 90 T.	(a)	..	..	..	{Westinghouse British T-H.
Great Northern, Piccadilly & Brompton Rly. (2)	Dec., 1906	9·25	18·5	4 8½	90 B	33	330	72 M. 144 T.	(a)	..	..	..	{Westinghouse British T-H.
Metropolitan Railway (2) ..	Jan., 1905	26	59	4 8½	86 B	44	363	86 M. 172 T.	4	4	Turbine	..	{Westinghouse British T-H.
Metropolitan District Railway (and running powers) (2)	July, 1905	41	80·46	4 8½	86 B	40	330	234 M. 286 T.	(a)	..	Turbine	..	{British T-H. Westinghouse
Waterloo and City Rly. (1) ..	Aug., 1898	1·5	3	4 8½	87 B	30	321	17 M. 12 T.	6	6	V. C.	..	{Siemens Bros. Dick, Kerr & Co.
PROVINCES:													
Lancashire and Yorkshire (2) .. (Extensions in progress)	March, 1904	43	85	4 8½	86 B	85	840	38 M. 52 T.	6	5	{1 V.C. 4 H.C.}	..	Dick, Kerr, & Co.
Liverpool Overhead Rly. Co. (1)	March, 1893	6·5	13·05	4 8½	60 V	40	429	46 M 7 T	7	7	{H. Cp. V. Cp.}	..	{Electric Cons. Co. Dick, Kerr & Co.
Mersey Railway (1)	April, 1903	4·5	9	4 8½	86 B	27	528	24 M. 37 T.	5	5	V. Cp.	..	{Westinghouse Elec. & Mfg. Co.
Midland Rly.—Morecambe and Heysham Branch (4)	June, 1908	9·75	19·5	4 8½	..	..	..	3 M. 6 T.	4	4	Gas.	..	{Westinghouse Siemens Bros.
North Eastern Railway (1) ..	March, 1904	..	..	4 8½	90 B	..	..	..	(b)	..	..	..	British T-H. Co.

*Power from combined lighting and power station. (1) Third rail system. (2) Third and fourth rails system. (3) Lorain surface contact system. (4) Single phase.
(5) Not including 9 miles owned but leased. Electric Supply Company, Limited. (a) Power supplied by Chelsea Power Station (80,000 H.P.) (b) Power purchased from the Newcastle-upon-Tyne
(c) Rolling stock supplied by Metropolitan Railway. (d) Power supplied by London Electric Supply Corporation.
M—Motor Cars. T—Trail Cars.

Digitized by Google

H.C. Copper Trolley Wire

Round, Grooved, or Channel Sections.

Overhead Fittings.

We have in hand orders - - for the - - overhead equipment of 500 MILES of Railway.

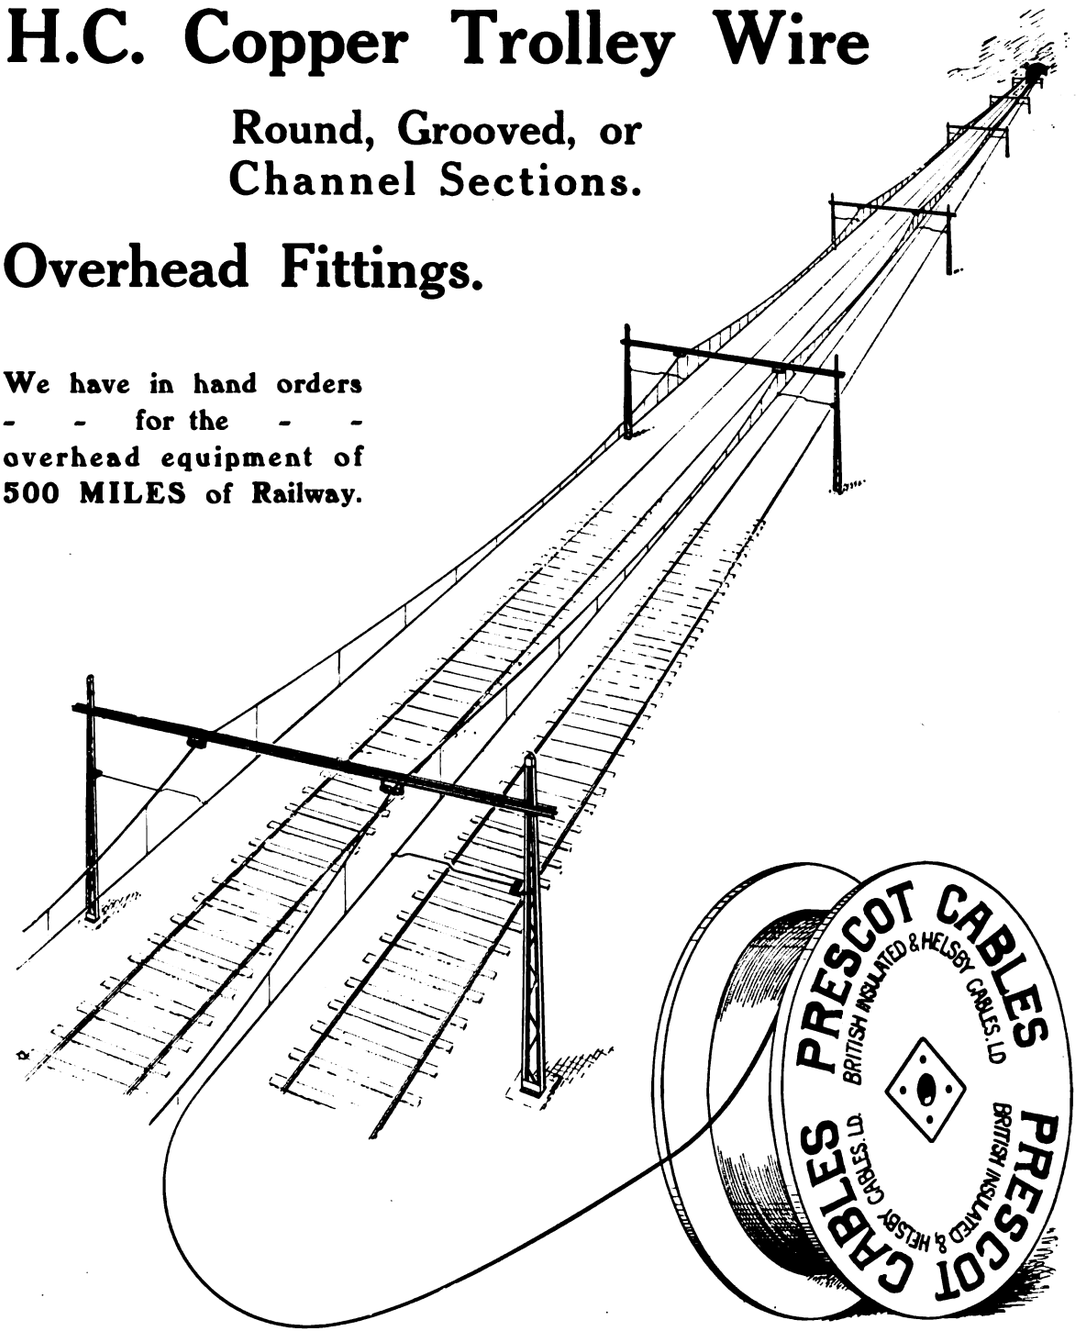

British Insulated & Helsby Cables Ltd.

CABLEMAKERS AND ENGINEERS

Contractors for the overhead equipment of Railways & Tramways.

Head Office: PRESCOT, LANCASHIRE, ENGLAND.
Works: PRESCOT and HELSBY.

Digitized by Google

R.E.T.

RAILLESS ELECTRIC TRACTION for passengers and freight.

Rubber Tyres. No Rails.

Also Battery Driven Vehicles and MOTOR LORRIES of all kinds.

The
R.E.T. CONSTRUCTION CO. LTD.
Balm Road, Hunslet, LEEDS

TRACTION SUPPLIES

SECTION INSULATORS
FROGS & CROSSINGS

IN STOCK
At Pre-War Prices.

GEO. W. GREEN & CO., (FELTHAM) LTD.

Q-FEL WORKS,
FELTHAM, MIDDLESEX.
Tel.: "CUFEL, FELTHAM."

"GROVER SPRING WASHER" NUT-LOCK

BEWARE OF ALL CHEAP IMITATIONS
They are like the original in appearance only.

SALES OVER 135,000,000.
Made in all sizes from $\frac{1}{16}$ in. to 4 inches, and in Millimetres.

FOR . .
FISH BOLTS (Iron or Steel)
ROLLING STOCK,
SIGNAL WORK, &
GENERAL PURPOSES,
ELECTRICAL WORK, &c.

GROVER & Co. Ltd. Britannia Engineering Works, Carpenters Rd., Stratford, London, E.
Telegraphic Address: "ADOPTED STRAT, LONDON." Telephone: STRATFORD 984-985.

SIMPLEX LEAD GLAZING

FOR ROOFS, SKYLIGHTS, & HORTICULTURAL WORK.
No Special Contract Required.

NO ZINC, IRON, OR PUTTY USED.



ANY QUANTITY SUPPLIED.
Millions of superficial feet in use on thousands of Structures.
Write for full Illustrations, Testimonials, and Particulars (sent post free).

Are You Satisfied With Your Ticket Service ?

Telegrams: "TICKETS, GLASGOW."

If you ask that question of the managers of the largest tramway undertakings, both at home and abroad, the answer will be:

"Yes, we use Glasgow Tickets."

May we send you some specimens? We produce tickets in any style, in any quantity, and print in any language.

Whenever you want tickets, either paper or pulp, we shall be pleased to quote you.

Freedom from ticket worry will be assured if you send your orders to

GLASGOW NUMERICAL TICKET & CHECKBOOK PRINTING CO.
31, FINNIESTON ST. GLASGOW

Digitized by Google

The United Electric Car Co. Ltd.

Telegrams "Prescar, Preston." **WORKS: PRESTON, ENGLAND** Telephone No. — 219. —

MANUFACTURERS of Carbodies and Trucks for Steam and Electric Railways, Street Tramways and Light Railways; also of bodies for Motor Buses, Petrol Rail Motor Cars and Railless Electric Traction Cars.

SPECIALITIES: Preston Flexible Axle Truck, Preston Patent Destination Indicator, "Triumph" Reversible Seat, "Leatheroid," "Duroid," and Cotton Duck Blinds.

SPARE PARTS for both Carbodies and Trucks supplied.

HOW TO CROSS LONDON

BY UNDERGROUND

Electric Railway House,
Broadway Westminster, S.W.

ROUTES

TO \ FROM	EUSTON	(ST. PANCRAS) KING'S CROSS	PADDINGTON
WATERLOO	By Hampstead Rly. changing at Charing Cross to Bakerloo Rly. Fare 2d.	By Piccadilly Rly. changing at Piccadilly Circus to Bakerloo Rly. Fare 2d.	By Bakerloo Rly. (direct). Fare 2½d.
CHARING CROSS	By Hampstead Rly (direct). Fare 1½d.	By Piccadilly Rly. changing at Leicester Square to Hampstead Rly. Fare 2d.	By Bakerloo Rly. (direct). Fare 2d.
VICTORIA	By Hampstead Rly changing at Charing Cross to District Rly. Fare 2½d.	By Piccadilly Rly. changing at Leicester Square and Charing Cross. Fare 3d.	By Bakerloo Rly. changing at Charing Cross to District Rly. Fare 3d.

EXAMPLE.—From Paddington to Charing Cross.—The square in the column headed Paddington and opposite Charing Cross contains the necessary directions.

Digitized by Google

SEND FOR BOOKLET No. 57.

ZENITH CARBURETTER

Mr. A. DUNN, of Helston, Cornwall, writes: "We have lately had a **Zenith** fixed, which proves a great success! The car consumes a good deal less petrol, pulls much faster on top gear, second gear, and especially on bottom gear, at which we are highly pleased."

This is only one of thousands of instances wherein the **Zenith** has proved its efficiency. A **Zenith** will save its cost in a few weeks. Let us demonstrate the fact to you by the experience of others.

ZENITH CARBURETTER Co. Ld.
40-42, Newman St., London, W.
Telephone - Regent 4812-4813.

TUDOR
ACCUMULATORS
FOR ELECTRIC VEHICLES.

ELECTRIC OMNIBUS.—BRIGHTON AND HOVE.

About 16 Electric Omnibuses have been in regular service for the past six years, and TUDOR Accumulators have been employed exclusively.

THE TUDOR ACCUMULATOR Co., Ltd.
3, Central Buildings, Westminster, London, S.W.
Works: DUKINFIELD, near MANCHESTER.

Can you trust the Brake?

Can you stop your heavy motor vehicle just when and where you want it, no matter what the load or the gradient? Have your brakes lined with "Ferodo" fabric and you can rely upon pulling up your vehicle in the shortest distance and with absolute certainty. "Ferodo" fabrics absorb more foot lbs. of energy per square inch than any other brake lining. They never "seize," engage perfectly no matter how violently applied, and are the most durable.

FERODO

CLUTCH AND BRAKE LININGS

Contractors to the War Office and Admiralty, London General Omnibus Co., and Underground Electric Railways of London and Paris. List Us from

THE HERBERT FROOD CO. LTD.
Works: CHAPEL-EN-LE-FRITH

'Phones: 19 and 20 Chapel. Wires: "Friction, Chapel."

LONDON ... ... **39, Upper Rathbone Place, W.**
BIRMINGHAM ... ... **202, Corporation Street.**

L. P.O

TICKETS FOR TRAMWAYS RAILWAYS STEAMBOATS ETC.

SPECIAL FEATURES:—
Accuracy of Numbering
Equality of Thickness
Clearness of Printing
Clean-cut Edges
Prompt Delivery
Satisfaction

BOOKS ROLLS or PACKETS

IMPORTANT
To users of TICKETS abroad
Our TICKETS are correctly printed in every language and used in all parts of the World

Economical Manufacturing Conditions, Modern and Reliable Machinery, Practical Experience, and a well-equipped Advertising Department make it possible for us to handle the largest Contracts in a thoroughly satisfactory manner

YOUR TICKET CONTRACT will expire, and if you send us Samples, stating quantity used annually, you will place your future orders with us when you compare our quality and prices :: :: :: ::

THE VISIBLE HAND PUNCH — to cut out round hole
This is the best **Visible** Punch on the market and it cannot fail to give absolute satisfaction. The special feature of this Punch is that you can **see exactly where you are punching the Ticket.** Specially adapted for cancelling times, dates, etc. in the body of the Ticket.

Inspector's Ticket Nippers and Punches of every description

AUTO-TICKET PRINTING CO. LTD.
MAKERS OF TRAMWAY TICKETS, &c.
41 to 54 WAPPING Telegrams: "Extension" LIVERPOOL

Digitized by Google

THE Tramway & Railway World
WITH MOTOR TRAFFIC SECTION

Founded 1892. LONDON, AUGUST 10, 1916. VOL. XL.

ELECTRIC TRACTION ON THE ITALIAN STATE RAILWAYS.

Like all countries which do not possess indigenous supplies of coal, Italy has for a long time found it necessary to import enormous quantities of coal for all purposes, estimated in ordinary times at about 11 million tons, and of this total not less than 2½ million tons are required for the railways. The question therefore of regular supplies at a steady price is of the highest importance to the Italian railways, and since such a happy working condition is practically impossible to secure (in view of constant fluctuations both in pit mouth prices and in freight rates), it is not to be wondered at that the Italian railway managements should seek an alternative source of motive power, either in the *houille blanche* of waterfalls or *combustible liquide* of heavy fuel oils, such as petroleum residues and similar products. The last named, however, are still of foreign origin, and therefore subject to some of, if not all, the difficulties attending the use of coal or patent fuel; but the possible employment of water power on the spot or in the near locality is so comparatively easy—especially in Northern Italy—that it is not surprising to find throughout that region of the country some striking developments in electric traction based on hydro-electric power plants with high voltage transmission lines.

Out of the 14,000 kilometres of railway line in Italy the existing distance thus operated by electricity is only some 350 kilometres, and these lines have naturally been chosen in the most suitable directions, being, moreover, the product of slow development in feeling the way towards new methods. Nevertheless the equipment of these lines, amounting to one-fortieth only of the total length of railway in the country, has led to the saving of nearly one-fifteenth of the coal consumed hitherto on the railways, while naturally the working and travelling conditions have been greatly improved all round. This may be shown, for instance, by one single detail in regard to possible train density.

Many of the lines have extremely severe grades owing to the hilly districts traversed; on one section near Genoa the daily car capacity has been increased by 33 per cent. by the adoption of electric working.

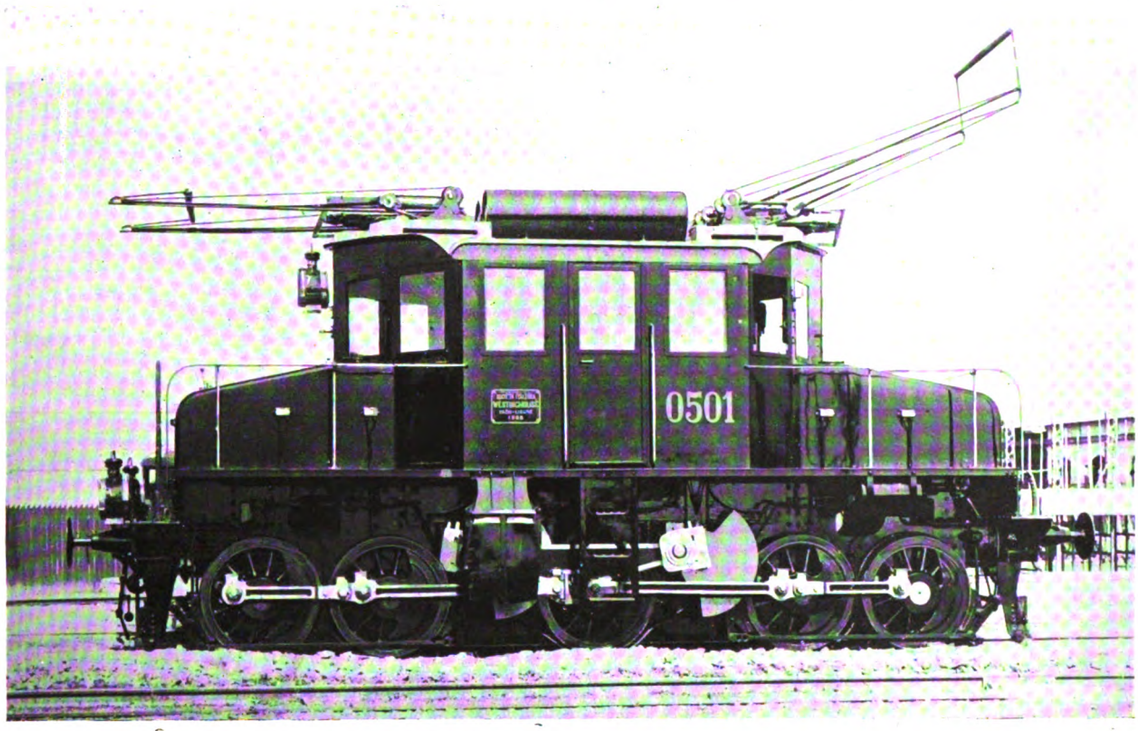

0-E-0 Type Electric Locomotive—Italian State Railways.

Digitized by Google

On another section the daily capacity is now double what it was with steam traction. Moreover, the great number of tunnels on these lines is a factor of supreme importance in favour of electric equipment instead of employing steam locomotives.

The lines at present worked by electricity are, as will be seen from the accompanying sketch map, all

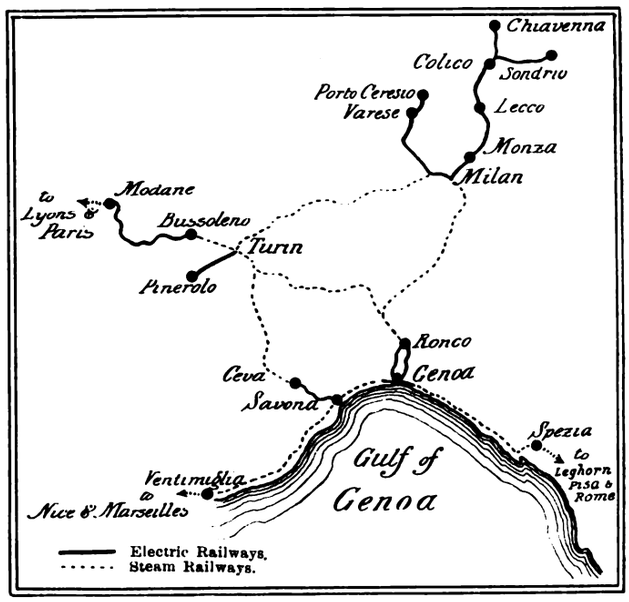

situated in the Northern provinces of Italy, with the three great cities of Milan, Turin, and Genoa as their approximate centres.

Extensions of this method of working must inevitably tend to connect up all these various isolated lines into one comprehensive network; but such a radical change —involving the outlay of large amounts of capital on construction work—must necessarily take many years to complete. Yet even with an enlargement to 2,000 kilometres in the total length of electric lines (including the new Rome-Naples through express route along the coast, and the equipment of the present lines from Genoa to Spezia and to Ventimiglia, which are very largely in tunnel throughout), the electrically equipped lines, amounting to one-seventh of the total length in the country, would reduce the quantity of coal to be imported by at least one million tons, or, say, 40 per cent. of the railways entire annual consumption.

Much as this would appear to militate against British trade in coal with Italy, it is a movement that ought to have the strongest support in this country, for obviously it would be more to our advantage to use this coal at home in the various works that might find at least some occupation in supplying the Italian railways with such electric plant and material as they cannot conveniently or economically produce in Italy.

As already stated, the Italian electric lines now at work or under equipment group themselves into three divisions, as follow :—

I.—Milan: (*a*) Milan-Varese-Portoceresio. (*b*) Milan-Monza-Lecco-Colico and Colico-Chiavenna Colico-Sondrio.

II.—Turin: (*a*) Turin-Pinerolo. (*b*) Bussoleno-Modane (including the Mont Cenis tunnel).

III.—Genoa: (*a*) Ronco-Busalla-Genoa. (*b*) Giovi-Genoa. (*c*) Savona-Ceva.

In the sketch map are shown in dotted lines the further main line tracks stretching from the French frontier at Ventimiglia through Savona and Genoa to Spezia, which it is proposed to equip as soon as possible, and the existing steam track connections between Milan, Genoa, and Turin are also represented in broken lines to show how all the three groups might eventually be combined into one comprehensive system.

In connection with these developments of electric traction upon the Italian State Railways, there are, of course, many points of great interest, but we can here allude only to two important features which deserve special attention. These are, first, the question of power supply, and, secondly, the locomotive equipment. For the particulars we are mainly indebted to the *Rivista Tecnica* of the Italian State Railways.

Ten years only have elapsed since the present State railway administration was constituted, and at that date the above groups numbered but two, and comprised merely the lines from Milan to Varese, Varese to Porto Ceresio (worked on the continuous current third rail system at a pressure of 650 volts in the contact rail)—these lines forming what are known as the "Varesine" service—and the lines from Lecco to Sondrio and Chiavenna through Colico, called the "Valtelline" service. This latter has throughout been operated on a three-phase high-tension system at 3,000 volts line pressure, 15 cycles per second.

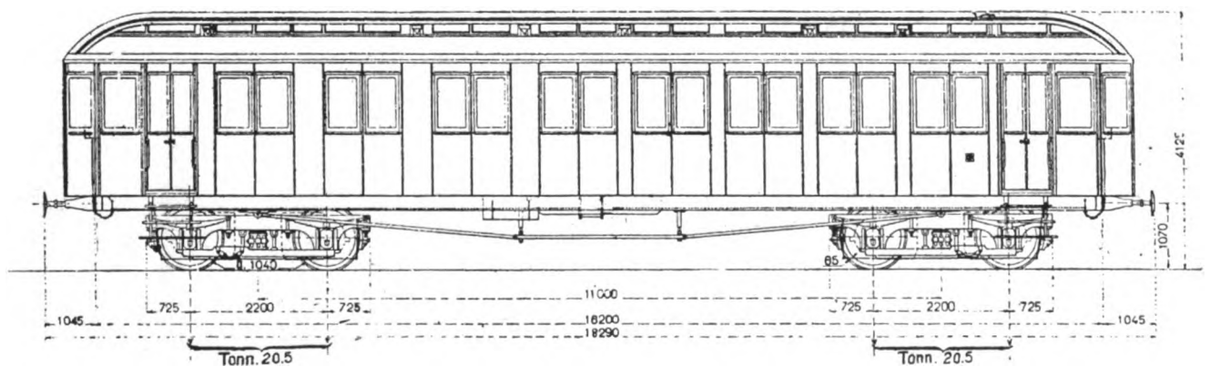

Fig. 1.

Figs. 1 to 4 inclusive illustrate the locomotive rolling stock employed in the Varesine section, being used for passenger traffic only; for goods trains, steam locomotives continued to be employed.

On the Valtelline section both goods and passenger traffic were carried on by means of the electric service, and in Figs. 5 to 8 inclusive are shown examples of the locomotive stock employed—all from the works of Ganz & Co., Buda Pesth, and built during 1902-4. The Varesine locomotives and motor coaches were

Digitized by Google

built in Milan, so far as their mechanical structure was concerned, the General Electric Company, of Schenectady, New York, being responsible for the electrical equipment. These latter date from 1901 to 1904.

The Varesine section was at first operated from a steam power-house situated at Tornavento, with a normal capacity of 2,000 KW. only; but this plant, being quite insufficient to cope with the growing traffic (though latterly used only for the section Milan-Varese), was closed altogether in 1912; and current for this section was then purchased from a local electric power company which had installed a hydro-electric power-house using waterfalls at Varzo. The other section—Varese to Porto Ceresio—was fed similarly with energy purchased from another power company controlling several hydro-electric stations (Cunardo, Maccagno, and Delio).

In the same year (1912) five additional and much more powerful locomotives were built by Messrs. Brown, Boveri and Company, and put into service on the Varesine section; these are represented by Fig. 9. They enabled the administration to keep pace with the great increase of traffic, and dispensed altogether with the need for steam trains in addition.

The Valtelline section was, until last year, operated by current from a hydro-electric station at Morbegno, where three units each of 1,250 KW. were installed, but as the traffic often required the use of all three units without reserve, another hydro-electric plant installed at Robbiate was called into service. The original four-motor Ganz locomotives of type 1—C—1 (Fig. 8) were added to in 1906-7 by several new ones of larger capacity (1,250 KW. each), with three synchronous running speeds (26, 42, and 64 kilometres per hour). These latter were modified in 1912-13, some of them (shown in Fig. 10) having two motors only, but the

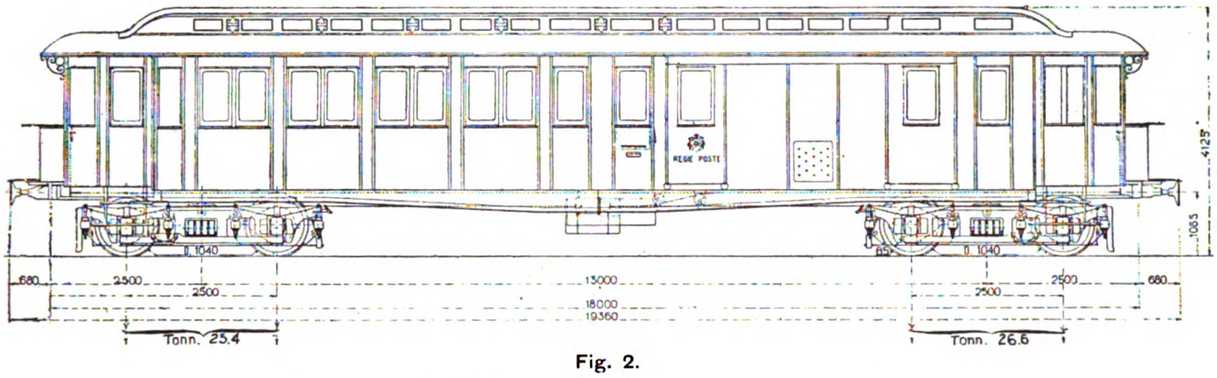

Fig. 2.

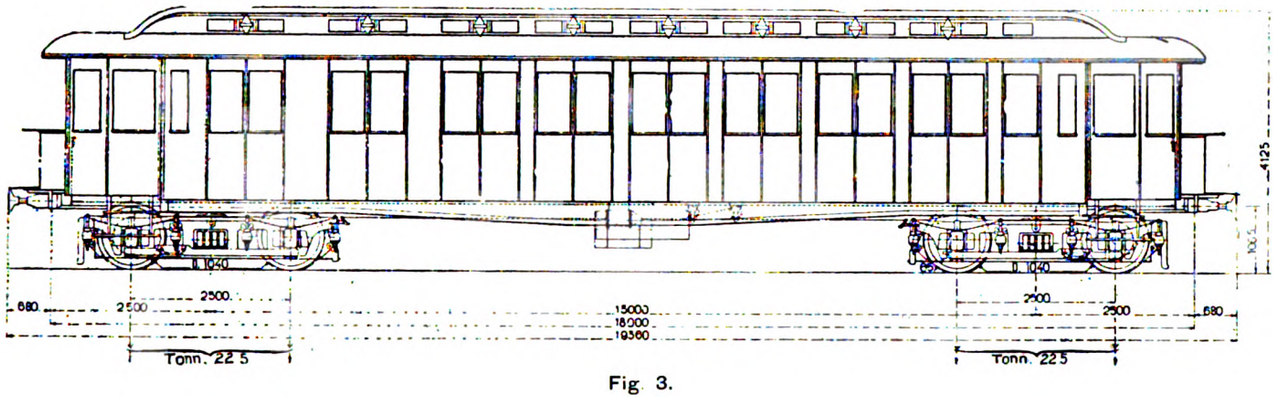

Fig. 3.

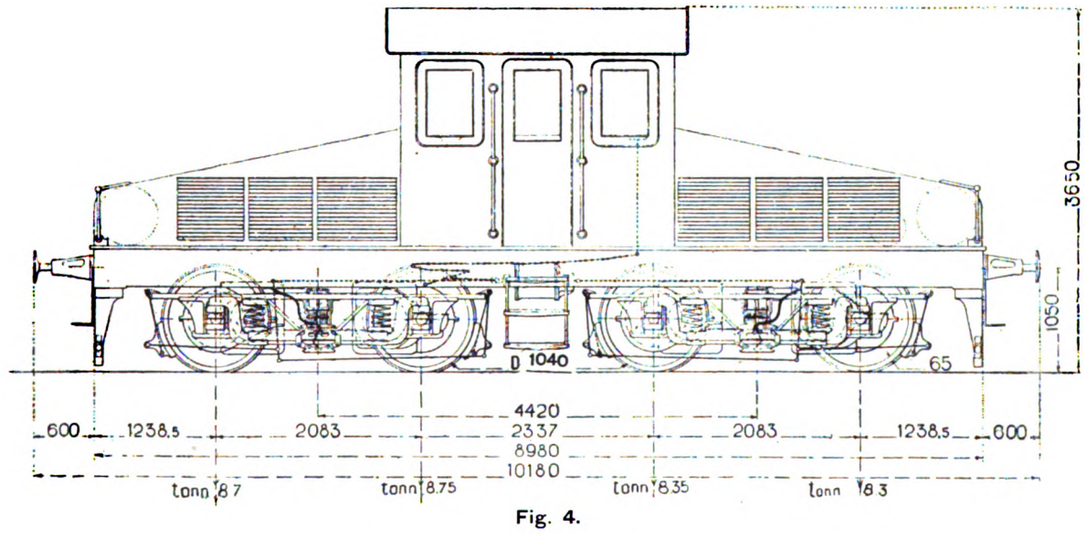

Fig. 4.

Digitized by Google

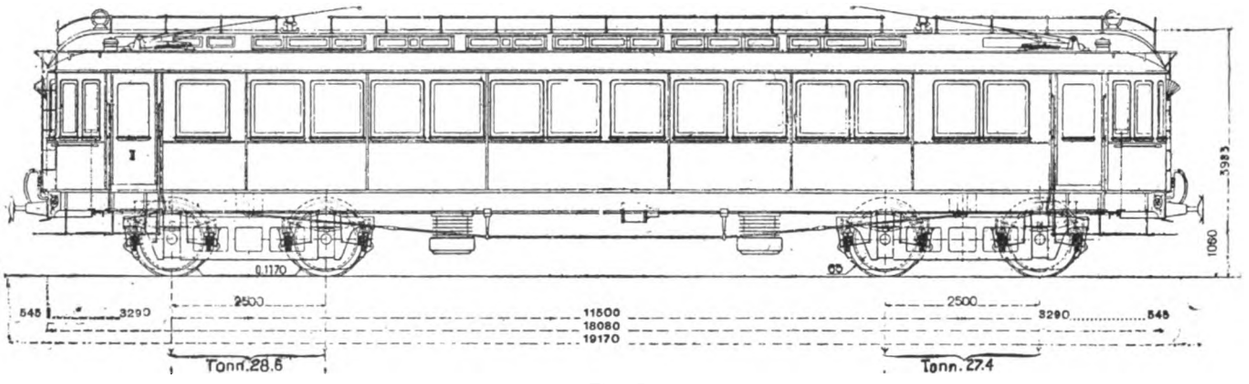

Fig. 5.

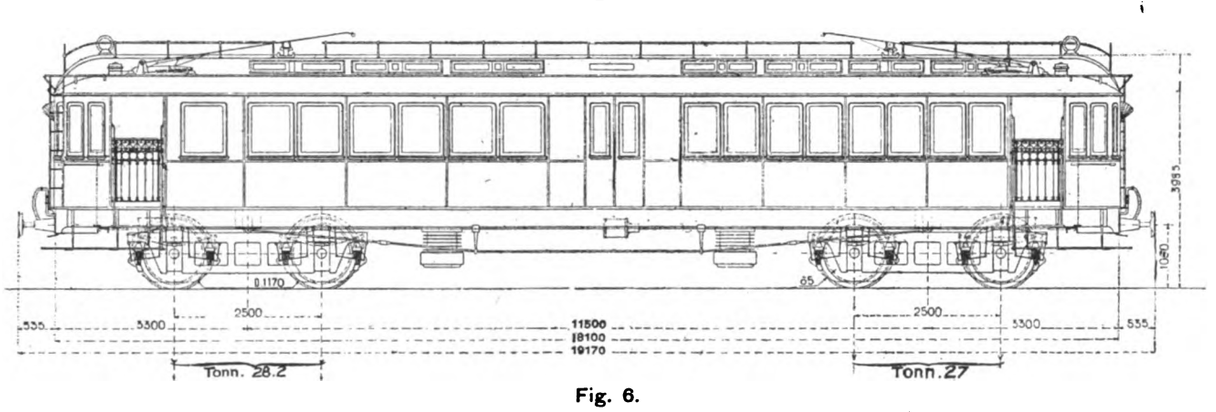

Fig. 6.

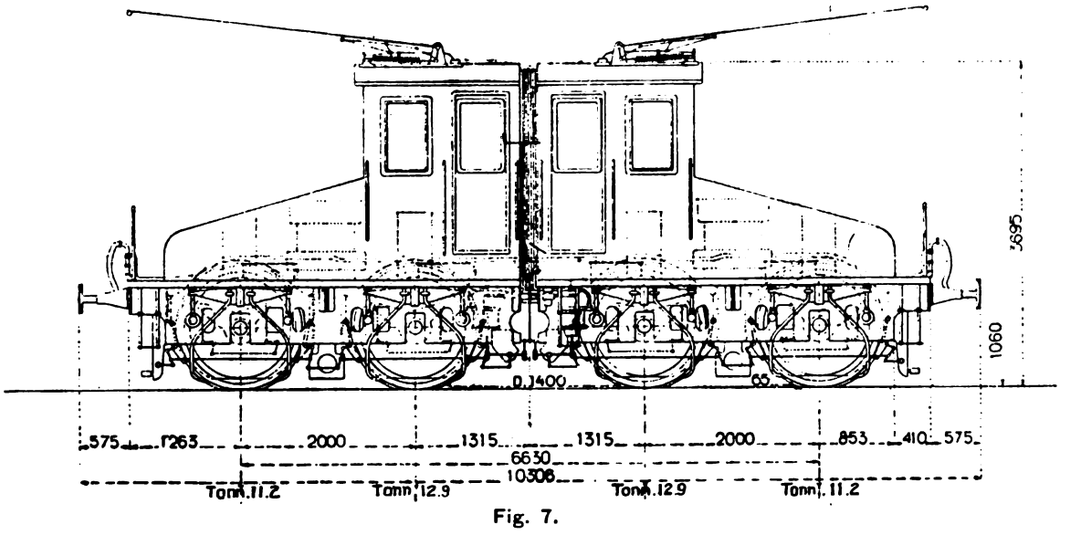

Fig. 7.

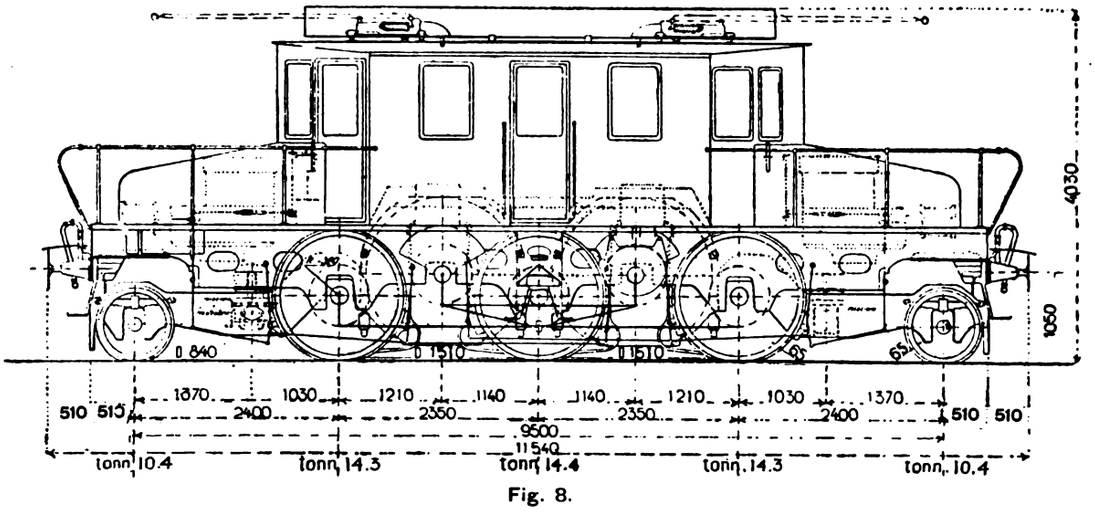

Fig. 8.

Digitized by Google

same capacity (1,250 KW.), and two synchronous running speeds—32 and 64 kilometres per hour. The others (represented by Fig. 11) were similarly each of two-motor equipment, with a capacity of 800 KW. and running speeds of 21 and 42 kilometres per hour.

Still further developments were made at the same time on this section with locomotives of 0—E—0 type (Fig. 12) that were originally designed for the Giovi-Genoa line. These latter had also each a double motor equipment with a joint capacity of 1,500 KW., all the five axles being coupled. It will be noticed by the way that the Italian railways classify their electric locomotives by indicating the axles instead of the wheels as is the case in this country, at any rate in regard to steam locomotives. The intermediate letter refers, of course, to the combination of electric motors and mechanical coupling—the entire system or method of classification being somewhat as shown in the following table :—

LOCOMOTIVE ROLLING STOCK.

Vehicle.	Type.	No. of Motors.	No. of Loco. Axles.	Remarks.
Motor coaches	0 – 4 – 0	Four	Four	Motor geared to each axle.
,, ,, ...	1 – 2 – 1	Two	Four	Motor geared to one axle of each bogie.
,, ,, ...	1 – 2 – 1 (Motors in parallel) 0 – 4 – 0 (Motors in series)	Four	Four	Motors mounted on loco. axles; hollow axle drive; articulated parallelogram side rods.
Locomotives	0 – 4 – 0	Four	Four	Motor geared to each axle.
,, ...	0 – B : B – 0	Four	Four	Motors mounted on loco. axles; hollow axle drive; articulated parallelogram side rods.
,, ...	1 – C – 1	Four	Five	Coupling rods from motor axles to three coupled loco. axles.
,, ...	0 – E – 0	Two	Five	All five locomotive axles coupled.

Of the 0—E—0 type of locomotive not less than 15 were put into service in 1911 on the first section of line near Genoa to be converted to electric traction—that between Pontedecimo and Busalla, the current for which was obtained from a steam power-house situated in a large quarry outside Genoa. This plant had a working capacity of 10,000 KW., with a reserve of the same amount.

These locomotives, as with those of similar type on the Valtellina line, operate on two running speeds, according as the motors are grouped in series or parallel; but the later examples have considerable improvements in their electric equipments which are much lighter in proportion to their capacity, being fitted each with two motors only, while the original Valtellina locomotives had four.

Still more powerful machines (shown in Fig. 13) of the 1—C—1 type were provided by the Italian Westinghouse Company during the year 1914 for working the completed lines round Genoa on the important main loop section to Ronco, where the traffic from the port up country reaches a maximum, and where the grades against the load are extremely heavy, while numerous tunnels made it almost impossible to carry on the service with steam locomotives using briquettes for the most part.

This latest type of locomotive has a capacity of not less than 2,000 KW. from two motors only, their axles being coupled to the three loco. coupled driving axles by the usual triangular frame connecting rod on each side. Four speeds are provided—35, 50, 70, and 95 kilometres per hour. These locomotives weigh about 73 tons each.

The 0—E—0 type, weighing about 60 tons, with a capacity of 1,500 KW. (frequency 15 cycles), and running speeds of 22·5 and 45 kilometres per hour, have shown themselves capable of hauling 190 tons each on grades of 3·5 per cent. between Pontedecimo and Busalla, where the ruling gradient is 2·7 per cent.

Energy supply for this section is now obtained from the Maira Hydraulic Power Company and from R. Negri's Riviera di Ponente Electric Company, both these concerns making use of large water powers in the Ligurian Alps. The voltage now employed is, however, 3,600 instead of 3,000, as at first, and the frequency 16·7 cycles instead of 15. This has raised the running speeds to 25 and 50 kilometres per hour respectively. The steam power plant at Genoa is now kept solely as a reserve or stand-by, the frequency of the plant being raised so that on emergency it can be operated in parallel with the supply purchased from the power companies.

The Modane-Bussoleno section—part of which was operated by electric locomotives so long ago as in 1912—was finally completed in May of last year only; and the importance of this line is enhanced by the fact that it includes the well-known Mont Cenis tunnel (or the Fréjus tunnel, more strictly speaking), about 8½ miles long. At first this section was worked with current provided by the city of Turin's electric plant, at a pressure of 50,000 volts and frequency of 50 cycles, which was reduced at sub-stations for line distribution to 3,500 volts and 16·7 frequency; later on the Maira Hydraulic Power Company furnished current at 65,000 volts, reduced to the same line voltage at six sub-stations through static transformers, a rotary transformer station at Bardonnechia (the Italian side of the Mont Cenis tunnel) being closed down and a new static transformer station erected at Bussoleno—the present terminus of the electric section, and half way between Modane and Turin.

The short section of line from Savona to Ceva, on the important trunk line between Savona and Turin—over which passes a large amount of traffic both inwards (principally coal) and outwards to the port of Savona—has very many tunnels combined with heavy grades, so that it offers every inducement for satisfactory electric working. Twenty-six locomotives of the 0—E—0— type (Fig. 12) are employed on this section, which is fed with current purchased from the R. Negri Riviera de Ponente Electric Company. This company utilises several water powers in the district, and has a high tension distribution network with at least five sub-stations, also a steam power plant at the terminus port of Savona, on the Riviera line between Ventimiglia (Italian Mediterranean frontier) and Genoa.

On the Monza-Lecco line (the electrification of which is completed) similar locomotives are at work for goods traffic, but passenger trains are drawn by sixteen of the more powerful type, 1—C—1, shown in Fig. 13. These machines have a weight of 73 tons,

Digitized by Google

of which from 45 to 51 tons are available for adhesion. They have four running speeds, 37·5, 50, 75, and 100 kilometres per hour, with corresponding tractive efforts of 9 tons, 9 tons, 9·5 tons, and 6 tons. At 75 kilometres per hour the capacity of the locomotive is 2,000 KW. The different running speeds are obtained by commutation of the poles, and connecting up the motors in series or parallel.

As stated, each locomotive has only two motors, and the motor stators are provided with a single winding.

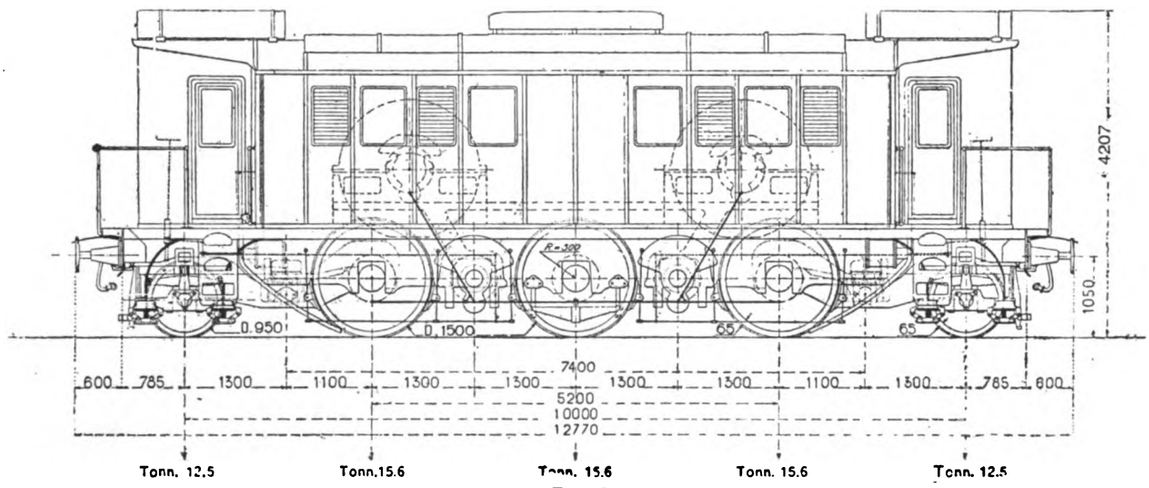

Fig. 9.

Other novel features to be noted in connection with the electric equipments are the following :—

1. The rotating fields of the stator of one traction motor are arranged so as to be in perfect phase accordance with that of the stator of the other traction motor.
2. Transmission of motive effort from the rotor axles to the locomotive driving axles by special triangular-shaped connecting rods, which enable high speeds to be attained.
3. A watt metric regulation, which permits running at constant power while still leaving the driver free to vary the value of such power according to need, the running being unaffected by inevitable variations of tension in the trolley wires.

It is interesting to note that the earlier triphase locomotives (Fig. 8) had a capacity of 9·4 KW. per ton weight, whereas the later type (Fig. 13) have a capacity of no less than 26 KW. per ton of total weight. Further note of progress in design is shown in the fact that the former had only two running speeds, whereas the latter has four.

Summing up the results of these ten years' working of electric traction on the various sections of the Italian State Railways now outlined, it may be said that the motor coaches and locomotives have shown themselves throughout perfectly well fitted to carry out all the duties of steam locomotives, and have moreover done other things for which they were not designed. Their special advantages have, of course, been great speed of acceleration, high specific power, more adhesion weight, or, perhaps, rather the better utilisation of the adhesion weight, and, lastly, their ability to draw heavy loads up steep grades at high speeds. The further advantage of doing away with smoke and fumes is of inestimable importance on lines such as the Mont Cenis, the Savona-Ceva, and the Genoa district sections, where there are numerous long tunnels. Moreover, on the descent of these grades the traction motors exert a recuperative effect on the distribution circuit by acting as generators, saving not only the current consumed but also the train brake gears and parts, although, of course, these latter are not in any way rendered unnecessary.

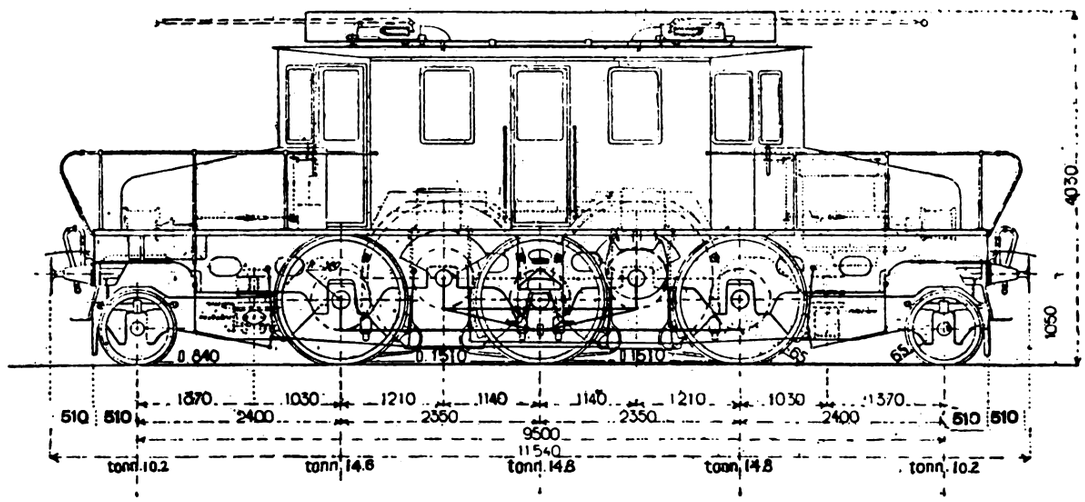

Fig. 10.

Although a triphase system does not permit of great variations in the feeding pressure, it has yet been found that the locomotives work quite satisfactorily at pressures from 2,700 to 3,700 volts, and with frequencies of 14 to 18 cycles.

Digitized by Google

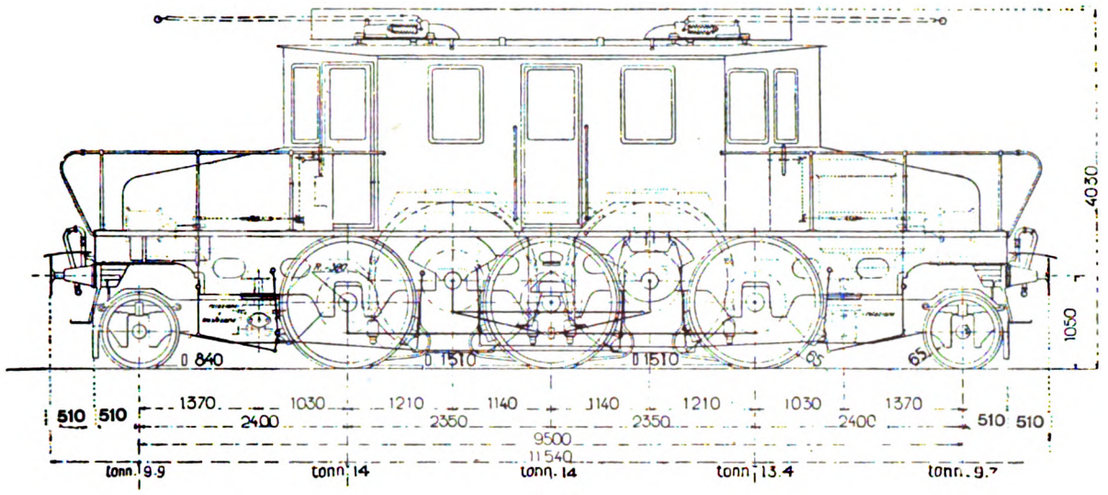

Fig. 11.

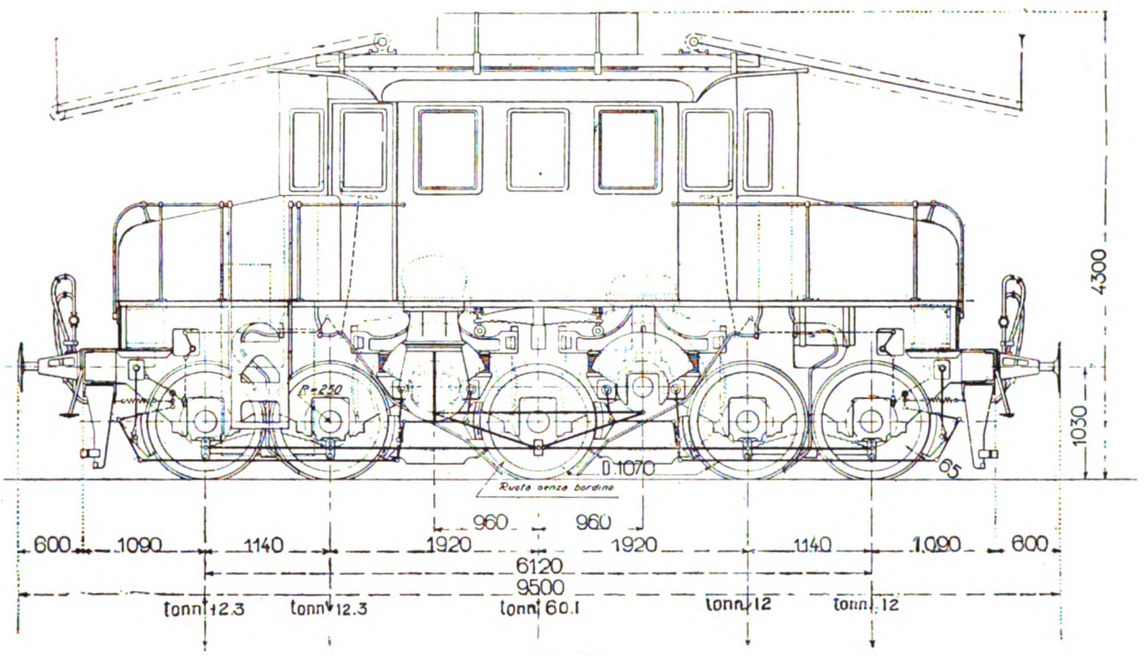

Fig. 12.

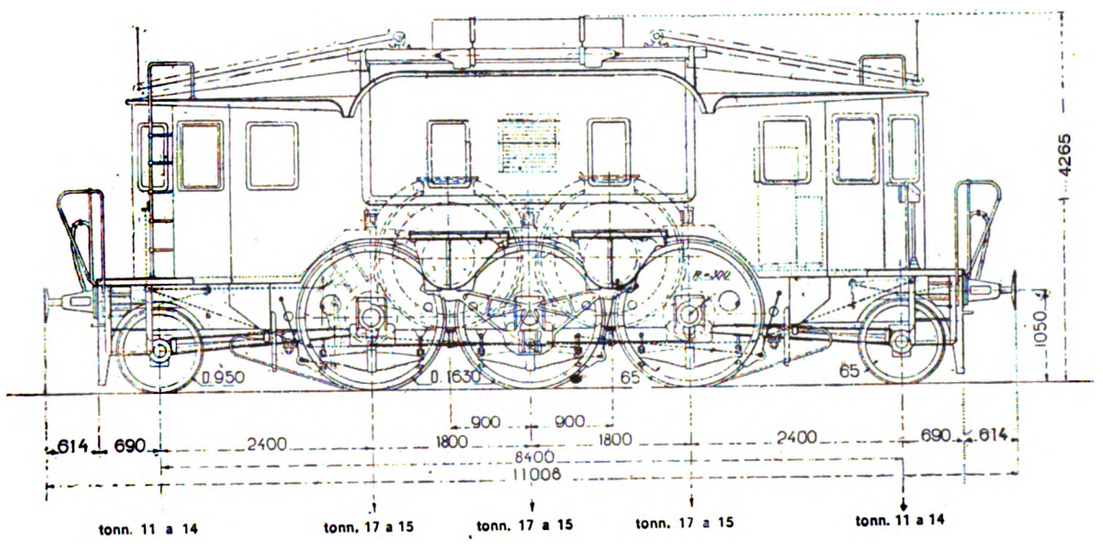

Fig. 13.

716517

Digitized by Google

Electric locomotives are admittedly more complicated and delicate than steam locomotives, and require more care and perfection of building and running if only from the small defects which may lead to serious trouble. For instance, a slight want of parallelism in the transmission rods, or hollow axles; the wear of bearings which reduces the small air gap between stator and rotor on one side only of the circumference and perhaps sets up actual contact; or, again, there may be electrical defects in the switch or regulating appliances, but thanks to an efficient staff, both for running and maintenance, no more serious breakdowns in the service have taken place than with steam traction, while the annual cost of repairs has certainly been reduced in proportion.

Outside interruptions have been due to natural causes, such as destruction of water canals, heavy snowstorms, or unroofing of buildings by gales, all of which have influenced the power supply for short periods on two or three occasions, but now that linking up of high tension mains over this part of Italy has been carried out, together with the provision of stand-by steam plants, there need be no further expectation of water power electric supply altogether failing and interrupting the service.

Breakdowns due to defective contact rails have only occurred on two occasions on the Milan-Varese line for one day and two days respectively, in the winters of 1906 and 1914, when ice formed on the rails and contacts. There seems to have been no difficulty at all in this connection with the overhead trolley wires of the sections worked with high tension alternating three-phase current.

In general the results, bearing in mind that they represent the working of the first ten years of heavy electric traction, appear so favourable that there seems

PARTICULARS OF ELECTRIC LOCOMOTIVE ROLLING STOCK—ITALIAN STATE RAILWAYS.

	Type.	No. of Traction Motors.	Capacity Total (kw.).	Gear Ratio.	Transmission.	Total weight, tons.	Adhesion weight, tons.	Max. speed km. per hour	Tractive effort in tons.	Passengers carried.	Type of brakes.	Date when built.	No. at work.
I.—Continuous Current: 600 volt													
A—Motor Coaches—													
Fig. 1	0—4—0	4	440	26:51	Toothed gear.	41	41	95	1·8 at 80 kms. per hour	73	Automatic Westinghouse	1901	20
Fig. 2	0—4—0	4	550	17:60	,,	52	52	60	3·25 at 46 kms. per hour	40 plus mails and baggage	,,	1903–4	5
Fig. 3	1—2—1	2	220 each	26:51	,,	45	23·6	95	·9 at 80 kms. per hour	76	,,	1903–4	16
B—Locomotives—													
Fig. 4	0—4—0	4	440	17:56	,,	34	34	60	3·25 at 46 kms. per hour	—	,, also Henry	1901	1
Fig. 9	1—C—1	2	1,200	—	lay shafts and connecting rods	71·8	46·8	100	5·1 at 80 4·0 at 100	—	,,	1912	5
II.—Alternating Current: 3-phase 3,000–3,600 volts: 15–16·7 cycles.				Max. speed of synchronism revs. per min.									
A—Motor Coaches—													
Fig. 5	1—2—1 0—4—0	4	440	300–334	hollow axles and articulatd side rods	56	28 parallel 56 cascade	73·4	2·4	24 plus baggage	Automatic Westing-	1902	5
Fig. 6	1—2—1 0—4—0	4	440	300–334	,,	55·2	27·6 parll. 55·2 casc.	73·4	2·4	56 plus baggage	,,	1902	5
B—Locomotives—													
Fig. 7	0—B : B—0	4	440	128–141	,,	48·2	48·2	36·7	4·8 at 33 kms. per hour	—	,,	1902	2
Fig. 8	1—C—1	4	600	225–250	triangular side rods	63·8	43	71·2	3·5 at 64 kms. 6·5 at 32 kms.	—	,,	1904	3
Fig. 10	1—C—1	2	1,250	225–250	,,	64·6	44·2	71·2	6·8	—	,,	1906–7	2
Fig. 11	1—C—1	2	800	150–167	,,	61	41·4	46·8	6·8	—	,,	1907	2
Fig. 12	0—E—0	2	1,500	225–250	,,	60·5	60·5	50	12	—	,,	1908–15	130
Fig. 13	1—C—1	2	2,000	334	,,	73	51	100	9 at 37·5 9 at 50 9·5 at 75 6 at 100	—	,,	1914	16

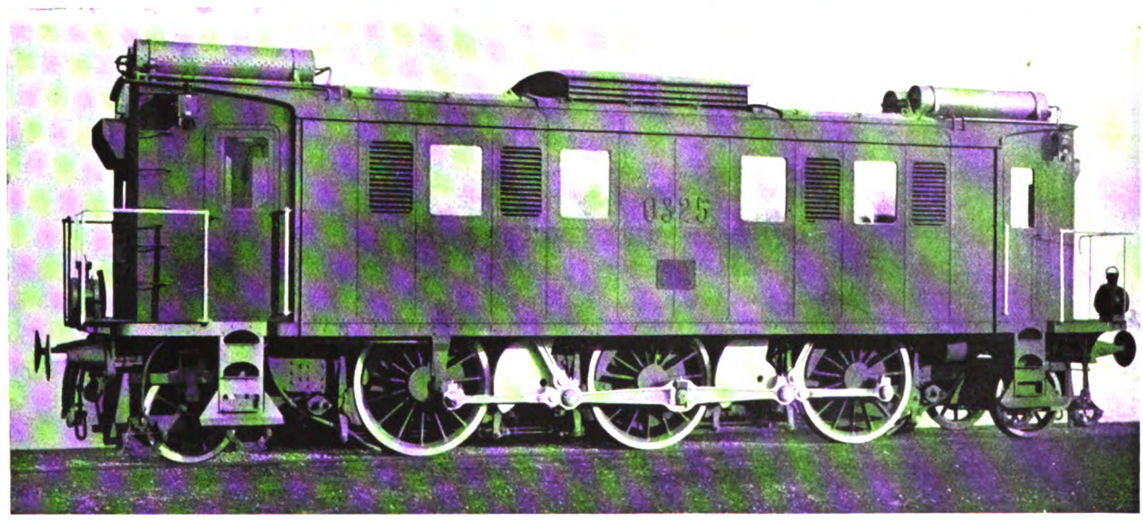

1-C-1 Type Electric Locomotive—Italian State Railways.

Digitized by Google

every expectation of further developments now that the experimental period of failures and mistakes has passed by; these developments will not and cannot be rapid, but it would seem only fair to think that the next twenty years will see a complete network established in the north-western parts of Italy, where water power is abundant, traffic extremely heavy, and the local conditions (steep grades and frequent tunnels) are entirely in favour of electric working.

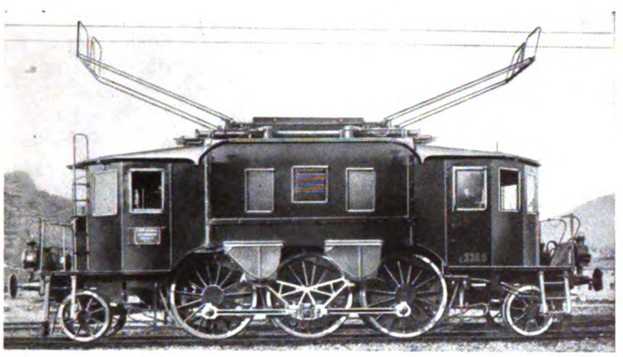

New 1-C-1 Type Electric Locomotive—Italian State Railways.

RAILWAYS, TRAMWAYS, AND THE DEFENCE OF THE REALM ACT.

In the Defence of the Realm (Acquisition of Land) Bill, which has passed its second reading in the House of Commons, Clause 6 makes provisions with respect to the maintenance of railways and tramways that have, for war purposes, been laid on, over, or under any public highway, and also deals with cases where any public highway has been closed. Dr. Addison (Parliamentary Secretary, Ministry of Munitions), introducing the Bill, stated that Clause 6 provided for the continuance of the use of certain light railways and sidings, subject to orders by the Board of Trade. They also had to deal with cases where they had arranged for the supply of light and power outside the area of existing authorities. Power was taken to continue the supply. The Railways and Canal Commission would deal with the questions arising under the Bill. They would have the assistance of assessors, and would be authorised to make local inquiries.

RAIL DESIGN, WEAR AND CORRUGATION.

By Robt. B. Holt
(Highways and Permanent Way Engineer, Leeds).

In articles on the Manufacture and Wear of Rails published in the issues of The Tramway and Railway World of January 6 and November 3, 1910, the writer called attention to the irregular wear which was taking place on both rails and wheel tires owing to the defects in the design of both. In these articles it was shown that whilst almost all rails, including the British Engineering Standard Sections, were designed with level plane or inclined plane treads, after a certain period in service these rails assumed a convexity of running surface of approximately 12 in. radius, and a corresponding hollow profile was acquired by the wheel treads. The writer demonstrated that a very imperfect contact was obtained between new rails with flat or inclined plane treads and worn wheels, and conversely between partly worn rails and new plane tires.

Referring to the loss of metal which results from this bad contact, the writer made the following statement :— "The wear of tramway rails is not uniform, and under the present conditions detrusion of the metal in the head commences immediately the rails are put into service. This is due to the unequal contact between the wheel and the rail, bringing immeasurable forces into play on portions of the rail head, causing an unrestrained flow of metal, which may possibly have some connection with the appearance of rail corrugation."

Fig. 1 is a reproduction of illustrations which appeared in the articles referred to, and Fig. 2 gives details of the rail designed by the writer for the Leeds Corporation Tramways, which was put into general service in 1910. As stated in The Tramway and Railway World of November 3, 1910, a very satisfactory contact is obtained between new rails of this design and worn wheel tires after about 48 hours in service.

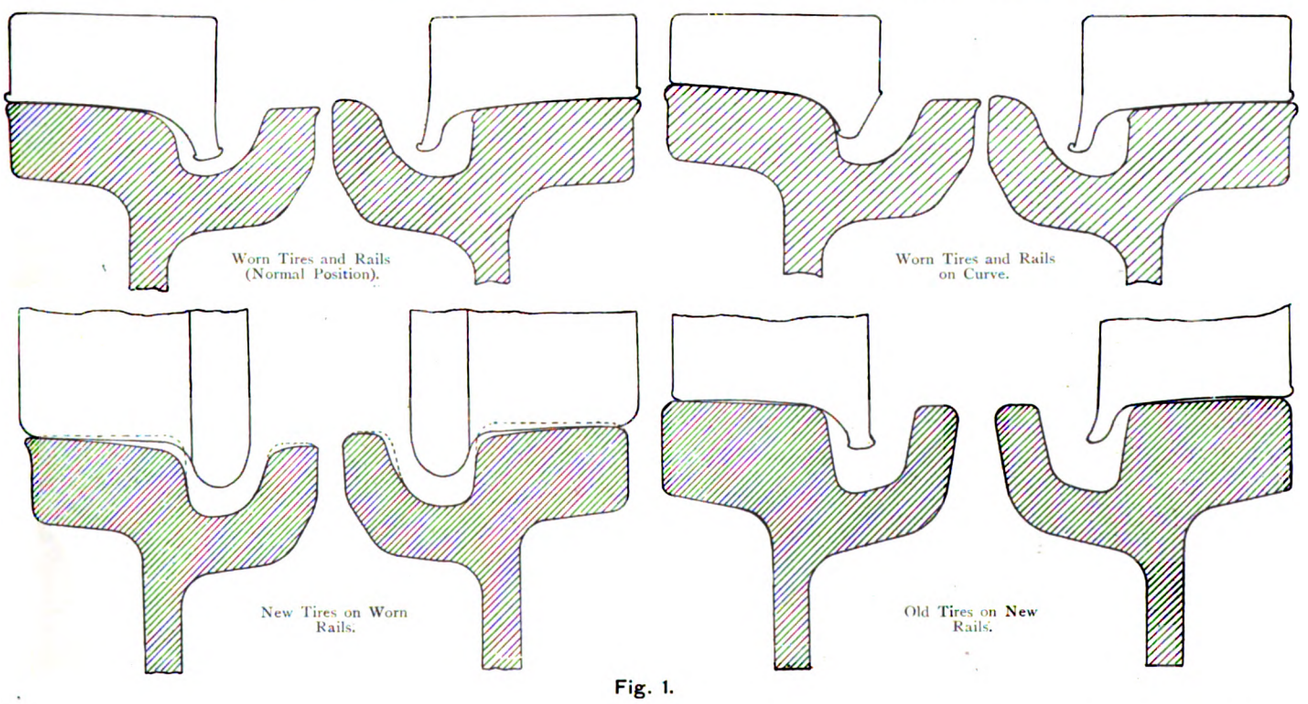

Fig. 1.

Fig. 3 shows the contact between a new rail of this design and a worn tire. Since 1910 about 6,000 tons

Digitized by Google

of this rail have been used on the Leeds Tramways, and without exception a broad uniform contact has been immediately obtained. No alteration has been made in the profile of the wheel treads for, although these are inclined planes they have the same inclination as the rail tread, and new tires, being subjected to continuous wear, soon accommodate themselves to the rail tread.

It is interesting to note that many of the more important British tramway undertakings have now adopted convex rail treads, and it is reported that

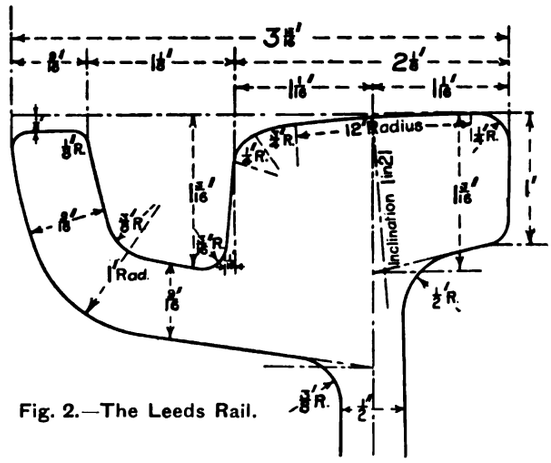

Fig. 2.—The Leeds Rail.

the British Engineering Standards Committee are contemplating alterations to their sections in this direction.

In the articles previously referred to, the writer concluded with the following observation :—" If rail corrugation is caused or accentuated by the detrusion of the metal in the rail tread, the writer suggests that rails and tires designed on the lines recommended will, by giving a better contact, lessen the tendency to either detrusion or corrugation, and will in any case

Fig. 3.—Showing Contact between Worn Tire and New Rail shown in Fig. 2.

lessen the wear on both and facilitate the progress of the car."

It appears that the question of wheel contact is also occupying the attention of American street railway engineers, and the *Electric Railway Journal* of New York, of December 25, 1915, contains a contribution by Mr. R. C. Cram, assistant way engineer to the Brooklyn Rapid Transit System, upon " Curved Heads for Girder Rails in Brooklyn." As stated by Mr. Cram, girder rails with curved heads are by no means new, and the writer is quite in agreement with his observation that " a study of actual conditions of rail and wheel tread wear leads to the belief that the inclined plane tread design was based upon a misconception of the theory of contact and was at variance with the requirements of correct design." Mr. Cram also raises the question of providing new wheels with curved treads, but like the writer he considers that whilst this is desirable it is not imperative.

The chief feature of Mr. Cram's article is in regard to the possible effect of the improved rail section with the convex tread upon rail corrugation ; it is " demonstrated that, as corrugation is caused by excessive pressure or force per unit area at the wheel tread, increasing the tread area by conforming the rail head contour to that of the worn wheel reduces corrugation," and further, " the curved head design by providing a range of contacts over new rail heads about three times that provided by plane heads and much further back from the unsupported metal near the gauge line fillet, seems to satisfy the theory of contacts as well as the conditions of wear found in service." Mr. Cram considers that " with these points in its favour it is thought that the curved head design merits the most careful investigation because of the potential value in tending to minimise the inherent tendency of all rails to corrugate." Fig. 4 is a reproduction of several illustrations from Mr. Cram's article, which are similar in essential features to those introduced by the writer in the articles referred to.

In regard to the detrusion and flow of metal in the rail tread on ordinary plane surfaced rails, Mr. Cram deduces from his investigations that owing to the imperfect contact between wheel and rail, as indicated in the diagram shown in Fig. 4, " The metal cannot do otherwise than to flow or cold roll under the extremely heavy concentrated loading produced by the conditions obtaining, and some of the metal flows forward ahead of the wheels, while some flows laterally over the gauge line fillet, where there is little or no support sideways against such action. The flow is also assisted by the increased coning of the curved wheel treads."

The writer is in accordance with Mr. Cram in regard to the lateral detrusion of the metal in the rail tread. Observations made a few days after new rails with plane treads have been placed in service reveal the formation of a beading of extruded metal near the gauge line fillet. Detrusion continues until the tread assumes the exact contour required by the car wheels. Five years' experience in Leeds, with the rail shown in Figs. 2 and 3, shows that a broad contact is immediately obtained, detrusion is entirely obviated and the rail maintains its original profile.

The writer does not consider that Mr. Cram has proved his contention that corrugation is caused by excessive pressure per unit area at the wheel tread ; and after the five years' experience referred to above with the rail shown in Fig. 2, it is evident that notwithstanding the full contact afforded by the convex tread on rails of standard quality, there is no diminution of the tendency to corrugate. Figs. 5 and 6 are photographs of corrugations on rails of this type after the passage of 523,250 and 300,000 11-ton cars respectively. These are not isolated cases ; but they are representative of the type of corrugation which is developing on rails with curved or convex treads in Leeds.

The investigations of the special committee appointed by the Municipal Tramways Association to inquire into the phenomena of rail corrugation* " showed that the occurrence of corrugation is independent of the number of cars which have passed over the rails " ; that " corrugation produced by one set of cars may be entirely removed by another set of cars running

* Interim Report " Rail Corrugation," Municipal Tramways Association.

Digitized by Google

in place of the first. It may also be caused and removed by the same set of cars under apparently the same conditions." Another finding of this committee which is of great importance is that "corrugation appears on the rails independently of whether the wheels are being actively driven by the motors or not. The committee are of the opinion that the explanation of this may be the slip and skid taking place owing to the different diameters of the wheels, which difference between the flange of the wheel and the side of the rail head, and they occur only when the pressure at the point of maximum intensity of pressure exceeds the elastic limit of the steel at that point. Space will not allow of a recapitulation of the many well reasoned points contained in this cogent article; but it is interesting to note that the author considers that most of the corrugations can be eliminated by so designing the rail head, wheel tread, and wheel flange and so

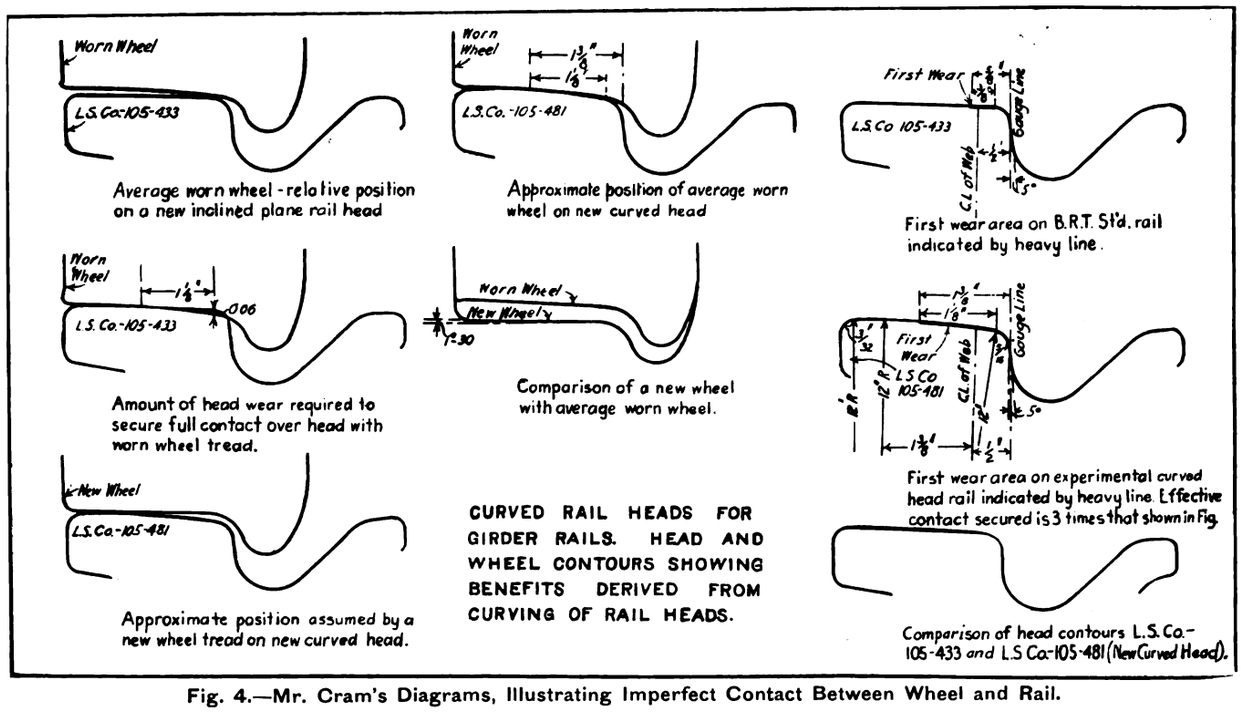

Fig. 4.—Mr. Cram's Diagrams, Illustrating Imperfect Contact Between Wheel and Rail.

largely results from the unequal wear produced by the relative difference in the speed of the motors."

In their interim report the committee state that "they consider that they have ample evidence that the force or forces responsible for the reaction which results in rail corrugation are external to the rail. It is realised, however, that whilst rails rolled to any known specification are affected to a certain degree by this reaction, some are not affected to the same extent as others." "From evidence collected, coupled with the experience of the members of the committee, the committee are of the opinion that a steel for rails can be obtained which is more durable and less liable to the development of corrugation than the ordinary varieties of steel in use at present." The *Electric Railway Journal* of New York published in September, 1911, an exceedingly able article by Mr. G. E. Pelissier on "A New Theory of the Cause of Corrugation," in which the writer evolved the theory that corrugations are directly due to non-uniformity of pressure between the tread of the wheel and the surface of the rail and laying the rails that the maximum intensity of pressure will occur near the centre of the rail tread and as far as possible from the gauge line fillet.

Mr. Pelissier further considers that corrugations produced by pressures exceeding the cubical elastic limit of steel (such as might occur with quick braking of heavy, fast trains) can be eliminated only by raising the elastic limit of the steel and increasing the area of contact between wheel and rail.

It would appear that the rail designed by the writer and that recommended by Mr. Cram fulfil the conditions as to contact, which Mr. Pelissier considers to be essential for the elimination of corrugation, but the fact remains that the Leeds rails of this design (B Standard quality), as previously stated, are just as susceptible to corrugations as the rails with plane or inclined plane treads. (See Figs. 5 and 6.)

In regard to Mr. Pelissier's recommendation that the elastic limit of the steel should be raised where the pressure brought to bear upon the rail surface is excessive, and also to the opinion of the Municipal

Fig. 5.—Corrugations on Rail shown in Figs. 2 and 3 after the passage of 523,350 cars.

Fig. 6.—Corrugations on Rail shown in Figs. 2 and 3 after the passage of 300,000 cars.

Digitized by Google

Tramways Association Corrugation Committee that a steel for rails can be obtained which is more durable and less liable to corrugation than the ordinary steels in use, it is evident that close attention should be given to the composition and manufacture of the steel, and in the writer's opinion this is, taking all service conditions into consideration, the only practicable way of dealing with corrugations.

On the Leeds Tramways extensive use has been made during the past eight years of "Sandberg" silicon steel rails, and whilst rails of this quality are by no means immune from corrugations, the development is very slow, and so far only an inconsiderable amount have had to be removed by grinding. During the past year experiments were commenced in Leeds with "Sandberg" air-cooled silicon steel; this steel is of the same chemical composition as the ordinary "Sandberg" steel, but by means of a patented process of cooling through the critical range of temperatures at a predetermined rate, a sorbitic structure is formed. Considerable interest is being taken in this new treatment, which is applicable to both carbon and alloy steels, and in promising to present a paper on the subject at an early date to the Iron and Steel Institute, Dr. Stead, F.R.S., the eminent metallurgist, stated that rails which had been treated by Sandberg's new process had shown an increased life of from 100 to 150 per cent.

The following table gives full particulars of the Leeds test on air-cooled Sandberg steel :—

LEEDS CITY TRAMWAYS

Test No. 1. Boar Lane, Leeds. *Ordinary Sandberg Silicon Steel.*
Test No. 2. Ditto *Sandberg Air-cooled Silicon Steel.*

	(1) ORDINARY "SANDBERG."	(2) "SANDBERG" AIR-COOLED.
Location (outgoing track)	Boar Lane, nr. Mill Hill	Boar Lane, between Mill Hill and Alfred Street
Alignment	490 ft. radius ...	245 ft. radius and straight
Gradient	1 in 116 (up) ...	1 in 116 (up) and 1 in 350 (down)
Speed	12 miles per hour ...	12 miles per hour
Weight	11 tons (4 wheels, 2 motors), wheels 30 in. dia.	11 tons (4 wheels, 2 motors), wheels 30 in. dia.
Period of test ...	12 months. Cars carried 533,333	12 months. Cars carried 533,333
Length of test rail ...	40 yards of rail ...	120 yards of rail
Composition ...	Carbon ·52%, silicon ·315%, manganese 1·12%, phosphorus ·07%. Basic Bessemer process	Carbon ·51%, silicon ·316%, manganese 1·14%, phosphorus ·07%. Basic Bessemer process
Tensile test	54·8 tons per square inch. Elongation 15%	58·2 tons per square inch. Elongation 13%
Impact test ... Supports 3 ft. 6 in. apart, 12 ft. drop. Weight of tup 2,240 lbs.	$1\frac{3}{16}$ in. deflection ...	$1\frac{3}{8}$ in. deflection
Crushing test ... 50 tons pressure. Diameter of ball 19 mm.	3 mm. impression ...	2·7 mm. impression
Bending test	Rail curved to 20 ft. radius. No sign of fracture	Rail curved to 20 ft. radius. No sign of fracture
AVERAGE DEPTH OF WEAR	·1406 in. = 24·99% of available depth	·0468 in. = 8·32%
MAXIMUM DEPTH OF WEAR	·1562 in. = 27·76% ...	·0625 in. = 11·11%
MINIMUM DEPTH OF WEAR	·1250 in. = 22·22% ...	·0312 in. = 5·54%

NOTE.—The average depth of wear on the "air-cooled" steel, as shown above, is only 8·32% of the total available depth of metal, while the average depth of wear on the ordinary quality is 24·99%, indicating an increased durability of over 200% in favour of the "air-cooled" quality, for the period mentioned above (12 months). So far there are no indications of corrugation.

It is too early to draw definite conclusions from this experiment, but from the data obtained from rails of this quality after twelve months in service, on the most heavily "trafficked" route in Leeds, it is evident that a rail steel with markedly superior wearing properties has been obtained by this improved process of manufacture, and as experiments are being made on other tramways with this steel its subsequent behaviour over a more extended period will be watched with considerable interest.

OVERHEAD TROLLEY RISKS.

Apropos of an article on the above subject in our issue of July 15, it is interesting to record that a London manager has taken steps to guard against accidents from trolley arms and wires on cars not fitted with top covers. On a car belonging to the South Metropolitan Tramways and Lighting Company, Limited, there is to be seen near each canopy an arched overhead rail, as shown in the appended photograph. This device, which is earthed, is likely to afford protection to top deck passengers in the event of the trolley arm or the wire falling. Its efficacy has been proved in

Protection from the Trolley Arm.

cases in which the boom is carelessly turned by conductors, when passengers' hats would be struck but for the presence of the hoops. Each hoop also serves to suspend a lamp to light the staircase. On no undertaking around London does it appear to have been found desirable to adopt a loop of material more substantial than rope for the secondary connection between the trolley wheel and the arm. In one case, however, there is a double thickness, bound together at its extremities. The objection to any stronger material seems to be the risk of bringing down the trolley wire in the event of the arm becoming displaced and colliding with the overhead equipment.

Subsidy for an Anglo-Italian Company.—It was stated in the House of Commons, on July 31, that the Government had arranged to give an annual subsidy up to £50,000 for ten years to the newly formed British-Italian Corporation, Limited. The company's capital of £1,000,000 has been subscribed mainly by the banks, and the objects will be to promote trade and to enable Italy to look to London for financing instead of to Berlin.

Digitized by Google

RESILIENT TRACK AND RAIL CORRUGATION.

The contention has often been advanced that the rigid tramway track construction with which we are familiar in this country is a contributing cause to rail corrugation. On the other hand, there are many well-known cases of corrugation on railways where sleeper and ballast construction is used. There is, however, a large body of opinion that other things being equal there is less likelihood of corrugation where the track has a certain resiliency, as with rails laid on sleepers, than when the track is rigid, as is the case where the rails are laid on a concrete foundation. It will be interesting to hear what is the experience in this country in connection with certain lengths of tramway track which have been laid on sleepers.

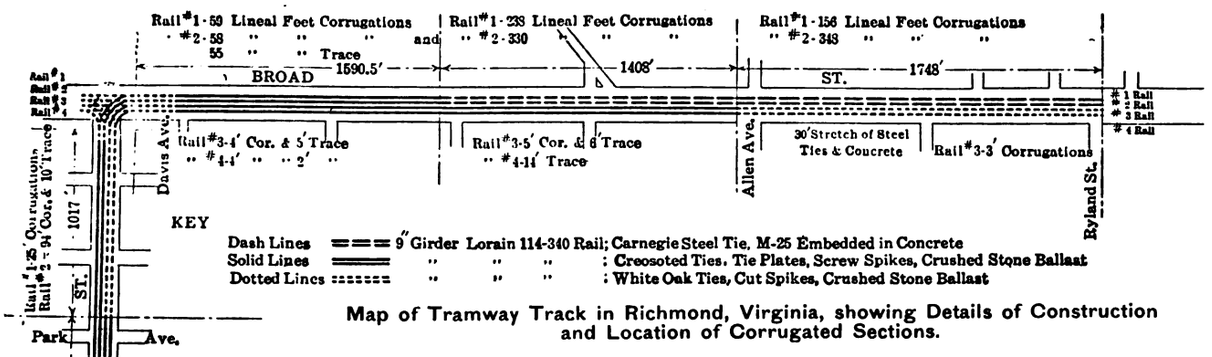

Map of Tramway Track in Richmond, Virginia, showing Details of Construction and Location of Corrugated Sections.

Meanwhile we quote some American experience as given by Mr. T. Norman Jones, jun., chief engineer of the Virginia Railway and Power Company, Richmond, Virginia. Writing in the *Electric Railway Journal*, of New York, he says that his company has had some interesting experiences with rail corrugation which developed on two miles of track. After having carefully inspected various sections of girder rail tracks constructed on various types of foundation, Mr. Jones in the spring of 1912 came to the conclusion that track constructed on a resilient foundation was superior to track constructed on a rigid foundation, and that the use of the former would greatly retard the developmen of corrugations. Having succeeded in convincing the street committee of the City Council that a change from concrete foundation to crushed stone would be desirable from the city's standpoint as well as that of the company, the management was permitted to adopt a resilient type of construction. During the summer and autumn of 1912 a considerable amount of track was constructed on crushed stone foundation, which type has been standard with the company ever since. The arrangement provides for crushed stone under and partly between the ties or sleepers, with a slab of concrete partly between and on top of the ties to support the paving.

Confirmation of Mr. Jones' belief is found in the data given in the accompanying illustration, which shows the tracks on Broad Street from Ryland to Robinson Street and on Robinson Street from Broad to Main Street, Richmond. The most interesting comparison is to be found in the section of track between Ryland Street and Allen Avenue. During 1908 or 1909 a 6 in. concrete foundation was placed under the westbound track from Ryland Street to Allen Avenue. It became necessary to renew the rails and reconstruct both tracks in 1912. In the reconstruction of the westbound track between Ryland Street and Allen Avenue the concrete foundation referred to above was utilised as the concrete was of good quality and the whole base in excellent condition. In the existing concrete foundation trenches were cut crosswise of the track at 8 ft. intervals. In these excavations Carnegie steel ties were placed and bolted to the rails, and fresh concrete was placed around and under the Carnegie ties to secure them in place.

In the construction of the eastbound tracks between the points above-mentioned, the foundation was thoroughly rolled before the placing of crushed stone ballast, after which the ties and rail were placed. For a portion of the distance, as noted in the illustration, white oak ties were used, the rails being fastened to them with cut spikes. In the remainder of this section creosoted pine ties were used with tie-plates and screw spikes.

Over both sections of track cars of the same type have been operated; in other words, the same cars that operate over the westbound track return over the eastbound track. Some of these cars were equipped with cast-iron wheels, others with steel wheels.

From the details given it will be seen that in both rails of the track on concrete, or rigid, construction there is a total of 1,072 feet of rail affected by corrugation, whereas in the same length of track constructed on a crushed stone, or resilient, foundation, only 8 ft. of corrugation is to be found. Only rail on which the wave length of the corrugation could be accurately measured was noted.

CHICAGO ELEVATED RAILROAD'S SAFETY RECORD.

The Chicago Elevated Railroads have recently called the attention of the public to their unparalleled record of operation. This road has carried 1,200,000,000 passengers during the past eight years without a single fatal accident to a passenger on a train. Every weekday the elevated system carries upward of 500,000 passengers, and this record of safe operation is a source of gratification to the management and to the employees, who look upon it as an incentive to try, with the co-operation of the public, to eliminate all minor accidents.

Regarding this notable record, the Chicago *Herald* recently remarked that "the managers and employees of the Chicago Elevated Railroads are certainly entitled not only to feel some pride but also to advertise the pride they feel in the results of their efforts to carry safely all who use these transportation facilities."

Digitized by Google

THE
Tramway and Railway World

FOUNDED IN 1892 AND PUBLISHED BY
THE TRAMWAY AND RAILWAY WORLD PUBLISHING COMPANY, LIMITED,
AMBERLEY HOUSE, NORFOLK STREET, LONDON, W.C.

SUBSCRIPTION:

THE TRAMWAY AND RAILWAY WORLD can be obtained, post free, at the following rates:

FOR THE UNITED KINGDOM—Twenty-five Shillings per annum

THE ANNUAL SUBSCRIPTION INCLUDES 64 ISSUES, OF WHICH 12 ARE ILLUSTRATED NUMBERS.

FOR ALL PLACES ABROAD—Thirty Shillings per annum.

Single Copies—One Shilling (Postage, 2 pence—Abroad, 5 pence).

THE EDITORIAL AND PUBLISHING OFFICES OF
THE TRAMWAY AND RAILWAY WORLD
ARE AT AMBERLEY HOUSE, NORFOLK STREET,
LONDON, W.C.

Telephone No.: GERRARD *2948.*
Telegraphic Address: "TRAMIGRO, ESTRAND, LONDON."

LONDON, AUGUST 10, 1916.

London Tramway Finance.

It was, of course, anticipated that the working of the London County Council tramway undertaking for the past financial year would, after meeting capital charges, result in a considerable loss. The expectation has been fulfilled, but the deficit is not so great as might have been feared. The reserve funds are so depleted that the future cannot be faced without some anxiety. To the ordinary ratepayer, knowing only that the undertaking is by far the biggest tramway system in the kingdom, and that there are many smaller but highly successful municipal tramways, it might at first seem strange that it should be in any financial difficulties. There are, however, various special circumstances. The capitalisation per mile of route is exceptionally high, making the interest and sinking fund charges extremely heavy. That trouble will be gradually diminished as time goes on by the application of the sinking fund. The conditions of the past year have been exceptionally unfavourable. The great tramway strike occurred in the period under review, and it is said to have cost £100,000. The coal bill was higher by nearly the same amount than it would have been at pre-war prices. Allowances to dependents of men who have joined the colours absorb a large sum. A survey of recent years shows, however, that whatever the circumstances the undertaking has not been prosperous financially. A permanent cure is needed for what threatens otherwise to be a permanent evil. There can be no doubt that to earn the heavy capital charges and to leave an adequate margin for renewal and reserve funds, the fares are much too low. Not only are there halfpenny fares, but the halfpenny fare stages are very long. Some neighbouring systems working on a smaller scale have recently abolished halfpenny fares, and the obvious course for the County Council is to take its courage in hand and make the minimum fare a penny. In the year 1914-15 about 29 per cent. of the total number of passengers paid halfpenny fares, and 41 per cent. contributed a penny per head. No doubt the abolition of the halfpenny fare would reduce the number of short-distance passengers, but the increase of the minimum to a penny would more than compensate for that. Another apparently necessary step is to increase workmen's fares, on which the estimate of a loss of about £80,000 a year apparently still holds good. Workmen can travel six miles or more for a penny. The charge should be graded according to distance, with a minimum of a penny. Cheap workmen's fares are a serious burden on many tramway and railway systems. They are, after all, a subsidy to employers, and it ought to be possible at least to reduce the loss arising from them. Whether the County Council decide on raising fares or not, it is certain that some drastic action is necessary, and if the ratepayers' pockets are to be spared it should be taken without delay. There can be no excuse whatever for conducting the tramway system of the greatest city in the world at a loss. It should at least be self-supporting, and those who maintain that ratepayers are entitled to a small profit for the use of their credit on which were obtained the huge loans required for the construction of the conduit system cannot be said to make an unreasonable claim.

Tramway Services after Two Years of War.

From various quarters we hear of complaints being made that the efficiency of tramway service has declined, that cars are not so clean or so well maintained, that the speed is slower, that the

Digitized by Google

permanent way is falling into general disrepair, that the consumption of power is rising in comparison with mileage, and that everything connected with tramway business is not what it was before the war. Broadly regarded, these complaints have only slight foundation ; in any case, they are inconsiderate in the extreme. Tramway staffs have been denuded of their best men for military service ; the most experienced and most active of our motormen and conductors are in the far-flung battle line ; the most skilful of our electricians and fitters have been called into Government service ; while the munitions factories have drawn men from tramway undertakings to such an extent that only those who are absolutely necessary for the carrying on of the work remain. The conductors and motormen who have been left are often overworked, and the newer hands are either youths or old men, and in many cases women. The handling of an electric car demands a certain minimum of careful skill, a sense of responsibility, and a clear understanding of the mechanism of the car. Those essential qualities are not acquired in a day by even the most capable men. We would not disparage by a single word the service which the men at present on the cars are giving, but no man works in a temporary job with the same efficiency as he does when engaged in his ordinary work. For one thing, the men know that they are indispensable, and the knowledge that they cannot be conviently dismissed does not make workmen the more amenable to discipline. As regards the conditions in the workshops and depots, tramway managers and engineers are entitled to the fullest sympathy in their difficult and trying task. On the whole, it must be admitted that those in charge of tramway undertakings have taken the wise and patriotic view of their duty. In the first instance, they encouraged their best men to offer their services to the nation ; and they set themselves to getting the work done, and continuing on as best they could under conditions of extreme difficulty. Under the stress of these conditions, meticulous attention to the perfection of small details became impossible and undesirable. The one object has been to carry on, and in general this has been done with surprising success. With regard to the increased power consumption, it is admitted that the utmost economy should be practised, but consideration should be given to the fact that much of the labour available for the power station and the driver's work is lacking in the skill and experience necessary. In a word, the users of tramcars and the tramway authorities must be constantly reminded that the nation is at war for its life, that the best energy of the tramway business, in common with that of almost every other peaceful pursuit, has been turned into war uses, and the public should be well content with such services as managers deem practicable and in the best interests of all concerned. This subject was discussed many months ago in these columns ; but it is desirable that after two years of war, attention should again be directed to the difficulties which confront those who are responsible for tramway services. They have no desire to subject the public to any more inconvenience than is necessary ; but it should be realised that it is in the interests of the nation that business of every kind should be considered as subordinate to the necessity of carrying the war to a successful end.

Differential Gears and Corrugation.

Results that have recently been obtained from the use of differential gears on some of the Huddersfield Corporation tramway cars were given in a recent issue by the general manager and engineer, Mr. Wilkinson, who has devoted a great deal of attention to the experiments. Differential gears are, of course, universally employed on automobile road vehicles, and years before there were any vehicles of the kind in use such gears were employed on tricycles. The tramcar is not called upon to make such acute curves as rail-free vehicles habitually perform, and though tramway curves are much sharper than those on railways, the railway form of wheels and axle has been retained for tramways. The wheels being rigidly attached to the axle, and revolving with it, the general belief is that much wear and tear of tires are caused in rounding curves. The outer and the inner wheels having different distances to travel, and yet having to revolve at the same rate, slipping and skidding must be looked for. But Mr. Wilkinson reports what must be regarded as the strange fact that with the differential-geared cars there has been no reduction in tire

Digitized by Google

wear or current consumption. Yet if the gear is working properly there should be no slipping or skidding on curves, as each wheel is free to revolve independently. Is the inference to be drawn that tire wear caused by curves has been much exaggerated? The special gears have been in use in Huddersfield since October, 1914, so that any difference in wear should be noticeable. It is gratifying, however, to know that the purpose for which the gears were introduced has, up till now at any rate, been attained—namely, the stoppage of rail corrugation. If the tires have not been saved, the rails have so far shown none of that kind of wear which takes the form of corrugation.

MUNICIPAL TRAMWAYS ASSOCIATION.

ANNUAL CONFERENCE.

The annual conference of the Municipal Tramways Association (Incorporated) will be held, as announced in our issue of July 15, at the Surveyors' Institute, Great George Street, London, S.W., on Thursday and Friday, September 21 and 22. The programme is as follows:—

THURSDAY, SEPTEMBER 21.

10.45 a.m.—Meeting of the Executive Council.
11. 0 a.m.—Presidential address by Mr. P. Fisher, general manager of Dundee Corporation Tramways.
Paper—"Some Notes on Passenger Transportation in Large Cities," by Mr. J. M. McElroy, general manager, Manchester Corporation Tramways.
1. 0 p.m.—Interval.
2. 0 p.m.—Paper—"Utilisation of Tramways for Goods Traffic," by Messrs. G. W. Holford, general manager, Salford Corporation Tramways, and W. Clough, general manager, Bury Corporation Tramways.

FRIDAY, SEPTEMBER 22.

10.30 a.m.—Meeting of the Executive Council.
10.45 a.m.—Meeting of Managers' Section.
11. 0 a.m.—Annual General Meeting.

As was the case last year, no social functions will take place in connection with the conference, and the usual Association dinner will be omitted. St. Ermin's Hotel, Westminster, S.W., has been selected as headquarters.

Communications should be addressed to the Hon. Secretary, Municipal Tramways Association, 7, Hall Ings, Bradford (Telegrams: "Tramways, Bradford").

PASSENGERS' LIABILITIES.

Notices were recently posted in the Newcastle cars warning passengers that they are responsible for paying the fare, and that the penalty for non-payment is 40s. The notice is, we believe, based upon the following clause from the Tramways Act, 1870:—

> "If any person travelling or having travelled in any carriage on any tramway avoids or attempts to avoid payment of his fare, or if any person having paid his fare for a certain distance knowingly and wilfully proceeds in any such carriage beyond such distance and does not pay the additional fare for the additional distance, or attempts to avoid payment thereof, or if any person knowingly and wilfully refuses or neglects on arriving at the point to which he has paid his fare to quit such carriage, every such person shall for every such offence be liable to a penalty not exceeding 40s."

Overcrowding is being dealt with under the following regulation commonly found in tramways bye-laws:—

> "No person shall hold or hang on by or to any part of any car, or travel therein or thereon, otherwise than on a seat provided for passengers, except in the interior of the car with the consent of the conductor."

Several persons have lately been fined by the Birmingham magistrates for having removed the chain placed across the entrance to tramcars to prevent persons from entering, and having boarded the vehicles.

TRADE AFTER THE WAR.

THE PRIME MINISTER CHAMPIONS A NEW POLICY.

NEED FOR PROMPT ACTION.

At last important action on the part of the Government has begun with the object of securing and improving the industrial and commercial position of this country after the war. The Government fully realise, and apparently the great majority of the members of the House of Commons realise the urgent necessity of effective steps being taken to checkmate all the machinations which Germany will let loose as soon as peace is declared. The statement made by the Prime Minister in the House of Commons on August 2 on the resolutions passed by the Allies' Economic Conference in Paris is thoroughly satisfactory as far as it goes. But at present it does not go far enough. The Government have already taken some steps towards carrying out certain of the resolutions, but they have put forward no scheme for giving effect to the most important. It is perhaps too soon to look for a complete scheme, but no opportunity should be lost of urging the need for prompt action. Meanwhile we consider that the great point has already been achieved, namely, that the Government will not be hidebound by antiquated fiscal theories, but will adopt whatever appear the best means to prevent German dumping and commercial penetration, and to foster and encourage British industry.

Mr. Asquith's speech consisted in large part of a citation of the leading resolutions of the conference, of a statement of approval of them, and of indications of what the Government are doing in the matter. The securing of economic independence for the allied countries he took as the keynote of the whole scheme. The first practical step of the Government, which is now being carried out, is the extension of the "black list," so as to prohibit trade during the war with enemy subjects wherever resident. Then the Prime Minister expressed strong adherence to the resolution against granting most-favoured-nation treatment to enemy Powers. Another encouraging point was that no legislation will be required to carry out the resolution to conserve for the allied countries their natural resources during the period of reconstruction and to facilitate the interchange of these resources. The case of each commodity is to be separately considered, and a check will thus be placed upon German efforts to obtain control of supplies in the countries of the Allies.

No indication was given by the Prime Minister as to what steps the Government propose to take to prevent German dumping fo a period of years, though he fully endorsed the resolution on the subject; but according to that resolution the matter is to be settled by agreement through diplomatic channels between the Allies. There seems to be no doubt, however, that if the Government propose tariffs for the purpose legislation will be required.

Nor was Mr. Asquith more specific as to how the Government propose to carry out the great resolution under the head of permanent measures, viz., that which declares that steps are to be taken without delay to render the Allies independent of enemy countries. Each Ally is left free as to the means "having regard to the principles which govern their economic policy." The resolution suggested subsidies, grants of financial assistance, and Customs duties or prohibitions. The Prime Minister indicated that something was already being done to encourage British industries, and spoke in glowing terms of their

Digitized by Google

enterprise and development since the war began. In certain trades changes have already taken place amounting to a positive revolution. The Government are considering, in concert with the representatives of labour, the outlines of a post-war policy, social and industrial.

The Board of Trade, Mr. Asquith assured the House, are actively engaged in devising schemes to render us independent of enemy supplies as regards various important commodities. A State scheme of assistance for scientific and industrial research has already been created. The question of industrial policy generally has been referred to a strong committee of which Lord Balfour of Burleigh is chairman, than whom a more admirable man for the duty could not be desired. The Government are communicating with the Dominions and India, and when Lord Balfour's Committee reports the Government will hold an Imperial Conference to consider Empire trade policy in the light of the resolutions. As to the old doctrines of free trade, the Prime Minister confessed that the upheaval caused by the war must suggest new problems or some modifications of the solution of old ones. This is a significant and encouraging admission coming from a Minister who, standing in the same place, once celebrated the "obsequies of preference." But for other lifelong free traders, as well as for Mr. Asquith, the logic of events is effecting a conversion which, if belated, is likely to be thorough and lasting.

Apparently no decision will be reached on the question of permanent tariffs against the enemy Powers until the promised Imperial Conference is held. Nor in the circumstances could it be. The Dominions are our partners, and they already have tariffs. It is, however, of great importance that the work of Lord Balfour's and other committees should be expedited, and that the new conference should be held as soon as possible. In the debate which followed Mr. Asquith's statement Sir Edward Carson approved warmly of the whole programme, but called on the Government to produce their scheme. Mr. Bonar Law, speaking later for the Government, emphasised the importance of organisation; he regarded that as even more important than tariffs. During the discussion only two or three voices crying in the wilderness protested against the resolutions. They included those of Sir John Simon, a visionary who left the Government because he failed to understand the demands of an unprecedented war, and Mr. Snowden, a Labour-Socialist. Two recognised leaders of the Labour party, Mr. Wardle and Mr. Hodge, supported the resolutions, and so did several other members. The debate took place on a motion for the adjournment of the House, so that no resolution on the subject was submitted.

The need for prompt action by the Government was reiterated by Mr. Hughes, Prime Minister of Australia, in an interview published on August 3, the same day as that on which the report of the debate in Parliament saw the light. Mr. Hughes has returned to Australia. He said that the potential effects of the resolutions of the Economic Conference were almost infinite. Then he added:—

> We must start immediately to give effect to those resolutions. Not to act promptly is as fatal as not to act at all. The resolutions will be merely empty words unless Great Britain takes the lead. The Allies expect her to breathe into the dry bones of their agreements the breath of life.

These are stirring words. If this country had in its Government some of the driving force which resides in Mr. Hughes many things would be altered for the better.

It may be noted that besides Lord Balfour's committee to which Mr. Asquith referred, one of the committees recently appointed by the Board of Trade, and presided over by Lord Farringdon, is instructed to consider the best means of meeting the needs of British firms after the war as regards financial facilities for trade, particularly with reference to the financing of large overseas contracts, and to prepare a detailed scheme for that purpose. That ought to mean action of great and practical importance.

To complete the outline, the reference to Lord Balfour's committee (which was appointed by the Prime Minister) is that it is to consider the commercial and industrial policy to be adopted after the war, with special reference to the conclusions reached at the Economic Conference of the Allies as to the following questions:—

(*a*) What industries are essential to the future safety of the nation and what steps should be taken to maintain or establish them?

(*b*) What steps should be taken to recover home and foreign trade lost during the war, and to secure new markets?

(*c*) To what extent and by what means the resources of the Empire should and can be developed?

(*d*) To what extent and by what means the sources of supply within the Empire can be prevented from falling under foreign control?

It is important to note that the members of the committee include the chairmen of various other committees which have been constituted for the purpose of anticipating the position of particular industries after the war.

It is gratifying to learn that the United British Industries Association has now been fully constituted, more than the 100 firms originally called for having come forward, each depositing a £1,000 guarantee. This powerful body ought to have great influence in fostering industry.

MANCHESTER TRAFFIC PROBLEM.

The Work of the Congestion Committee.

The Treasury having vetoed during the war any expensive street improvement for the purpose of dealing with traffic congestion in the central area of Manchester, no attempt has been made to carry out a scheme based upon the report presented by Mr. J. M. McElroy as the result of his visit to America and the Continent in 1913. That report was very fully noticed in the Tramway and Railway World of April 9, 1914. Discussion of the question is, however, being maintained by a Special Committee, who have been considering the reports issued by the Tramways Committee, the Watch Committee, and the Improvements Committee. The committee is known as the Traffic Congestion Committee, and although their sittings are private, statements are issued from time to time concerning their proceedings. They have appointed a sub-committee composed of the chairmen and deputy chairmen of the Traffic Congestion, Watch, Tramways, Improvements, and the Old Infirmary Site Committees. The object of the sub-committee will be to prepare a report for presentation to the City Corporation. A member of the sub-committee has stated that they hope to present a "much more workable and less costly scheme" than those put forward in the reports of the first three of the foregoing committees. He added that it is not expected that the problem can be effectively dealt with under an expenditure of about one million sterling.

So far consideration has been given to the reports of the Tramways and Watch Committees, to various suggestions emanating from members, and to the report of the Improvements Committee upon the schemes proposed by the Tramways and Watch Committees. In that report the Improvements Committee point out if the scheme advised by the Tramways Committee alone were adopted the cost would be not

Digitized by Google

far short of three million pounds. While approving of a number of the proposals of the Tramways Committee, notably the new tramway routes and terminals in widened thoroughfares, they suggested that several of the alterations might be effected at much less cost. The objection of expense was also raised by the Improvements Committee in reference to the Watch Committee's recommendations, which included subways, bridges, and inclined approaches. The first two proposals they considered would be of little use, and the latter they seem to have condemned as being impracticable.

Another project to which some discussion has been devoted is an extension of the motor omnibus department of the tramways undertaking. The proposer suggested that omnibuses might be used to take passengers to special terminals beyond the crowded streets in the centre of the city. The idea apparently is to cease running the tramcars in Market Street, Corporation Street, Cross Street, and Oldham Street. Nearly three thousand cars pass daily up and down Market Street. It is not explained how congestion is to be lessened by filling the streets with the larger number of omnibuses that would be required to deal with the traffic now carried by the cars. No surprise will therefore be created by the latest announcement that this idea has not gained serious attention.

It may be of some interest to the committee to learn that a stranger visiting the city, after reading what has been written anent the traffic problem, is at a loss to discover indications of serious congestion. Much of the congestion is apparently due to the great extent to which horse traction is still employed and to obstruction created by vans at warehouses and factories. From time to time the Watch Committee have proposed that the Corporation should secure powers to deal more effectively with the latter item, but the opposition has proved too strong for them. Considerable advantage would arise if the Corporation possessed powers to order certain streets to be reserved for one-way traffic, such as is the case in the City of London, and also to divert slow traffic to parallel thoroughfares.

ANNUAL STATEMENT OF TRADE.

Certain alterations in classification, recommended by the British Electrical and Allied Manufacturers' Association to the Board of Trade in 1914, will appear in the issue of the annual statement of trade of the United Kingdom covering 1915, which, it is anticipated, will be shortly issued. The new classification will be as follows :—

IMPORT LIST.

Electrical Goods and Apparatus, etc.—Meters and measuring instruments, switchboards, and unenumerated.

Machinery and Parts thereof (Electrical).—Generators and motors (except for aeroplanes, motor cars, and motor cycles) and unenumerated.

EXPORT LIST.

Electrical Goods and Apparatus, etc.—Meters and measuring instruments, transformers, switchboards, and unenumerated.

Machinery and Parts thereof.—Prime movers (except electrical). Other kinds :—Steam reciprocating engines, steam turbine engines, internal combustion engines (except for aeroplanes, motor cars, and motor cycles), and unenumerated. Electrical :—Railway and tramway motors, other generators and motors (except for aeroplanes, motor cars, and motor cycles), and unenumerated.

A Harvest Poster.—The new 60 in. by 40 in. "Harvest" poster, the work of Mr. J. Walter West, now being shown on the Underground railway stations, is of topical interest in view of its bearing upon the food supply of the nation. Although the exhibition of new pictorial advertising has ceased for the time being on the Underground railways, the "Harvest" poster has been issued as arrangements had been made for its production, and it is felt that its publication would be a reminder to the public to see for themselves the growing fields of ripening corn which exist but a few miles from the metropolis. It also illustrates another modern change—the employment of women on the land. It chronicles pictorially a new era and the revival in agricultural life.

INCREASED FARES.

THE HALFPENNY RIDE UNREMUNERATIVE.—RESULTS OF THE INCREASES AT BIRMINGHAM AND LEICESTER.

It will be a convenience to our readers to have a list of the tramway undertakings that have increased their fares in order to meet the extra cost of working and maintenance brought about by the war. The appended list is compiled in the order in which the various authorities took action.

BIRMINGHAM.

On June 1, 1915, the Tramways Committee submitted to Birmingham Corporation a report recommending that 1½d. stages be increased to 2d., the 2d. stages to 2½d., and the curtailing of the length of the first penny stage from the centre of the city from an average of 2¼ miles to an average of 1¾ miles. It was also advised that the workmen's 1d. return tickets should be abandoned. Councillor Harrison Barrow, chairman of the committee, justified the recommendation on the grounds of the higher cost of materials, labour, rates, and income tax, while war allowances to dependants were expected to go up by £17,000 to £35,000. If the existing fares were maintained, he said that the estimated surplus would not exceed £4,000, which would be £30,000 short of the amount required for the reserve fund, besides leaving nothing to be voted in relief of rates. The latter item in the three preceding years had totalled £30,130 in 1914–15, £45,168 in 1913–14, and £62,248 in 1912–13. By a large majority the Council adopted the recommendation.

As an indication of the result we may make a quotation from the paper in which Mr. Alfred Baker, the general manager, ably dealt with the matter, entitled "Financial Problems as affecting Tramways during War Time," at last year's conference of the Municipal Tramways Association. At that time the new fares had been in operation not far short of two months. Mr. Baker said there was no grumbling on the part of the passengers, who recognised that fares, like everything else, must go up. The receipts for August, the first month of the new fares, showed an increase of 1·49d. per car mile, viz., from 11·69d. in June, 1915, to 13·18d. The increase was equal to £1,666 per week, and Mr. Baker estimated that at the end of the year the receipts would be augmented by a sum of £70,000 or £80,000.

By turning to the annual report for the year ended March 31, 1916, published in our issue of July 13, the full extent of the financial result will be seen. Receipts showed an increase of £124,945, or 19·5 per cent. in excess of the previous highest total, which was recorded in the preceding year. Expenditure exceeded the previous year's figures by £60,000, or 12·7 per cent. It should be noted that, mainly owing to the great activity created in the city by war work, the number of passengers increased by nearly 14 millions, as against an increase of nearly three millions for the preceding year. The average fare paid per passenger rose from 1·03d. in the two previous years to 1·12d. After paying interest and sinking fund charges, the surplus available for the reserve fund and relief of the rates was £107,749.

BLACKPOOL.

The unprofitable nature of the contract tickets, 1,466 in number, was commented upon by Mr. C. Furness, general manager, Blackpool Corporation Tramways, in his report for the year ended March 31, 1915. Mr. Furness submitted figures showing that these season tickets holder were subsidised to the extent of one farthing per journey. In October, 1915, the Council agreed to raise the charge from £3 to £4.

LEICESTER.

On July 27, 1915, the Corporation of Leicester decided, on the recommendation of the Tramways Committee, to raise the charge of 1d. for early morning return tickets, transfer, and over-lapping tickets to 1½d., and that the fares on Stoneygate, Aylestone, and Clarendon Park sections be increased to 1½d. for the full journey, with a penny stage for two-thirds of the distance. Alderman Flint, chairman of the Committee, stated that the increased cost of working entailed by the war made it necessary to find another £19,000 of income. It was estimated that the higher fares would bring in £16,000. On May 7 the sale of books of tickets which were issued at a discount was abolished for the period of the war.

In his report on the working of the tramways for the year ended December 31 last, Mr. A. F. Lucas, general manager, attributed the increase of £10,014 in the passenger receipts to the exceptionally good trade and to the increased fares. There was an increase of 2,525,385 in the number of passengers, and a decrease of 237,323 in the car mileage. Working expenses rose by £3,535.

GREAT YARMOUTH.

In July, 1915, the Council adopted a recommendation made by the Tramways Committee, on the advice of Mr. F. L. Turner, the general manager, to fix the penny stage on the Gorleston section at the Halfway House instead of the Barking Fishery premises. The latter stage had proved unprofitable since it was instituted "to make the cars popular."

Digitized by Google

BELFAST.

In August, 1915, a fare of 2d. charged for the Glengormley six-mile pleasure ride on the Belfast Corporation Tramways was increased to 3d., and the committee were instructed to revise the working expenses so as to meet the deficit of £5,400 anticipated by the city treasurer.

EDINBURGH.

In November last the Edinburgh Tramways Company raised the ordinary and workmen's fares. In many cases a halfpenny was added to the penny stages. A deputation of the directors informed the Tramways Committee that the total advance in the costs of cables, coal, etc., was about £25,000, and in addition the company were paying war allowances to employees' dependants. The increased fares, they added, would amount to 8 per cent. on a turnover of £310,000 per annum, and would affect about one-fifth of the passengers.

DOUGLAS.

The up-journey fare on the cable section of Douglas Corporation Tramways was increased on December 20, 1915, from 1d. to 2d. On the horse section the charge was raised to 2d. either way.

DEWSBURY AND BATLEY.

The Yorkshire (Woollen District) Electric Tramways Company altered the fare from Dewsbury to Hick Lane, Batley, from 1d. to 1½d.

NEWCASTLE-ON-TYNE.

Finding it impossible to cope with the workmen's short distance traffic at halfpenny fares, Newcastle Tramways Committee on May 27, 1915, abolished the halfpenny charge and made a penny the minimum fare.

On May 3, 1916, the City Council confirmed a proposal by the committee to put an end to workmen travelling at half fare, which resulted in a loss of 2·158d. per car mile. The following regulation was agreed to :—" That no reduced fares be allowed except to those passengers producing coupon tickets, and that 12 coupon tickets entitling a passenger to travel a 1d. workmen's distance shall be sold at 1s. 3d. instead of 1s. ; similarly that 12 coupon tickets for a 1½d. workman's distance shall be sold at 1s. 9d instead of 1s. 6d. ; and that 12 dinner-time coupons for a ½d. workman's distance shall be sold at 8d. instead of 6d." It is hoped by this means to increase the revenue by £10,000 per annum. The increases came into effect on May 21.

At the end of June, the fares on the Corporation omnibuses were advanced in amounts ranging from a ½d. to 1d., in order to meet the increased cost of petrol. The effect of the increased fares may be gathered from the return for the four weeks ended July 15. For the first week the receipts totalled £6,824, and for the fourth week £7,129, while the average number of cars in use had risen from 157 to 159. For the four weeks the receipts were £27,698, as against £26,006 in the corresponding period of last year, while the average number of cars in use had gone up from 128 to 159. The comparative return from April 1 to July 15 (106 days) showed receipts amounting to £98,221, as against £94,821 for the corresponding period of last year, an increase of £3,400. The number of passengers showed an increase of 879,372, and the number of miles run an increase of 104,915.

CROYDON.

To allow of increases being made in the employees' wages, Croydon Tramways Committee, in July of this year, recommended the Corporation to revise the fare stages by shortening. This would reduce the 1d. distances from an average of 2 miles 290 yards to 1 mile 1,416 yards, and the others accordingly. Ninety per cent. of the passengers pay penny fares, and the Committee are of opinion that the alterations would give an increase of 8 per cent. in the revenue, producing £7,472, which it is hoped would meet the extra sum of £1,865 required for wages, as well as the increased cost of materials, at the same time leaving a balance to place to the reserve and renewals fund.

Some objection was made to the revision of one stage at the Corporation's meeting on July 24, when it was stated that while two 1d. stages, 2 miles 1,280 yards and 2 miles 1,140 yards, were being increased to 1½d., a fare of 2d. was to be charged for the stage of 2 miles 1,180 yards from Thornton Heath to the Greyhound Hotel. A motion to refer back the latter revision was lost by four votes, and ultimately the report was adopted by a majority of 21.

KEIGHLEY.

The discontinuance of halfpenny fares was agreed to by Keighley Council in June, 1916. In their place prepaid tickets in books of 20 for 1s., 10 for 6d., and 5 for 3d. have been issued. When a prepaid ticket is not presented a uniform fare of 1d. is charged for any distance between two termini. The prepaid tickets are not available on Sundays or after 2 p.m. on Saturdays. Councillor A. Smith, chairman of the Tramways Committee, said the increased working costs entailed by the war had created a deficit during the past two years, and money was required to carry out necessary improvements.

KIRKCALDY.

To provide for future repairs and renewals, Kirkcaldy Tramways Committee have recommended the abolition of ½d. fares except on workmen's cars.

BLACKBURN.

An increase of fares is threatened at Blackburn. Councillor C. Higham, vice-chairman of the Tramways Committee, stated on July 8 that the expenditure had gone up by leaps and bounds, and £1,400 a year was being paid to employees' dependants. The receipts had declined, and the committee might have to consider the question of raising fares.

RAWTENSTALL AND BACUP.

Rawtenstall Corporation have asked Bacup Council to agree to increases of fares in the latter district. The Bacup authority have decided to consider modifications in the stages only, and have stated that Rawtenstall must ask the Board of Trade to appoint an arbitrator if their proposals are insisted upon. At a meeting of representatives of the two Councils in June, 1916, Alderman Coupe, chairman of Rawtenstall Tramways Committee, stated that the tramways, saddled by heavy charges due to the high purchase price of the old tramways, had involved the rates to the extent of 3½d. to 4d. in the £. The renewals fund was totally inadequate, and there was now the increased working charges due to the war. The alteration of fares was an adjustment of distances. At the present time the 1d. ride in Bacup was nearly half as far again as in Rawtenstall, where the full legal fare of one mile for a penny was being charged. The proposal was to divide the distance between Waterfoot and Bacup into five stages instead of four.

GLOUCESTER.

In July, 1916, there came into operation on Gloucester tramways a minimum fare of 1d., entitling the passenger to ride two stages of about half a mile each instead of three stages. The new arrangement does not apply to workmen and school children. For transfer tickets the charge has been increased from 1d. to 1½d. The Council's action was based on a report presented by Mr. F. H. Corson, the manager, in consequence of the higher cost of working. By the changes it is hoped to prevent further calls being made upon the ratepayers.

OUTER AREAS OF EAST LONDON.

After prolonged consideration, due mainly to the opposition of the labour members, West Ham Council in June last adopted a recommendation of long standing, made by Mr. J. S. D. Moffet, general manager, for the abolition of the ½d. fare, except for children, and the institution of a universal 1d. fare for any single journey on any car. Workmen's return fares were fixed at 1½d. The increased cost of working, and the prospect of the ratepayers being called upon to provide a large sum for renewals, are the causes that led to this effort to place the undertaking on a sound basis. The London County Council now have under consideration a letter from Mr. Moffet, asking them to withdraw the ½d. fare on the portion of the through running route in their area. Mr. Moffet added :—" If your Council are at all favourable to such an alteration, the opportunity presents itself for arriving at a uniform fare scheme for practically the whole of the tramways operating in the Eastern Metropolitan area."

Leyton Council have withdrawn the ½d. fare, which was adopted some years ago against the advice of a large body of expert opinion. On the recommendation of Mr. L. E. Harvey, the general manager, who has shown great zeal in the matter, the universal penny fare has been instituted.

On December 20, 1915, the Corporation of Walthamstow accepted a recommendation by the Tramways Committee for shortening all the stages, but Councillor W. R. Clarke, the chairman of the committee, urged that the halfpenny stages should be abolished and the present penny stages retained. During the ten years of the undertaking's existence the deficit has totalled £22,700, which the ratepayers have had to pay. In February, 1916, the Council adopted a new list of fares and stages recommended by Mr. W. Murray, the manager. Halfpenny fares were abolished except for children, and workmen's fares were increased by 50 per cent.

In consequence of another adverse balance (£4,869) on the East Ham tramways undertaking for 1914–15, Mr. Wm. Ullmann, the engineer and manager, was directed to submit a report on the question of a revision in fares and stages. The annual report gave the average fare charged per mile as ·63d. and the average ride given for ½d. as 1,457 yards, while the maximum was 1 mile 418 yards. In October, 1915, the Council adopted a scheme prepared by the manager for shortening the halfpenny stages.

NO LENGTHENING OF STAGES AT BRADFORD.

Bradford Tramways Committee in June last refrained from lengthening penny stages during the war, but instructed the general manager to bring up a scheme to adjust inequalities within three months after the declaration of peace. Mr. C. J. Spencer had reported that the cost of operation per car mile, including interest and sinking fund, for the past year amounted to 11·905d. Taking the last five years of peace, the receipts averaged 11·439d., which was ·466d. less than the expenses for the year 1915–16. If the receipts of war time had been the same per car mile as the average of the previous five years, there would have been a loss of nearly ½d. per car mile, so that if the receipts had not been in excess of the receipts in peace the undertaking would have shown a loss of £12,900.

Digitized by Google

LONDON COUNTY COUNCIL TRAMWAYS.

At the meeting of the London County Council on July 18, the Highways Committee submitted the tramway accounts for the year ended March 31, 1916, together with the report of the chief officer of tramways on the working of the undertaking. The tramways extend over a total length of 150¼ street miles (144½ miles of electric lines and 5¾ miles of horse lines). The whole is worked by the Council with the exception of 2⅛ miles in Harrow Road, which are worked by the Metropolitan Electric Tramways, Limited. The total income and working expenses were given in the following table, to which we have added the corresponding figures for the two previous years :—

	1915–16.	1914–15.	1913–14.
	£	£	£
Income	2,339,291	2,399,847	2,268,669
Working expenses	*1,683,660	†1,700,572	1,615,467
Surplus on working	655,631	699,275	653,202
Deductions—	£	£	£
Interest	326,477	330,300	—
Redemption	425,908	405,605	—
	752,385	735,905	736,598
Rent drawbacks, etc.	6,797	1	—
Income tax	40,000	32,102	28,197
Parliamentary expenses	2,261	2,803	2,086
	801,442	770,811	766,881
Less—Tax retained, interest on balances, rent, etc.	72,016	38,363	25,153
	£729,426	£732,448	£741,728
Deficiency (met from General reserve)	£73,795	£33,173	£88,526

* Including war service allowances of £95,365.
† „ „ „ „ £42,209.

The renewals fund amounted on March 31 to £329,968. There has been no payment into this fund since the year 1912–13. The general reserve fund on March 31, after meeting the deficiency on the year's working, amounted to £70,119. In the case of both funds the balances take no account of the depreciation of investments, which on present prices amounts to about 20 per cent. The total operating expenses, excluding war service allowances amounting to £95,364, were £1,588,295. The total number of passengers during the year was 545,423,397 ; the number of car miles was 47,879,675. The corresponding figures for 1914–15 were 550,497,993 and 58,978,792. In considering the results, the Highways Committee observe that it must be borne in mind that the strike, involving the disorganisation of the service and a consequent loss amounting to over £100,000, occurred in the second month of the financial year. Further, there is a special charge of £10,000 for the removal of the old horse lines in Liverpool Road. As the estimates for 1915–16 contemplated a deficit of £91,614, and this figure took no account of the loss of about £100,000 due to the strike, the actual results, which show a deficit of £73,795, are better than might have been expected. War conditions have seriously increased the working cost, but on the other hand some advantages have accrued through the relaxations of restrictions as to over-crowding. The capital expenditure up to March 31 amounted to £13,516,577, of which £200,854 represents the expenditure during the year 1915–16. The net debt on March 31 was £9,580,991, including £971,878 in respect of the horse tramways now obsolete. The sum paid as rates on the permanent way amounted to £82,927. This represents an average relief to the rates of London of about ½d. in the £. The savings of the road authorities in consequence of the Council maintaining the paving along the tramway routes is estimated at £140,000 a year. The expenditure incurred in the maintenance of the tracks during 1915–16 was ·52d. per car mile. The amount paid for street widenings and the estimated saving to local authorities on maintenance of paving gives a total of £238,469.

Finance Committee's Report.

The Finance Committee report that they approve the accounts of the tramway undertaking. These show that the net expenditure amounted to £200,854 and the total debt incurred up to March 31, 1916, was £13,930,660. The debt outstanding at the same date was £9,701,208. This debt included £971,878 in respect of capital expenditure on horse traction which had been rendered obsolete and has still to be provided for. The total revenue receipts for the year amounted to £2,339,291, a decrease of £60,555. The surplus on working was £655,631. The charges to be met are as follows :—Interest, £326,477 ; repayment of debt, £425,908 (less deductions amounting to £23,959), or a total of £729,426. These charges thus exceed the surplus on working by £73,795. This figure is, however, less than the original estimated deficiency for the year, which was £91,614. No payment has been made to the renewals fund in respect of the car mileage run, which was some years ago fixed at 1½d. per car mile. The expenditure for renewals of track and equipment amounted to £73,355, leaving a balance in the fund on March 31 of £329,968. This is invested in securities, and taken at current quotations these investments would stand at £274,654. The net deficiency for 1915–16 of £73,795 has been met by a transfer from the general reserve fund, which was reduced on March 31, to a balance of £70,119. Commenting on the position, the Finance Committee remarked that the condition of the undertaking causes them no little anxiety.

Annual Estimates, 1916–17.

The Highways Committee submitted the annual estimates for the year 1916–17, of which the following is a summary :—

Surplus on working		£655,355
Interest on bank balances and sundry rents ...		19,110
		£674,465
Deductions—		
Debt charges (repayment of capital, £429,851 ; interest, £313,273) ...	£743,124	
Income tax and sundry items ...	5,433	£748,557
Net estimated deficiency		£74,092

The reserve fund will be used to meet the estimated deficiency. The estimates contain provision of £20,000 for contingencies, and £122,500 for allowances to officers and employees on war service, but it is probable that this figure will prove insufficient, as the estimates were prepared before the introduction of the second Military Service Bill. But for these two special items of charge, the results of working the tramways for the year would show an estimated surplus of £68,408. The receipts are estimated at 11·50d. per car mile, as compared with 11·42d. earned in 1915–16. The estimates include no sum for addition to the renewals fund, and this fund and the general reserve fund will be more than absorbed if the estimated deficiency is realised. The Committee remark that they view with no little anxiety the probable continuation of the deficit, but they point out that in many directions the undertaking is being worked under abnormal and adverse conditions arising out of the war. In 1915–16 the electric car mileage was 47,867,176. The estimated mileage for the current year is 50,000,000

Sir John Benn contended there was no justification for predicting that the tramways would become a charge on the rates. The undertaking was handicapped by all sorts of charges.

Sir George Goldie (chairman of the Finance Committee) denied the suggestion that he or his committee were unfriendly to the tramways. His anxiety was to maintain their reputation, and he quoted from his budget statement the opinion that the tramways could not be judged by results obtained in war conditions and that their present position was not to be regarded as permanent. When the report was before the Highways Committee there was not a dissentient voice as to reporting the possibility that before long they would have to make a call on the rates. He pointed to the depletion of the renewals and reserve funds.

Mr. H. H. Gordon reminded the Council that in the last four years they had repaid two millions of debt on the tramways. This in the commercial world would be taken as equivalent to provision for depreciation. London would always require tramways ; the omnibuses could not carry the passengers. Cheap transit in London was a valuable asset and must be maintained, and he hoped that when the war was over the undertaking would be relieved of some of the burdens which ought never to have been placed upon it.

The reports were then received and estimates approved.

LONDON TRAMWAYS' RECORD REVENUE.

The traffic revenue on the London County Council's tramways for the week ended August 2 amounted to about £52,300, which is a record for the undertaking. For the two preceding weeks the totals were £49,514 and £48,584. The increase is mainly due to the presence of the captured German submarine mine layer off the Temple Pier. In the first seven days from July 26, 120,000 persons paid for admission to file past the vessel, the proceeds being given to naval charities. Many more were satisfied with a free view from a distance on the Victoria Embankment. The exhibition will remain open until August 15.

During one week's record traffic 729,177 children travelled by tramway at the reduced fare of half-price for those under 12 years of age for any single fare above a halfpenny. Many special cars were run for schools to the Embankment. The fares are largely taken advantage of by even the poorest children to visit the parks and open spaces.

Metropolitan Electric Tramways Bill.—This measure, which has received the Royal assent, relieves Middlesex County Council from any liability to proceed with the tramway and street widenings authorised by Parliament in 1911. An extension of time is allowed for the erection of railless trolley-car equipment in Wood Green and Tottenham.

Digitized by Google

LONDON TRAFFIC REPORT.

Combined Railway, Tramway, and Omnibus Traffic.

The Annual Report of the London Traffic Branch of the Board of Trade was issued in April last, and was briefly noticed in these pages, but pressure on our space has hitherto prevented fuller publication of its contents. On local railways, tramways, and omnibuses the total approximate number of passengers in 1914 was 2,064,612,057, compared with 972,465,682 in 1903, and the number of journeys per head of population 276·5, compared with 144·9. For the purposes of the comparison the population of Greater London in 1914 is taken as 7,465,278, and in 1903 as 6,710,272. Passengers carried by local railways in 1903 numbered 290,722,680, and in 1914 the total was 462,019,537; by tramways (approximately), 394,356,531 and 846,000,673; and by omnibuses 287,386,471 and 756,591,847.

The following table, compiled from information obtained from the tramway authorities and railway and omnibus companies, gives approximately the number of passengers carried in the last twelve years by local railways, tramways, and omnibuses, and the report again draws attention to the importance of the roads in the consideration of the London traffic problem:—

Year.	Number of passengers carried by—				Estimated Population of Greater London.	Number of Journeys per Head.
	Railway (Local Companies).	Tramway (Approximate).	Omnibus.	Total (Approximate).		
1903 ...	290,722,680	394,356,531	287,386,471	972,465,682	6,710,272	144·9
1904 ...	298,638,750	431,813,839	288,965,214	1,019,417,803	6,775,645	150·5
1905 ...	305,052,495	477,944,684	290,665,051	1,073,662,230	6,841,651	157·0
1906 ...	329,521,648	508,700,269	291,563,048	1,129,784,965	6,908,298	163·5
1907 ...	356,233,666	589,745,792	330,000,000*	1,275,979,458	6,975,593	182·9
1908 ...	399,666,339	636,009,090	340,000,000*	1,375,675,429	7,043,540	195·3
1909 ...	410,744,610	687,138,908	311,000,000*	1,408,883,518	7,112,145	198·1
1910 ...	425,271,861	763,797,856	377,207,555	1,566,277,272	7,181,415	218·1
1911 ...	436,498,785	821,819,741	400,628,487	1,658,947,013	7,251,358	228·8
1912 ...	436,492,548	797,487,581	551,622,398	1,785,602,527	7,321,978	243·9
1913 ...	462,019,537†	811,397,317	733,931,201	2,007,348,055	7,393,280	271·5
1914 ...	462,019,537‡	846,000,673	756,591,847	2,064,612,057	7,465,278	276·5

* Number of passengers estimated on basis of receipts; the figures are believed to be underestimated.
† Figures compiled on basis of Railway Companies (Accounts and Returns) Act, 1911, and not strictly comparable with those for previous years.
‡ Figures for 1913 repeated, no later figures available.

Railway Electrification and Statistics.

The total length of railways open for passenger traffic in Greater London at the end of 1914 was 669·5 miles, as against 607 miles in 1903. Exclusive of halts there were 628 stations.

In the following table a comparison is made of the mileage and the number of stations for the years 1903, 1907, 1912, 1913, and 1914, with the addition of the proportions of mileage and stations to population and area:—

	In Greater London.				
	1903.	1907.	1912.	1913.	1914.
Length in route miles ...	607·3	667·4	668·8	669·2	669·5
Length per square mile	·88	·96	·97	·97	·97
Population per route mile	11,049	10,452	10,842	11,048	11,150
Number of stations ...	538	611	623	626	628
Number of stations per square mile	·78	·88	·90	·90	·91
Number of inhabitants per station	12,473	11,417	11,639	11,810	11,887

In a reference to electrification of steam railways in and around the metropolis it is stated that the work has been checked very considerably by the war. "The London, Brighton and South Coast electrical system was being supplied from abroad, and equipment has not been obtainable. It is understood that in spite of this some progress has continued to be made."

An account is given of various improvements on the Underground Electric Railways, including the provision of moving stairways at Baker Street to connect with the Baker Street and Waterloo Tube, and moving stairways and a concourse hall at Oxford Circus station. Similar stairways are shortly to be constructed at Trafalgar Square, Piccadilly Circus, and Tottenham Court Road on the London Electric Railway, and at Shepherd's Bush, Oxford Circus, and the Bank on the Central London. A future undertaking is the enlargement of the tunnels and other improvements on the City and South London line, which was the first electric railway to be opened in London. The report does not come up to a sufficiently late period to mention the opening of the electrified suburban railways of the London and South-Western Company, which were fully described and illustrated in our issue of November 18.

Motor Omnibus Details.

Owing to impressments for war service, the number of motor omnibuses fell from 3,664 in 1913 to 3,120 in 1914, and by June 15 last the total had declined to 2,602. By the end of 1914 over 4,000 workers had left for military duty. Nevertheless, the number of passengers carried in that year increased by 22,660,000, the aggregate being 756,591,000. Of the 2,602 mechanically propelled omnibuses, 2,310 were petrol, 175 petrol-electric, and 117 steam. In 1913 there were 2,826 tramcars, and 2,839 in 1914. Besides the omnibuses themselves, the military authorities had taken over a considerable part of the undertakings of the Omnibus Companies.

At the end of June, 1914, 9,953 motor cabs were licensed; a year later the figure was 6,638, a reduction of 3,315. This decrease is attributed to the war, many drivers having either rejoined the colours or enlisted.

During the year the London General Omnibus Company assumed control of the New Central and Metropolitan Steam Omnibus Companies. The omnibus companies now incorporated with the London General are the Associated British Automobile Traction (M.E.T.), South Metropolitan Electric Tramways and Lighting, Gearless, Metropolitan Steam, Thomas Tilling, and New Central.

Through bookings between the different systems—omnibus, train, and tramway—are in operation over many routes. Daily services are run into the country districts such as to Farnborough, St. Albans, and Reigate. Connections are made on the latter route at Merstham with the East Surrey Traction Company's omnibuses to Redhill, and at Reigate with the same company's omnibuses to Godstone, Dorking, Westerham, and Sevenoaks. The longest route in operation is No. 107 on Sundays, from Clapham to Dorking, a distance of over 20 miles. On weekdays the longest route is that from Stockwell to Reigate, 19·40 miles. Certain all-night services are run. The miles of roadway traversed in 1914 by the omnibuses was about 520 on weekdays, 550 on Saturdays, and 600 on Sundays. The number of fatal accidents during 1914 attributed to omnibuses was 124, or ·051 per vehicle, calculated on the average number of vehicles working. Fatal accidents per million miles run were 1·17, and per mile of route operated ·23.

Tramways Traffic.

In 1914 there were 158·72 street miles and 305·55 single track miles of tramways open within the county, while in outer London the figures were 195·69 and 356·95. The number of passengers within the county was 550,497,993; in outer London the number was 295,502,680, making a total of 846,000,673. The London County Council total is not strictly comparable with former years, as passengers taking a transfer ticket now receive only one ticket instead of one on each car. Only 24 street miles of the L.C.C. Tramways are on the overhead system.

A clause was incorporated in the London County Act, 1913, whereby the Council obtained power to carry on certain occasions an additional number of passengers, not exceeding one-third of the number of inside passengers that the vehicle might be licensed to carry. In 1914 this clause was amended to make clear that the section was intended to confine the power to carry additional passengers to one-third of the number of passengers in the lower saloon of the car. Only a small mileage of new tramways was sanctioned in the 1914 and 1915 Bills of the Council, and the carrying out of the work of construction has been suspended in consequence of the war. Clause 23 of the 1915 measure amends the Act of 1912 as to the use of trailer and coupled carriages, enabling those vehicles to be run over the whole system.

As showing the effect of converting a horse line to electric traction it is mentioned that passengers on the Tooley Street route increased from 438,604 in the last month of horse traction to 1,014,000 in March, 1915. The benefit derived from short extensions to traffic points is shown in the case of the extension from Norton Folgate (Bishopsgate Street) to Liverpool Street. With the city terminus at the first-named point, 127,558 persons were carried in one month, as against 491,413 after the extension. The report might have added that one or two similar extensions were included in the last Parliamentary Bill, but were rejected or withdrawn.

Hitherto workmen's tickets have shown a progressive increase annually, but during 1914-15 the number fell by 6,199,146. The report observes that the issue of cheap return tickets may tend to reduce the number of persons travelling by workmen's cars, and also to relieve the congestion at the early rush hours. No reference is made to the undoubted decrease of workmen entailed by the mobilisation of many thousands of Army Reservists and members of the Territorial Force. The maximum number of cars licensed at one time during 1914 was 1,620 electric, 13 trailers, and 22 horse cars. The 150 trailers on order are now being delivered.

Digitized by Google

The mileage of electric tramways in Greater London in 1915 was as follows :—

Tramway.	Electric Lines Open for Traffic. Single Track Miles.	Route Miles.	Car Shed Track—Junction Lines.
London County Council	281·92	145·10	16·62
Middlesex County Council	86·30	43·15	2·66
Hertford County Council	3·00	1·50	—
London United Tramways, Ltd. ...	102·76	55·29	4·80
Metropolitan Electric Tramways, Ltd.	18·55	9·41	—
South Metropolitan Electric Tramways, etc., Company, Ltd. ...	26·22	13·26	1·14
East Ham Corporation	14·30	7·50	·46
West Ham Corporation	30·04	16·80	1·10
Croydon Corporation	19·70	11·92	·61
Ilford Urban District Council ...	11·35	6·66	·18
Barking Urban District Council ...	4·17	2·84	·13
Leyton Urban District Council ...	17·70	8·95	·55
Walthamstow Urban District Council	12·52	9·14	·60
Erith Urban District Council ...	8·44	4·71	·22
Lessees of Dartford U.D.C. ...	8·76	6·85	·55
Bexley Urban District Council ...	6·45	5·10	·28
City of London Corporation ...	0·48	0·24	—
Total	652·66	348·51	29·90

Length of Line Constructed on 31st March, 1915.

	Street Miles.
Double	141·0051
Single	10·3547
Total ...	151·3598

Systems of Traction.

	Street Miles.
Conduit	121·2263
Overhead	24·2334
Horse	5·9001
Total ...	151·3598

The following table gives the mileage of tramway lines and the number of tramway passengers in Greater London from 1903 to 1914 :—

Year.	Length of Line Open. Within the County of London. Street Miles.	Within the County of London. Single Track Miles.	In Outer London. Street Miles.	In Outer London. Single Track Miles.	In Greater London. Street Miles.	In Greater London. Single Track Miles.	Passengers Carried. Within the County of London.	In Outer London.	In Greater London.
1903 ...	115·18	205·92	73·74	121·55	188·92	327·47	299,209,364	95,147,167	394,356,531
1904 ...	119·35	213·08	103·66	177·77	223·01	390·85	311,691,157	120·122,682	431,813,839
1905 ...	117·73	213·66	131·37	220·33	249·10	433·99	324,854,380	153,090,304	477,944,684
1906 ...	117·59	219·04	169·31	303·51	286·90	522·55	316,986,310 (a)	191,713,959	508,700,269
1907 ...	126·80	234·12	177·13	319·51	303·93	553·03	372,515,754	217,230,038	589,745,792
1908 ...	131·57	248·53	179·93	323·81	311·50	572·34	412,913,881	222,195,240	635,109,121
1909 ...	136·47	257·70	189·78	343·61	326·25	601·31	451,439,216 (b)	235,891,425	687,330,641
1910 ...	146·90	277·35	192·68	355·33	339·58	632·68	504,715,326 (b)	259,082,530	763,797,856
1911 ...	149·75	286·91	195·16	356·42	344·91	643·33	533,440,235 (b)	288,379,506	821,819,741
1912 ...	157·74	297·03	195·65	356·91	353·39	653·94	512,052,053 (b)	284,834,928	797,487,581
1913 ...	157·86	299·03	195·65	356·91	353·51	655·94	522,952,640 (b)	288,444,677	811,397,317
1914 ...	158·72	305·55	195·69	356·95	354·41	662·50	550,497,993 (b)	295,502,680	846,000,673

(a) Falling off due to dislocation of traffic during electrification of London County Council Northern Tramways.
(b) Passengers carried by the London County Council only.

EXPEDITING TRAFFIC IN LONDON.

WORK OF THE COUNTY COUNCIL TRAMWAYS DURING THE WAR.

The Highways Committee, at the meeting of the London County Council, on August 1, presented a report representing some of the services rendered by the tramways in connection with the war. Many changes have been made at short notice in the services, owing to the redistribution of the centres of industry in consequence of the development of munition manufactories. These changes have been of the greatest service to the workers engaged in these industries. More than eleven and a half millions of passengers have been carried weekly, the great majority travelling to and from their work in connection with ordinary industry and commerce, while tens of thousands use the cars to reach the munition works in various districts. Of the various passenger-carrying services the Council's tramways were alone in a position to expand the normal services to an extent sufficient to meet the rapidly-growing needs of Woolwich. In July, 1914, just before the outbreak of war, the maximum number of the Council's cars arriving at a certain point during the busiest half-hour was 41 ; this number has now been increased to 86, an addition of 110 per cent. The number of cars arriving at the same point each day before the war was 975 ; the number is now 1,595, an increase of over 63 per cent. During the busiest hour to-day accommodation is provided for 13,688 people, compared with 4,094 before the war. Accommodation provided by motor omnibuses in this district, compared with that before the war, shows only a slight increase.

The service between Eltham and Woolwich is still being added to, and further augmentation of the services on the main route through Woolwich from the city termini to Abbey Wood would also be made but for the fact that the section of tramway in one of the main Woolwich thoroughfares, which consists of only a single line with passing places is already worked to its full capacity. The Council has for some time been in communication with Woolwich Council with a view to sections of single line being doubled, and although the borough council has consented to some of the projected doublings, it has declined to agree to doublings to which the greatest importance is attached, except on the conditions, which the Council would not be justified in accepting, that costly street widenings should be undertaken at a proximate date. If the consent of the borough council to these doublings could be secured on the compromise terms that the Highways Committee have submitted to the borough council, it would be possible at an early date to increase appreciably the existing very heavy service on those tramways. To enable the present additional services to be run, the sub-station at Woolwich has had to be enlarged and additional plant installed ; new cables between Greenwich generating station and the sub-station and between the sub-station and the tracks have been laid ; one section of the track has been doubled, and at three additional points further doublings are in progress. Other parts of London are not being neglected.

Authority has been obtained to carry an excess number of passengers, and this has proved a considerable help in meeting the needs of the arsenal workers. Women have been employed on work formerly done by men, more especially as conductors, the Commissioner of Police having agreed on October 20 to issue conductors' licenses to women. To-day there are 1,072 women conductors. The construction of trailer cars has been expedited as much as possible.

The tramways have been the principal means of meeting the great expansion and redistribution of passenger transit, owing to the altered conditions created by the war. The Highways Committee state confidently that no other form of transit could have provided so satisfactorily the increased facilities rendered essential by national requirements. If a comparison be made between tramcars and other forms of passenger conveyance, it will be found, the committee add, that the carrying of a given number of passengers involves the employment of a less number of employees in the case of a tramcar than in that of any other type of road conveyance, thus showing that the fullest possible use of tramway facilities is the most economical as regards labour incidental to passenger services using the roads. Although during the past two years the problem set before the management of meeting the requirements has been a difficult one, the needs of the country have been borne in mind ; the services of officers and employees have been lent to the Government for national work ; from the beginning of the war men have been encouraged to join the forces of the Crown ; substantial allowances have been made to the men enlisting or to their dependants, involving a charge on the undertaking of over £168,700, a sum that will be increased to over £200,000 by the end of the current financial year if the war continues until March 31, 1917.

A Manager Assists in Driving.—Six married employees of Carlisle Tramways Company have been granted conditional exemption from military service, the company being so shorthanded that Mr. R. L. McCulloch, the engineer and manager, is obliged to give assistance in driving.

Digitized by Google

Mr. J. S. D. MOFFET APPOINTED GENERAL MANAGER OF BELFAST TRAMWAYS.

On July 25 Mr. J. S. D. Moffet, general manager of West Ham Corporation Tramways, was appointed to a similar position at Belfast under the Corporation of that city. Mr. Moffet will take up his duties in September, when Mr. Andrew Nance retires and becomes consulting engineer to the tramways department. Before arriving at their decision the Council met in committee to receive the report of the Tramways and Electricity Committee, a deputation from which body had visited England and Scotland for the purpose of inspecting the tramway undertakings with which the candidates were associated. The committee had reduced the list of applicants to six, namely, Messrs. J. S. D. Moffet (West Ham), W. J. McCombe (Hull), R. S. Pilcher (Aberdeen), R. H. Wilkinson (Huddersfield), J. W. Dugdale (late general manager and engineer, Oldham Corporation Tramways), and J. F. Simpson (Preston). After considering the report of the deputation (Ald. J. Tyrrell, Councillors J. A. Duff and J. C. White), the committee recommended the Corporation to make their selection from Messrs. Moffet, McCombe, Pilcher, and Wilkinson. These gentlemen attended the meeting of the Council in committee, and each was interviewed. Upon a vote being taken, the choice fell on Mr. Moffet.

At the open meeting Councillor J. McCaughey, chairman of the Tramways and Electricity Committee, moved that Mr. Moffet be

Mr. J. S. D. Moffet.

appointed general manager at a salary of £800 per annum, rising by annual increments of £50 to £1,000, the engagement to be terminable on three months' notice by either party. The deputation, he said, came to the conclusion that Mr. Moffet would make an excellent manager. Alderman G. A. Doran, in seconding, expressed the hope that the appointment would result in bringing peace and harmony among the members of the committee. The resolution was unanimously adopted. The Lord Mayor (Councillor Sir Crawford McCullagh) heartily congratulated Mr. Moffet, and said he hoped that his selection would prove advantageous to Belfast.

The Belfast deputation reported as follows on their visit to West Ham :—"Although the population of West Ham served by the tramways is about three-fourths that of Belfast, and the car-mileage about two-thirds, it must be borne in mind that, while the other cities and towns which the deputation visited are, like Belfast, surrounded by country, West Ham lies among densely populated urban localities, whose populations are passing and repassing continuously over its roads, streets, and tramways, so that in our opinion the borough of West Ham afforded a test of tramway management not found elsewhere, and is the most severe criterion of tramway administration that your deputation met with where the supervision of the traffic, the maintenance of the overhead equipment, and the permanent way are under the same control and exercised to the satisfaction of the Council. The responsibility for the maintenance of the track has been recently transferred to the tramway manager at his express desire, and the arrangement of the staff appears to lead to harmonious working."

Mr. Moffet is by education and training a civil and mechanical engineer, and he has also the qualifications of an excellent business manager. As a controller of men he has also proved his capability, and he will leave West Ham as he left Rochdale, holding the esteem and respect of the staff and employees. Mr. Moffet succeeded Mr. H. E. Blain at West Ham in August, 1913, and of all the Metropolitan managers he has perhaps had the most trying time. Besides having to contend with omnibus competition, Mr. Moffet has earnestly and successfully worked to place the West Ham undertaking on a sound basis in the matter of fares. It was only a few weeks ago that the Council adopted his scheme for the abolition of the halfpenny fare and the institution of the universal penny fare. Acting upon his advice, the Council a year ago gave him the control of permanent way maintenance, for which work he secured an enlargement of his staff. Mr. Moffet is a native of Sunderland, and is 42 years of age. He received his technical education at the Heriot-Watt Engineering College, Edinburgh, and at the Durham College of Science, Durham University, Newcastle-on-Tyne. Later he entered the engineering works of Messrs. George Clark, Limited, Sunderland, and completed his training for the engineering profession under the borough engineer of Sunderland. In 1899 he was appointed chief engineering assistant to Mr. S. S. Platt, borough engineer of Rochdale, under whom he carried out a good deal of Parliamentary work, besides being responsible for the construction, with direct labour, of about thirty miles of tramway track. In 1904 he was appointed general manager of the Rochdale Corporation Tramways. He is an associate member of the Institute of Civil Engineers and a member of the Institution of Mechanical Engineers.

EDINBURGH AND ELECTRIFICATION.

Mr. J. B. Hamilton, general manager of Leeds Corporation Tramways ; Mr. J. A. Brodie, city engineer of Liverpool and permanent way engineer of the Corporation Tramways in that city ; and Mr. A. H. Campbell, the burgh engineer of Edinburgh, have presented to Edinburgh Tramways Committee an interim report on the methods of traction that might be adopted for the tramways, "keeping in view probable future extensions, with full information as to the probable costs of installation and working." The three gentlemen named state that they will submit a full report in September. The chief point on which the experts were asked to report was—"Is it practicable to arrange for a system of traction other than the cable being installed so as to be operated immediately on the expiry of the lease to the Tramways Company on June 30, 1919?" An affirmative reply is given, and the report adds that the Corporation may proceed with their arrangements independently of the Tramways Company. The next question was—"Would it be advisable to adopt a new system of traction for some of the routes, retaining the cable for other routes, and, if so, which?" The answer is that it is desirable to have only one system.

Another question was—"Could the electric system be operated in such a way that there would be no overhead wires in the central parts of the city?" The report states that such an arrangement would be possible, but that it could not be put into operation immediately on the expiry of the lease. The excavation for a conduit system would require considerable preparation, and would involve interference with the running of the cable cars up to June 30, 1919. It is suggested that the overhead system might be introduced all over, so that there would be no delay in securing a sufficient service, the formation of conduit sections being proceeded with later, if that is desired.

Dealing with alternative systems, the report refers to self-propelled cars, petrol, petrol-electric, and steam omnibuses, but none of these is advised in preference to overhead trolley traction.

A report presented to the Tramways Committee by the expert who has examined the 228 cable cars operated by the company, states that their condition indicates that upkeep has not had adequate attention. The under framing of the bodies appears to be sound enough, though the steel and iron parts are much corroded. There is no evidence to show that the under parts have been repainted since the cars were built. The amount of the wear in the brake work is much worse than the expert has seen on other tramways.

The Tramways Committee on July 19 referred the report to the City Council, and on the same date the burgh engineer reported that during the 42 days from June 5 to July 16, there had been 39 interruptions of the tramway traffic, the stoppages lasting from eight minutes to five hours.

When the interim report came before the Corporation on July 25, Councillor Harrison, convener of the Tramways Committee, stated that the Council would have until December 31, 1917, to make up its mind regarding the future of the tramways. The experts had reported that 200 new cars could be built in a twelvemonth. The present rails would do for electric traction, and for self-propelled cars, but would be worn out sooner than would be the case if of a heavier make. Personally he would advise the adoption of the conduit system for the centre of the city.

Digitized by Google

FINANCIAL REPORTS AND MEETINGS.

Prudent Finance at Coventry.—The Corporation have adopted the Tramways Committee's recommendation that the balance at their disposal of £5,091 on the past year's working be applied as follows:—£4,000 to the reserve or renewals fund; £1,091 carried forward.

British Thomson-Houston Company.—The profits for 1915 were £262,361, while £13,797 was brought forward. After providing for interest on debentures, the directors recommend the transfer for reserves and depreciations of £144,878, and to carry forward £73,358, subject to excess profits tax.

Delhi Electric Tramways and Lighting Company.—The revenue for 1915 was £10,300, and the surplus for appropriation £6,113, which has been applied as follows:—In writing off preliminary expenses, £2,217; transfer to depreciation reserve account, £2,000; to renewals reserve account, £1,000; carried forward, £895.

Dublin United Tramways Company.—The directors have declared interim dividends for the half-year at the rate of 6 per cent. per annum, less income-tax, on the pref. shares, and at the rate of 4 per cent. per annum, less income-tax, on the ordinary shares. The reduction of 1 per cent. on the ordinary shares is due to the loss of over £13,000 in the traffic receipts during the Sinn Fein rebellion.

Waygood-Otis, Limited.—The profit for the year ended March 31, 1916, is £12,798, making with balances a total of £14,544. Depreciation of plant, etc., absorbs £3,900, Otis amalgamation expenses £1,022, chairman and managing director's remuneration and directors' fees £6,542, and national service grants to the dependants of employees £2,396, leaving a balance to be carried forward of £671.

Belfast Corporation Tramways.—The Tramways Committee have received the city's accountant's report on the audit of the tramway undertaking for the year ended March 31 last. After allowing for all fixed charges and for the annual payment of £17,000 for depreciation, there remained to the credit of the appropriation account a balance of £7,861, which was transferable to the general purposes fund. The transfer was ordered to be made.

Edmundson's Electricity Corporation.—Mr. P. D. Tuckett, presiding at the annual meeting on July 20, said the war had affected almost all of their undertakings. As to the Scarborough tramway undertaking, the bombardment, followed by the air raids, had not only reduced the resident population, but was estimated to have deprived it of nearly 500,000 visitors. The tramway revenue had shrunk by 58 per cent. compared with 1914.

Kirkcaldy and Halfpenny Fares.—The net surplus on the Corporation Tramways for the past year was only £136, and it is suggested in the annual report that halfpenny fares should be abolished with a view to obtaining the increased revenue that will be required to meet the cost of permanent way renewals a few years hence. The total revenue for 1915-16 from 5,403,000 passengers was £17,433. Nearly 50 per cent. paid halfpenny fares, and there was a decrease of 90,000 in the total number of passengers.

J. G. White and Company, Limited.—Mr. Wm. C. Burton, who presided at the annual meeting, stated that engineering constructional work in all parts of the world had been seriously reduced by the war. The profits for the year amounted to £17,380, against £19,772 in the previous year, and they recommended a dividend of 6 per cent. upon both classes of shares, leaving £34,939 to be carried forward, as against £29,559 in the preceding year. Methods for broadening the scope of the company's work, both at home and abroad, were receiving consideration.

Plymouth Corporation Tramways.—The traffic receipts for the year ended March 31 last amounted to £65,009, and sundry receipts £870, and interest on investments £25, making a total of £65,905. The gross profit was £22,106, and after payment of capital charges and income-tax there was a net profit of £9,754. The Tramways Committee have decided to apply £9,022 in aid of the borough fund, and the balance of £732 to the reserve fund. These figures include the receipts and expenditure of the Devonport undertaking acquired by the Corporation on October 2 last.

Bombay Electric Supply and Tramways Company.—The total revenue for 1915, including sale of current to the tramways, amounted to £310,770, an increase of 2·71 per cent. The total expenditure amounted to £142,091, a decrease of 2 per cent. The net profit aggregated £168,679, an increase of £11,096, equivalent to 7·04 per cent. The directors recommend a dividend on the ordinary shares at the rate of 7 per cent. per annum, free from all income-tax, carrying forward £9,603. For the two preceding years the dividend was 6 per cent.

Cape Town Consolidated Tramways Company.—The directors' report for the year ended December 31, 1914, showed a debit balance of £1,894 6s. 9d. This amount, added to the debit balance for 1913, makes a total of £9,997 15s. 8d., which has been carried forward. The loss has been incurred in connection with the undertaking of the Cape Marine Suburbs, Limited, one of the subsidiary companies. The operation of the Camps Bay Tramways resulted in a profit of £1,521 5s. 1d., against £1,599 2s. 3d. in the preceding year. The number of passengers carried showed a decrease of 7,052.

Rangoon Electric Tramways and Supply Company.—The report for the year 1915 states that the total traffic receipts were Rs.8,60,664, a decrease of Rs.32,252, or 3·61 per cent. In the lighting and power department the gross receipts for current amounted to Rs.7,32,172, an increase of 13·77 per cent. The gross profits were £63,347, and transfer fees and interest on deposits and investments in London yielded £1,307, making £64,654. Among the appropriations are the transfer to reserve for renewals account, £12,500, and to special reserve for cables, etc., £2,500, leaving £20,327, plus £2,766 brought forward. The directors recommend a dividend on the ordinary shares of 3 per cent. for the year, tax free, leaving £2,783 to be carried forward.

Middlesex County Council Tramways.—In their report for the year ended March 31, the Light Railways and Tramways Committee state that the receipts totalled £467,368, equal to an average of 9·79d. per car mile. There are 56¾ miles of route in operation, and the car mileage was 11,453,276 miles. The number of passengers was 93,325,170. Compared with the previous twelve months there is a decrease of £8,390 in the receipts and of 802,153 miles in the car mileage. The committee also reported that the recent strike among the Tramways Company's employees resulted in two millions fewer passengers being carried in the two weeks. The receipts the first week fell to £4,177 from £8,712 in the preceding week, and to £1,561 in Whit week. During the latter week in last year the receipts were £11,655.

Lisbon Electric Tramways Company.—Mr. L. Breitmeyer presided at the annual meeting. The traffic receipts, he said, continued to establish a record. The increased expenditure was due mainly to the higher cost of coal, labour, and supplies. Coal had gone up to nearly £5 per ton, against 22s. 6d. in pre-war times, an average of 42s. for the past year. The quality was also inferior. Their coal consumption was 20,000 tons annually, and they were studying the feasibility of substituting wood, partially or entirely. The increase in expenditure and the falling off in the rate of exchange had reduced the profits by £25,000, and the directors had been compelled to reduce the ordinary dividend from 6 to 4½ per cent. If conditions remained unfavourable, the question of approaching the Camara in Lisbon for permission to increase the fares would have to be considered.

Swansea Tramways Company.—At the annual meeting the directors reported that the revenue for 1915 amounted to £65,084, a decrease of £1,631. The traffic receipts amounted to £63,088, showing a decrease of £2,047. After setting aside £4,000 for renewals, there remained a surplus of £12,982. The directors proposed to place to reserve £3,000, to pay dividends on 984 preference shares at the rate of 6 per cent. for the year, on 4,016 preference shares at the rate of 5 per cent., and on 13,000 ordinary shares at the rate of 6 per cent. for the year, leaving to be carried forward £2,415. Mr. C. G. Tegetmeier, who presided, referred to the increased charges for materials, and said that the sum of £6,098 spent on repairs and maintenance was considerably less than for some years past. Owing to the high costs and the scarcity of labour, renewals and reconstruction were being deferred.

Potteries Electric Traction Company.—For the year ended December 31 the revenue amounted to £136,167, of which £119,871 represented traffic receipts, being an increase of £4,788. There remained a balance of £40,871, as compared with £35,824 for 1914. With £1,698 brought forward, there was an available balance of £42,570, which the directors proposed to allocate as follows:—Reserve account, £8,035; renewals account, £10,000; dividend on preference shares, £12,250; dividend of 3 per cent. on ordinary shares, £7,350; carrying forward £4,934. Presiding at the annual meeting, Mr. R. J. Howley, referring to the negotiations with Stoke Corporation for a postponement of the date for the purchase of the tramways in the borough, regretted that the majority of the Corporation had not yet agreed to assure to the company the enjoyment of the property for a period sufficient to justify the expenditure on new works and improvements. The motor omnibus services had been steadily developed, and had proved a great convenience.

Calcutta Tramways Company.—Sir Henry Kimber, presiding at the annual meeting, said that the traffic receipts were £225,058, which showed a falling off of only £1,313. The working expenses were £118,189, or £2,683 less. There was thus a balance of working profit of £107,825. Compared with 1913 the receipts were practically the same. The expenditure showed reductions of about £1,300 in power and traffic expenses. There was an increase of £1,342 under the head of maintenance and repairs, due to improving the standard of track maintenance. The result of the working was a final dividend of 6s. 6d. per share, making 9½ per cent. for the year, which would be paid, less income-tax, at the rate of 2s. 8d. in the £. That dividend was arrived at after making the usual contributions of £15,000 to the reserve fund and £1,309 to the provident fund. The receipts for the current year showed an increase of £4,721 over those for the same period in 1915. The undertaking comprised 35 miles of track. There were 245 trains and 10 trailers carrying 37,000,000 and upwards of passengers. They carried them 5,500,000 miles in the course of the year, in a maximum of 206 trains and cars

Digitized by Google

run daily, and took in traffic receipts per train and car-mile in Calcutta 10·16d., while the expenses of running were 5·21d.

Nottingham Corporation Tramways.—The report for the year ended March 31, 1916, shows that the undertaking has passed very successfully through a year of exceptional difficulty. The comparative results are indicated by the appended summary, covering the past three financial years:—

	Year ended March 31.		
	1916.	1915.	1914.
Total capital expenditure ...	£735,382	£733,674	£667,705
Amount outstanding	£449,826	£473,999	£410,091
Total revenue	£195,392	£179,315	£175,379
Working expenses	£121,266	£112,583	£108,422
Gross balance	£74,126	£66,732	£66,957
Net profit	£33,500	£28,664	£31,013
Passengers carried	45,741,208	41,210,964	40,535,874
Fare per passenger	1·01d.	1·02d.	1·02d.
Car mileage	3,885,322	3,789,857	3,543,669
Units per car-mile	1·64	1·53	1·51
Power cost per car-mile ...	2·25d.	1·91d.	1·92d.
Receipts per car-mile ...	12·06d.	11·35d.	11·87d.
Expenses per car-mile ...	7·49d.	7·13d.	7·34d.
Ratio of expenses	62·10	62·78	61·82
Total track mileage	44·25	44·25	37·40
Number of cars in stock ...	155	155	135

Considerable permanent way renewals have been carried out, the total expenditure being £21,167. This amount has been charged to the reserve and renewals fund, which now stands at £50,375. Nine miles of overhead trolley wires, with the necessary fittings and span wires, were renewed, the cost being charged to working expenses.

Bradford Corporation Tramways. The city treasurer has presented the annual statement of accounts relating to the working of the tramways in 1915-16. The traffic income amounted to £314,500, an increase of £9,500, and working out at 12·8d. per car-mile, against 11·8d. The traffic portion of the working expenses amounted to £88,000, against £87,100, or 3·6d. per car-mile, against 3·40d. The direct contribution to rates amounted to £15,700, an increase of £500; and in addition £25,000 was appropriated from tramway reserves in relief of rates, making a total contribution of over £40,000. Repairs and maintenance of the permanent way and cars cost over £5,000 less, but in allowances to dependents of employees £8,338 had been paid, being £5,554 more. For the trackless system the income was £8,780, representing 6¼d. per car-mile, as compared with 5¾d. in the previous year. The expenditure, inclusive of interest and sinking fund, amounted to £10,711, slightly less than 8d. per car-mile, as compared with 8¼d. the previous year. The car mileage run on the general tramways was 5,877,000, being 317,000 less; on the railless system it was 322,000, an increase of 145,000. This increase was largely accounted for by new routes having been opened. The net profit for the whole undertaking was £29,700. The committee expressed gratification at this result and appreciation of the good work done by the management and all branches of the service. There was a diminution of £5,000 for maintenance expenditure on permanent way and cars, and renewals cost only £6,000 as compared with an average annual expenditure of between £20,000 and £25,000. A substantial reduction should be made therefore from the year's profits because it had been impracticable to carry out work to keep the system in its usual high state of repair, work which must be undertaken when the present difficulties with regard to labour and material disappear.

Anglo-Argentine Tramways.—Mr. J. B. Concanon, presiding at the annual meeting, said that the Board regretted they could not recommend a dividend on the ordinary shares. Although the financial position was sound, enterprise in Buenos Ayres had been almost at a standstill. The high cost of freight and limited tonnage hampered both exports and imports. Up to April 30, although the receipts showed a falling off of only £32 compared with corresponding period in 1915, the expenditure was £33,495 more, entirely attributable to the higher cost of energy; and they would have to face a greater ratio of increase for the remainder of the year. Mr. Pedriali, the general manager, had effected substantial economies. The sinking fund for the redemption of the 5 per cent. debentures came into operation this year, and would entail a charge on revenue of £8,000. There was no foundation for the rumour that the company was "controlled" by Germans. The report of the Anglo-Argentine tramways for 1915 shows gross receipts amounting to £2,709,615, less working expenses (which include various items amounting in the aggregate to £120,000 carried to the depreciation renewals reserve in addition to £265,692 expended on ordinary maintenance) £1,786,740, leaving £922,875, which, with interest on investments and deposits, £45,403, transfer fees, etc., £233, and the amount brought forward, £96,408, makes £1,064,921. Interest and charges absorb £970,801, leaving balance of net revenue account, £94,120. The receipts show a decrease of £141,380, and the expenditure has been reduced by £94,256, and now probably represents the minimum compatible with efficiency, while the position is aggravated by the continuous rise in the price of fuel, upon which the price paid for electric current is based. In these circumstances, and having regard to the difficulty of forecasting the results of the present year, the directors were unable to recommend the payment of a dividend on the ordinary shares. The balance at the credit of profit and loss, £94,120, has been carried forward.

General Electric Company, Limited.—The profits for the year ended March 31 amounted to £196,274, and £36,701 was brought forward. After deducting debenture interest and depreciation amounting to £27,259, a dividend of 10 per cent. is declared on ordinary shares and 6 per cent. on preference shares, transferring to the reserve £40,000, granting to dependants of men on active service £12,961, and leaving to be carried forward £48,053. The report states that the works have been mainly employed in the production of war material. Some 1,500 members of the staff and workpeople now serving at the front had to be replaced by untrained substitutes, and new workshops erected for special work. If the present results were satisfactory, they were entirely due to the devotion, initiative, and unremitting energy of the staff and workpeople. The capital expenditure on new works at Witton during the year amounted to £70,000. The export business recorded very large inquiries, but owing to well-known causes common to all exporters at the present time only a small proportion of the demand could be filled. Mr. H. Hirst, presiding at the annual meeting on July 17, said that the advance shown was all the more remarkable in view of the fact that a great portion of the previous year's output was for Government requirements, and the prices were almost without exception those ruling prior to the war; where advances had been asked for, they were in proportion to increased prices of material and labour. Increased profits were largely explained by more repetition work than could be expected in normal times. In some departments which showed annual pre-war loss there had been profits. The shell factory laid down by the company was in full swing. The deliveries had given the greatest satisfaction, but they had not yet succeeded in making a profit. This was no time to think of larger dividends; they must conserve their strength and keep their assets liquid. The stronger they made themselves the better they could wage the fierce commercial and industrial contest which was bound to follow the war. Through the Peel Conner Telephone Works they had established a magneto factory at Coventry.

Brighton Corporation Tramways.—After payment of interest, sinking fund charges, and income-tax, Brighton Corporation tramways have a balance in hand of £2,230 for the year ended March 31 last. The previous year the balance was only £18. A summary of the report is as follows:—

	1915-16.	1914-15.
Income	£57,936 4 11	£56,525 19 6
Expenditure	£41,001 0 8	£42,517 8 1
Balance	£16,935 4 3	£14,008 11 5

From these balances there had to be allocated interest, sinking fund, and income-tax, amounting in each of the two years to:—

Interest	£7,347 11 10	£7,660 13 4
Sinking fund	£6,429 8 10	£5,917 4 3
Tax	£965 10 1	£467 6 8
Totals	£14,742 10 9	£14,045 4 3

It was only possible to meet these charges last year from the fact that bank interest gave a credit of £54 15s. 5d., leaving £18 2s. 7d. to carry forward. This was allocated to reserve and renewals fund. Bank interest this year was £38 0s. 1d., which, added to the balance of £2,192 13s. 6d., gave £2,230 13s. 7d., which will doubtless be added to the reserves renewals fund, at present amounting to £3,235 13s. 5d. Other comparisons for the past three years are:—

	1915-16.	1914-15.	1913-14.
Electricity used	1,678,627	1,676,770	1,722,548
Car-miles run	1,053,285	1,108,352	1,156,584
Revenue per car-mile	13·202d.	12·24d.	11·79d.
Expenses per car-mile	8·47d.	8·91d.	8·80d.
Expenses to receipts	64·14	72·79	74·66
Passengers per mile	12	11	10
Passengers	12,295,198	11,837,828	11,339,515

Glasgow Corporation Tramways.—The financial year of the Glasgow Corporation Tramways, which closed on May 31, was marked by several exceptional features. As will be seen from the comparative abstract on page 118, the surplus to the common good, which is the sum remaining after the payment of all charges and reserves, and may be regarded as the net profit, amounted to £43,548, as compared with £12,951 in the previous year. This notable result has been obtained in spite of the fact that the payments to dependants of the men on active service and supplementary allowances have increased from £51,817 to £80,438. On the other hand, the traffic receipts show the very large expansion of £78,570, and against this there is only a relatively small increase in expenses of £8,834. A notable item in the accounts is the growth in the income-tax, which has risen from £22,789 to £39,853, an increase of £17,064.

Digitized by Google

	1915-16.	1914-15.	1913-14.
Traffic receipts	£1,149,264	£1,070,694	£1,078,691
Sundry receipts	8,072	6,183	5,156
Total revenue	£1,157,336	£1,076,877	£1,083,847
Traffic expenses	£350,186	£345,625	£332,546
General expenses	144,297	142,020	134,034
Maintenance and repairs ...	133,659	144,530	156,214
Power expenses	64,346	51,995	53,483
Clydebank bridges	516	—	—
	£693,004	£684,170	£676,277
European War	80,438	51,817	—
Total expenditure	£773,442	£735,987	£676,277
Balance carried to net revenue account...	£383,894	£340,890	£407,570
Dumbarton Tramways	—	126	180
Interest on investments	81,203	65,700	64,809
Total	£465,097	£406,717	£472,559
From which there fall to be deducted :—			
Rent of Paisley lines	£6,700	£5,659	£5,830
Interest on capital	90,474	78,797	82,921
Sinking fund	109,614	105,491	102,607
Income-tax	39,853	22,789	14,057
Parliamentary expenses	500	8,817	609
Renewal and depreciation ...	174,408	172,310	212,642
Total	£421,549	£393,766	£418,666
Surplus to Common Good ...	£43,548	£12,951	£53,893

Sheffield Corporation Tramways.—The report for the year ended March 25, 1916, shows that the income was £455,609, and the working expenses £270,939, to which has to be added amount paid in war allowances to the dependants of employees, viz., £11,210. The gross profits are thus £173,460. The net amount of the charges for interest and sinking fund aggregate £63,818. Income-tax on profits was £13,862, an increase of £8,294. Deducting these charges there is a balance of £95,780, an increase of £25,840 over the previous year. The balance is appropriated as follows :—Street improvements, proportion of service of debt, £8,159 ; renewals fund (including interest on investments and bank interest), £30,115 ; accumulated surplus fund (including interest on investments and bank interest), £8,049 ; special purposes fund, £2,000 ; special grants to the Pure Science and Applied Science Departments of the Sheffield University, £5,000 ; capital account (special items of expenditure), £601 ; transfer to general district rate, £41,856. The expenditure on renewals of permanent way amounted to £10,833, a reduction of £12,739. Certain renewals work that would have been done in the ordinary course of events at an approximate cost of £10,000 has been postponed on account of the war. The motor omnibus section shows a balance of £3,816, which has been transferred to the special reserve fund to meet any future contingencies. The committee are now working a regular omnibus service on ten routes with a total length of thirty miles. Five of these routes extend over considerable distances beyond the city boundary. Since the beginning of the war 426 tramway employees have joined the forces. Practically every available man of military age attested, and arrangements are made from time to time with the military representative as to what men are to be released for army service and what may be retained. The number of employees is now 1,808. During the year free travelling facilities for wounded soldiers and Belgian refugees, etc., have been provided. The total number of these tickets issued amounted to 380,000, equal in value to £1,566. A summary of the reports for the last three years is appended :—

	Year ended March 25.		
	1916.	1915.	1914.
Capital expenditure ...	£1,554,201	£1,554,260	£1,521,438
Loans outstanding ...	£1,106,691	£1,122,482	£1,073,612
Total track mileage ...	79	79	78
Number of cars in stock ...	339	339	335
Traffic revenue	£449,946	£391,535	£386,059
Total revenue	£455,608	£396,229	£392,397
Working expenses ...	£270,939	£246,829	£232,761
War allowances	£11,209	—	—
Income-tax	£13,861	£5,566	£3,305
Total expenditure... ...	£296,009	£252,395	£236,066
Interest and sinking fund	£63,818	£73,893	£78,722
Balance on year's working	£95,779	£69,941	£77,607
Passengers carried ...	123,429,410	107,023,195	104,851,408
Average fare per passenger	·878d.	·878d.	·884d.
Car-mileage	8,867,726	8,810,252	8,883,576
Units per car-mile ...	2·173	1·979	1·933
Power cost per car-mile ...	1·765d.	1·347d.	·849d.
Traffic receipts per track mile	£5,688	£4,950	£4,884
Traffic receipts per car-mile	12·175d.	10·747d.	10·430d.
Expenses per car-mile ...	*7·333d.	6·724d.	6·288d.
Ratio of expenses to revenue	*59·926	61·116	59·732

* Excluding war allowances.

DIVIDENDS.

Rio de Janeiro Tramway, Light, and Power Company.—One and a quarter per cent.

Brazilian Traction, Light, and Power Company.—One per cent. on the ordinary stock.

San Paulo Tramway, Light, and Power Company.—Two and a half per cent. on the common stock.

London Electric Railway.—Interim dividend for the first half of 1916 on the ordinary shares at the rate of 1½ per cent. per annum.

Chatham and District Light Railways Company.—Interim dividend at the rate of 3 per cent., less tax, on ordinary shares has been declared.

London General Omnibus.—Interim dividend of 5 per cent., free of tax, on the ordinary shares for the half-year ended June 30, against 6 per cent. a year ago.

Metropolitan District Railway.—Interim dividends for the first half of 1916 on the second preference stock at the rate of 3 per cent. per annum, the same as a year ago.

Blackpool and Fleetwood Tramroad Company.—An interim dividend at the rate of 4 per cent. per annum (4s. per share), free income-tax, on the ordinary shares for the half-year.

Bristol Tramways and Carriage Company.—An interim dividend at the rate of 5 per cent. per annum for the half-year ended June 30 on the ordinary shares, against 4 per cent. a year ago.

Liverpool Overhead Railway Company.—At the rate of 5 per cent. per annum on the preference stock, and 2½ per cent. per annum on the ordinary shares, income-tax being deducted at 4s. 6d. in the £.

Underground Electric Railway.—Interest on the 6 per cent. cumulative debenture stock, less tax, at the rate of 6 per cent. per annum, and coupon No. 17 off 6 per cent. income bonds, free of tax, at the rate of 6 per cent. per annum.

Edinburgh and District Tramways Company, Limited.—The directors intimate that they do not propose to pay any interim dividend on the preferred shares. In the preceding half-year a dividend of 3s. 9d. per share was paid.

City and South London Railway.—Interim dividend for the first half of the year 1916 on the ordinary stock at the rate of 1¼ per cent. per annum. Last year no dividend was paid on the ordinary stock, the last distribution being ⅛ per cent. in 1913.

Central London Railway.—Interim dividends for the first half of the present year on the undivided ordinary stock at the rate of 3½ per cent. per annum, and on the preferred ordinary stock at the rate of 4 per cent. per annum. A year ago the dividend on the undivided ordinary stock was at the rate of 3 per cent.

AN EXPERIMENT IN FUEL ECONOMY.

The Board of Trade has called attention to the increasing difficulty of providing supplies of coal to important consumers, and in view of the possibility of a serious shortage in the near future it is urged that every practicable economy in consumption should be adopted without delay. The London County Council is considerably handicapped at the present time in regard to its purchases of coal for use at the Greenwich station, as the stokers are only equipped for burning the better class of coal, the price of which is now about 32s. a ton The Highways Committee reported on August 1 that the arrangements at the boiler-house at Greenwich station have recently been considered by Messrs. Kennedy and Donkin, the Council's expert advisers in connection with the increase in the capacity of the plant, and they have pointed out that when the four new turbo-generators have been installed more steam will be required than the present boilers can supply, so that it will be necessary in the near future to fit ten of the boilers with grates having considerably larger area than the present grates. This would enable an increased output to be obtained, and a cheaper class of fuel to be used. By the use of coke the Council would be complying with the representations of the Board of Trade, and whether coke or cheaper coal were used, a very considerable saving would be effected. The Highways Committee recommended that an experiment should be immediately carried out by altering four of the existing boilers. They would then be in a position to decide in from six to nine months whether further alterations could profitably be undertaken. The cost of the work is estimated at £5,000. By burning a cheaper class of coal that expenditure should be recouped in a comparatively short period. No expenditure would be incurred without the sanction of H.M. Treasury having been obtained. The Finance Committee approved of the expenditure, and the report was adopted.

Digitized by Google

CONTRACTS AND ORDERS.

Birkenhead Council have agreed to purchase a Daimler petrol motor tower wagon for the tramways department, at £820.

Glasgow Tramways Committee have accepted the offer of P. and W. MacLellan, Limited, for a three months' supply of iron and steel bars.

Sheffield Tramways Committee have accepted an offer received from Hadfield's, Limited, for the renewal of the tramway junction at Fitzalan Square.

Chloride Electrical Storage Company, Manchester, have a contract to supply a storage battery to London County Council in connection with the lighting of Woolwich tunnel.

Northampton Corporation Tramways have ordered a large number of seats for women conductors from the Equipment and Engineering Company, of 2, Norfolk Street, London, W.C.

Pinchin, Johnson and Company, Limited, of Bevis Marks, E.C., have been awarded a contract by the London County Council for insulating varnishes, etc., required for the tramways.

Hadfields, Limited, have received a contract for the supply and delivery of steel tires and axles for Salford Tramways Committee, and points and crossings for Bolton Tramways Committee.

Messrs. Walton and Clough, who obtained the contract to supply coal conveyors for the Southampton electricity works, have been permitted by the Ministry of Munitions to execute the order.

Herbert Morris, Limited, have received an order from Birmingham Electricity Committee for an overhead electric runway, including a travelling electric pulley-block and bogie trolley, at £421.

Messrs. John Cantor and Company, of Old Nichol Street, Shoreditch, London, E., supplied the new uniforms for the Portsmouth Corporation Tramways, to which reference was made in a previous issue.

Rotherham Council have placed an order with Messrs. Steel, Peech and Tozer, Limited, for forty tons of rails at £16 10s. per ton, in order to construct a double track in a portion of Westgate.

Willans and Robinson, Limited, Rugby, have received a contract to supply to Wolverhampton Corporation a 5,000 KW. Zoelly turbine, with Siemens generator, Rees Roturbo pumps, and Willans surface-condensing plant.

Bristol Council have accepted the tender of Fraser and Chalmers, of Erith, to supply a 3,000 KW. Fraser and Chalmers turbine, coupled to a Vickers alternator, and with condensing plant by the British Westinghouse Company.

Salford Council have accepted tenders for the supply of coal for the electricity works at prices ranging from 16s. 8d. to 18s. 4d. per ton, and for coal conveyors, bunkers, and chutes, by the New Conveyor Company, Limited, at £1,504.

Shepherd's Parging Block Company, Limited, have received an order for a large quantity of block parging from the Gloucester Corporation Tramways, and the company's block parging has been specified for two other Corporation tramway extensions.

The British Westinghouse Company have been given the contract for the supply of choke coils, etc., for turbo-generators at Greenwich generating station, and this contract has been made in addition to certain temperature alarms which were ordered to complete the installation.

Rawtenstall Council have placed a contract for a 2,000 KW. turbo-generator with James Howden and Company, Limited, and for condensing plant with Mirrlees, Watson and Company, Limited. The generator will be manufactured by the General Electric Company, Limited.

Luton Council have awarded contracts as subjoined:—Two boilers and stokers complete, £7,648, Clarke-Chapman and Company; economiser, £1,091, E. Green and Sons; coal-weighing machines, £440, W. & T. Avery, Limited; one water softener, £455, Harris Anderson Patent Feed Water Filter Company; rotary feed pump, £258, Hayward, Tyler and Company.

Buenos Ayres Western Railway Electrification.—Leeds Forge Company have received an order for underframes and bogies for motor coaches and bogies for trailer coaches now being constructed in England for the Buenos Ayres Western Railway. The value of the order is placed at about £70,000, and the work is in connection with the electrification of a section of the railway.

H. Bessemer and Company, Limited, have a contract from the London County Council for 500 driving-wheel tires, at £38 10s. a ton, and 250 pony-wheel tires, at £55 10s. a ton, less 2½ per cent. discount. These prices were for tires not tested to specification. The prices, inclusive of tests, were £40 and £57 a ton, less 2½ per cent. respectively, and as the tests are considered essential the latter prices were accepted.

Manchester Electricity Committee have placed the following contracts:—Coal stacker, supplied with 420 volt. a.c., three-phase motor, Fraser and Chalmers, Limited; three electric capstans, Sir W. G. Armstrong, Whitworth and Company, Limited; scrap cable and copper, B.I. and Helsby Cables, Limited; cables, Pirelli-General Cable Works, Limited; Western Electric Company, Limited; W. T. Glover and Company, Limited; Callender's Cable and Construction Company, Limited; British Insulated and Helsby Cables, Limited; Chas. Macintosh and Company, Limited.

PERSONAL.

Mr. T. Britten, manager of the Chelmsford works of Crompton and Company, Limited, has been elected a director of the company.

Mr. W. H. Allen has resigned the appointment of engineer and manager of Loughborough Corporation electricity department, and has accepted a position elsewhere.

Mr. F. P. Dolamore, assistant borough surveyor at Bournemouth, has been appointed to fill the vacant borough surveyorship caused by the death of Mr. F. W. Lacey. The salary is to be £550 per annum.

Mr. G. W. Watson, consulting engineer to the Commercial Motor Users' Association, has for some time been acting consulting engineer to the Munitions Mechanical Transport department of the Ministry of Munitions.

Mr. J. H. Balfour Browne, K.C., on his retirement from the Parliamentary Bar, has been elected a director of the Trafford Park Company and Railway. He has also joined the Board of the Trafford Park Estates, Limited.

Sir Albert H. Stanley, managing director of the London Underground Railways and London General Omnibus Company, is the chairman of the new Motor Transport Committee recently established at the War Office.

Mr. Ralph W. Kennedy, who for the past eleven years has acted as assistant editor of "Electrical Industries," has been appointed chemical engineer in the Aeronautical Inspection Department of the War Office. Throughout his career Mr. Kennedy has been closely associated with scientific and technical work.

Salaries of Coventry Tramways Staff.—Increases of salary have been granted to all the members of the Corporation tramways staff, the chief officers affected being Mr. H. A. Goodyer, chief clerk and accountant; Mr. E. P. Brown, traffic superintendent; Mr. J. Barry, permanent way foreman; and Mr. A. S. Neason, book-keeper.

Mr. A. E. Wray's work as general manager of the Luton Corporation tramways during the difficulties of the past year or so, was alluded to by members of the tramways committee at a recent meeting. He was complimented by the committee on the general improvement of the undertaking. The tramways are worked for the Council by Messrs. Balfour, Beatty and Company.

Mr. W. T. Stevenson, of the Pernambuco Tramways Company, is at home on a short visit. It is three years since Mr. Stevenson left London to take up the position of superintendent of the company's rolling stock. This now consists of 140 cars, and under present circumstances maintenance has been no easy matter in view of the scarcity of supplies. Mr. Stevenson will shortly return to Pernambuco.

Engineering Standards Committee.—At a special meeting of the main committee (Sir John Wolfe Barry, K.C.B., chairman), held on July 27 last, Mr. Charles le Maistre, A.I.Inst.C.E., M.Inst.E.E., who has been in charge of the work of the electrical section since 1903, was appointed secretary to the committee in succession to the late Leslie S. Robertson, M.Inst.C.E., who was lost with Lord Kitchener in the disaster to H.M.S. "Hampshire."

Mr. G. W. Shepherd, who on account of ill-health recently resigned the position of general manager of the Edinburgh and District Tramways Company, which he had held since 1906, and was appointed secretary, has now resigned that position. Mr. John Wiseman, who has been associated with the company for over thirty years, has been appointed secretary. Mr. Shepherd has had many difficulties to contend with during his management, and has shown himself to be possessed of resource and energy.

Mr. G. W. Knight, superintendent of the repair depot of the London County Council Tramways, has been given a grant of £50 by the Council. The Highways Committee had reported that Mr. Knight was appointed on the permanent staff in January, 1914, and among other duties has the supervision of a staff of 750 employees, his salary being only £300 a year. The committee propose to consider the question of his salary after the war, and they stated that its inadequacy is accentuated at the present time owing to the special work which Mr. Knight is performing for the Government. They therefore recommended that the above mentioned grant should be made.

British Electric Traction Personnel.—Mr. E. Garcke, chairman of the company, at the annual meeting said it was impossible to mention all the officers of the companies to whom acknowledgments were due, but there were two he could mention because, in addition to the high qualities they possessed, they were representative of the others, and it afforded him genuine pleasure to take this opportunity of thanking Messrs. C. H. Dade and R. J. Howley, the joint managers, and all the other officers they represented, for the excellent services they had rendered in their respective spheres. Mentioning that the burden of the heavy English income-tax had induced the

Digitized by Google

shareholders of the Bombay Electric Supply and Tramways Company to move the direction and management to India, Mr. Garcke stated that Mr. C. Shirreff B. Hilton and himself had had the satisfaction of being associated with Sir Charles Ollivant, the chairman to the Bombay Company, for the past ten years. Sir Charles had consented to join the Board of the British Electric Traction Company. In securing him as a director the Board had rendered the company an important service. The meeting re-elected Mr. C. E. Tegetmeier and Mr. P. D. Tuckett as directors. The chairman remarked that Mr. Tegetmeier was chairman of the fund for maintaining the families and dependants of those who had joined the forces in approximately the same position as before the war.

Councillor G. H. Walker, of Stalybridge, whose death is announced, was a partner in the firm of William Underwood and Brother, contractors, Dukinfield. The firm constructed a number of tramways and many other public works during the past twenty years.

WITH THE FORCES.

Major W. A. Vignoles, of the Lincolnshire Regiment, and borough electrical engineer of Grimsby, was wounded during the fighting early in July.

Lieutenant R. E. Bullough, South Midland T.F. unit of the Royal Engineers, who has been wounded in France, is the son of Mr. R. C. Bullough, general manager of Colchester Corporation Tramways.

Second Lieutenant Jinks, Northamptonshire Regiment, has been wounded while directing the work of a machine gun section. He was a member of the testing staff of the British Thomson-Houston Company.

Sapper E. Jackson, who before the war was an electrical engineering student in the Preston Corporation tramways department, has been awarded a commission in a field company of the Royal Engineers. He had already won the D.C.M.

Lieutenant A. R. Courtenay has been in hospital at Malta for an illness that only temporarily incapacitated him from duty. Mr. Courtenay, who has of late been serving at Salonika, was formerly of the publicity department of the General Electric Company.

Second Lieutenant J. Austin Baker was recently promoted to lieutenant, and has been appointed to carry out workshop duties with the Welsh division in France. Mr. Baker, before enlisting in the Army Service Corps in January, 1915, as a lorry driver, was in the traction department of the British Westinghouse Company, Manchester, and for some years was assistant rolling stock superintendent of West Ham Corporation Tramways.

Second Lieutenant Broster, 6th Liverpool Rifles, who enlisted in 1914, was a clerk in the offices of Liverpool Corporation Tramways. Early in the war he was promoted to sergeant, and awarded the D.C.M. For a more recent act of gallantry he was granted a commission and another decoration. Six other clerks from the office have also been granted commissions, out of thirty-five clerks who enlisted at an early stage of the conflict. Three others have been killed. The total number of employees serving with the colours is 1,400.

Second Lieutenant F. R. Hoggett, who died on July 18 from wounds received in France, was formerly with Callender's Cable and Construction Company.

Captain G. C. Whitaker, Leeds "Pals" Battalion, who has been killed in action, was shortly to have married Miss Mary Hamilton, daughter of Mr. J. B. Hamilton.

Sergeant-Major J. C. Clay, a Manchester Corporation motorman, has been killed in action. He had served twelve years in the army, and re-enlisted in November, 1914. He had been recommended for the D.C.M.

Motorman W. R. Martin, Bristol Tramways Company, has been killed in France while working a machine gun of a local battalion. His officers have written of his "willing and daring service, unselfishness, and cheery helpfulness."

Company Sergeant-Major E. C. Laughton, who has fallen in action, was for nine years associated with the lamp and fittings department of Siemens Brothers' Dynamo Works, Limited. He joined the 8th East Surrey Regiment in September, 1914, as a private, and went to France early in May last year. He was well known to many members of the electrical industry, who will deplore the loss of a valued colleague.

Second Lieutenant E. L. F. Beatty, who was killed in action on June 24 on the Western front, was the eldest son of Mr. A. H. Beatty, of Balfour, Beatty and Company. He joined the ranks early in the war, and was gazetted in February last year. At the time of his death he was serving in the 73rd Trench Mortar Battery. Writing to Mr. Beatty, the commanding officer said:—"He met his death bravely, going up into a heavy bombardment, his detachment being hit by a shell which killed him and four men. He was an exceptionally keen officer, and was liked and respected by all."

TRAMWAY AND LIGHT RAILWAY NOTES.

BELFAST.

ANNUAL ESTIMATE AND THE FARES.

The Tramways Committee on July 25 received from the city accountant the statutory estimate of the tramway revenue and expenditure for the year ending March 31 next, and the committee having considered this, and also, according to statute, the fares to be charged, passed a resolution recommending the Council to make no change in the present fares.

BRADFORD.

VOLUNTEER MOTORMEN—PARCEL CHARGES AND THE WAR—SUGGESTED BRADFORD-KEIGHLEY LINKING AND GOODS TRAFFIC.

The tramways department have now trained thirty volunteer motormen, who are rendering very acceptable service. In his annual report Mr. C. J. Spencer, the general manager, states that there is a probability of the scale of charges for parcels delivery on the tramways being increased, in consequence of the increased cost of running the department. Mr. H. Webber, general manager, Keighley Corporation Tramways, in his annual report says:—"It would appear that there is a prospect that the short distance existing between the Stockbridge terminus and the Bradford tramway terminus at Crosslatts will be stepped over in the near future. Such a linking up with Bradford would, in my opinion, have a very beneficial effect on the Keighley tramway undertaking. The amount of goods traffic taken from Keighley to Bradford by road is developing every year, and it seems to be a legitimate field for the tramway undertaking to handle such traffic, and thus reduce the number of private vehicles of all descriptions, which would have a direct saving on the wear and tear of the roads."

COVENTRY.

MEMORIAL TO TRAMWAY SOLDIERS—PRAISE FOR OFFICIALS AND EMPLOYEES.

To commemorate the names of the men of the Corporation Tramways Department who have lost their lives in the war, the Tramways Committee have decided to erect a tablet at the depot. Councillor H. W. Wale, vice-chairman of the Tramways Committee, in submitting to the City Council the annual report of Mr. T. R. Whitehead, the engineer and manager, acknowledged the loyalty, skill, and energy put into the undertaking by every member of the staff; they had been magnificent, particularly the women. Owing to the reduction of the staff the service had been materially decreased in the aggregate, but on one section where the ordinary service was eight cars they were running, particularly at night, twenty cars. While the number of passengers was nearly eleven and a half millions, the accidents were of a trivial character, although the traffic problem was one of the most complicated that obtained in any urban centre.

GLASGOW.

AN APPEAL FOR MORE WOMEN CAR HANDS—THE TRAINING OF WOMEN DRIVERS—OVERTIME SUGGESTED IN LIEU OF A WAR BONUS—EXPECTORATING FROM CARS.

Owing to the depletion of the male staff a further appeal has been made to women to come forward and fill the vacancies on both the front and rear platforms. There are already nearly 1,300 women conductors. The Scot has always been noted for his power of discernment. Apparently the latter quality is deserting the townsman in Glasgow, for we read that complaints have been received of disparaging remarks being made to men conducting cars which are driven by women. The explanation is that the men are motormen who are acting as conductors in order that the women may gain further experience and acquire confidence. Long as Glasgow has possessed electric tramways, there are evidently some of her citizens who do not know what an important part a good conductor plays in facilitating the work of a tyro on the front platform. The women drivers have gratefully acknowledged this form of help, and honour is due to the Glasgow motormen for the part they have taken in the training of the women. These drivers now number 140, and more are being trained. As an alternative to an annual expenditure of £47,845 that would result from granting the request of both sexes of car employees for a bonus of 6s. per week, Mr. J. Dalrymple, the general manager, has suggested that the 3,067 drivers and conductors be asked to work one hour longer per day. Their hours, he has reported, were shorter than on any other tramways, and the additional hour would give them from 3s. to 4s. 6d. per week. The question will be considered by the Corporation at the August meeting, when the Tramways Committee will recommend that the working hours be increased from 51 to 57, the extra six hours to be paid for at the rate of time and a half. The Corporation have been recommended by the Committee to make it an offence to spit from a tramcar.

LIVERPOOL.

STARTING OF CARS BY PASSENGERS.

There is no truth in a widely published report that nine Liverpool passengers have been fined for ringing the bell to stop cars while the women conductors have been on the top deck. The fines were inflicted for ringing the bell to re-start cars. It was

Digitized by Google

because accidents had occurred from the practice that the prosecutions were instituted. Steps have also been taken to prevent men riding on the platforms in order to talk to women conductors. If passengers are really desirous of assisting the conductors, they can do so by adopting a suggestion of a tramway official that whenever possible the fare should be paid on the platform. Or the Tramways Committee might consider the advisability of calling for volunteers to be trained to discharge, during rush traffic, the duties performed at Manchester by bell boys and girls. The risk arising from permitting unauthorised persons to start the cars are very serious. Fatalities due to that cause are not unknown; one was recorded from a northern town in our issue of December 2 last. Moreover, claims for damages arising from similar mishaps cannot be resisted, as the authority would have encouraged inattention to duty on the part of the conductor by allowing passengers to re-start the cars.

LONDON.

ARBITRATION ON THROUGH RUNNING—DOCKS AND ARSENAL TRAFFIC—WOMEN CONDUCTORS.

Mr. J. M. McElroy, general manager, Manchester Corporation Tramways, has been selected by Messrs. Balfour, Beatty and Company and by Bexley Urban Council as arbitrator in the revision of the through running of tramcars between Bexley and Crayford. The Board of Trade having asked West Ham Council whether their scheme for doubling the tramway track at a certain terminus could not be postponed, the Tramways Committee replied that the heavy traffic from the docks and arsenal rendered the completion of the work a matter of urgency. Woolwich Council have agreed to the doubling of the County Council tramways at three places in Plumstead on condition that when widenings take place the track will be removed to the centre of the road. This concession is the outcome of the negotiations that have been in progress for several months with a view to facilitating traffic to the arsenal. The necessity for the doublings was urged in this column in October last before the Ministry of Munitions sought the advice of Mr. J. M. McElroy on the transit problem. Delay is still occurring, however, as regards the suggested doubling on the most important section, which the Ministry have asked for. The Borough Council urge that the Ministry and the County Council should bear the cost of the necessary widening. As the result of a conference with the Ministry, representatives of the County Council have expressed the authority's readiness to carry out the widenings within a term of years to be agreed upon, but the Borough Council, on July 26, asked that the period should be limited to one year after the declaration of peace. A large outlay has been made by the County Council in order to provide the additional electrical supply needed to increase the service.

MIDDLESEX.

LACK OF RAILS FOR PERMANENT WAY RENEWALS.

The surveyor to the Middlesex County Council has reported that in parts the tracks of the London United Tramways Company "are in a deplorable condition." The report adds:—"I have called the attention of the representatives of those areas, which are directly concerned, to the matter, who have informed me that owing to the war it is impossible for the company to proceed with a complete renewal of the tracks, owing to their inability to obtain new rails. I have pointed out to the district authorities their obligations under Section 11 of the Local Government Act, 1888, and that, as they are responsible for the satisfactory state of the roads from fence to fence, it is necessary that some steps should be taken in connection with the said tramways as soon as possible." On July 5 the surveyor to Hampton Wick Council reported that the company were about to carry out repairs in Hampton Court Road.

SHEFFIELD.

AUTOMATIC REVERSERS—A FORTY PER CENT. INCREASE IN TRAFFIC—EMPLOYMENT OF WOMEN.

At the termini of several routes automatic trolley reversers have been fitted, and the number is being gradually increased. It is expected that all terminal points will eventually be thus fitted. The new arrangement enables the poles to be automatically reversed without leaving the wires, and it has the advantage of maintaining the light in the car. Mr. A. R. Fearnley's annual report to the Tramways Committee refers to the severe tax of the department's resources to meet the demand for car and omnibus services in consequence of munition work. Records of passengers carried and total receipts have been made and broken week after week. On the Tinsley service there was an increase in the traffic of 40 per cent. It became necessary to employ women as conductors, and the only remaining men conductors are those unfit for motormen and not eligible for the army. Women are now engaged in car cleaning, and are gradually replacing men at this work. The number of women employed is over 700, the total staff being 1,807.

SOUTHAMPTON.

A CAR FOR SUMMER AND TRAILER TRAFFIC—NEW METHODS OF JOINT REPAIRING—ROLL OF HONOUR FOR TRAMWAY OFFICES.

A reference to the appreciation shown for the toast-rack type of car for summer traffic is made in the annual report of the general manager to the Tramways Committee. Mr. W. T. Robson also recommends that trailers of this type should be provided. Two new methods of joint repairs have been introduced during the year. One, the application of Thermit welding, has only been tried for this purpose on one system previously; the other method consists of packing all springing joints by driving in a species of resilient material and applying a waterproof cement to ensure that no deterioration can take place. The total number of joints Thermit welded during the year was 272. Early this year the permanent way was entirely reconstructed from the Dock Station to Holy Rood, and double track was laid down in the place of single track in Bridge Street, which has improved the time of the cars. The total cost was £4,207, this being at the rate of about £12,600 per mile of double track, an exceedingly satisfactory figure, as the manager observes, for war time renewal. A handsome Roll of Honour has been constructed in the tramway works out of oak timbers forming part of H.M.S. *Southampton*, which was built in 1806 and broken up in 1912. This occupies a prominent position in the tramway office, and will form a lasting memorial of the patriotism of the employees.

WEST HAM.

NEW MOTORS AND CONTROLLERS.

During the past year 21 single-truck cars have been equipped with new motors of the G.E. 200 ventilated type, which has now been adopted as the standard for the West Ham ordinary four-wheel single-truck type of car. In all 31 cars have now been fitted with T.2.G. controllers. This work has been done by the tramways department, in addition to the ordinary up-keep of the rolling stock. In his report the general manager, Mr. J. S. D. Moffet, says that plans have now been completed for putting in hand the work of reinforcing and where necessary reconstructing the car bodies as speedily as the circumstances will allow, but the lack of a sufficient renewals fund and shed accommodation retards the progress of the work.

GLASGOW TRAMWAY BATTALION.

COMPETITORS IN WAR EXERCISES "SOMEWHERE IN FRANCE."

The high spirit that animates our new army in France is shown by the fact that they make a sport of the exercises that fit them for their deadly work against the enemy. These events are held amongst brigades and divisions under the title of an assault-at-arms, with the result that the fighting efficiency of the units is greatly increased by the rivalry. Judging by the circumstance that the 15th Battalion Highland Light Infantry (Glasgow Tramways Battalion) recently came off easy victors at such a meeting, their adeptness at the real thing, coupled with the traditional Scottish gallantry, is likely to afford reason for congratulation to the Glasgow

Trophy won by Glasgow Tramways Battalion in France.

Corporation Tramways department for having recruited such a fine body of soldiers. Certainly the Tramways Committee and Mr. J. Dalrymple, the general manager, view with pride the prowess of the corps at the assault-at-arms, for Mr. Dalrymple has received for safe custody the cup that was the object of the rivalry. The trophy was the gift of General Compton, and a photograph of it is given on this page. How different the programme of the assault-at-arms was from events of a like kind during peace will be seen when we mention that the competitions included rapid wiring, relay race, tug-of-war, bomb throwing, bayonet fighting, Lewis, Vickers, and Stokes gun competitions, transport competition, alarm race, mule competition, and Victoria Cross race.

Digitized by Google

KEIGHLEY RAILLESS TROLLEY SERVICE.

In his annual report on the Keighley Tramways, Mr. H. Webber, general manager and electrical engineer, states that the weather experienced from the beginning of November up to the end of the financial year, on March 31, was of the worst possible kind for electric traction The tramway track and the roads on which the trackless trolley vehicles run were in such a state as almost to stop the service. The amount of cleaning and overhauling during the period was also increased by at least 50 per cent. on a normal winter. Another exceptional expense was the allowance and war bonuses granted as a direct result of the war.

Although all the railless routes authorised under the Parliamentary Bill of 1912 had now been nearly completed, the amount sanctioned for expenditure under the Bill was £27,000, whereas the equipment up to date had only cost £18,134, leaving a balance of £11,848. This showed that the work had been carried out with the least possible expenditure of capital. At the present time the last length of the installation was well under way towards completion. The whole of the overhead construction was carried out at the contract price of £923 per route mile.

The net revenue account showed a surplus of £51, which had been carried to reserve and renewals fund account. The total revenue had been £4,973, on a capital expenditure of £18,134. The amount provided and set aside for sinking fund had been £965, making a total of £1,429 in hand for this purpose.

In our issue of December 9 last we published an illustrated and detailed description, written by Mr. Webber, of the railless undertaking, together with a map of the district. The routes were previously operated by motor omnibuses at a loss. The railless vehicles are of the over-running trolley type. The overhead equipment was supplied and erected by Messrs. Clough, Smith and Company, Limited.

BARRETT JACKS.

Barrett jacks, manufactured by the Duff Manufacturing Company, of Pittsburgh, have a well-established reputation for reliability. Their jacks are made in a great variety of designs, and purchasers have the assurance that the essential qualties of easy operation, quick lift, safety, and durability, are combined to the highest degree. In ball and cone bearing screw jacks the company have effected many structural improvements, with the result that in every recent test undertaken by users, their high efficiency and strength has been clearly demonstrated. These jacks are the strongest built for heavy loaded vehicles, while the operation is made remarkably easy owing to the greatly compounded leverage. Trucks on which the bodies overhand the axles considerably are most conveniently handled with this type of jack, as the load can

Ball and Cone Bearing Screw Jacks—Capacity, 10 Tons.

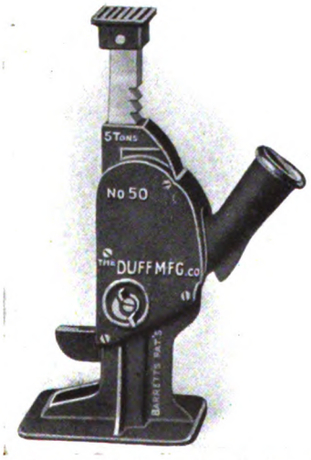

Automatic Lowering Jack—Capacity, 5 Tons.

be raised with low or short strokes of the ratchet lever, and the full capacity can be easily lifted with one hand.

Special attention has also been given to the improvement of the Barrett automatic lowering jacks. These are now made in various sizes with a lifting capacity up to 15 tons. The term "automatic lowering" is applied to this type of jack to distinguish them from the Barrett trip jacks which drop the load instantly. The automatic lowering jacks are ratcheted up or down, notch by notch, the direction being reversed by half a turn of the small eccentric at the side. This type of jack is particularly useful where a jack is placed upon each tramcar or light railway coach as part of its equipment, and it is extensively used for this purpose.

LONDON TRAFFIC GROUP.

ARRANGEMENTS WITH PUBLIC TRACTION AUTHORITIES.

In connection with the increase of fares on the Croydon Corporation Tramways, Alderman Allen, chairman of the Tramways Committee, has informed the Council that the London General Omnibus Company and the South Metropolitan Electric Tramways Company had agreed to fall into line with Croydon as soon as the new fare stages were instituted. Councillor Roberts suggested that as the undertakings were working on such friendly relations it might be possible for the omnibuses to have different stopping places from the cars, as the use of the same stopping places was a source of danger. Alderman Allen replied that the matter was one for the police, but the Tramways Committee would see what could be done.

In their report on the working of the London County Council Tramways for the year ended March 31, the Highways Committee set forth the through services instituted with the Metropolitan Electric Tramways Company two years ago, and state that on the through routes to North Finchley and High Barnet there are also through bookings with the London Electric and Central London Railways. The latter through tickets are available for travelling north of Highgate Station either by tramcar or by omnibus between the Archway Tavern and Fortis Green Road. The proportion of the through fares allocated to the Council is the ordinary tramway fare for the distance travelled by tramcar.

PATENT LIST.

Abstracted for "The Tramway and Railway World" from the Official Journal of Patents.

*** If the inventions have been communicated the names of the communicators are given below in *italics*.

APPLICATIONS FOR LETTERS PATENT.

Carburetter (9,245)—C. H. Adams.
Trunk pistons of internal-combustion engines (9,201)—Albion Motor Car Company.
Wheel axles (9,067)—P. J. F. Batenburg.
Device for locking and releasing brakes (9,071)—W. F. Buck.
Automatic trolley alarm for electric tramcars (9,127)—R. Dodd.
Tool carriers for motor road vehicles (9,123)—C. Gouldesbrough.
Automatic trolley alarm for electric tramcars (9,127)—Horstmann Gear Company.
Speed indicators (8,976 and 8,977)—E. Jaeger.
Carburetters (9,217)—H. J. Owers.
Driving mechanism of motor road vehicles (9,070)—F. and F. W. Quarmby.
Lighting and heating of motor road vehicles, etc. (9,203)—W. F. W. Rhodes.
Wheels for road vehicles (9,207)—H. Street.
Differential gearing for electro-mechanical variable-speed mechanism (9,171)—J. G. P. Thomas and the Thomas Transmission, Limited.
Route and stopping-place indicators for vehicles (8,948)—J. Wood.
Motor lorries (9,628)—G. Moore.
Electric signalling systems (9,655)—F. G. Bell.
Driving gear for motor vehicles (9,528)—N. Bulkley.
Wheels for vehicles (9,363)—J. J. Butcher.
Electrical signalling systems (9,655)—W. C. Davey.
Double-deck tramcars, motor omnibuses, etc. (9,339)—E. Hatton.
Motor vehicles (9,365)—R. F. Macfie.
Driving gear for motor vehicles (9,528)—W. March and D. W. Robertson.
Motor lorries (9,628)—G. Moore.
Emergency steam brake apparatus (9,285)—M. J. E. Moore.
Devices for gripping electric cables (9,371)—St. Helens Cable and Rubber Company, and J. C. White.
Life-guards for motor vehicles (9,460)—D. Shanahan.
Superheater boilers (9,867)—Babcock and Wilcox (*Babcock and Wilcox Company*).
Regulators for polyphase transmissions systems (9,766 and 9,812)—British Thomson-Houston Company (*General Electric Company*).
Protection of Electric transmission systems (9,938)—British Thomson-Houston Company (*General Electric Company*).
Clutch control gear (9,936)—J. Brown, and Compayne, Limited.
Life-guards for vehicles (9,940)—S. C. Caddy.
Appliances for using paraffin with internal combustion engines (9,903)—A. Cox.
Electric accumulator containers (9,825)—B. M. Drake and the D.P. Battery Company.
Electrical signalling systems (9,750)—T. McLeod.
Protectors for motor car tires (9,901)—R. W. Muir.
Combined automatic and straight air brakes (9,704)—W. E. Pomeroy.
Multiple control apparatus for electric railways (10,099)—Akt.-Ges. Brown, Boverie et Cie.
Vessel to save waste of petrol from motor omnibus, etc. (10,345)—W. H. Beament.
Direction indicator for motor vehicles (10,002)—T. W. Bennett.

Digitized by Google

Manufacture of blocks suitable for wedges for rails, sleepers, etc. (10,248)—R. Bowen.
Speed-changing mechanism of motor vehicles (10,189)—J. D. Dean.
Roller bearings for axles of railway vehicles (10,255)—R. G. Dobson. and J. Heppell.
Means for stabilising railway tracks (10,009 and 10,010)—F. Fabre.
Means for consolidating rail joints (10,012)—F. Fabre.
Ticket punches (10,245)—E. G. Judd.
Direction indicator for motor vehicles (10,281)—H. S. Neville, H. G. Osborne, and W. E. Trinder.
Control of petrol-electric vehicles (10,361)—P. F. Smith and Tilling-Stevens, Limited.
Electric signalling (10,558)—L. Cohen and G. O. Squier.

FOR HIGH-CLASS
CONDENSING PLANT
WRITE TO
THE MIRRLEES WATSON CO., LTD.,
SCOTLAND STREET, GLASGOW.

Ask us to quote you
—for TUBES
Before placing orders for Steel Tubes, ask us to quote you — we can offer you advantages in quality and price.
We specialise in SEAMLESS STEEL TUBES for all purposes—and also make Electric Welded, Butt Welded, and Close Joint Steel Tubes. Consult us NOW.
ORIENTAL TUBE CO., LTD.,
West Bromwich, Birmingham.
Wires: "Tubes, West Bromwich."
'Phone: 45, West Bromwich.
ORIENTAL

Electrical driving for motor vehicles (10,491)—H. Crochat.
Paraffin-vaporising appliance for petrol motor engines (10,509)—E. Cummings.
Shock absorber for axles of tramway vehicles (10,669)—T. C. Winfield.

Specifications Published.

1915.

Starting mechanism for motor cars (8,365)—Fillettaz.
Fluid pressure braking apparatus (8,374)—Turner.
Convertible bodies for road vehicles (9,603)—Shepherd.
Points for tramways, railways, etc. (10,745)—Edgar Allen and Company, Robinson, and Larmuth.
Ticket punches (11,924)—Judd.
Car brakes (15,384)—Allison.
Motor vehicles (16,459)—Clayton and Shuttleworth, Limited, Robson, and Bretherton.
Repeater signalling apparatus for railways (17,353)—Louis.
Railway signalling systems (8,651)—Moore and Berry.
Electric motor control systems (8,748)—British Thomson-Houston Company and Martin.
Locomotives and other railway vehicles (9,050)—Spencer.
Trolley heads (12,848)—Taylor.
Anti-friction wheel bearings (12,972)—Chevrolet Motor Company of New York.
Projectors for motor vehicles (15,885)—Imray (*Robert Bosch*).
Springs for railway vehicles (9,257)—Glascodine.
Road vehicles (9,392)—Dawson and Buckham.
Non-skid device for motor vehicles (10,613)—Perkins.
Fish-plates (9,198)—Henry.
Rail joints (11,133)—Macer.
Steering gear for motor vehicles (12,970)—Chevrolet Motor Company.
Automatic slack adjuster for railway carriages (14,161)—Djurson.
Direction indicator for use on motor vehicles (16,770)—Edwards and Richards.
Side splash mudguards for motor vehicles (9,967)—Adams.

1916.

In the following list the numbers in italics are those that the specifications will finally bear and under which they will be indexed and abridged before acceptance and finally printed. The application numbers should, however, still be used for correspondence purposes.
Means for transmitting signals to railway vehicles (877—*100,582*)—W. F J. H. Bouman.
Starting mechanism for automobiles (198—*100,006*)—British Westinghouse Electric and Manufacturing Company, Limited.
Car couplings (749—*100,220*)—McConway and Torley Company.
Supports for railway rails (2,965—*100,724*)—W. P. Day.
Electrical systems for engines (4,688—*100,228*)—C. F. Kettering and W. A. Chryst.
Chairs for railway rails (5,626—*100,720*)—H Lumsdon.
Transmission gearing for automobiles (6,913—*100,816*)—G. V. Harriman.

Colonial and Foreign Tramways Traffic Returns.

NAME OF COMPANY.	1915. WEEKS ENDED.					1916. WEEKS ENDED.					AGGREGATE.		
	July 3	July 10	July 17	July 24	July 31	July 1	July 8	July 15	July 22	July 29	Wks.	1916.	Increase or Decrease.
	£	£	£	£	£	£	£	£	£	£		£	£
Anglo-Argentine	48,158	52,553	49,999	49,235	47,136	46,726	51,679	54,578	49,729	46,346	31	1,528,391	– 3,223
Auckland	19,139	(28 days)	...	...	...	21,705	(28 days)	...	...	...	52	274,763	+ 7,515
Burma... ... ... Rs.	4,037	4,770	4,476	4,900	3,726	3,605	4,661	4,545	3,637	3,437	52	—	+ 3,920
Calcutta ... ... Rs.	65,884	69,560	69,948	68,754	63,240	67,102	71,200	70,104	68,933	66,960	31	2,018,893	+ 91,941
Madras ... ... Rs.	29,180	(2 weeks)	32,086	(2 weeks)	30,490	29,250	(2 weeks)	34,007	(2 weeks)	32,762	30	437,111	+ 31,700
Pernambuco	...	3,008	2,911	2,911	2,803	...	3,104	3,104	2,998	2,917	30½	89,108	– 5,398

Companies Issuing Monthly Statements.

	1915. Feb.	March.	April.	May.	June.	July.	1916. Feb.	March.	April.	May.	June.	July.	Wks.	AGGREGATE. 1916.	+ or –.
	£	£	£	£	£	£	£	£	£	£	£	£		£	£
Brazilian Street Mtrs.	...	...	...	...	...	...	...	...	...	...	...	...	—	—	—
Brazilian Traction Mtrs	5797500	6294910	6333460	6670110	6591940	...	6079000	6711000	6678000	7091000	6961000	...	26	39,950,000	+2,265,890
Brisbane	34,050	30,740	29,890	31,780	29,880	31,150	30,320	34,275	32,575	33,510	31,390	32,880	31	227,230	+ 17,580
British Columbia $	558,512	557,135	540,861	512,568	498,093	...	572,935	577,117	549,046	542,353	529,078	...	52	6,602,624	– 703,939
Buenos Aires Pt. & C.	...	...	...	...	...	...	...	...	...	...	...	...	—	—	—
Buenos Ayres Lacroze	38,877	44,332	41,765	44,480	40,421	...	39,137	42,219	40,220	41,503	36,213	...	52	490,818	– 15,324
Cape Town	...	...	...	...	...	...	...	14,994	...	...	12,920	...	—	—	—
Carthagena & Herrerias	1,882	2,436	1,496	1,931	2,059	2,157	1,585	2,991	2,513	2,927	3,512	2,371	31	18,740	+ 5,935
Cordoba	11,534	12,746	13,609	14,494	...	...	11,831	13,598	14,053	14,868	...	...	9	28,921	+ 818
East India	1,649	1,846	1,864	2,119	2,194	2,231	1,863	2,196	2,116	2,161	2,283	2,220	52	25,370	+ 1,586
Kalgoorlie	2,352	2,638	2,841	3,269	...	...	2,248	2,479	2,553	2,921	...	...	21	12,437	– 1,035
La Plata	4,016	4,582	4,269	4,489	3,875	4,054	4,346	4,613	4,354	4,343	3,735	3,909	31	29,835	+ 15
Lima	30,164	34,185	31,633	...	...	...	32,900	34 159	33,556	...	...	...	18	134,629	+ 5,614
Manaos	...	...	...	...	...	...	...	157,156	155,030	152,854	...	...	—	—	—
Manila ... ... $	...	119,984	117,450	...	...	...	...	124,750	124,350	...	...	...	—	505,381	+ 16,765
Melbourne	59,086	...	...	...	...	...	69,395	69,542	...	69,275	...	...	—	—	—
Mexico ... $	...	...	...	...	...	...	...	...	...	...	...	...	—	—	—
Monte Video	30,008	29,716	26,786	27,771	24,266	25,161	32,502	31,956	28,997	28,349	25,300	25,220	39	266,288	+ 14,435
Port Elizabeth ...	...	...	...	...	...	...	3,857	...	...	2,809	...	...	—	—	—
Puebla ... $	...	...	...	...	...	...	...	...	...	...	...	...	—	—	—
Rangoon	4,991	5,217	4,964	4,887	4,997	...	4,674	5,501	4,849	4,589	4,205	...	26	28,581	– 1,164
Toronto ... $	767,326	820,750	795,816	795,262	787,558	...	846,256	910,969	883,209	903,924	884,491	...	26	5,335,199	+ 525 136
Winnipeg ... $	314,658	303,209	264,856	263,302	255,549	...	293,252	296,500	282,498	276,980	254,686	...	26	1,701,474	– 50,782

(Continued on page 124)

Digitized by Google

TRAFFIC RETURNS—*continued.*

Tramways and Omnibus Undertakings in the United Kingdom.

NAME OF COMPANY OR CORPORATION.	1915. WEEKS ENDED.				1916. WEEKS ENDED.						AGGREGATE.		
	July 3	July 10	July 17	July 24	July 31	July 1	July 8	July 15	July 22	July 29	Wks.	1916.	Increase or Decrease.
	£	£	£	£	£	£	£	£	£	£		£	£
Aberdare U.D. Council	321	353	325	368	338	354	364	384	410	411	17	6,351	+ 464
Aberdeen Corporation	1,753	1,869	1,783	2,053	1,885	1,834	1,998	1,841	1,865	2,267	8	15,395	+ 96
Accrington Corporation	548	569	559	537	649	561	547	583	555	667	17	9,914	+ 283
Ayr Corporation	414	487	608	1,051	628	385	470	503	745	710	11	5,066	- 330
Bath Electric	*	...	...	...	...	...	...	...	...	...	—	—	—
Birkenhead Corporation	1,452	1,461	1,438	1,438	1,459	1,556	1,623	1,531	1,531	1,673	17½	26,331	+ 2,104
Birmingham Corporation	13,365	13,189	13,828	14,143	14,285	16,322	16,263	16,615	16,529	17,145	17	281,498	+ 49,317
Birmingham Corp. Motor Omnibuses	892	845	892	867	865	970	974	1,028	1,049	1,172	17	16,527	+ 1,921
Blackburn Corporation	1,319	1,193	1,250	1,420	1,561	1,263	1,206	1,194	1,300	1,648	17⅝	22,869	- 459
Blackpool and Fleetwood	1,237	1,108	961	1,346	1,586	893	1,583	1,234	1,526	1,822	30	19,587	+ 1,744
Blackpool Corporation	2,190	1,932	1,699	2,064	2,748	1,630	3,067	2,281	2,924	3,718	17	31,080	+ 5,792
Bolton Corporation	2,955	2,786	2,868	2,901	2,887	2,826	2,915	2,788	3,093	3,083	18	50,522	+ 2,742
Bournemouth Corporation	2,122	2,026	2,097	2,178	2,926	2,304	2,179	2,411	2,515	2,775	18	40,465	+ 1,530
Bradford Corporation	6,596	6,474	6,676	6,642	7,748	6,551	6,859	6,657	7,060	7,679	17	117,656	+ 330
Brighton Corporation	1,201	1,148	1,186	1,250	1,512	1,236	1,328	1,273	1,451	1,543	17⅞	20,886	+ 1,323
Bristol	10,371	10,102	10,344	9,823	10,179	10,508	10,448	10,691	10,591	11,415	30	292,586	+ 11,689
Burnley Corporation	1,758	1,700	1,569	1,610	1,662	1,601	1,665	1,587	1,685	1,799	18	30,761	+ 1,143
Burton-on-Trent Corporation	292	317	306	301	322	270	286	266	286	292	17	4,578	- 543
Bury Corporation	1,405	1,301	1,366	1,440	1,429	1,344	1,403	1,383	1,581	1,554	18⅞	25,525	+ 879
Cardiff Corporation	2,727	2,820	2,801	2,828	2,812	3 058	3,074	3.048	3,139	...	16	47,494	+ 2,745
Chatham and District	1,295	1,366	1,336	1,303	1,317	1,317	1,341	1,343	1,336	1,396	30	34,946	+ 1,279
Chesterfield Corporation	264	284	261	272	269	271	275	287	279	272	16	4,459	+ 157
Colne Corporation	...	...	...	...	...	...	...	...	...	...	—	—	—
Cork Electric	560	590	540	514	551	567	581	542	589	619	30	14,747	- 82
Croydon Corporation	...	...	...	...	...	...	...	...	...	...	—	—	—
Derby Corporation	1,107	1,031	1,073	1,087	1,097	1,114	1,118	1,138	1 162	...	16½	18,232	+ 801
Dover Corporation	332	348	343	360	364	321	347	338	...	...	15	4.747	- 20
Dublin and Lucan	134	190	164	165	158	199	167	186	195	204	4	752	+ 74
Dublin United	6,834	6,421	6,310	6,530	6,073	7,274	6,464	6,629	7,034	7,629	30	173,427	6,822
Dundee City	1,379	1,428	1,355	1,425	1,550	1,377	1,359	1,340	1,408	1,480	10⅝	14,327	+ 38
East Ham Corporation	1,304	1,404	1,351	1,351	1,321	1,390	1,405	1,346	1,347	1,414	17½	22,870	- 23
Exeter Corporation	389	409	403	414	417	389	405	403	438	467	17	6,636	- 74
Gearless Motor 'Buses	*	...	...	...	...	...	...	...	...	...	—	—	—
Glasgow Corporation	22,566	21,700	21,452	17 842	19 951	23.065	22.157	22,493	22.251	23,153	8⅔	197.248	+ 16,049
Glasgow Subway	1,009	957	928	642	864	1,067	1,030	1,030	955	980	30	35,105	+ 3.747
Glossop (Urban Elec. Supply Co.)	134	125	134	139	141	133	138	135	144	161	31	4.188	+ 449
Halifax Corporation	2.202	2.209	2,203	2,240	2,350	2,234	2.275	2,226	2,180	2,630	16½	37,924	- 159
Halifax Corp. Motor Omnibuses	53	46	50	53	55	50	49	47	47	55	16½	791	- 73
Hastings and District	1,024	1,028	1,059	1,063	1,199	1,042	1,131	1,165	1,266	1,322	30	27,243	+ 854
Huddersfield Corporation	2,753	2,628	2,652	2,849	2,893	2,832	2.974	2,892	2,962	3,381	17	47,877	+ 4,206
Hull Corporation	3,048	2,902	3,044	3,115	3,121	3,184	3,234	3,279	3,288	3,238	17	53,768	+ 221
Ilford U.D. Council	702	725	670	684	677	745	718	713	723	741	17	12,034	+ 618
Ilkeston Corporation	132	136	142	140	171	133	147	135	155	159	18	2,475	+ 75
Ipswich Corporation	640	650	625	649	675	619	669	615	550	567	17	9.405	+ 64
Isle of Thanet	474	502	498	576	738	384	446	453	525	573	43	12.852	- 2,364
Kilmarnock Corporation	178	175	178	204	240	169	176	168	187	228	10½	1 891	- 97
Lanarkshire	2,009	2,115	2,012	2.627	1,973	2.372	2.371	2.255	2,478	2,676	30	67.120	+ 10,222
Lancashire United	2 041	2.020	1,777	1,849	1.919	1,851	2.054	1.844	1,810	2.163	30	52.273	+ 1,700
Leeds City	9,253	8,863	9,111	9,286	9,465	9,764	10.074	10.005	10.110	10,905	18	169,277	+ 14,170
Leicester Corporation	*	...	...	...	...	...	...	...	...	...	—	—	—
Leith Corporation	805	825	831	858	828	850	852	914	951	1,043	10½	9.543	+ 831
Leyton U.D. Council	1,600	1,840	1,725	1,716	1,662	1,753	1,737	1,762	1,706	1,828	17	28,376	+ 210
Liverpool Corporation	14,392	14,071	14,156	14,164	14,421	14,477	14,866	14,690	14,643	15,665	30½	416,130	+ 18,060
Llandudno and Colwyn Bay	415	418	468	538	569	426	448	492	554	580	34½	9,938	+ 213
London County Council	44,534	47,297	46,405	46,999	...	49,001	49,616	49,514	48,584	...	15½	755,621	+ 98,068
London General Omnibus	*	...	...	...	...	...	...	...	...	...	—	—	—
London United	*	...	...	...	...	...	...	...	...	...	—	—	—
Lowestoft Corporation	*	...	...	...	...	...	...	...	...	...	—	—	—
Maidstone Corporation	234	245	224	223	235	210	245	222	214	226	17	3.685	- 120
Manchester Corporation	18.798	17,824	18,045	18,218	18,221	20.674	19,320	19.055	19,429	20,477	17	297,032	+ 36,996
Metropolitan Electric Tramways	*	...	...	...	...	...	...	...	...	...	—	—	—
National Steam Car	*	...	...	...	...	...	...	...	...	...	—	—	—
Nelson Corporation	196	228	185	217	230	210	181	200	230	258	17½	3.744	+ 280
Newcastle-on-Tyne Corporation	6.412	6.484	6.546	6,642	6,633	6.753	6.993	7,129	7.125	...	16	105.345	+ 3,884
Newport (Mon.) Corporation	875	901	883	857	862	904	935	930	1.001	1,009	17	15.884	+ 1,073
New St. Helens and District	1,096	1,155	1,072	1.074	1,108	1,039	1.081	1,083	1,030	1,289	4	4.240	+ 68
Northampton Corporation	825	784	817	804	805	701	716	695	691	738	17	11.873	- 1,486
Nottingham Corporation	4,581	4,498	3.844	3.839	3,770	3,907	3,852	3.993	3.888	4,150	17	65.261	+ 373
Oldham Corporation	2.236	2,406	2,420	2.444	2,427	2,400	2,460	2,462	2,806	2,702	20	46,110	+ 2,691
Portsmouth Corporation	2,605	2,727	2,498	2.601	2,899	2.754	3.042	2.886	3,019	3.319	18	47.652	—
Preston Corporation	977	1,000	967	976	998	1,042	1,091	1,126	1,029	1,132	16½	18.218	+ 1,839
Provincial	2,447	2,424	2.411	2.457	2,623	2,464	2,684	2.633	2,698	2.913	43	95,205	+ 5,162
Reading Corporation	814	858	823	814	815	836	847	875	844	...	15½	13 026	+ 451
Rhondda Tramways	1,170	1,215	1,187	1,192	...	1.299	1.298	1.358	1.339	...	29	35.649	+ 2,114
Rochdale Corporation	1,772	1,683	1,764	1,808	1,945	1,647	1,810	1.785	1.914	2.085	17½	31.700	+ 832
Rotherham Corporation	1,158	1,171	1,165	1,187	1,425	1.571	1.591	1.548	1,647	1,660	17½	26.294	+ 5,923
Salford Corporation	5,332	5,292	5,429	5,413	5,587	5,654	5.759	5,468	6,137	5,945	17⅔	97,470	+ 4,901
Sheffield Corporation	8,654	9,015	9,151	9,098	9,126	10.742	10,828	10,679	10,990	10,992	18½	189.037	+ 31,413
Southampton Corporation	1,474	1,624	1,566	1.554	1,519	1.679	1.716	1.657	1,710	1,838	16½	27.048	+ 1,913
Southend-on-Sea Corporation	737	838	836	837	874	895	960	1.010	1,019	1,146	17	14,352	+ 439
South Metropolitan Tramways	*	...	...	...	...	...	...	...	...	...	—	—	—
South Shields Corporation	834	793	823	832	877	809	849	896	904	992	17½	14.115	+ 406
Sunderland Corporation	1,559	1,526	1,572	1,597	1,647	1.613	1,644	1,708	1,834	1,985	17	27.916	+ 1,580
Sunderland District	605	577	565	592	...	630	591	602	647	...	38	22,126	+ 1,157
Swindon Corporation	196	211	206	204	199	198	194	201	192	216	16½	3.337	- 7
Torquay Tramways	493	593	551	559	605	604	604	635	701	763	30	15,544	+ 530
Tramways (M.E.T.) Omnibus Co.	*	...	...	...	...	...	...	...	...	...	—	—	—
Tyneside Tramways and Tramroads	768	644	651	675	659	629	489	675	703	...	3	1.867	- 104
Wallasey Corporation	1,392	1,352	1,420	1,463	1,576	1,388	1.472	1,438	1,539	1.779	17½	23.746	+ 738
Walsall Corporation	781	762	797	807	783	826	827	824	833	859	31	24.289	+ 2.620
Walthamstow U.D. Council	957	1,103	993	1,011	998	1.133	1,147	1,129	1,128	1,247	17	18.837	+ 2,477
Warrington Corporation	469	483	458	471	464	491	497	495	477	...	16	7,685	+ 509
West Ham Corporation	3,081	3,324	3,239	3,176	3,108	3.304	3,322	3.346	3,259	3,386	16⅝	55,281	+ 2,252
Wigan Corporation	1,546	1.601	1,567	1.637	1,578	1.628	1.679	1,673	1,680	1,763	17	28.281	+ 1.695
Wolverhampton Corporation	1,119	1,114	1,160	...	...	1,197	1.239	1.224	...	...	16	19.140	+ 1.655
Yorkshire (West Riding)	1,542	1,680	1,567	1,635	1,776	1,869	1,783	1.710	1,831	1,980	31	52,923	+ 4,722

* TRAFFIC RETURNS SUSPENDED.

Owing to the European war, the Government have taken over the railways of Great Britain as from August 4, 1914, and the issue of traffic returns has been suspended. Consequently the traffic returns of the electric railways which usually appear on this page cannot be given.

The Publication of the Traffic Returns of the Tramways marked with an asterisk in the above table have also been suspended during the war.

TRAMWAY DIRECTORIES.

A useful feature of this issue is the directory of electric railways and electric tramways which will be found among the advertising pages. This directory contains the names of the chief officials and the principal particulars relating to each undertaking.

THE TRAMWAY AND RAILWAY WORLD

can be obtained, post free, at the following rates:

For the United Kingdom—
Twenty-five Shillings per annum (including 64 issues, of which 12 are large illustrated numbers).

For Places Abroad—
Thirty Shillings per annum.

Tel. No.: **2948** Gerrard.
Telegraphic Address: **"Tramigro," London.**

Amberley House, Norfolk St., W.C.

Digitized by Google

More Mileage Records
of
DAIMLER
Commercial Vehicles

WE have repeatedly stated in our announcements that the Daimler Sleeve-Valve Engine requires no attention whatever (beyond oiling) for a minimum of 20,000 miles.

Here are the records of three Daimler Commercial Vehicles in the service of "County Carriers" in the St. Helens District.

32,000 miles without inspection.
50,000 miles without requiring attention.
52,000 miles without attention.

Such continuity of service, as every experienced user of motor traction knows, is the prime factor in reducing maintenance costs to an absolute minimum.

It is peculiar to the Daimler Sleeve-Valve Engine which is *different* in design and in principle, and in results superior.

The Daimler Company, Ltd.,
Coventry.

Depôts:
London, Manchester, Nottingham, Bristol, Leeds, Cardiff, Newcastle, Birmingham.

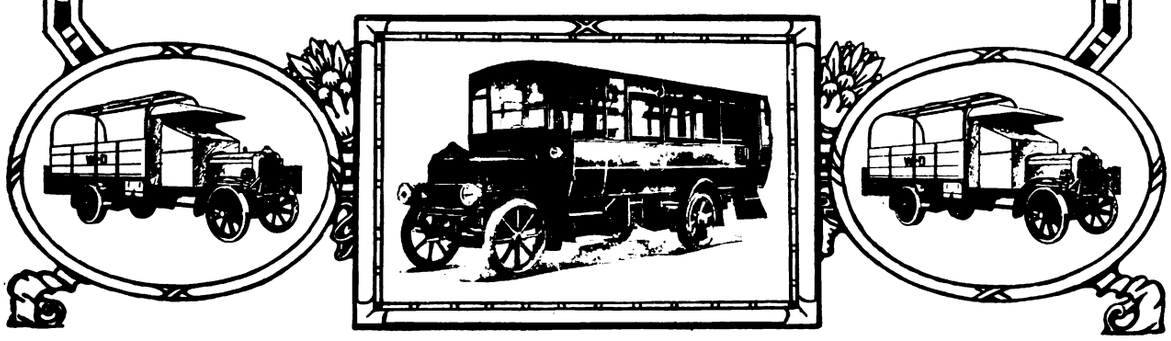

II

Digitized by Google

BRITISH **NAPIER** BUILT

BUSINESS VEHICLES

Railway Delays!

These are **Acute** now. Be Independent by Purchasing a

3½ TON NAPIER BUSINESS VEHICLE.

Full particulars from

D·NAPIER & SON, LTD.,

WORKS:-
ACTON, LONDON, W.

14, NEW BURLINGTON STREET, LONDON, W.

Digitized by Google

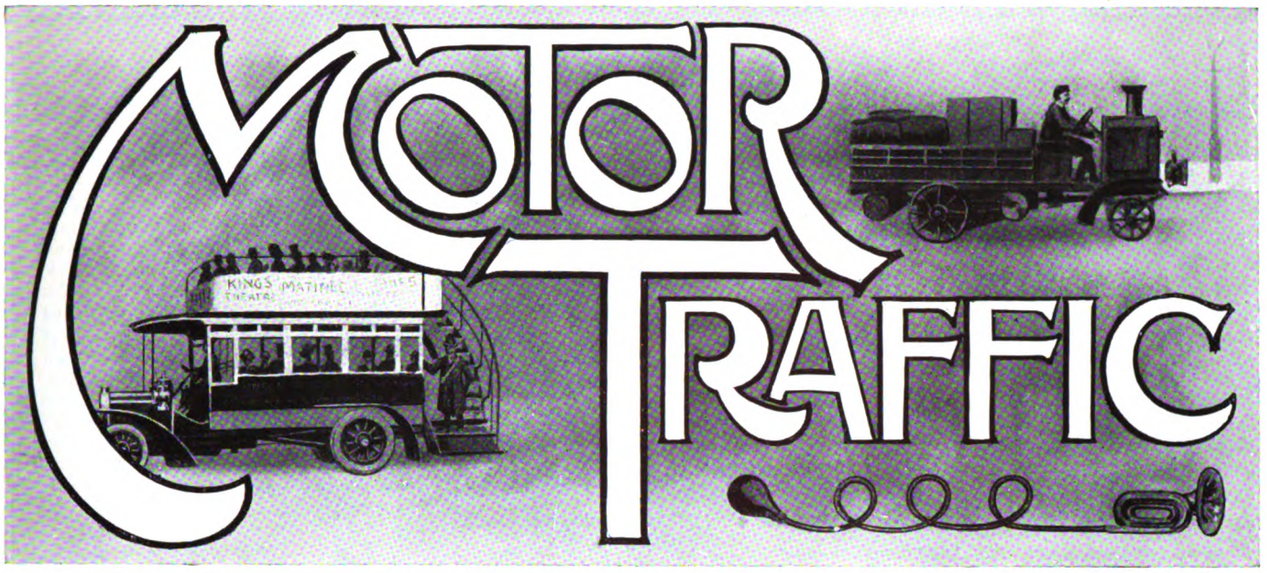

For those who have the ownership or management of fleets of utility motor vehicles it may be difficult to extract consolation of any kind from things in their present condition. The shortage of petrol is not, from anyone's point of view, a minor matter. The petrol situation represents the most substantial of any of the inconveniences or deprivations that we have had to face as a result of the war. That things are all that is vexatious and chaotic is only too obvious, but they have their redeeming feature, and it is this: the public at large is about to learn, as it has never learnt yet, the real value of motor transport, and what it means to their daily existence. The sudden curtailment of the delivery facilities for goods and the withdrawal of passenger services in London and elsewhere are bound to prove very formidable eye-openers. The public will be brought to realise that motor transport is truly indispensable, and that its maintenance and development are matters of first-rate importance. Thus the greater mass of the people—as distinct from the expert and directly interested few—may be brought into closer touch with the motor fuel question. That in itself would be a great step forward, and an ample compensation for all of our trials and tribulations. The question of fuel supplies for internal combustion vehicles has been a live and crucial issue for some years past. Its essential importance has never at any time received adequate recognition from the State, and one of the reasons is that it has always presented itself, plausibly, at least, as a minor issue, and one in which only a very few were interested. Consequently motor transport was left to take care of itself, and to struggle as best it could against the various circumstances by which the price and supplies of fuel in normal times have been influenced. We are reaping now some of the inevitable consequences of this policy of inaction on the part of the State, however excusable or inexcusable it may be, and if the present scale of restriction and curtailment of motor transport should become so extended and serious as to constitute a great public issue, some good purpose may after all have been served.

* * * * * *

One recognises the enormous difficulties of the Petrol Committee's task, and the impossibility of proceeding on any but rough and ready lines. Where there is legitimate ground for complaint is in the fact that the Committee was not set up long before the date on which its formation was first announced. The Government must have had some idea that there would be a shortage of petrol so soon as the operations of the armies in the field, and their consequent necessities, assumed certain dimensions, and to have left the necessary measures for dealing with this position to so late a date suggests lack of foresight, or, what is more likely, perhaps, entire failure to realise the elementary facts of transport conditions as they exist to-day. It must be remembered that the public is more dependent on motor traffic now than might ordinarily have been the case. The wholesale requisitioning of horses at the outbreak of the war led to a good many firms buying motor vans, so that in scores of cases we are confronted with the spectacle of important commercial businesses being unable to obtain a sufficiency of either motor or horse delivery service. Apparently what the Committee has endeavoured to do is to give some proportion of petrol to all comers. This line of action is excellent in theory, but, if its results are to be such that, for instance, firms supplying foodstuffs to hospitals and camps are to be allotted quantities of spirit on which it is quite impossible to "carry on," if the delivery of materials urgently needed for munitions is to be impeded, the sooner we drop this "quota" system the better.

* * * * * *

There can be no justification in giving even a pint of petrol for ordinary motor cycles or pleasure cars while the transit facilities of London and elsewhere have to be cut down. These facilities were considerably restricted before the question of petrol shortage arose. The process of discrimination can, of course, be carried considerably farther, if needs be. Obviously there is no case to be made for permitting petrol to be used in conveying small parcels, or luxury goods, if essential commodities are thus to be held up; the cabs can be more readily dispensed with in an extreme resort than can the omnibus. Again, there is no apparent justification for another mile to be run by pleasure chars-a-bancs while things remain as they are. It may be urged that some share-and-share-alike method must be adopted, and that people should not be compelled to close down their businesses. It would, however, be a far sounder policy to suspend the running of all unnecessary motor vehicles and to compensate those affected than to proceed on the rather happy-go-lucky lines that have been followed up to the present time. No doubt some of the muddles will straighten themselves out in due course, but it is a pity that the whole question was not thoroughly investigated before action became necessary.

Digitized by Google

MOTOR TRAFFIC.

The proverbial slowness of legal machinery is strikingly illustrated by the case that was lately decided in the House of Lords concerning the liability of a railway company to maintain bridges over its lines in a state fit for the heavy traffic of to-day. Over two years ago an action was brought by the Attorney General (on the relation of Pickfords, Limited) for an order requiring the Great Northern Railway Company to maintain a certain bridge in a London suburb in a state fit to bear the traffic that might reasonably be expected to pass over it. It was heard before Mr. Justice Warrington. The bridge was built some 50 years ago, when traffic conditions were very different from what they are now. While admitting their liability to maintain it, the company contended that that liability was limited to the structure as it was originally built, and that they were not called upon to strengthen it on account of the increased weight of traffic now common on the roads. The anomalies arising from this position are obvious, and it simply means that a comparatively weak bridge might hold up the transit development of a whole district. Something of the kind, in fact, has happened in this particular case. Mr. Justice Warrington found against the company, but his judgment was reversed by the Court of Appeal a year or so later, which decision has now been affirmed by the House of Lords. It is, doubtless, sound law, but it can hardly be said that it leaves matters in a satisfactory state from the point of view of road traffic and its future. No doubt some of its difficulties can be overcome by negotiations, in due time, between railway companies and road authorities, but the former cannot be expected to go out of their way to do more than they are legally obliged in connection with schemes for facilitating competitive means of transport. Thus the road authorities may find themselves saddled both with the cost of reconstructing and maintaining bridges over railways in many places, since the company's liability to maintain can hardly extend to entirely new structures in which they have no part or lot. On the other hand, it will not be at all difficult for county councils and public bodies generally to make out a clear case of special expenditure incurred on account of the demands of heavy motor traffic, and in the event of any legislative action becoming eventually necessary, owners of heavy motors will be lucky if they do not find themselves involved in extra taxation on that account.

THE PETROL PERMITS.

Under regulations imposed by the Finance Act the petrol licence system came into force on August 1. It makes an additional tax of 6d. a gallon, except on spirit used by trade cars, while medical and veterinary practitioners are charged half rate. A penalty of £100 is the punishment held out for persons who obtain or attempt to obtain motor spirit without a licence, obtain or attempt to obtain more than a licence allows, or who use motor spirit supplied for a special purpose indicated on a licence for any purpose other than that indicated. A similar penalty is threatened for supplying spirit to an unlicensed person or supplying to a licensed person more than he is authorised to obtain. The supplier has to enter his name and address, the date, and the amount supplied on the licence of every person supplied.

Great dissatisfaction has been aroused by the Petrol Control Committee's curtailment of supplies to commercial vehicles. It is at the rate of 50 per cent., and the only satisfaction is the announcement that licences may be varied at the end of three months.

The London General Omnibus Company have now suspended or varied some two dozen of their services; they have also started two new services from certain districts to the munition centre.

To demonstrate the necessity of the Government's action, Mr. Harcourt, President of the Board of Trade, made a statement in the House of Commons on August 1, when he showed the need for conserving the supply for the use of motor transport at the front. He stated that two Sundays ago, on a wet day, 600 civilian cars were counted on the Brighton and Maidenhead roads, and that the Government might have to resort to a total prohibition of Sunday motoring. No race meetings would be licensed after August 10. The restriction in the supply was due to the great increase of the consumption during the war and to the diminution in the number of oil-carrying ships, a large number of which had been taken over by the Admiralty in order to provide for the needs of oil-driven battleships completed for sea during the past year. Mr. Harcourt also remarked that if he could describe what the recent advance in Picardy meant in the way of petrol, his statement would stagger the House. Strict regulations had been imposed on the use of petrol for military and naval cars on home service.

An unofficial announcement was made on August 1 that on July 31 the Petrol Control Committee met a gentleman connected with a Colonial firm outside the petrol syndicate in regard to his offer to supply 4,000,000 gallons of petrol per month. The firm are prepared to provide eight tank steamers for the purpose.

BRITISH CHEMICAL SUBSTITUTE FOR PETROL.

The owner-drivers' branch of the Licensed Vehicle Workers' Union has made a successful test of a new chemical substitute for petrol. It is a British production, and the Union has ordered 100,000 gallons at half the cost of petrol. It will be on sale to the members as soon as it is delivered. The owner-drivers have been trying a mixture of paraffin and petrol, which answered well for a day, but the next morning it delayed the "starting up." After a mixture of equal quantities of petrol and the new fuel had been used the vehicle was allowed to stand all night, but the starting next morning proved entirely satisfactory.

ELECTRICAL VEHICLE COMMITTEE.

The report on the work of this committee during the year ended March 31, 1916, was presented at the annual meeting of the Incorporated Municipal Electrical Association. The membership of the committee includes eight representatives of the Association, and also representatives of 13 other interests, including Mr. A. R. Fearnley, of the Municipal Tramways Association, and Mr. A. V. Mason, of the Tramways and Light Railways Association, while Mr. F. Ayton, engineer and manager, Ipswich Corporation Electric Supply and Tramways, has been the indefatigable honorary secretary since the formation of the committee three years ago. In addition to the two tramway organisations, other bodies that during the past year accepted invitations to become represented on the committee were the Institution of Municipal and County Engineers, the British Electrical Federation, Limited (represented by Mr. R. J. Howley), and the Garage Proprietors. Makers of electric vehicles are represented on the committee as follow:—Messrs. E. W. Curtis, General Vehicle Company, Limited, J. F. Monnot, Arrol-Johnston, Limited, A. E. Meaden, Wolseley Motors, Limited, P. A. Mossay, Sims and Jefferies, Limited, while Mr. W. H. L. Watson represents Edison Accumulators, Limited.

The report stated that many new vehicles had been put into commission during the year, so that at the present time the estimate of vehicles in use in the United Kingdom is about 680. This number includes 48 electric warehouse or works trucks, the use of which is likely to considerably extend in the near future. It is noteworthy that 33 municipalities operate between them, or have on order, 78 vehicles. The total number of vehicles quoted above shows an increase during the 12 months of 197 vehicles.

Reference was made to the various activities of the committee during the year, as reported from time to time in this journal, and it was stated that the committee had received an invitation to elect a representative to sit on the Tire and Road Wear Research Committee of the Society of Motor Manufacturers and Traders. The committee had become affiliated with the Electric Vehicle Section (formerly the Electric Vehicle Association of America) of the National Electric Light Association of America.

The financial statement showed an expenditure of £469, and a balance in hand of £45. Of the income, £129 was derived from subscriptions by municipalities, other associations, companies, and private individuals. Twenty-seven municipalities and councils and six electric supply companies were among the subscribers. The committee, of whom Mr. R. A. Chattock is the chairman, expressed "their thanks to Mr. Ayton for the very able and efficient manner in which he has handled the work of the committee."

Digitized by Google

MOTOR TRAFFIC.

MOTOR TRACTION IN THE WAR.

First Claim for Petrol—One of our many Supply Columns in France.

The restriction placed upon the civilian use of petrol in this country since August 1 affords an opportunity for again calling attention to the invaluable work that is being performed by motor vehicles for the Allied armies. We have already related how in the early days of the war Field Marshal Lord French's army was transferred in motor vehicles many miles from one position to another in the Allied line, thus enabling the British to defeat an attempt to break through. Reference has also been made to the use of motor transport for moving the French force out of Paris and flinging them at the flank of von Kluck's army, with the result that the effect was felt at the battle of the Ourcq, which was the turning point of the German advance upon the French capital. Since then the British and French motor services for the conveyance of troops, munitions, and food have become the greatest transport organisations in the world. At the same time great attention has been paid to the development of power and animal traction on tramways and

Advance of the Guns—3-Ton Lorry Hauling a Howitzer Across a Field.

Digitized by Google

MOTOR TRAFFIC.

light railways, while great use is found for the horsed regimental transport in the vicinity of the trenches leading to the front line. It is easier to clear away the debris and to prevent obstruction if a light cart instead of a motor vehicle is hit by shell fire. It has been estimated that there are 60,000 army motors of all kinds on the Allied fronts, and that 34,000 of the machines are of American manufacture. An indication of the work performed was given in the remarks made by the President of the Board of Trade on August 1 in reference to the petrol problem. Mr. Harcourt referred to the important part played by petrol in our present advance and also during the defence of Verdun. In the latter area motor transport had to be solely relied upon, as the enemy's artillery and bombs had destroyed all the lines of communication immediately to the rear of the French lines. Large supplies of petrol were contributed by this country, notwithstanding that in order to conserve their own supplies the French have imposed more severe curtailment of civilian use than has at last been adopted in Great Britain. One fact that serves to limit the supplies of motor fuel in both countries is that every drop of benzol and alcohol is appropriated for the manufacture of explosives. The part that motor vehicles played at Verdun was recognised by General Joffre in a special order. On one occasion an army corps was moved in 5,000 wagons from Bar-le-Duc to Douaumont in ten hours, and a few days later another huge force was transported in the same wagons. For over two months the French were entirely dependant on motors for the supply of everything required by the quarter of a million men who were engaged in the defence of Verdun. Over an area of 90 miles the convoys were passing at average intervals of 20 seconds between each vehicle. The time has not yet arrived to refer in detail to the work of the British motor transport in the present advance, but it may be stated that the carefully devised plans have been carried out without a hitch. An American correspondent has referred to the continuous maintenance of ammunition and supplies as the result of "the most perfect thing in the way of motor transport yet developed."

AUTOMOBILE EXPERIENCES IN THE WAR.

Information Useful to Makers and Drivers.

Among the papers read at the annual summer meeting of the American Society of Automobile Engineers was one submitted by Mr. W. F. Bradley, the European correspondent of the *Commercial Vehicle* (New York). It bore the title, "Automobile Experiences in the Great War," and is published in full in recent issues of that journal. From it we make the following extracts, which, however, do not exhaust the interest of the paper either for makers or users of the commercial vehicles that have played an invaluable part in the work of the British and French Armies. For the most part the author's statements are to be regarded as applying to American and French vehicles.

The author observed that the war had not been in progress more than a month before France, the nation that had most carefully studied the use of motor trucks in war, had sent an official to the United States with instructions to buy several thousand trucks; England, with a greater number of commercial vehicles than any other nation, was also anxious to supplement her military fleet with trucks from across the Atlantic. The trucks available were ordinary commercial vehicles, built for commercial conditions in the United States, without their designers or manufacturers ever having conceived that they might some day be employed on war service. These purely commercial trucks were put to work side by side with the more specialised European machines, and although they were all open to improvement in some or many respects, they all gave—and are still giving—good service in the war zone.

From this it must not be assumed that any ordinary truck is fit for war work, that there are no special military requirements, and that no lessons have been learned during neary two years of war. The point to be enforced is the uselessness of trying to develop a special type of truck to meet purely military requirements, without any consideration of commercial service. The proportion of motors attached to European armies will never again fall as low as it was prior to August, 1914. Of necessity a certain number of purely military vehicles will differ from the commercial vehicle as much as a battleship differs from a cargo boat; but the great bulk of the motor trucks for any future war will be the commercial trucks of the nations involved.

British and French Subsidy Vehicles.

Before the war the British authorities had designed a subsidy type of truck. Admittedly a good vehicle for military purposes, it had been designed with such disdain of commercial service that few business houses would purchase it. When England went to war less than fifty of these army subsidy trucks were to be found in the whole of Great Britain. Then the requisition officers gathered in practically everything on wheels. It was a jump from one extreme to the other, for many of these hastily-requisitioned trucks never got within sound of the guns.

The French system was much less drastic. The military authorities, instead of saying dogmatically what were and what were not good features of army truck design, left these matters largely to the engineer, and were content principally with imposing working conditions. If a truck could fulfil these conditions, it would be accepted as an army subsidy vehicle, no matter whether it had worm or chain drive, whether its motive power was obtained from steam, gasoline, electricity, or from a combination of these. In the end this tended towards uniformity, for it automatically eliminated unsuitable types. But it did not bar a manufacturer who failed to see eye to eye with the military expert on the question of final drive, or who refused to give up his preference for a particular type of wheel bearing or gear box.

The problem was, and ever will be, one of directing design into such channels that the whole of the nation's commercial trucks could be applied to purposes of war. This application must be possible, however, without interfering with the primary usefulness of the trucks as commercial vehicles. It is a matter of compromise. If the truck is highly specialised for some class of commercial work, it will probably not be of great value on war duty; if it is designed only to meet military requirements, the ordinary customer will refuse to buy it, either with or without the offer of a subsidy.

For instance, in France it was considered that the most suitable military type was a 2-ton truck. But the commercial user was not satisfied with a 2-tonner and would have preferred a vehicle with a 5-ton load capacity. Thus a compromse was struck with 3½ tons, and it is this capacity of truck that has proved most suitable under actual war conditions. It is not so light as to be constantly threatened with overloading; it is capable of hauling one or more trailers; and its dead weight is sufficiently low to enable it to operate over poor road services. For the general conditions of war service the 5-ton truck has too great a dead weight.

For certain special classes of work it has been found that a 4-ton truck gives the most efficient service. This model has not been produced in great quantities in Europe, and, curiously, is not found in America. Manufacturers in the United States have specialised on 3-ton models, but have not produced any intermediary model between this and the 5-ton truck. The demand for a 4-ton is comparatively recent; it does not alter the general statement that the bulk of the work is best done by the 3½-ton vehicles. This refers to conditions obtaining prior to 1915. Since the war great changes have taken place in American catalogues.

Light weight, consistent with strength, has been shown to be essential. The French truck, as it has been developed up to the eve of war, had to weigh not more than 3½ tons, 7,716 lbs., this including the entire truck with its body, water, gasoline, oil and hoops capable of receiving a suspended load of 2,645 lbs. In reality the weight was nearly always below the maximum, some of the trucks scaling as low as 5,730 lb., and the average being just under 6,200 lb. The tendency since the war has been toward a further reduction in weight. Such bodies are of the platform type, with movable sides and detachable canvas top on reinforced hoops, the hoops being used as a support to carry a portion of the load—generally wounded men.

Four-cylinder Engines for all Ordinary Purposes.

Four-cylinder engines are insisted on, and these have been found quite sufficient for all ordinary purposes. Some of the heavy tractor engines have six cylinders, but their number is small. The French military authorities have never made any attempt to impose cylinder dimensions. It was in the interests of the manufacturers to get the smallest engines capable of doing the work, for fuel consumption was taken into consideration. The small engines of two or three years ago, however, have been found unsatisfactory. Moreover the requirement that each truck should be capable of hauling a fully-loaded companion up a macadamised 8 per cent. gradient, has tended toward a slight increase in piston displacements, and also toward certain modifications in gear ratios. Statistics of eighteen different makes of French army type trucks that went into service August, 1914, show that the average bore was 3·9 in., and the average stroke 5·7 in. The biggest engine measured 3·9 by 6·69 in. and the smallest 3·5 by 5·5 in. bore and stroke respectively.

All engines are carried under a hood. There are a few exceptions, which tend to prove the rule, notable among them being the Paris omnibus type of chassis. These vehicles, however, are used exclusively for carrying troops. On such work the greatest possible body area is required.

Digitized by Google

MOTOR TRAFFIC.

In passing it may be mentioned that the internal combustion engine has proved itself without a rival for military transportation. No gasoline-electric systems have made good. [The author gives no grounds for arriving at this conclusion. It is a well-known fact that the petrol-electric vehicle manufactured by Messrs. Tilling-Stevens, of Maidstone, has for years proved its reliability and low working costs in omnibus work in London, Birmingham, and elsewhere, while it is also extensively used for haulage. During the war the firm have had to refuse civil orders for the reason that their whole output has been taken by the Government, and notably the Admiralty for searchlight and gun vehicles, etc.—ED., *T. and R.W.*] The tendency is toward a reduction in the number of steamers. Even the British, who have always shown a partiality toward steam, are making comparatively little use of it in France, although steam tractors are much in evidence around the camps in England.

The Final Drive Problem.

Under the French military regulations every type of final drive was admitted; the English military subsidy specification called for worm drive. Those partisans who looked to the war to settle the question of final drive are likely to be disappointed. At present motor trucks are in service on the front with straight bevel drive, double reduction bevel, worm, internal gears, and side chains with and without housings. No one type has shown itself incontestably superior to all the others, and so far as it is possible to estimate their opinion the higher authorities have no intention of imposing the adoption of any particular type of final drive. The motor vehicle department of the French army has carefully compiled statistics dealing with parts supplied to trucks in service, but it is likely they will be used only to determine the makes that have been most economical and satisfactory, and not which type of design is superior. These data are closely guarded, and even if given out would be useless without explanations. One poorly-built make of truck would be quite sufficient, for instance, to discredit a particular type of final drive if statistics were examined without a complete understanding of them.

While the question of final drive will remain unsolved by the war, it being left to commercial users to work out this problem, the writer is of the opinion that chain drive will gradually disappear before worm, internal gear, and double reduction bevel axles. This is not intended to infer that the chain has given more trouble than its rivals. Under certain conditions of operation unprotected side chains constantly plough through a bed of mud, and although they can get through it is at the cost of their chains.

Some Defects and Requirements.

It is not an easy matter to generalise on defects revealed by war service. There is not a make of truck but has developed some weak point—it may be of minor, it may be of major importance. To quote all these would tend to give the impression that motor trucks are a hotbed of trouble, whereas few of the defects are applicable to more than one or two makes. For instance, one American worm-driven truck cracked its axle housings; this was a case of faulty design, and was a particular and not a general defect. A light American truck literally ate up differential drive shafts; this was traced to poor material. A French chain-driven truck warped its differential casing under heavy braking stresses. Another had shed timing gears mounted on bearings of insufficent size. Vibration ensued, and the gears were reduced to what the mechanics termed "marmalade." A more general complaint was the breakage of canvas and leather universal joints, it being not uncommon to see drive shafts flung across the road during heavy pulling in sand and mud.

Spring troubles were fairly general, but in only a few makes did the breakage of a front spring entail the smashing of the crank chamber. In these makes when the frame dropped the base-chamber came in contact with the axle. Also, spring failures were almost invariably confined to the front, it being rare for a rear spring to break, even on trucks and cars known to be of poor quality. On trucks this may be attributed to the narrowness of the front wheels; these would drop into small holes over which the rear tires would ride safely, thus putting additional stresses on the front. Few, if any, trucks on war service had sufficiently heavy front springs. The generally adopted method of attaching the springs to the axle cannot be considered safe. Not one driver in a hundred thinks it necessary to give any attention to his spring clips, yet these have a habit of working loose, and in many cases when an axle has shifted it is practically impossible to steer the vehicle. Frequently the complete breakage of a front spring is to be preferred to the loss of nuts or the breakage of clips.

Radiators were a general source of trouble, many a good engine being burned out by reason of small-diameter tubes or by brackish water. The honeycomb radiator is not suitable for army truck service. The large-diameter vertical tube type is most successful, and is adopted whenever replacements become necessary. Another good type is the circular tube radiator with centrifugal fan, as used on the Paris omnibus type of chassis.

Considering a 3½-ton truck as the most suitable type, and of this all who have had experience in the war zone are in agreement, the engine should be a four-cylinder L-head of about 450 cubic inches piston displacement. It has already been stated that the under-the-seat position is not suitable except for special service where a maximum body space is required. The underpan is an abomination on an army truck. The base-chamber should be easily removable, although unfortunately this does not necessarily follow when there is no mudpan. The connecting rod bearings should be detachable, so that it is possible to change them in case of necessity without taking the engine out of the frame. A speed governor is a desirable equipment.

War service has tended to prove the superiority of pump circulation over thermo-syphon. As a general rule trucks tend to overheat when operating in convoy formation on crowded roads. This condition is common on certain portions of the front, and should be provided for. There are few trucks on which sufficient attention is paid to draining off all the water from radiator, pump, and jackets. No man who has had to start an engine at daybreak on a frosty morning, with the knowledge that delay meant disaster, is inclined to treat this matter lightly. The manufacturer might help in this direction by making a tightly-fitting hood with louvers that could be opened or closed at will, by supplying a heat retaining radiator cover and also providing a safety lamp capable of maintaining a certain amount of heat under the hood when the truck is left standing in the open all night. An adjustable air-shutter on the carburetter is a valuable fitment. It is important, too, that the engine should develop something like its full power within a few minutes of starting. In the early days of the war, before men had learned to take precautions, the writer has known convoys to be held up for three or four hours owing to starting difficulties.

All army trucks should have radiator guards attached, not to the radiator itself, but to the frame members. The design should be such as not to interfere with free operation of the starting crank. The guard, too, should be so designed that it will not allow the overhanging rear of the body to pass above it. In some cases it has been found advisable to fit a transverse bumper with coil springs at the rear of the trucks, this bumper coming in contact with the centre of the radiator guard in case of a collision.

Lubrication, Turning Radius, and Gear Boxes, Etc.

It has been noticed by officers in charge of army repair depots that engines with the old-fashioned splash system of lubrication are generally better preserved than those with pressure feed of oil to all bearings. On war service the lubricating oil is apt to remain in service longer than is desirable, and the impurities deposited in the oil are picked up by the pump and forced into the bearings. The remedy seems to be, not a return to splash, but a pressure or circulating system so designed that the dirt will deposit away from the pump. It is not necessary that the pump should be in the lowest portion of the base-chamber. Several American trucks have suffered materially and in reputation by the absence of a suitable oil. Pressure feed being common in Europe, a heavy oil is generally employed, and this has been used with disastrous results in engines requiring a light-bodied oil. The only remedy appears to be for manufacturers to indicate clearly the type of oil to be used in their engines. The best place for the fuel tank is on the dash. Suitable provision has not been made, particularly on French and American trucks, for the carrying of a reserve supply of fuel. Thus drivers have had to fix up as best they can a storage place for a 12-gallon can of gasoline. Ignition by high-tension magneto has proved all that could be desired for war service, no need having been shown for a second system, either as a reserve or for ease in starting.

There is an amazing lack of uniformity in the steering lock and the turning radius of army trucks. This is most disadvantageous when convoys are composed of different makes of trucks, for while one vehicle can make a turn easily the one following may be unable so do so. The disadvantage is also felt where makes are grouped, for one convoy may negotiate a difficult road with ease while the next will be stopped. In some makes of trucks the short turning radius is only an illusion, for owing to the radiator extension in front of the axle it is only possible to turn within the given radius if the road is entirely free. In other cases the radiator is so high that it is impossible for the driver to see directly ahead and take full advantage of his lock. This matter is important, for when a road is under fire the greater the time spent in making a turn the greater the chance of being hit by a shell.

Brake rods should be regarded as organs needing protection and placed in such a position that they are not likely to be damaged by obstacles on the road. Not many American trucks are fitted with sprags, although this is a valuable accessory on military trucks working in convoy formation.

Digitized by Google

MOTOR TRAFFIC.

Four-speed gear boxes are now insisted on by the French military authorities, and are found to be indispensable. First speed should be equivalent to 2 miles per hour, with the engine running at its normal speed, 1,000 to 1,200 revolutions per minute. One type of gear box that has proved satisfactory under war service is the Damaizin patent constant mesh gears. This gear set was fitted to the Paris omnibus chassis, and its use has been extended to other makes. It is impossible for a driver to muddle his gears, no matter how ignorant he may be of the elementary methods of changing. No experiments have been made with trucks without differentials, but a differential lock, capable of being operated from the driver's seat if possible is an absolute necessity under many conditions of active service. The only reproach brought against one of the best American trucks on the French front is the absence of this lock.

ECONOMY OF MOTOR FIRE APPLIANCES.

From time to time as the London Fire Brigade have made progress in the motorisation of their engines, escapes, and turntable ladders, the Chief Officer has been able to recommend either a reduction in the number of men by dispensing with the services of coachmen, or else an increase in the effective strength by substituting firemen for coachmen. A step of the latter character was taken by the County Council on July 18, when it was decided to dispense with 16 horse drivers and to add 16 firemen.

On the same occasion the Council approved of the action of the Fire Brigade Committee in having accepted the offer of Leyland Motors (1914) Limited to supply two new motor fire engines at £887 each. The committee also reported that they had arranged for a sum of £20 for contingencies in respect of each appliance to be included in the contract. The two engines were required in place of four motor engines that had been disposed of, two at £500 each and two at £400 each. These were purchased in the early stages of the process of substituting motor for horse-drawn appliances, and of late the outlay on repairing and overhauling them had been disproportionately heavy. The committee had been advised that if more efficient appliances were obtained the number of spare engines could be reduced, and that it would be necessary to obtain only two new machines.

DENNIS FIRE ENGINES FOR RUSSIA.

The wide adoption of motor fire extinguishing appliances in this country of late years has added to the sense of security of the population during the visitations by the German barbarians of the air. Notwithstanding the extra busy time that British manufacturers of motor fire engines have experienced since the outbreak of the war, they have found themselves able to provide machines

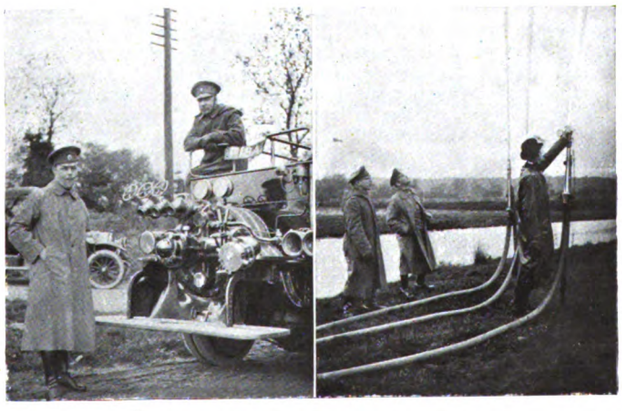

Capacity Test of a Dennis Fire Engine.

for our Russian and French allies, thanks to the patriotism of their employees in facing work at long continued high pressure. In the production of these appliances the British makers stand unrivalled for the efficiency of the engines and excellence of workmanship. The accompanying photographs illustrate tests of one of two Dennis turbine motor fire engines recently supplied to the Russian Government by Dennis Bros., Limited, of Guildford. These engines from the Guildford works are intended for the protection of the Obouchoff Admiralty Works at Petrograd, and they are very similar in type to numbers now utilised by the London Fire Brigade and other fire brigades in the United Kingdom. The engine undergoing tests in the presence of two Russian officers is of the six-cylinder 500

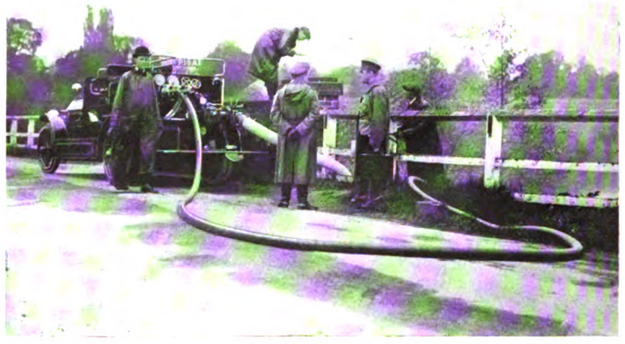

The Deep Lift Test.

gallons type, but the actual capacity on the official trials showed an appreciable increase on the latter figure, the readings indicating a discharge of over 600 gallons per minute. The photographs show the capacity and the deep lift tests, the latter being taken from a point 26 ft. below the engine level. Running on a level road, the machine attained a speed of nearly 40 miles an hour.

MOTOR VEHICLES FOR MUNICIPALITIES.

Tynemouth Council are obtaining a motor fire engine.

Finsbury Council have ordered a Laffly motor road sweeping machine.

Poplar Council have been recommended to purchase a motor car for the works department.

Hull Tramways Committee have ordered a 3-ton Belsize chassis for a tower wagon at £700.

Friern Barnet Council are considering the question of purchasing a motor fire engine.

Rotherham Gas Committee have obtained the consent of the Corporation to the purchase of a motor lorry.

Salford Council have placed a contract with Mr. T. Garner, Manchester, for supplying four Studebaker motor ambulance vans at £1,150.

South Shields Council have decided to acquire a second Edison battery wagon, at £1,007. An Edison ash-tipping wagon is expected to be delivered shortly.

Bradford Council have decided to purchase three electric tipping wagons, and application has been made to the Local Government Board for permission to borrow £3,700 in payment.

Birmingham Corporation have purchased a British-made car for the use of the stable and veterinary department. Two electric wagons for the collection of house refuse have been put in service.

Salford Council have sanctioned the purchase of four motor ambulances for the conveyance of wounded soldiers to and from hospitals. The vehicles have been presented to the Red Cross Society. As the result of the Council's action, thirteen ambulances have been presented by other local institutions.

New Works for Leyland Motors, Limited.—This company purpose erecting additional works at Farington, instead of on land adjoining the present works at Leyland. This will enable a railway siding to be provided for the use of the company and the Leyland and Birmingham Rubber Company.

Digitized by Google

MOTOR TRAFFIC.

NEW OMNIBUS ROUTES.

ATTITUDE OF THE LOCAL AUTHORITIES.

In connection with the institution during the present year of the London General Omnibus Company's service from Woolwich to Erith, the Road Board have asked Woolwich Council to maintain the roads involved in a suitable condition. The Board will then make representations to the Ministry of Munitions for a refund of any expenditure in excess of the average annual maintenance during the preceding five years. This communication was received by the Council in response to an application to the Board for a grant to cover the cost of resurfacing the macadam roadway, estimated at £3,500. The Ministry of Munitions recently notified the Council of the starting of two new services from Beckenham and Brockley to Woolwich, and the latter body have replied that they have no objection to the use of their roads, subject to the Road Board agreeing to reimburse them any extra cost of maintenance.

The County Councils' Association have adopted a recommendation by their Highways Committee framing a general policy for county councils in regard to new omnibus routes. They recommend that maps be prepared showing new routes of traffic and roads capable of carrying omnibus traffic, and that, as far as possible, the councils should get the owners of the vehicles to co-operate by friendly arrangement as to the routes to be used.

In connection with the Local Government (Emergency Provisions) Act, 1916, which makes it unlawful for any omnibus to ply for hire on any route that has not been regularly used by omnibuses plying for hire within two years prior to March 1, 1916, except with the consent of the highway authority, the Highways Committee of the London County Council have been entrusted with the consideration of matters arising under the Act so far as they affect the position of the Council as highway authority.

The Scottish General Transport Company having asked for sanction to the provision of omnibus services between Stirling, Dollar, Loncroft, and Alloa, the Stirlingshire Central District Committee have decided to approve of the application if the company will pay "a charge of ½d. per ton-mile for 12 months, at the end of which time the matter will be reconsidered."

Two Glasgow firms of motor hirers have applied to the Western District Committee of the County Council for permission to run omnibuses between Glasgow and Aberfoyle. It was stated that the Central District Committee imposed a charge of ½d. per ton-mile, and the application was referred to the Roads Committee.

Eastbourne Corporation have prohibited the use of certain roads for the return journeys of chars-a-bancs from Seaford and Brighton. Three licences have been granted to a rival company, subject to the vehicles not entering the borough by certain roads. These restrictions have thrown extra traffic on roads under the control of Eastbourne Rural Council, who have asked the advice of the Local Government Board in regard to dealing with such users of district roads.

DENNIS AMBULANCE FOR BLACKPOOL

The Dennis ambulance here illustrated was presented by the Blackpool Traders' Association to the local hospital. The vehicle

is of 24 H.P. standard London County Council type, having a four-cylinder engine and four-speed gear box. The cantilever springing ensures easy riding. Accommodation is provided for four persons—two outside and two inside—in addition to the driver.

AN ALLY OF THE RAILWAY.

During the war the motor lorry has proved invaluable to railway companies and traders in enabling goods trains to be rapidly unloaded as well as by providing an alternative means of transport. The subjoined photograph taken from a semi-bird's eye position, shows one of the latest type Great Northern Railway express goods engines (which is Mr. Gresley's last word in this Atlantic type of engine), taken alongside two Napier 3½-ton motor vehicles. In the old days it was customary to regard the motor transport wagon as a competitor to the great railway companies, but time has proved that the former have been the means of bringing greatly increased traffic to the railways. The two models shown are two of the well-known

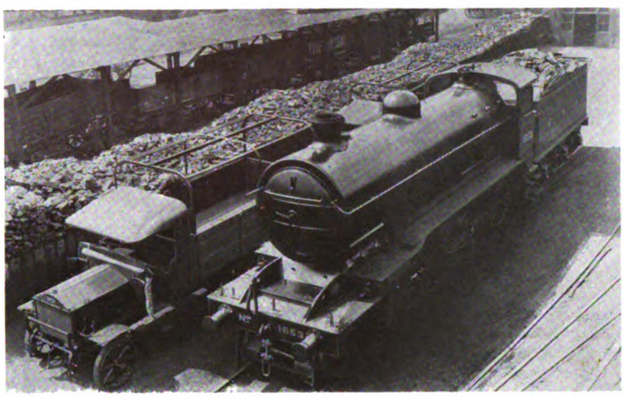

3½-ton Napiers, which are actively engaged on Government work for the Allies.

The railway companies of the United Kingdom last year owned 223 motor omnibuses and more than 250 motor lorries and vans, notwithstanding the extensive requisitioning of vehicles by the War Office during the year 1914. Since then the deficiencies have been made good by the purchase of petrol and electric battery vehicles. The largest fleets are owned by the Great Western with 109 omnibuses and 95 lorries and vans. The London and North Western have 20 omnibuses and 75 lorries and vans, the figures for the other leading companies being:—North Eastern, 43 and 17; Midland, 2 and 38; Great North of Scotland, 36; London and South Western, 2 and 27.

MOTOR DRIVERS' EXAMINATIONS.

The results of the annual written technical examination of commercial motor drivers held by the Commercial Motor Users' Association have been announced as subjoined:—

PETROL EXAMINATION.—Champion Petrol Driver—First prize of £5, certificate and badge:—W. G. Hayter (employer, Roburite and Ammonal, Limited); equal second—£3, certificate and badge:—J. B. Pudney (Hawkes Brothers, Limited) and R. J. W. Spurrier (E. Nelson and Company); £2 and certificate:—C. F. Bidmead (Westminster Electric Supply); £1 each and certificate:—A. J. Woodcock (E. Nelson and Company), A. Kiff (Tottenham District Gas Company), G. A. Cooper (General Post Office), R. W. Shepard (Lever Brothers, Limited), G. C. Rochester (Gas light and Coke Company), J. Grove (E. Nelson and Company), J. J. Robins (H. Gadsdon and Son), H. F. Hatch (General Post Office), J. J. Pearcy (McNamara and Company, Limited), C. H. Dench (Bryant and May, Limited), and E. Small (General Post Office).

STEAM EXAMINATION.—Champion Steam Driver—First prize of £5, certificate, and badge:—F. Upchurch (employer, Sun Flour Mills Company, Limited); equal second—£3, certificate, and badge:—H. J. Maskell (M. B. Foster & Sons) and H. Button (Higgs and Hill, Limited); £2 and certificate:—J. Copsey (Gas Light and Coke Company); £1 each and certificate:—F. Coughtrey (Westminster City Council) and J. Donoghue (Westminster City Council).

ELECTRIC EXAMINATION.—First prize of £5 and certificate:—A. Kiff (Tottenham District Gas Company); £3 and certificate:—J. Grove (E. Nelson and Company).

Mr. G. W. Watson, the examiner, reports that the work done by the candidates showed a standard of intelligence higher than ever before. The prizes fund was contributed to by many well-known firms.

Digitized by Google

MOTOR TRAFFIC.

BLACKPOOL'S MUNICIPAL MOTOR VEHICLES.

Fire Extinction and Street Cleansing.

On the occasion of the forty-second annual meeting of the Institution of Municipal and County Engineers, which was held at Blackpool from June 29 to July 1, Mr. J. S. Brodie, the president, borough engineer of Blackpool, included in his address the following descriptions of the motor fire engine and street cleansing vehicles in use in Blackpool.

Leyland Motor Fire Engine and Pump.

Of this vehicle, which was purchased in 1913 at a cost of £1,115, the subjoined particulars were furnished by the Chief Constable, Mr. W. J. Pringle. The engine is of the 4-cylinder vertical type, with dual ignition, and capable of developing 60 H.P. on the bench at 1,020 revolutions per minute. Its consumption of petrol is comparatively small, being on an average of seven gallons for one hour's pumping and 12 miles to one gallon on the road, and it is practically smokeless. Forty-five miles per hour can be obtained on the level, and gradients of 1—6½ can be negotiated with full load. There are fitted four speeds forward and one reverse. The drive is transmitted from the engine to the gear box, thence through a universal joint to the differential casing, the final reduction being made through a crown wheel and two spur wheels, and direct on to two spur wheels fixed on the axle, which is of the War Office type, its great advantage being that the weight of the machine is removed from the axle to the axle casing. The control is by means of ignition and throttle levers which are fitted on a quadrant immediately under the steering wheel, and foot accelerator which acts on the throttle and controls the more rapid though necessarily less fine adjustments called for in traffic. Dual ignition is fitted in Bosch watertight magneto and Wade and Jones distributor and coil, and the engine will start readily from either. The carburetter is of the Zenith type, automatic, giving correct mixtures at all speeds. The petrol tank is of steel, lead coated, and has a capacity of 30 gallons which will allow of four hours' continuous pumping. The water-cooling and oil lubrication are automatic. Cooling is ensured when working the pump for a considerable time by means of a special two-way valve fitted to the turbine pump casing, whereby water is supplied under pressure to one of two filters, from which it passes into the engine circulation.

When pumping sea water, fresh water is required for cooling, and this may be supplied to the engine circulation from a hydrant, an adaptor being fitted under the radiator for this purpose. The steering is of the worm and segment type. Two double acting brakes are fitted, one on the gear shaft, which is of ample width and actuated by a push foot pedal, and one operating on the road wheels of the internal expanding type and operated by a hand lever. The tires are of the K.T. type, and specially designed to prevent side slipping. The pump is made of gun-metal throughout, and is of the Rees Roturbo type, twin impellor, four stage, is capable of delivering 450 gallons per minute at a pressure of 120 lbs. to the sq. in. in the pump when working with a suction lift of 10 feet. It will also deliver water through 100 feet of 2½ in. rubber-lined hose and 1⅜ in. jet with 120 lbs. on the pump gauge. It will also deliver water through the same hose and 1⅛ in. jet at 160 lbs. on the pump gauge, and maintain this pressure for four hours. The great advantage when working the pump is the general accessibility to the controlling parts, which are confined to the rear of the machine. This avoids any running backwards and forwards from the engine to the pump by the man in charge.

A first aid apparatus is fitted--this consists of a lead-lined steel tank of 40 gallons capacity, fitted with the necessary control valves, hose reel, with 180 feet of 1 in. four-ply rubber hose, ¼ in. jet, and will perform the following operations:--(*a*) supply water from tank to pump; (*b*) supply water from tank or hydrant to hose; (*c*) supply from hydrant to tank; (*d*) supply from the pump to the hose. A pressure of 60 lbs. can be obtained, and an efficient fire stream maintained for the extinguishing of small fires. The operation is by running the turbine pump slowly. A large hose box is fitted which is capable of carrying 2,000 feet of 2½ in. hose and sundry fire appliances, and will seat eight or nine men. There are also fitted side boxes for branch pipes, standpipes, jets, tools, smoke helmet apparatus boxes, etc. A 40 feet Ajax telescopic ladder built in three sections is mounted on suitable brackets, and fittings are also provided to attach if necessary the existing 60 ft. escape.

Laffly Motor Sweeping Machine.

Mr. James Bee, cleansing superintendent, Blackpool, supplied the appended details concerning the Laffly motor sweeper which was purchased in June, 1914, at a cost of £628. This machine has in every respect given entire satisfaction, and has been the means of effecting a very considerable saving in the cost of street cleansing, although, owing to the comparatively little use of horse machine brooms in recent years, it is difficult to say definitely what the actual saving has been, but it is estimated that the motor is quite capable of carrying out the work of six horse machine brooms. The machine is able to sweep at the rate of eight miles per hour, and under ordinary working conditions it sweeps the Promenade from North Pier to Manchester Hotel (a distance of about a mile long by 15 yards wide) in 40 minutes. The broom, which lasts about 60 hours, and costs £1 18s. to re-bass, sweeps a span of 6 ft. wide; whilst a forced spray operates in front of the broom when necessary. It is not practicable to use the machine to its full capacity, as a considerable number of Blackpool streets are constructed of macadam, and it is not advisable to sweep this class of road too frequently with a machine broom. For the purpose of washing the streets, the motor broom has proved invaluable, as, together with the electric sprinkler, this work is now carried out far more efficiently and expeditiously than was the case when it was necessary to employ horse-drawn watering-carts and machine brooms.

Working expenses of the motor sweeping machine since June, 1914:—

	1914-15. (10 months.)	1915-16.
	£ s. d.	£ s. d.
Driver's wages:—		
Sweeping streets	22 0 5	24 2 1
Washing streets	1 17 7	2 13 8
Cleaning motor, etc.	15 11 9	11 11 7
	39 9 9	38 7 4
Working expenses:-		
Petrol	36 1 6	41 8 0
Oil and grease	3 5 11	1 8 4
Re-bassing brooms	21 4 0	24 0 0
Repairs	4 7 6	17 9 7
Insurance	7 13 0	8 14 9
Depreciation on machine	—	62 16 0
Depreciation on tires	—	20 0 0
	£112 1 8	£214 4 0

	1914-15. (10 months.)	1915-16.
Gallons of petrol consumed	520	576
Hours at work:—		
Sweeping streets	755	826½
Washing streets	64½	92
	819½	918½
Days at work	236	265
Petrol used per hour	2½ qts.	2½ qts.
Cost per hour:—		
Driver's wages	7d.	7d.
Petrol	10d.	11d.
Repairs, etc.	1s. 4d.	1s. 4d.
Depreciation	—	1s. 10d.
	2s. 9d.	4s. 8d.

Electric Street Watering Vehicle.

Mr. Bee also gave the following information respecting the above vehicle, which was supplied by the General Vehicle Company, Limited, of London, in July, 1915, and cost £974. The chassis is a 3½ tons one, and is 18 ft. 6 in. long and 6 ft. 9 in. wide. The total weight of the vehicle when empty is 5 tons; but when full its weight is increased to about 8 tons 10 cwt. The wheels are fitted with solid rubber tires, the front ones being single and the back ones twin; and they are chain driven. The tank, which is cylindrical in shape, has a capacity of 750 gallons, and is fitted with sleeve valve sprinklers, the spray being at front for easier control by the driver. The battery for supplying the motive power is an Ironclad Exide, and consists of 44 cells. These are re-charged from the refuse destructor electric plant at a charge of one penny per unit; this is an important factor, and a convincing argument in favour of electric vehicles for carrying out municipal work. The re-charging of the batteries takes about six hours, and is carried out during the night. A boosting charge is made during the dinner hour. The current used in charging at 5 amp. hours per unit is approximately 70 units. During an average day of nine hours the vehicle waters about 40 miles of streets, using about 22 loads, which is equal to 16,500 gallons of water. The ampère hours used during this period amounts to about 300, or 7½ ampère hours per mile. The vehicle is capable of travelling 40 miles at one charging, and on a level road can travel at 10 miles per hour.

Digitized by Google

MOTOR TRAFFIC.

Although only obtained at the end of last July, the work which the vehicle has accomplished since then shows that it will prove a great saving to the department, and will easily do the work of six horse-drawn watering vans. In connection with the washing of the promenade during the end of last summer, the use of the vehicle released four men for other work. The usefulness of the vehicle is not limited to the watering of streets, as it is also used in conjunction with the motor sweeping machine for washing streets. As they are able to travel at a fair speed, only half the water is used compared with horse-drawn vans; whilst the work is done better and quicker. In addition to this the electric vehicle has already accomplished good work in connection with the cleansing of sewers, as with a flush of 750 gallons the trouble and expense of dredging operations, which are both slow and costly, are often saved. In conclusion, it is interesting to note that the electric street watering vehicle was the first of its kind to be used in this country, and many enquiries have been made respecting it.

The following are particulars of the cost, and work carried out by the vehicle, during the eight months it has been at work :—

To March, 31, 1916.

WORKING EXPENDITURE.

	Hours.	£ s. d.
Driver's wages :—		
Watering streets	475 ...	13 16 1
Washing streets	92½ ...	2 13 11
Flushing sewers	64½ ...	1 17 7
Cleaning, etc.	111½ ...	3 5 0
		21 12 7
Re-charging batteries, 4,261 units at 1d.	... ...	17 15 1
Insurance	... ...	10 19 9
Depreciation (8 months) :—		
Vehicle (tank, etc.)	46 0 0	
Batteries	30 0 0	
Tires	7 0 0	
		83 0 0
Sundries (oil, grease, etc.)	... ...	2 0 0
		£135 7 5
Miles vehicle travelled	... ...	2,566
Miles watered	... ...	1,713
Gallons of salt water used :—		
Watering streets	556,550	
Washing streets	174,850	
Flushing sewers	81,250	
		812,650
Days at work watering streets	... ...	59
Total days at work	... ...	97

Additional information relating to this vehicle was given by Mr. Bee in a paper read at the conference of the Institute of Cleansing Superintendents held at Cardiff on July 17-21. The author then observed that as the vehicle is called upon to move a great weight during the course of the day, and is loaded up many times, he had never run it more than about 30 miles without it being boosted up. Mr. Bee gave the following additional figures of the working costs for April and May, 1916 (the cost of power being worked out on the basis of 1½ units per mile), as compared with horse vehicles :—

COST OF STREET WATERING FOR APRIL AND MAY, 1916.

1916.	£ s. d.	£ s. d.
Wages—		
Motor driver	8 7 4	
Horse drivers	10 3 0	
Hire of horses from Highway Department	10 5 10	
Depreciation—		
Vehicle £12		
Batteries 8		
Tires 4		
	24 0 0	
Sundries—Insurance, oil, etc....	2 10 0	
Power—1,902 units at 1d.	7 18 6	
Water	16 3 0	
		79 7 8
1915.		
Wages—Horse drivers	58 12 8	
Hire of horses from Highway Department	60 9 0	
Hired carts (horses and drivers)	19 10 5	
Water	36 2 9	
		174 14 10

Total saving on the two months, £95 7s. 2d.

In the author's opinion the electric vehicle is quite capable of doing the work of six horse vans, and as it might be of interest to the members, I have estimated what the saving would be per week (5½ days), on this basis.

COST OF ELECTRIC VEHICLE PER WEEK.

	£ s. d.	£ s. d.
Driver's wages	1 15 0	
Power, 384 units at 1d.	1 12 0	
Depreciation	2 10 0	
Sundries, insurance, oil, etc.	0 6 0	
Water, 84,500 gallons	2 2 3	
		8 5 3

COST OF SIX WATERING VANS PER WEEK.

	£ s. d.	£ s. d.
Six drivers' wages at 29s.	8 14 0	
Hire of six horses at 27s.	8 2 0	
Water, 173,000 gallons	4 6 3	
		21 2 3

Estimated saving per week, £12 17s.

The present vehicle had given such entire satisfaction that the Cleansing Committee had ordered the same firm to supply a similar vehicle at a cost of £1,028.

REFUSE REMOVAL BY ELECTRIC WAGONS.

At the recent Cardiff conference of the Institute of Cleansing Superintendents, Mr. J. Terry, of Nottingham, gave his experiences in the use of two Edison accumulator wagons, and presented the following statistical information :—

During six months ending July 1, 1915, the cost of emptying dry ash-bins by horse vehicles in Nottingham averaged 4s. 4d. per ton, but, owing to the increased charges for horse-keep, wages, etc., the cost is now 5s. Our No. 1 motor was delivered on October 15, 1915, commenced work on the 18th, and has been in use daily ever since. During the six months ending April 15 it carried 422 loads, weighing 1,288 tons, at a cost of £241 13s. 10d., which is equal to 3s. 9d. per ton, the average weight per load being 3·05 tons. The costs are made up as follows :—

	£ s. d.
Depreciation at 10 per cent. ...	£52 13 0
Insurance	4 5 0
Oil, water, repairs, etc. (allowed) ...	11 9 8
Tires—1,819 miles at 1·1d. ...	8 6 9
Current—2,541 units at 1¼d. ...	13 4 8
Wages...	151 14 9
	£241 13 10

If we take the six months ending July 1, 1916, we get a period corresponding to the period covered by the figures given in my original report, and this is a more fair comparison than taking the first six months' work, which are all winter months. We find that during this time we removed 1,167 tons of refuse at a cost of £253, or 4s. 4d. per ton, which is exactly the same as the cost by horses as mentioned in my original report, but it must be remembered that the conditions then were the same as before the war. Under existing conditions, as I have already stated, the cost is 5s., thus showing 8d. per ton in favour of the motor, which means that if all our dry ash refuse were removed by motors, a saving of over £1,000 per annum would be effected, and this in a town which I consider not best adapted to motor traction for this class of work. I have dealt only with the results obtained by our No. 1 motor, but the figures for the No. 2, which has been at work daily since March 13, are identical.

Even if the running costs and standing charges of motor vehicles are only equivalent to the present cost of horse collection, I most strongly contend that, from a sanitary point of view, the change is to be recommended. I feel personally that too much emphasis cannot be brought to bear on what appears of national importance, for the following, amongst many other reasons, which no doubt will occur to you :—(1) Cleanliness of street; (2) labour provided for building chassis in this country; (3) reducing the demand for fodder and cereals for horses; and (4) correspondingly increasing the supply available for feeding cattle. From a hygienic standpoint the value of No. 1 alone compels us, as cleansing superintendents, to be in the front rank in adopting this improved form of traction.

It is worthy of mention that my faith in the success of electrics is upheld by many other municipal officials who, with myself, have franked their good opinion by placing orders and repeat orders, as follows :—Edison battery vehicles—Sheffield, 5; Chester, 4; Dover, 6; Barnes, 4; Glasgow, 2; Pontypridd, 2; Newcastle, Heston and Isleworth, South Shields and Smethwick, 1 each. Lead batteries—Birmingham, 2; Wolverhampton, 1. In many cases reports have been made, in each of which substantial savings have been shown.

Digitized by Google

MOTOR TRAFFIC.

EDISON WAGON AT SOUTHAMPTON.

The 2-ton chassis Edison tip wagon illustrated below was purchased some time ago by Southampton Corporation Tramways on the advice of Mr. W. Robson, general manager and engineer. The chassis is of the ordinary GM 2-ton type, with a battery equipment

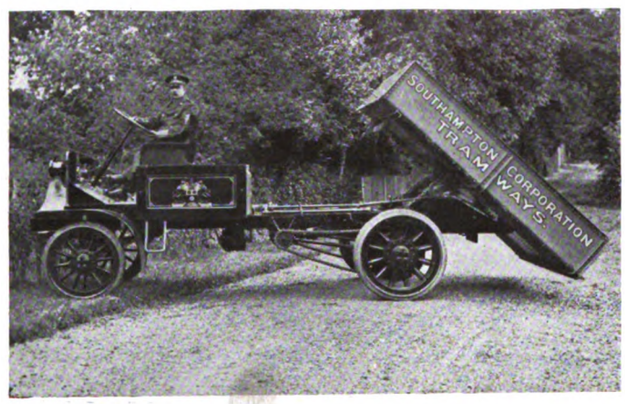

of 60 A8 Edison cells. This vehicle and a tower wagon, which has a similar chassis and was illustrated in our issue of March 12, 1914, have replaced five horses, and although it is too early to give exact figures, it is already evident that a considerable financial saving will result.

MOTOR TRAFFIC NOTES.

A New Service in Cheshire.—The British Automobile Traction Company have been granted licences to run four motor omnibuses in Altrincham.

Wolverhampton Corporation Omnibuses.—The motor chars-a-bancs department of the Corporation tramways yielded a gross profit of £1,459 for the year ended March 31 last.

St. Helens and District Motor Services.—The Daimler Company had supplied an eighth chassis to this company, and it has been fitted with a single-deck omnibus body by Messrs. E. and H. Hora, London.

Birmingham Corporation Omnibuses.—The Daimler Company have completed the order received for twelve new omnibuses for Birmingham Corporation Tramways. The department are now running fifty vehicles on the various city routes.

Electric Traction in the Future.—Middlesbrough Council have appointed a sub-committee to consider the question of taking over the local tramways. Ald. Hinton said the committee would have to consider the possible variation in the distribution of coal after the war and the substitution of benzol and petrol, which might revolutionise the question of street traction.

Omnibuses for Wounded Soldiers.—On the occasion of the meeting at the Royal Albert Hall on August 4, to mark the opening of the third year of the war, the London General Omnibus Company lent 150 omnibuses to convey to the hall 3,500 soldiers from the hospitals in the vicinity of the metropolis. The petrol consumed was a gift from the Asiatic Petroleum Company.

Omnibus Service Suggested for Musselburgh.—That the Town Council should invite the Edinburgh motor omnibuses to run between Joppa and Prestonpans was a suggestion submitted by Councillor Niven at the last meeting. The Town Clerk, while not prepared to state whether the Corporation had power to give an invitation, said the Tramways Company had statutory powers, and might possibly object to opposition running over their track.

Albion Company's Enterprise.—This commercial motor vehicle firm, whose works are at Scotstoun, Glasgow, have issued a booklet that should prove of assistance to municipalities, traction undertakings, and business firms who desire to be in a position to secure early delivery of machines after the war. The company advise intending purchasers not to postpone the consideration of the question until the close of the conflict, when it may be difficult to secure a reliable vehicle at short notice, but to at once consult them. If any commendation of the products of the Albion Works is needed it is to be found in convincing form in the booklet, which gives particulars and illustrations of Albions that have been in service for periods ranging from 9½ years to 14 years. Unfortunately for the commercial motor manufacturing business, there have been a number of motors placed on the market the design of which originally was intended for pleasure car work. To meet the urgent demands of the business community, the chassis have been slightly modified and offered freely as commercial motors. The user of such vehicles generally finds within a year or two his motor van is completely broken down, and the repairs required necessitate a complete withdrawal of the vehicle from service.

LIFEGUARD FOR OMNIBUSES.

The photograph reproduced below gives a very clear indication of the front wheel lifeguard with which the London General Omnibus Company is now experimenting. This type is intended to pick up the person who has the misfortune to fall in front of the vehicle or to be knocked down thereby. The lower portion of the guard is composed of india-rubber. The company has had something like 900 different designs submitted, but in nearly every instance

Experimental Lifeguard on a London Omnibus.

the suggested device was obviously impracticable. The sideguard, which was introduced about three years ago, has proved very efficient. Its object is not to pick up any obstacle lying in the track of the omnibus, but to push it aside and prevent it from getting under the rear wheels. It was from rear wheel accidents that the majority of fatalities previously arose. The effectiveness of the sideguard is shown by the operating manager's (Mr. H. E. Blain) recent announcement that it has saved 123 lives.

Digitized by Google

Registered Trade Mark

WORKS

675, Commercial Road
London, E.

which is now their . . .

ONLY ADDRESS

THERMIT LTD.

Entirely British

Owned and Managed

THERMIT LIMITED
675, Commercial Road
LONDON, E.

Telegrams:—
"FULMEN STEP LONDON"

Telephone:—EAST 4157

Digitized by Google

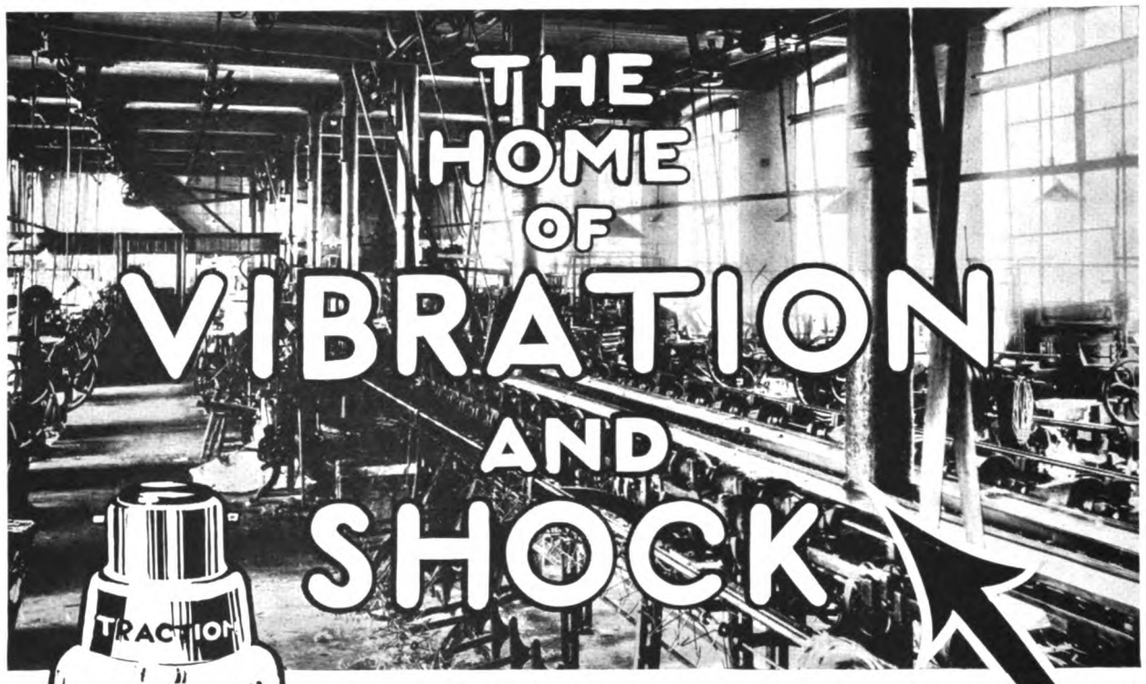

THE HOME OF VIBRATION AND SHOCK

IDEAL FOR INDUSTRIAL INSTALLATIONS

VIBRATION and accidental shocks are fatal to most ordinary types of Metal Filament Lamps, and renewal costs increase accordingly. This fact was chiefly responsible for the introduction of

SIEMENS WOTAN DrawnWire TRACTION TYPE LAMPS

THESE Lamps have Tungsten Filaments and combine high efficiency with great mechanical strength. The filament is in one continuous length helical wound, and mounted in loop formation on a special support. This arrangement prevents "sagging," and the short-circuiting of adjacent lengths of filament. The distance between the top and bottom supports is in no case greater than ¾", and sharp bends are avoided. Maximum strength is thus obtained, and the lamps are therefore ideal for the local lighting of individual machines, work-benches, &c.

SIEMENS BROTHERS DYNAMO WORKS LIMITED. Lamp and Supplies Dept.: 38 & 39, Upper Thames St., E.C.

Digitized by Google

Telegrams:
"THOUGHTFUL, LONDON."

THE

Telephone
8186 LONDON WALL

LORAIN STEEL CO.

36-38, New Broad Street, London, E.C.

Highest Possible Recognition

Awarded at the Panama-Pacific International Exposition for the general excellence of Girder, Groove, Guard and High Tee Rails and Special Track Work products; the greatest merit being recognised in the following special products exhibited as representing the highest development of the Art:—

"Tadpole" Tongue Switch
Tongue-Holding Device
Electrically Welded Rail Joints

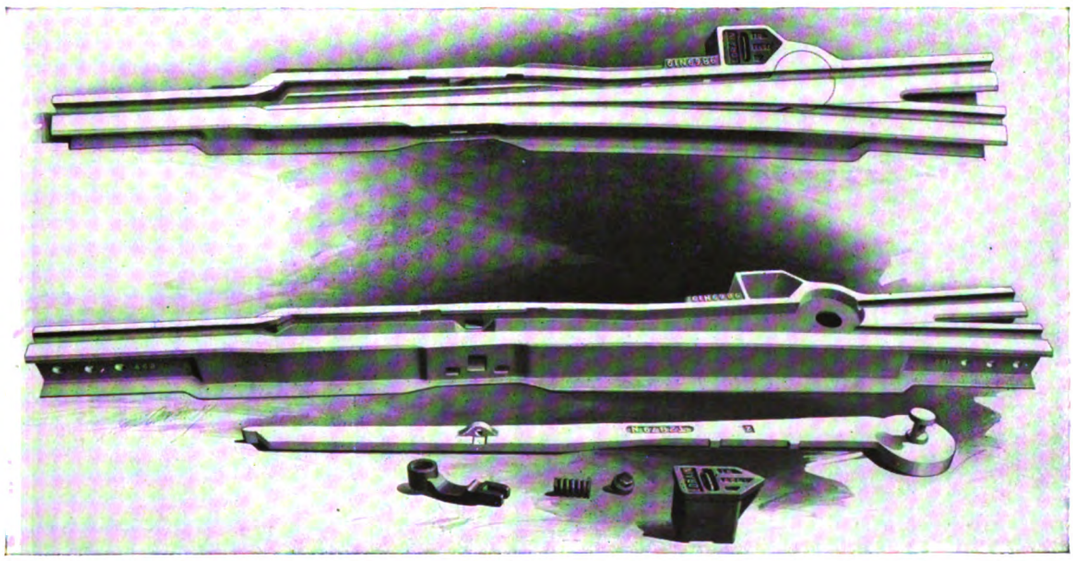

SOLID MANGANESE TADPOLE TONGUE SWITCH
Made with either grooved or plain Tongue

Digitized by Google

Traction Controllers

with Metallic Shield Blow-out.

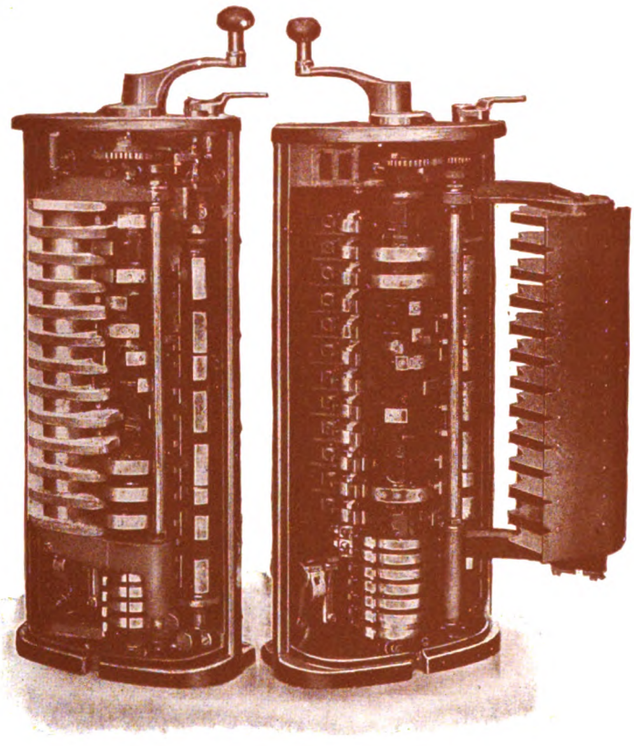

THE success which has been gained by our Metallic Shield Blow-out Controller during recent years has abundantly proved the soundness of the principles involved in its design.

In our latest standard controllers the blow-out has been made particularly powerful, securing cleaner contacts and thereby reducing the maintenance costs.

DICK, KERR

& CO., LIMITED.

Head Office: ABCHURCH YARD, CANNON ST., LONDON, E.C.

Branch Offices: Manchester, Newcastle, Tokyo, Sydney, Johannesburg, Buenos Aires, Rio de Janeiro, and Milan.

Digitized by Google

Turbo-Alternators

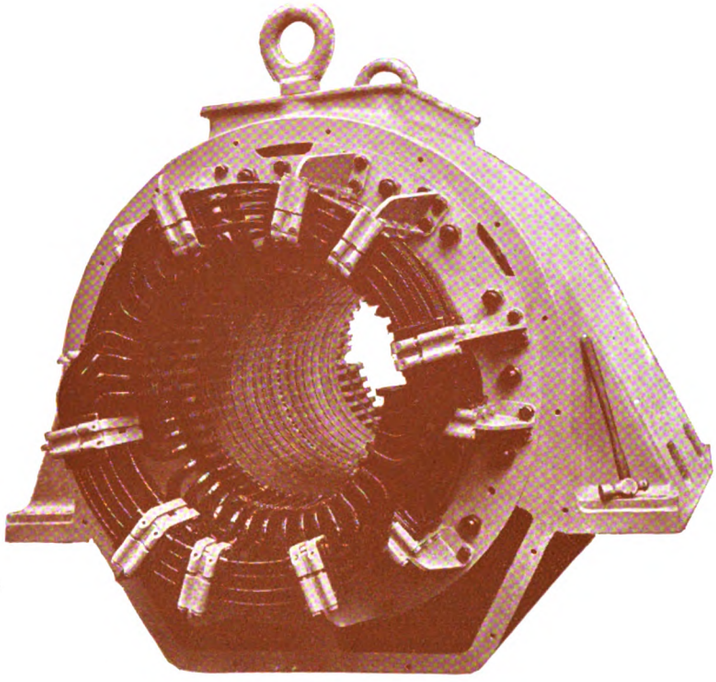

Soundness of Construction

THE world-wide reputation enjoyed by Dick, Kerr & Co., for the quality and reliability of their products, is due to soundness of construction, correct design, and skilled workmanship. Added to that—our very long and extensive experience in the design and manufacture of all classes of Electrical Plant, gives the purchaser confidence and assurance of successful operation.

DICK, KERR

& CO., LIMITED.

Head Office: ABCHURCH YARD, CANNON ST., LONDON, E.C.

Branch Offices: Manchester, Newcastle, Tokyo, Sydney, Johannesburg, Buenos Aires, Rio de Janeiro, and Milan.

Digitized by Google

For Successful Sub-Station Operation

it is essential that the converting plant should be of unquestionable reliability and possess high efficiency and large overload capacity.

B.T.H. Rotary Converters

possess the above qualities in an exceptional degree, and are extensively used in connection with important electric distribution schemes throughout the world, the machines installed in the United Kingdom alone having an aggregate capacity of over 200,000 kw.

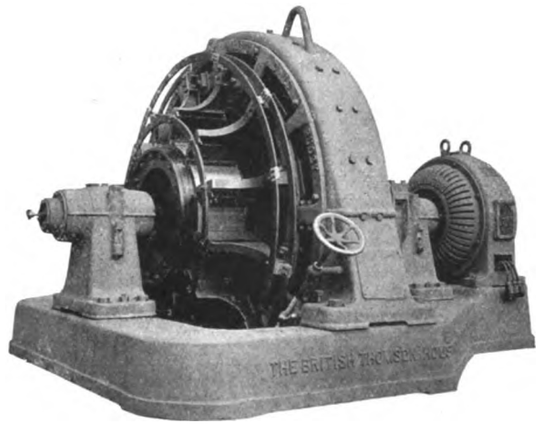

The British Thomson-Houston Co. Ltd.

ELECTRICAL ENGINEERS AND MANUFACTURERS

HEAD OFFICE AND WORKS : RUGBY, ENGLAND

TROLLEY WIRE

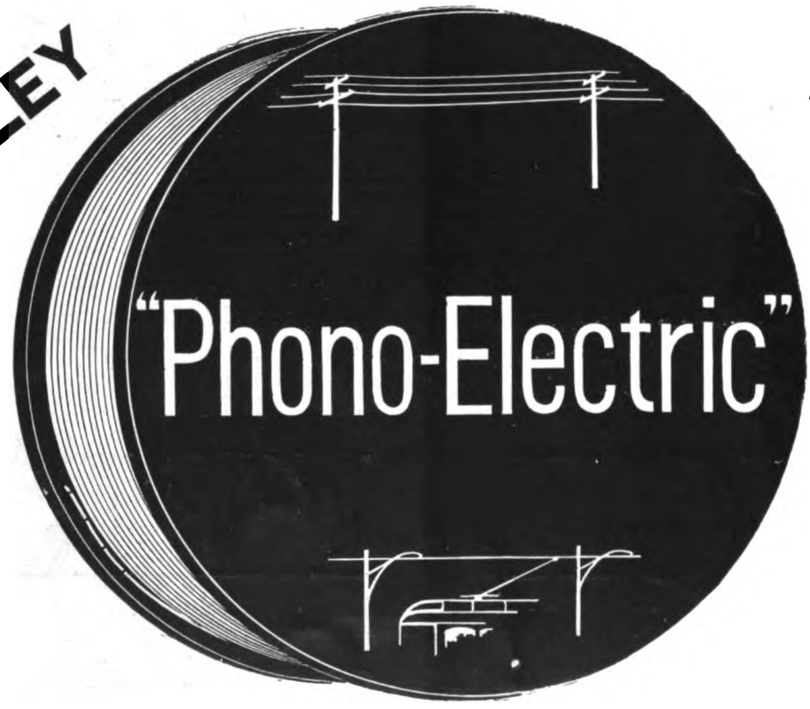

Manufactured by the Bridgeport Brass Co.

Wears 2 to 3 times as long as hard-drawn Copper

THE EQUIPMENT & ENGINEERING CO.

2 & 3, Norfolk Street, STRAND, LONDON, W.C.

Telephone— CITY 1088 (2 lines).

Telegrams— Kharparts, Estrand, London.

Digitized by Google

The STANDARD INSULATING VARNISHES & COMPOUNDS

get a real chance to demonstrate their immense superiority to the "next best" when used upon the windings of Traction Motors.

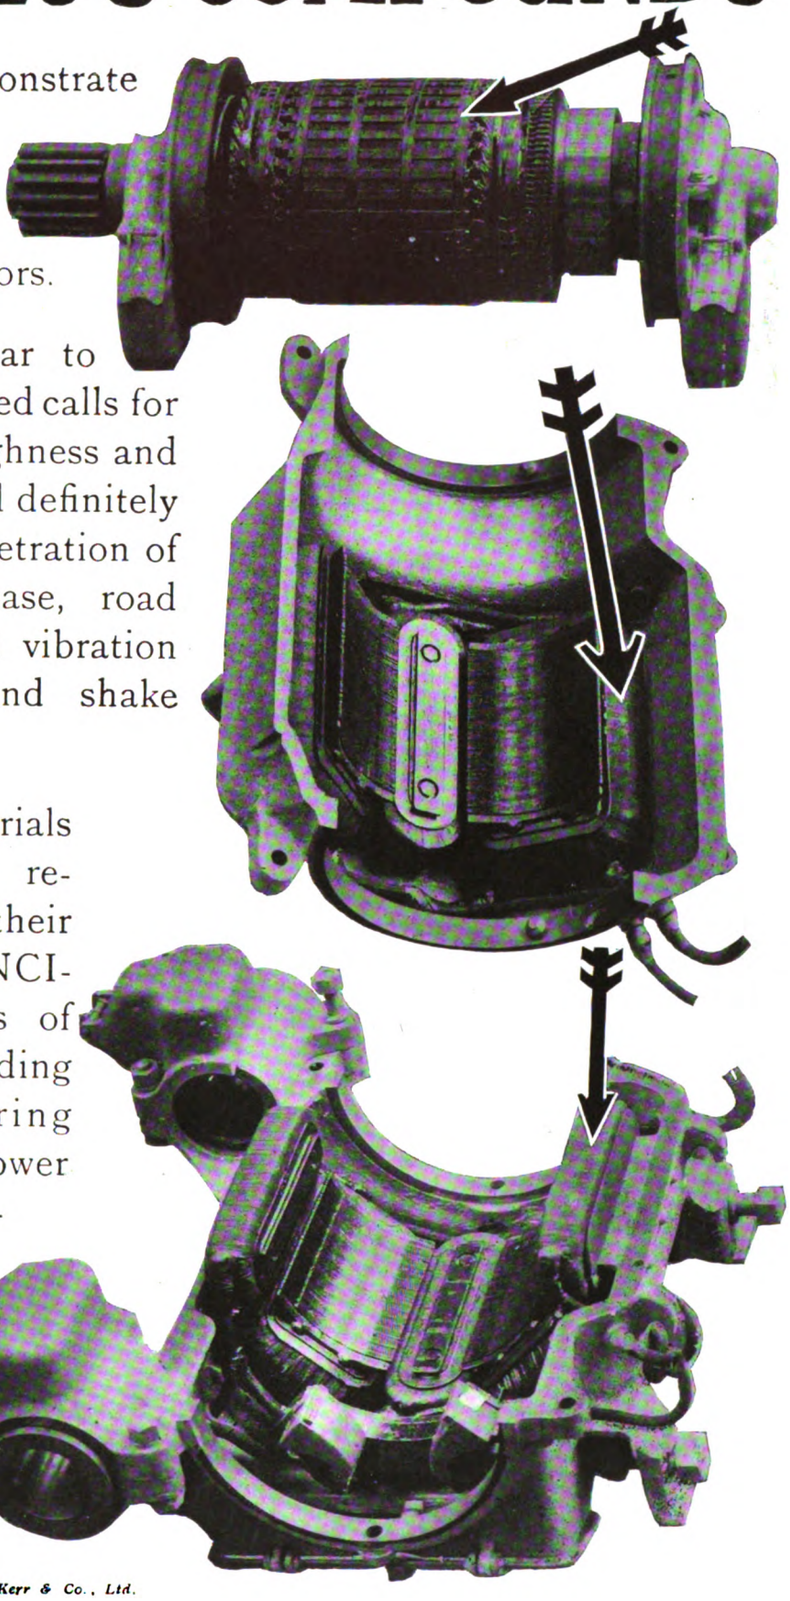

The severe wear and tear to which this plant is subjected calls for an insulation of great toughness and durability—one which will definitely resist the deleterious penetration of moisture, oils, acids, grease, road dirt, &c., and one which vibration will not disintegrate and shake to pieces.

That STANDARD materials completely fulfil these requirements is proved by their *regular* usage by the PRINCIPAL TRAMWAY Co.'s of the U.K., by the Leading Electrical Manufacturing Firms, Lighting & Power Stations, &c., *an every-day-service proof of practical utility.*

Catalogue and Expert advice where necessary from

PINCHIN, JOHNSON & Co.,
LIMITED,
Minerva House, Bevis Marks,
LONDON, E.C.

These photographs are reproduced by the courtesy and permission of Messrs. Dick Kerr & Co., Ltd.

Digitized by Google

HADFIELDS LTD

WORKMEN EMPLOYED OVER 6000

Hecla & East Hecla Works, SHEFFIELD.

WORKS AREA 110 ACRES

CAST IRON GOOD!

150 Years Ago

CAST IRON was used for rails for the transportation of heavy loads on wheels, and for fifty years was considered good enough.

WROUGHT IRON BETTER!!

100 Years Ago

WROUGHT IRON had become extensively used for this purpose and for half a century was the universal material for Railway Track-work.

STEEL BETTER STILL!!!

50 Years Ago

STEEL owing to cheaper methods of manufacture was adopted by many, and ultimately by all of the Railways for their Permanent-way.

To Day

"ERA" MANGANESE STEEL BETTER THAN ALL!!!!

HADFIELD'S PATENT 'ERA' MANGANESE STEEL is the only material that will withstand the enormous wear caused by the great increase in weight and speed of modern traffic at the Crossings and Curves of Tramways and Railways. For this purpose it is absolutely unequalled.

1795
POINT AND CROSSING OF CAST IRON

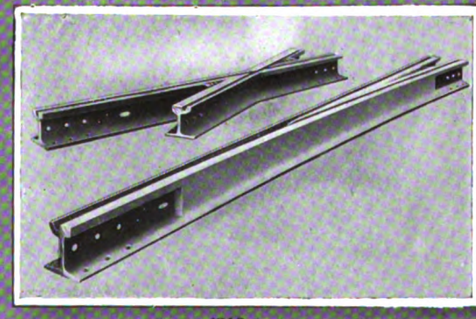

1916
POINT AND CROSSING OF 'ERA' MANGANESE STEEL

SPECIALISTS IN DESIGNING AND CONSTRUCTING
COMPLETE LAY-OUTS AND JUNCTIONS
OF EVERY DESCRIPTION FOR ELECTRIC RAILWAYS AND TRAMWAYS.

Digitized by Google

CONTENTS

	Page
Electrification of the Chicago, Milwaukee and St. Paul Railway (Illus.)	169
West Ham Tramway Rolling Stock (Illus.)	179
Sydney Electric Railway Scheme	181
Editorial Comments—A Great Railway Electrification	182
"The Right Man in the Right Place"	182
Collection of Used Tickets	183
The Partially Disabled as Motormen	183
Trade after the War	184
The Future of Edinburgh Tramways	185
Partially Disabled Men as Drivers	186
Tramwaymen with the Colours	188
Tramwaymen's Roll of Honour	189
A Notable Year at Portsmouth (Illus.)	192
Financial Reports and Meetings	193
Contracts and Orders	194
Personal	195
Bristol Tramways	196
Tramway and Light Railway Notes	197
Origin and Development of Tickets	198
Patent List	198
MOTOR TRAFFIC SECTION	203
The Petrol Restrictions	204
Automobile Experiences in the War	205
Roads Construction at the Front	206
London War Workers' Omnibuses	206
London Omnibus Traffic	207
Straker-Squire Deliveries (Illus.)	207
York Electric Omnibuses	208
Electric Vehicle Committee	208
The Import of Battery Vehicles	208
Motor and Petrol Dividends	208
Motor Vehicles for Municipalities	209
Business Items	209
Daimlers at St. Helens (Illus.)	209
Warrington Corporation Omnibus Costs	210
A Halley W.D. Lorry wins a Prize (Illus.)	210
Municipal Use of Steam Tractors	211
Motor Traffic Notes	211
Motor Vehicle Contracts	212
The Institution of Automobile Engineers	212
Traffic Returns	199-200
Directories of Electric Tramways and Railways	xxiii-xxx
Municipal Tramways	xxiii-xxiv
Company Tramways	xxiv-xxvi
Particulars of Track and Equipment	xxvii-xxx
Buyer's Guide	xvi-xx
Index to Advertisements	xiii

WE ARE ADDING ALL THE TIME TO OUR LIST OF TRAMWAYS WHICH USE

TOOL STEEL GEARS and PINIONS

but most of our orders are now from systems which have used T. S. material for some time. Experience is better than statements, and to-day we offer records and not promises

SCHOLEY & CO. LIMITED

56, Victoria Street WESTMINSTER **LONDON, S.W.**

Digitized by Google

Coming—a rush!!

It is extremely likely that tramway services will be utilised to a greater extent as a result of the curtailment of 'bus services. The extra strain on tramway stock, however, can be met without fear of trouble by fitting each car with Skefko SKF ball bearings—the unique features of which enable them to remain unaffected by hard service. Upon hearing from you we will gladly send you further particulars.

SKEFKO.SKF
(PATENTED) MADE IN ENGLAND TRADE MARK

SELF-ALIGNING DOUBLE-ROW
BALL BEARINGS

The Skefko Ball Bearing Co. Ltd.
HEAD OFFICE AND WORKS **LUTON, ENGLAND**
London Office - - 28, Victoria Street, S.W.
Glasgow Office - - 45, Bothwell Street.

FLOWER BRAND.

TRADE MARK

TRADE MARK

MAGNOLIA METAL

THE D. H. STOLL COMPANY, INC.
MANUFACTURERS OF PRESSES, SHEARS, DIES AND SPECIAL SHEET METAL WORKING MACHINERY.

Buffalo, N.Y., April 7, 1914

Gentlemen :—We have used your metal for the past few years in all our Power Presses and Shears, both large and small, with the most satisfactory results.

This applies both to the equipment, which we have manufactured here for our own use, and the many carloads shipped to some of the largest manufacturers in both the United States, Canada and abroad, in which was the entire plant equipment for many large plants.

As above stated, we have used this metal in both large and small machines and some machines running as high as 60 to 70 tons for heavy sheet metal drawing work.

Yours very truly,
THE D. H. STOLL COMPANY.

MAGNOLIA ANTI-FRICTION METAL COMPANY OF GREAT BRITAIN, LTD.

Tel. No.: City 6596. **49, Queen Victoria Street, LONDON, E.C.** Teleg.: "Magnoller, London."
Tel. No.: 254-01. **LA MAGNOLIA, 21, Rue de Petrograd, PARIS.** Teleg.: "Metamagne, Paris."

Digitized by Google

INDEX TO ADVERTISEMENTS.

	PAGE
Albion Motor Car Co. Ltd., Scotstoun, Glasgow ...	129
Allen, Edgar, & Co., Ltd., Sheffield	146
André Sleigh and Anglo Ltd., London, W.C. ...	xiv
Auto-Ticket Printing Co., Ltd., Liverpool	132
Avon India Rubber Co., Ltd., Melksham	125
Baker, John, & Co. (Rotherham) Ltd., Rotherham	xxii
Beckett, Laycock & Watkinson, Ltd., Willesden ...	xx
Bell Punch & Printing Co., Ltd., London, E.C. ...	144
Brill Company, J. G., London, E.C.	xxxv
British Insulated & Helsby Cables, Ltd., Prescot...	xxxi
British Thomson-Houston Co., Ltd., Rugby ...	viii
British Westinghouse Electric & Manufacturing Co., Ltd., Manchester	xix
Brockhouse, J., & Co., Ltd., West Bromwich ...	147
Clayton & Co. (Huddersfield), Ltd., Huddersfield...	129
Cleveland Metal Co., Stockton-on-Tees	xviii
Coan, R. W., 219, Goswell Road, London, E.C. ...	xviii
Commercial Cars, Ltd., Luton	136
Courtenay, J. W., Ltd., London, W.C.	143
Coventry Chain Co., Ltd., Coventry	xiv
Daimler Co., Ltd., Coventry	201
Dennis Bros., Guildford	124
Dick, Kerr & Co., Ltd., London, E.C. ... vi, vii,	148
Docker Brothers, Ltd., London, E.C.	144
Dunlop Rubber Co., Ltd., Aston Cross, Birmingham	135
Edison Accumulators, Ltd., London, S.W.	—
Edison & Swan United Electric Light Co., Ltd., Ponders End	xxi
Electro-Mechanical Brake Co. Ltd., West Bromwich	xxxviii
Equipment & Engineering Co., London ... viii,	xxxvi
Firestone Tyre and Rubber Co. Ltd., London, W....	—
Fodens, Ltd., Sandbach	138
Garrould, E. & R., Edgware Road, London, W. ...	140
General Electric Co., Ltd., London, E.C.	i
General Seating Co., Ltd., London, E.C.	ii
Glasgow Numerical Ticket Printing Co., Glasgow...	134
Goodyear Tyre and Rubber Co., Ltd., London, W.C.	137
Green, Geo. W., & Co. (Feltham), Ltd., Feltham ...	xxxii
Grover & Co., Ltd., Wharf Road, London, N. ...	134
Hadfields, Ltd., Sheffield	x
Halley's Industrial Motors, Ltd., Glasgow	126
Henley's Telegraph Works Co., Ltd., London	xix, 139
Herbert Frood Co. Ltd., Chapel-en-le-Frith ...	132
Hurst, Nelson & Co., Ltd., Motherwell	xxxvii
International Truck and Car Co., Ltd., London ...	—
Johnson & Phillips, Ltd., London, S.E. ...	xxxviii
Lacre Motor Car Co., 78, York Road, London ...	131
Leyland Motors (1914), Ltd., Leyland	127
"L'Industrie des Tramways et Chemins de Fer," Paris	144
London General Omnibus Co. Ltd., Broadway, Westminster, S.W.	140
Lorain Steel Co., London, E.C.	v
Macintosh, Chas., & Co., Ltd., Manchester ...	xxxiv, 141
Magnolia Anti-Friction Metal Co., London, E.C. ...	xii
Maudslay Motor Co., Ltd., 4, Parkside, Coventry ...	126
Millars' Timber & Trading Co., Ltd., London, E.C.	—
Mirrlees Watson Co., Ltd., Glasgow	199
"Motor Traction," 20, Tudor Street, London, E.C.	xviii
Napier, D., and Son, London, W.	202
Oriental Tube Co., Ltd., West Bromwich	199
Patent File and Tool Co., Ltd., London, E.C. ...	xiv
Pease & Partners, Ltd., Middlesbrough	xxii
Peckham Truck & Engineering Co., Ltd., London...	xv
Pinchin, Johnson & Co., Ltd., London, E.C. ...	ix
R.E.T. Construction Co., Ltd., London, E.C. ...	xxxii
Scholey & Co., Ltd., London, E.C.	xi
Shepherd's Parging Block Co., Milkstone, Rochdale	xiii
Shrewsbury & Challiner Tyre Co., Ltd., Manchester	128
Siemens Bros. Dynamo Works, Ltd., London, S.W.	iv
Skefko Ball Bearing Co., Ltd., Luton	xii
Smith, Frederick, & Co., Ltd., Salford, Manchester	xxxii
Spencer-Moulton & Co. Ld., Deansgate, Manchester	130
Standard Underground Cable Co., London, E.C. ...	xviii
Stewarts & Lloyds, 41, Oswald Street, Glasgow ...	147
Straker & Squire, Ltd., London, S.E.	134
Thermit, Ltd., London, E.C.	iii
Thornycroft, John I. & Co., London, S.W.	133
Tilling-Stevens, Ltd., 26, Victoria Street, S.W. ...	123
Titan Trackwork Co., Ltd., Sheffield	xv
"Tramway and Railway World"	xvi, 140
Tramway Supplies, Ltd., Leeds	147
Tudor Accumulator Co., Ltd., London, S.W. ...	132
Tyne Metal Co., Ltd., Newcastle-upon-Tyne ...	147
Underground Electric Railways Co., Ltd., London	xxxiii
United Electric Car Company, Preston, Lancs. ...	xxxiii
Walter Scott, Ltd., Leeds Steel Works, Leeds ...	145
Watlington & Co., Ltd., London	—
Waygood-Otis, Ltd., London, S.E.	xvi
White Motors and Accessories, Ltd., London, S.W.	xvii
Williamson, Alfred, Ashton-under-Lyne	xiv
Wilson Rolling Shutter Co. (1914) Ltd., London, S.W.	—
Wood-Milne, Ltd., Preston	142
Vandervell, C. A. & Co. Ltd. London, W.	133
Zenith Carburetter Co., London, W.	132

fill it in with a Solid Block

REQUIREMENTS OF A RAIL FILLER—A satisfactory Filler must

1. Be handy and convenient to use.
2. It must not deteriorate in stock.
3. Must fix to present a solid upright vertical wall against which to pave.
4. Must not liquify and run with heat.
5. Must be unaffected by frost during the operation of laying and when fixed in position.
6. Must bear the pressure and vibration of heavy surface traffic.
7. Must be able to be used in rail after rail.
8. Must fix so that it absolutely prevents the adjoining paving from dipping below the rail to expose the rail edge and become dangerous to users of the road.



SHEPHERD'S PARGING BLOCK CO. LTD.
MILKSTONE, ROCHDALE. Telephone: 912 and 721 Rochdale
No. 11

BLOCK PARGING

Digitized by Google

Dreadnought Rail Files

are the most efficient and economical tools for track work, and they cost but a few pence more than the inferior ordinary article.

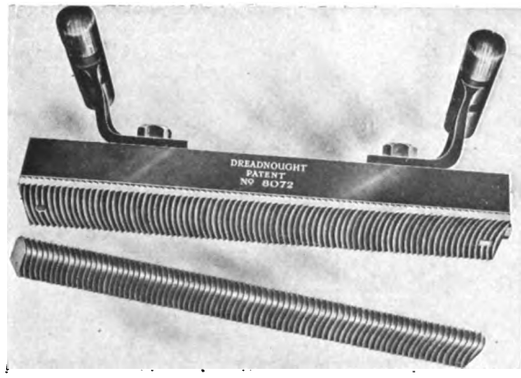

Illustration of FLAT and GROOVE Dreadnought Rail Files.

BRITISH MAKE **SPECIAL SHEFFIELD CRUCIBLE STEEL**

The Patent File & Tool Co. Ltd., 8, WHITE STREET LONDON, E.C.

COVENTRY ROLLER CHAINS

Suit every type of British & American Service Vehicle.

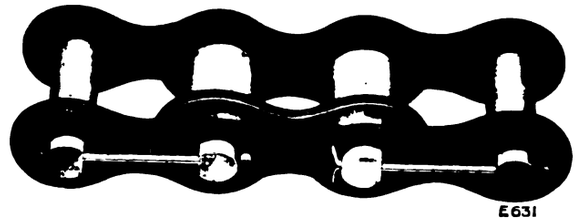

B. TYPE.

Every Link Detachable.

Catalogue D/6V post free.

"THE COVENTRY" CHAIN CO. LTD., COVENTRY, ENGLAND.

ALFRED WILLIAMSON

TRAMWAY & RAILWAY TICKET PRINTER,
ASHTON-UNDER-LYNE.

THE 'WILLIAMSON' REGISTERING TICKET BELL PUNCH

TICKETS & **PUNCHES**
Supplied on the **Very Best Terms.**

ESTABLISHED 1835.

Telephone: 320 Ashton under-Lyne.

THE STRONGEST PUNCH ON THE MARKET.

SAMPLES & PRICES ON APPLICATION.

PUNCHES ON SALE OR HIRE.

BETTER BLOCKS FOR ENGINEERS

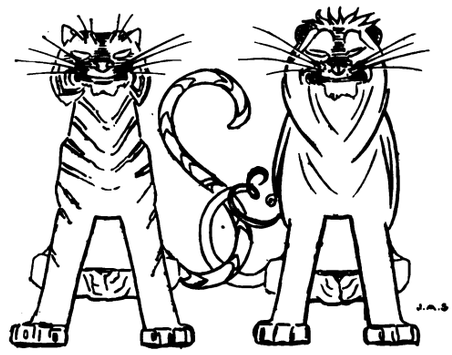

André Sleigh & Anglo Ltd.

Milford Lane, Strand, LONDON, W.C.

ENGRAVERS in every known process.

Send for our "Quarterly." It will interest you.

Digitized by Google

ALL TYPES OF TRAMWAY POINTS

Made of
"TITAN"
MANGANESE STEEL

TITAN TRACKWORK CO.

Rutland Works, Rutland Road, SHEFFIELD LTD.

A GOOD THING IS SURELY WORTH A TEST!!

YOU CAN INCREASE THE SPEED OF YOUR CARS WITHOUT FEAR OF DERAILMENT

SEND FOR PARTICULARS, DRAWINGS ETC.

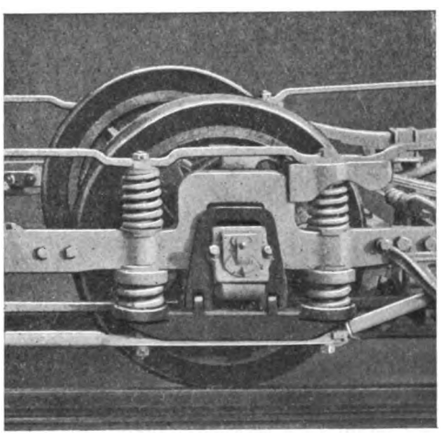

THIS GEAR RELIEVES THE CAR AND MOTORS FROM SIDE SHOCKS, ETC.

THE PECKHAM PENDULUM GEAR HAS STOOD THE SEVEREST TESTS ON OVER 35 TRAMWAYS IN THIS COUNTRY WITH ENTIRE SATISFACTION

CAN BE FITTED TO ANY EXISTING TRUCKS

THE PECKHAM TRUCK & ENGINEERING CO., LTD.

Telephone City 3,294
Telegrams "TRUXENPECK, CANNON, LONDON"

26, BUDGE ROW,
CANNON STREET,
LONDON, E.C.

3

Digitized by Google

ESTABLISHED 1833

WAYGOOD-OTIS, LTD.

Lift Makers — To H.M. The King.

By Appointment

WAYGOOD-OTIS LIFTS

of all kinds and for all purposes.

FALMOUTH ROAD, LONDON, S.E.

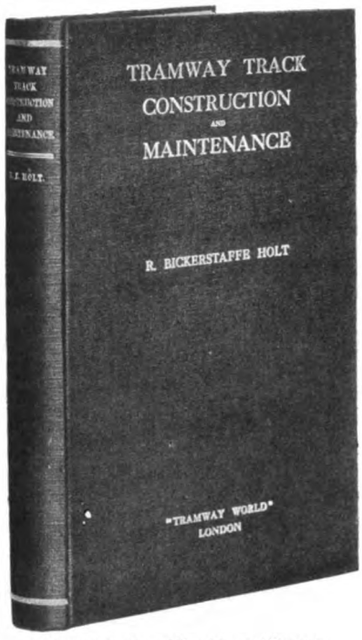

250 pages, 10 × 6¾ × 1 in., with over 150 illustrations—Price 10s. 6d.

SOME PRESS OPINIONS

"THE GLASGOW HERALD."

"The volume is bound to be of the greatest possible value to permanent way engineers."

"THE IRON AND COAL TRADES REVIEW."

"The book throughout bears the stamp of close practical experience with all branches of the subject."

"THE ELECTRICAL TIMES."

"Those who wish to discuss 'What's Wrong with the Track?' will find Mr. Holt's views and suggestions indispensable to their researches."

"THE YORKSHIRE POST."

"It is a thoroughly practical book. Mr. Holt has confined himself to really important matters, and has written on them with the authority that comes of practical scientific experience."

"THE ELECTRICIAN."

"The book, which throughout is essentially practical rather than academic, leaves upon the mind the impression of a thoughtful and helpful contribution to the knowledge of engineers engaged upon track work."

"THE ELECTRICAL INDUSTRIES."

"Mr. Holt has the gift of clear exposition in a degree to which few engineers can lay claim. His book is mainly intended for tramway engineers, and we can assure that gentle band of controversialists that they will find enough in it to keep them happy for a long time."

TRAMWAY & RAILWAY WORLD OFFICES
Amberley House, Norfolk Street, London, W.C.

BUYER'S GUIDE

The Names of Advertisers whose announcements appear in consecutive issues of THE TRAMWAY AND RAILWAY WORLD are inserted free of charge, under such headings as may be desired.

ACCUMULATORS, ELECTRICAL.
Edison Accumulators, Ltd., London.
Tudor Accumulator Co., London, S.W.

ADVERTISING, TRAMWAY AND RAILWAY.
J. W. Courtenay, Ltd., London.

AIR BRAKES. (See Brakes.)

ALUMINIUM.
British Aluminium Co., Ltd., London, E.C.

AMMETERS. (See Voltmeters.)

ANCHOR CHAIRS.
Blackwell & Co., London.

ANGLE IRON BUFFERS.
Brill Company, J. G., London, S.W.

ANTI-FRICTION METAL.
Magnolia Anti-Friction Metal Co., Ltd., E.C.

AUTOMATIC BRAKE ADJUSTERS. (See Brake Adjusters.)

AXLE BOXES.
Brill Company, J. G., London, E.C.
Peckham Truck and Eng. Co., London, S.W.

AXLES AND TYRES.
Anger Mfg. & Supply Co., Ltd., Preston, Lancs.
Baker, John, & Co., Rotherham.
Equipment & Engineering Co., London, W.C.

BALL BEARINGS.
Skefko Ball Bearing Co., Ltd., Luton.

BATTERIES, STORAGE. (See Accumulators.)

BEARINGS.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
Skefko Ball Bearing Co., Ltd., Luton.
Watlington & Co., Ltd., London, E.C.

BELLS AND GONGS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Watlington & Co., Ltd., London, E.C.

BLINDS AND CURTAINS.
Beckett, Laycock & Watkinson, Ltd., London.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.

BOILERS.
Babcock & Wilcox, Ltd., London, E.C.

BOLTS.
Allen, Edgar & Co., Ltd., Sheffield.
Bayliss, Jones, & Bayliss, Wolverhampton.
Brockhouse, J., & Co., Ltd., West Bromwich.
Hadfields, Ltd., Sheffield.
Peckham Truck and Eng. Co., London, S.W.
"The Coventry" Repetition Co., Coventry.
Titan Trackwork Co., Ltd., Nottingham.

BOND PAINTS.
Ruberoid Co., Ltd., London, E.C.

BOXES, JOURNAL.
Anger Mfg. & Supply Co., Ltd., Preston, Lancs.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
Watlington & Co., Ltd., London, E.C.

BRACKETS AND CROSS ARMS. (See Poles.)

BRAKE ADJUSTERS.
Anger Mfg. & Supply Co., Ltd., Preston, Lancs.

BRAKES, CAR.
Brill Company, J. G., London, E.C.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Electric Co.
Dick, Kerr, & Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peacock Brake Co., London, E.C.
Peckham Truck and Eng. Co., London, S.W.

BRAKE HANDLES.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peacock Brake Co., London, E.C.
United Electric Car Co., Ltd., Preston.

BRAKE SHOES.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
Hadfields, Ltd., Sheffield.
Hurst, Nelson & Co., Ltd., Motherwell.
Peacock Brake Co., London, E.C.
Peckham Truck and Eng. Co., London, S.W.
Tyne Metal Co., Ltd., Newcastle-on-Tyne.
United Electric Car Co., Ltd., Preston.

BROOMS, TRACK.
Brush Elec. Engineering Co., Ltd.
Hurst, Nelson & Co., Ltd., Motherwell.
Watlington & Co., Ltd., London, E.C.

BRUSHES, DYNAMO AND MOTOR.
British Westinghouse Co., Ltd., London.
Electric Construction Co., Ltd., London.
Watlington & Co., Ltd., London, E.C.

CABLES, ELECTRIC TRAMWAY AND LIGHTING.
British Aluminium Co., Ltd., London, E.C.
British Westinghouse Co., Ltd., London.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.
Henley's Telegraph Works Co., Ltd., London
Macintosh & Co., Ltd., Chas., London, E.C.

CABLE PULLEYS.
Tyne Metal Co., Ltd., Newcastle-on-Tyne.

CABLE TRAMWAYS.
Dick, Kerr & Co., Ltd., London, E.C.

CARBON BRUSHES. (See Dynamo & Motor Brushes.)

CARBURETTORS.
Green, Geo. W., & Co., Ltd., Feltham.

CAR CURTAINS.
Beckett, Laycock & Watkinson, Ltd., London.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.

CAR JACKS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.
Watlington & Co., Ltd., London, E.C.

CAR ROOF COVERINGS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

CAR SEATS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
United Electric Car Co., Ltd., Preston, Lancs.

CAR STEPS. (See Movable Car Steps.)

CAR STOVES.
Brill Company, J. G., London, E.C.

CAR TRIMMINGS.
Brill Company, J. G., London, E.C.
General Seating Co., Ltd., London, E.C.

CARS, TRAMWAY.
Brill Company, J. G., London, E.C.
Dick, Kerr & Co., Ltd., London.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

CAR TRUCKS.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
United Electric Car Co., Preston.

CASTINGS.
Allen, Edgar & Co., Ltd., Sheffield.
Hadfields, Ltd., Sheffield.
Hurst, Nelson & Co., Ltd., Motherwell.
Stewarts & Lloyds, Glasgow.
Titan Trackwork Co., Ltd., Nottingham.

CHAINS.
Coventry Chain Co., Ltd., Coventry.

CHARS-A-BANCS.
Commercial Cars, Ltd., Luton.
Clayton & Co. Huddersfield, Ltd., Huddersfield.

CIRCUIT BREAKERS.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd
Electric Construction Co., Ltd., London.
Watlington & Co., Ltd., London, E.C.

COLOURS. (See Paint.)

COMMERCIAL MOTORS.
Clayton & Co. Huddersfield, Ltd., Huddersfield.

COMMERCIAL VEHICLES.
Commercial Cars, Ltd., Luton.

COMMUTATORS & COMMUTATOR SEGMENTS.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

Digitized by Google

JACKS FOR TRAMCARS & MOTOR VEHICLES

ALL MODELS DELIVERED FROM STOCK

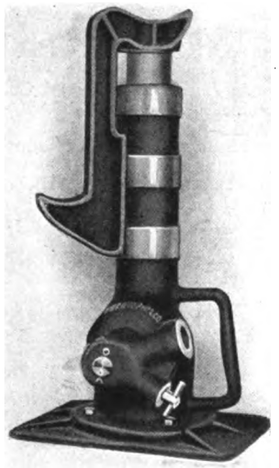

"Barrett" Ball and Cone Bearing Screw Jacks
Capacity - 10 Tons £4 15 0 each

The provision of Jacks

At an inquest on a child who rolled off the tray of a lifeguard on a Blackpool tramcar and was fatally injured, the jury suggested that the Corporation should "provide some better means of securing jacks to raise cars in case of accident."

Vide—THE TRAMWAY AND RAILWAY WORLD, August 19, 1916.

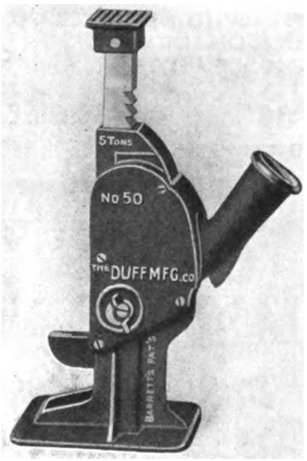

"Barrett" Automatic Lowering Jack
Capacity - 5 Tons £2 5 0 each

SOLE BRITISH AGENTS

White Motors and Accessories, Limited,

Concanon Works, Concanon Road, Acre Lane, Brixton,
(Close to Lambeth Town Hall)

Telephones: 565 & 566 Brixton
Telegrams: Yenisean, London

LONDON, S.W.

Cables: Yenwalt, London

DIRECTORY OF MANUFACTURERS OF AND DEALERS IN SUPPLIES (*continued*).

CONDENSING PLANT.
Belliss & Morcom, Ltd., Birmingham.
Mirrlees Watson Co., Ltd., Glasgow.

CONDUITS.
Doulton & Co., London.

CONTROLLER FINGERS.
Anger Mfg. & Supply Co., Ltd., Preston, Lancs.
Equipment & Engineering Co., London, W.C.

CONTROLLERS, ELECTRIC CAR.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Dick, Kerr, & Co., Ltd., London.

CONVERTIBLE CARS.
Brill Company, J. G., London, E.C
Hurst, Nelson & Co., Ltd., Motherwell.

CONVEYING AND ELEVATING MACHINERY.
Allen, Edgar, & Co., Ltd., Sheffield.
Hadfields, Ltd., Sheffield.

CROSSINGS. (See Points and Crossings).

CRUCIBLES.
Doulton & Co., Ltd., London.

DESTINATION INDICATORS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.

DESTINATION SCREENS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.

DESTINATION SIGNS.
Brill Company, J. G., London. E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.

DOG SPIKES.
Bayliss, Jones & Bayliss, Ltd., Wolverhampt'n

DROP FORGINGS.
Smethwick Stamping Co., Smethwick.

DYNAMOS.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Dick, Kerr & Co., Ltd., London.

ECONOMISERS.
Green, E., & Son, Ltd., Wakefield.

ELECTRIC BRAKES.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Electric Co., Ltd., Manchester.

ELECTRIC CABLES.
Henley's Telegraph Works Co., Ltd., London.
Macintosh & Co., Ltd., Chas., London, E.C.

ELECTRIC HEATERS.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.
Watlington & Co., Ltd., London, E.C.

ELECTRIC LAMPS.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.
Watlington & Co., Ltd., London, E.C.

ELECTRIC TRAMWAY SUPPLIES.
Allen, Edgar, & Co., Ltd., Sheffield.
Brill Company, J. G., London, E.C.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Co., Ltd., London.
Consolidated Accessories Co., London.
Dick, Kerr, & Co., Ltd., London.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.
Hadfields, Ltd., Sheffield.
Henley's Telegraph Works Co., Ltd., London.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
Titan Trackwork Co., Ltd., Nottingham.
United Electric Car Co., Ltd., Preston, Lancs.
Watlington & Co., Ltd., London, E.C.

ELECTRIC TRAMWAYS.
Allen, Edgar, & Co., Ltd., Sheffield.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Dick, Kerr, & Co., Ltd., London.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

ELECTRICAL ACCESSORIES.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.

ENGINES.
Belliss & Morcom, Ltd., Birmingham.

FANS, ELECTRIC
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.

FARE REGISTERS.
Bell Punch & Printing Co., Ltd., London.
Brill Company, J. G., London, E.C.

FENCES AND GATES.
Bayliss, Jones, & Bayliss, London, E.C.

FENDERS, TRAMCAR.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

FISHBOLTS.
Allen, Edgar, & Co., Ltd., Sheffield.
Bayliss, Jones & Bayliss, Ltd., Wolverhampt'n

FISHBOLTS AND PLATES.
Anger Mfg. & Supply Co., Ltd., Preston, Lancs.

FOLDING GATES.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.

FORGINGS.
Baker, John, & Co., Rotherham.
Brill Company, J. G., London, E.C.
Brockhouse, J., & Co., Ltd., West Bromwich.
Hurst, Nelson & Co., Ltd., Motherwell.
Smethwick Stamping Co., Smethwick.

FUEL ECONOMISERS.
Green, E., & Son, Ltd., Wakefield.

GEAR CASES.
British Thomson-Houston Co., Ltd., Rugby.
Equipment & Engineering Co., London, W.C.
Peckham Truck and Eng. Co., London, S.W.
Watlington & Co., Ltd., London, E.C.

GEARS.
British Thomson-Houston Co., Ltd., Rugby.
Hadfields, Ltd., Sheffield.
Scholey and Co., Ltd., London, E.C.
Watlington & Co., Ltd., London, E.C.

GEARS AND PINIONS.
British Thomson-Houston Co., Ltd., Rugby.
Equipment & Engineering Co., London, W.C.
Peckham Truck and Eng. Co., London, S.W.
Watlington & Co., Ltd., London, E.C.

GEAR WHEELS.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

GENERATORS. (See Dynamos.)

GLASSWARE.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.

GRINDING MACHINES.
Equipment & Engineering Co., London, W.C.

GRINDING MACHINES, CAR WHEEL.
Thermit, Ltd., London, E.C.
Watlington & Co., Ltd., London, E.C.

GUARD WIRE.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

Digitized by Google

WIRE & RODS

COPPER
BRASS
COPPER CLAD
PHOSPHOR BRONZE
SILICON BRONZE
TROLLEY WIRE

Standard Underground Cable Co.
DOCK HOUSE, BILLITER ST., LONDON

Telegrams: KRANKASES, ISLING-LONDON. Telephones: 4879 CENTRAL, 3846 CITY.

ALUMINIUM CASTINGS

COAN CASTS CLEAN CRANK CASES

MADE AND REPAIRED.

FOR ALL TRADES.
LARGE AND SMALL.
PURE AND HARDENED

Inquiries invited. Estimates given.

Contractor to Admiralty and War Office.

R. W. COAN, THE ALUMINIUM FOUNDRY,
219, Coswell Road, London, E.C.

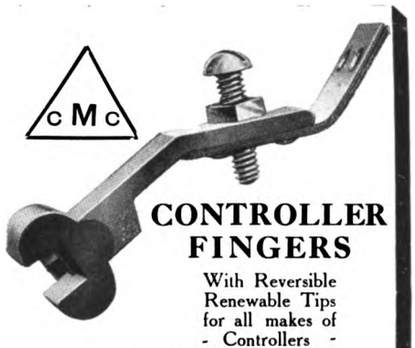

CONTROLLER FINGERS

With Reversible Renewable Tips for all makes of - Controllers -

Cleveland Metal Co. Ltd.
Bridge Works, Stockton-on-Tees.

Agents:
London: A. & A. Electrical Co., 51, Whitcomb Street, W.C.
Scotland: Horton, King & Smith, 8, Wellington Street, GLASGOW.

MOTOR TRACTION

DEALING WITH MOTOR VEHICLES for BUSINESS ☐ PURPOSES ☐

GIVES

Practical information and reliable data regarding all types of Motor Vehicles for the transport of passengers or goods, municipal purposes, etc.

Every Wednesday. One Penny.
Specimen Copy Post Free.

ILIFFE & SONS Ltd., 20, Tudor St., London, E.C.

DIRECTORY OF MANUFACTURERS OF AND DEALERS IN TRAMWAY AND RAILWAY SUPPLIES (*continued*).

GUARDS.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.

HEADLIGHTS.
Brill Company, J. G., London, E.C.
Watlington & Co., Ltd., London, E.C.

HEATERS, ELECTRIC.
Watlington & Co., Ltd., London, E.C.

HYDRAULIC PRESSES.
Hadfields, Ltd., Sheffield.

IGNITION LEADS (FOR MOTOR CARS).
Henley's Telegraph Works Co., Ltd., London.

INDICATORS.
Brill Company, J. G., London, E.C.
Consolidated Accessories Co., London.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

INSTRUMENTS.
Edison & Swan United Electric Light Co.

INSULATING MATERIAL.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

INSULATING VARNISHES.
Equipment & Engineering Co., London, W.C.

INSULATORS, TRAMWAY.
Blackwell, R. W., & Co., Ltd., London, E.C.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Co., Ltd., London.
Consolidated Accessories Co., London.
Doulton & Co., Ltd., London.
Equipment & Engineering Co., London, W.C.
Henley's Telegraph Works Co., Ltd., London.
Watlington & Co., Ltd., London, E.C.

IRONWORK FOR CAR BODIES.
Brockhouse, J., & Co., Ltd., West Bromwich.

JACKS.
Equipment & Engineering Co., London, W.C.

JAPANS.
Kearsley & Co., Ripon.

JOINT BOXES.
Henley's Telegraph Works Co., Ltd., London.

JOINT PLATES.
Allen, Edgar, & Co., Ltd., Sheffield.
Hadfields, Ltd., Sheffield.

JOINTS, RAIL.
Allen, Edgar, & Co., Ltd., Sheffield.
Thermit, Limited, London, E.C.

JOURNAL BOXES.
Brill Company, J. G., London, S.W.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
United Electric Car Co., Ltd., Preston, Lancs.

JOURNAL BOX PACKING.
Beckett, Laycock & Watkinson, Ltd., London.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.
Peckham Truck and Eng. Co., London, S.W.

LAMPS, ELECTRIC.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Electric Construction Co., Ltd., London.
Watlington & Co., Ltd., London, E.C.

LEATHERS (UPHOLSTERY).
General Seating Co., Ltd., London, E.C.

LIFE GUARDS.
Hurst, Nelson & Co., Ltd., Motherwell.

LIFTING JACKS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Glasgow.

LIGHTNING ARRESTERS.
Blackwell, R. W., & Co., Ltd., London, E.C.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

LINCRUSTA WALTON.
General Seating Co., Ltd., London, E.C.

LINE MATERIAL, ELECTRIC TRAMWAY
British Thomson-Houston Co., Ltd., Rugby.
Clough, Smith, & Co., Ltd., London, E.C.
Consolidated Accessories Co., London.
Dick, Kerr, & Co., Ltd., London.
Electro-Mechanical Brake Co., West Brom.
Equipment & Engineering Co., London, W.C.
Henley's Telegraph Works Co., Ltd., London.
Tramway Supplies, Ltd., Leeds.
Watlington & Co., Ltd., London, E.C.

LOCK WASHERS (Palnut Patent).
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

LOCOMOTIVES.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Co., Ltd., London.
Dick, Kerr, & Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.

LORRIES.
Clayton & Co. Huddersfield, Ltd., Huddersf'ld.
Commercial Cars, Ltd., Luton.

LUBRICANTS.
Wakefield, C. C., & Co., London, E.C.

METALS
Magnolia Anti-Friction Metal Co. of Great Britain, Ltd., London, E.C.

MILLBOARDS—"PANELLIUM."
General Seating Co., Ltd., London, E.C.

MOTOR OMNIBUSES.
Clayton & Co. Huddersfield, Ltd., Huddersf'ld
Commercial Cars, Ltd., Luton.

MOTOR TRUCKS (See Trucks).

MOTOR VANS.
Clayton & Co Huddersfield, Ltd., Huddersf'ld.
Commercial Cars, Ltd., Luton.

MOTOR VEHICLES.
Clayton & Co Huddersfield, Ltd., Huddersf'ld.
Commercial Cars, Ltd., Luton.

MOVABLE CAR STEPS.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.

MUNICIPAL VEHICLES.
Clayton & Co. Huddersfield, Ltd., Huddersf'ld.
Commercial Cars, Ltd., Luton.

OILS.
Wakefield, C. C., & Co., London, E.C.

OILSKINS.
Ailsa Oilskin and Rubber Co., Dalry.

OVERHEAD TROLLEY EQUIPMENT. (See Line Mat'l.

OVERHEAD LINE MATERIAL.
British Thomson-Houston Co., Ltd., Rugby.
Green, Geo. W., & Co., Ltd., Feltham.
Watlington & Co., Ltd., London, E.C.

OVERHEAD LINE TOOLS.
M. & G. Truck & Engineering Co., Ltd.
Watlington & Co., Ltd., London, E.C.

PAINT.
Kearsley, Robert, & Co., Ltd., Ripon, Yorks.

PAINTS, INSULATING.
Ruberoid Co., Ltd., London, E.C.

PANELS, ALUMINIUM.
British Aluminium Co., Ltd., London, E.C.

PANELS, MAHOGANY, etc.
Brill Company, J. G., London, S.W.

PANELS, 3-PLY, etc.
General Seating Co., Ltd., London, E.C.

PERMANENT WAY TOOLS.
Allen, Edgar, & Co., Ltd., Sheffield.

POINTS AND CROSSINGS.
Allen, Edgar, & Co., Ltd., Sheffield.
Dick, Kerr, & Co., Ltd., London.
Hadfields, Ltd., Sheffield.
Lorain Steel Company, London.
Titan Trackwork Co., Ltd., Sheffield.

POINT CONTROLLERS.
Clay & Atkinson, Bradford.
Equipment & Engineering Co., London, W.C.

POLES, METAL.
Clough, Smith, & Co., Ltd., London, E.C.
Dick, Kerr, & Co., Ltd., London.
Equipment & Engineering Co., London, W.C.
Peckham Truck and Eng. Co., London, S.W.
Stewarts & Lloyds, Ltd., Glasgow.
Watlington & Co., Ltd., London, E.C.

PORTABLE RAILWAYS.
Hurst, Nelson & Co., Ltd., Motherwell.

PRESSES, HYDRAULIC.
Youngs, Ryland St. Works, Birmingham.

PUBLIC SERVICE VEHICLES.
Clayton & Co Huddersfield, Ltd., Huddersf'ld.

PULLEY BLOCKS.
Youngs, Ryland St. Works, Birmingham.

PULLEYS, CABLE.
Dick, Kerr, & Co., Ltd., London.
Hadfields, Ltd., Sheffield.
Tyne Metal Co., Ltd., Newcastle-on-Tyne.

PULLEYS, SHAFTING, COUPLINGS, etc.
Allen, Edgar, & Co., Ltd., Sheffield.
Brown Bayley's Steel Works, Ltd., Sheffield.
Hadfields, Ltd., Sheffield.

PUNCHES, TICKET.
Auto-Ticket Printing Co., Ltd., Liverpool.
Bell Punch & Printing Co., Ltd., London.
Ticket Punch & Register Co., Ltd., London.
Williamson, Alfred, Ashton-under-Lyne.

RAIL BENDERS.
Equipment & Engineering Co., London, W.C.
Hadfields, Ltd., Sheffield.

(Continued on page xx.)

Digitized by Google

Over 4500 Westinghouse
Tramway Motors

have been supplied to the London County Council and the Glasgow Corporation. These motors are famous for their efficiency and low maintenance costs. All renewable parts made to jigs, ensuring accurate fitting of spare parts.

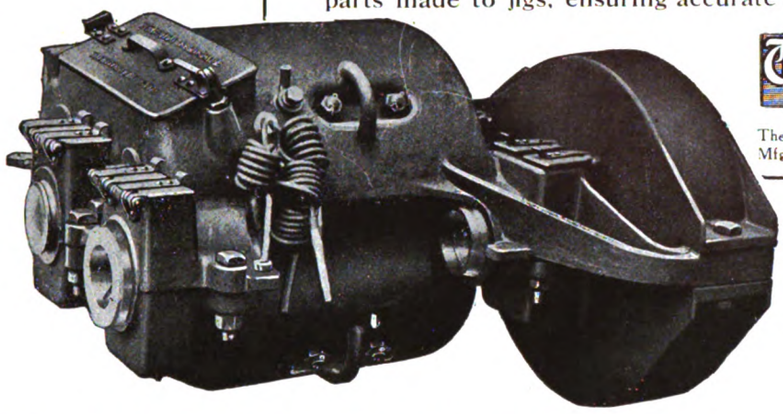

Westinghouse
Manchester

The British Westinghouse Electric and Mfg. Co. Ltd., Trafford Park, Manchester

Henley's Solid Rubber Cables

Also known as "Cab Tyre Sheathed." ***Patent 3996/11.***

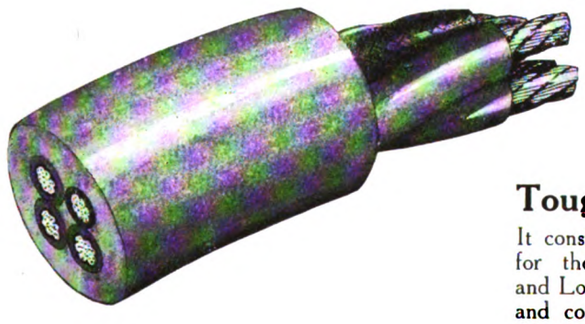

HENLEY'S tough, resilient, SOLID Rubber Cables will resist destructive action over periods covered by several replacements of cables having other forms of protection.

THE sheathing used on these Cables is that referred to in the Wiring Rules of the Institution of Electrical Engineers, Seventh Edition, March, 1916, page 14, Section 65, as

Tough Rubber Compound Protection

It consists of tough, resilient, *solid* rubber of the type used for the tyres of heavy motor vehicles, such as 'Buses and Lorries. We are manufacturers of Solid Band Tyres, and consequently know the type of Rubber Compound that will withstand the greatest amount of rough usage.

Therefore we can recommend our Solid Rubber Protection for Trailing Cables in Collieries, Wharves, Docks, Shipbuilding Yards, Manufactories, Railway Sheds and Tunnels, and all situations in which a wear-resisting sheathing is necessary; and for general wiring in Chemical Works, Breweries, Bleach and Dye Works, &c.

ASK FOR A SAMPLE.

W. T. HENLEY'S TELEGRAPH WORKS CO., LTD.,
Blomfield Street, London, E.C.

Digitized by Google

DIRECTORY OF MANUFACTURERS OF AND DEALERS IN SUPPLIES (*continued*).

RAIL BONDS.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

RAIL CLEANERS.
Brill Company, J. G., London, E.C.
Consolidated Accessories Co., London.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Watlington & Co., Ltd., London, E.C.

RAIL GRINDERS.
Consolidated Accessories Co., London, E.C.
Equipment & Engineering Co., London, W.C.
Thermit, Ltd., London, E.C.

RAIL JOINTS.
Bayliss, Jones & Bayliss, Ltd., Wolverhampton
Continuous Rail Joint Co., Ltd., London, E.C.
Hadfields, Ltd., Sheffield.
Thermit, Limited, London, E.C.

RAILLESS ELECTRIC SYSTEMS.
R.E.T. Construction Company, London, E.C.
Watlington & Co., Ltd., London, E.C.

RAIL LIFTERS
Equipment & Engineering Co., London, E.C.

RAIL PLANES.
Thermit, Ltd., London, E.C.

RAILS, TURNOUTS, CURVES, etc.
Allen, Edgar, & Co., Ltd., Sheffield.
Dick, Kerr, & Co., Ltd., London.
Hadfields, Ltd., Sheffield.
Lorain Steel Company, London.
M. & G. Truck & Engineering Co., Ltd.
Titan Trackwork Co., Ltd., Sheffield.
Walter Scott, Ltd., Leeds.

RAILWAY AND TRAMWAY MOTORS, ELECTRIC.
Brill Company, J. G., London, S.W.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Co., Ltd., London.
Dick, Kerr, & Co., Ltd., London.
Electric Construction Co., Ltd., London.

RAILWAY STORES.
General Seating Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.

RATTAN.
Brill Company, J. G., London, E.C.
General Seating Co., Ltd., London, E.C.

ROLLER BEARINGS.
Hurst, Nelson & Co., Ltd., Motherwell.

SANDING DEVICES.
Equipment & Engineering Co, London, W.C.
Taylor, John, Liverpool.

SAND BOXES.
Brill Company, J. G., London, S.W.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

SEATS AND SEATING MATERIALS.
Brill Company, J. G., London, E C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.

SIDE GUARDS.
Equipment & Engineering Co., London, W.C.

SIMPLEX TACKS.
Equipment & Engineering Co., London, W.C.

SLACK ADJUSTERS.
Peckham Truck and Eng. Co., London, S.W.

SLEEPING BERTHS.
Beckett, Laycock & Watkinson, Ltd., London.
General Seating Co., Ltd., London, E.C.

SNOW PLOWS.
Brill Company, J. G., London, S.W.
Hurst, Nelson & Co., Ltd., Motherwell.

SPRINGS.
Allen, Edgar, & Co., Ltd., Sheffield.
Brill Company, J. G., London, E.C.
Hadfields, Ltd., Sheffield.
Hurst, Nelson & Co., Ltd., Motherwell.
M. & G. Truck & Engineering Co., Ltd.
United Electric Car Co., Ltd., Preston, Lancs.

SPRINGS (LAMINATED AND SPIRAL.)
Brockhouse, J., & Co., Ltd., West Bromwich.

SPRINGS (UPHOLSTERY, etc.).
General Seating Co., Ltd., London, E.C.

SPRINKLING CARS.
Brill Company, J. G., London, S.W.
Hurst, Nelson & Co., Ltd., Motherwell,
M. & G. Truck & Engineering Co., Ltd.
United Electric Car Co., Ltd., Preston, Lancs.

STEAM TURBINES.
Belliss & Morcom, Ltd., Birmingham.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Dick, Kerr, & Co., Ltd., London.

STEEL.
Allen, Edgar, & Co., Ltd., Sheffield.
Baker, John, & Co., Rotherham.

STEEL FORGINGS.
Allen, Edgar, & Co., Ltd., Sheffield.
Baker, John, & Co., Rotherham.
Brill Company, J. G., London, E.C.
Brockhouse, J., & Co., Ltd., West Bromwich.
Hadfields, Ltd., Sheffield.

STEEL STRUCTURAL WORK.
Allen, Edgar, & Co., Ltd., Sheffield.

STEPS. (See Movable Car Steps.)

STONEBREAKERS.
Allen, Edgar, & Co., Ltd., Sheffield.
Hadfields, Ltd., Sheffield.

STRAIN WIRE
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd, London, E.C.

SWEEPERS.
Brill Company, J. G., London, S.W.
Hurst, Nelson & Co., Ltd., Motherwell.

SWITCHBOARDS AND GEAR.
British Thomson-Houston Co., Rugby.
British Westinghouse Co., London.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.
Tramway Supplies, Ltd., Leeds.

SWITCHES, ELECTRICAL.
British Thomson-Houston Co., Ltd., Rugby.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.
Watlington & Co., Ltd., London, E.C.

TANK AND GIRDER WORK.
Allen, Edgar, & Co., Ltd., Sheffield.

THIRD-RAIL INSULATORS.
Doulton & Co., Ltd., London.
Watlington & Co., Ltd., London, E.C.

THREE-PLY VENEER.
Equipment & Engineering Co., London, W.C.

TICKET PUNCHES. (See Punches).

TIME INDICATORS.
General Seating Co., Ltd., London, E.C.

TIRES.
Allen, Edgar, & Co., Ltd., Sheffield.
Baker, John, & Co., Rotherham.
British Griffin Co., Ltd., London, E.C.
Equipment & Engineering Co., London, W.C.
Hadfields, Ltd., Sheffield.
Macintosh & Co., Ltd., Chas., London, E.C.
Peckham Truck and Eng. Co., London, S.W.

TOP COVERS.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

TOWER WAGONS.
Clayton & Co. Huddersfield, Ltd., Huddersf'ld.
Commercial Cars, Ltd., Luton.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

TRACK BRAKES.
Brill Company, J. G., London, S.W.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.

TRACK SANDERS.
Brill Company, J. G., London, S.W.
Hurst, Nelson & Co., Ltd., Motherwell.

TRACK TOOLS AND APPLIANCES.
Allen, Edgar, & Co., Ltd., Sheffield.
Watlington & Co., Ltd., London, E.C.

TROLLEY CORD.
Anger Mfg. & Supply Co., Ltd., Preston, Lancs.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

TROLLEY HANGERS.
British Westinghouse Co., Ltd., London.
Consolidated Accessories Co., London.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

TROLLEY STANDARD EARTHING DEVICE.
Consolidated Accessories Co., London.

TROLLEY TENSION INDICATOR.
Consolidated Accessories Co., London.

TROLLEY WHEELS AND HEADS.
British Aluminium Co., Ltd., London, E.C.
British Thomson-Houston Co., Ltd., Rugby.
Tramway Supplies, Ltd., Leeds.
Watlington & Co., Ltd., London, E.C.

TROLLEY WIRE.
Equipment & Engineering Co., London, W.C.
Frederick Smith & Co., Salford, Manchester.
Watlington & Co., Ltd., London, E.C.

TRUCK BRAKES.
Brill Company, J. G., London, E.C.
Peckham Truck & Eng. Co., London, S.W.

TRUCKS, CAR.
Brill Company, J. G., London, S.W.
Dick, Kerr, & Co., Ltd., London.
Hurst, Nelson & Co., Ltd., Motherwell.
Lorain Steel Company, London.
Peckham Truck and Eng. Co., London, S.W.
United Electric Car Co., Preston.

VARNISHES.
Pinchin, Johnson, & Co., Ltd., London, E.C.

WELDED JOINTS.
Thermit, Limited, London, E.C.

WHEELS AND AXLES.
Allen, Edgar, & Co., Ltd., Sheffield.
Baker, John, & Co., Rotherham.
Brill Company, J. G., London, S.W.
British Griffin Co., Ltd., London.
Equipment & Engineering Co., London, W.C.
Hadfields, Ltd., Sheffield.
Hurst, Nelson & Co., Ltd., Motherwell.

WHEELS WITH WROT IRON CENTRES.
Baker, John, & Co., Rotherham.
Hurst, Nelson & Co., Ltd., Motherwell.

WHITE METAL FOR BEARINGS.
Magnolia Anti-Friction Metal Co., London.

WIRE, COPPER.
Henley's Telegraph Works Co., Ltd., London.
Smith, Frederick, & Co., Salford, Manchester.
Watlington & Co., Ltd., London, E.C.

WIRE ROPES.
Watlington & Co., Ltd., London, E.C.

BECLAWAT

(Reg. Trade Mark).

Balanced Frameless Window

The window illustrated is a plain polished plate running in our Silent Window Channel and operated by Window Balance.

Weatherproof.
. No Rattling .

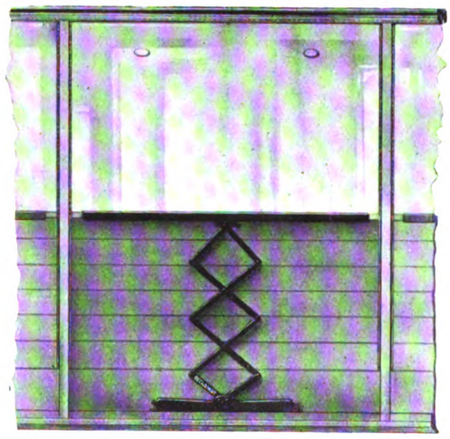

BECKETT, LAYCOCK & WATKINSON, Ltd.

Patentees and Manufacturers,

—AGENTS ALL— OVER THE WORLD.

Willesden, LONDON, N.W.

Tel. No. 1558 Willesden.

Tel. Add. "BECLAWAT"

Digitized by Google

STRONG & ECONOMICAL.

VIBRATION-RESISTING.

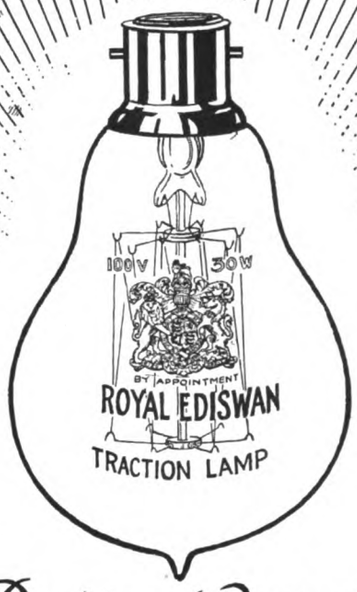

Designed & made to stand vibration

WHICH IS, OF COURSE, AS A TRACTION LAMP SHOULD BE. SPECIAL CARE IS TAKEN IN MANUFACTURE WITH THE GLASS STEMS TO ASSURE THAT THEY ARE PERFECT IN EVREY DETAIL

ROYAL

EDISWAN

DRAWN WIRE TRACTION LAMPS

HAVE SHORT RIGID FILAMENTS AND EVERY LAMP IS SEPARATELY AND RIGIDLY TESTED BEFORE BEING ALLOWED TO LEAVE THE WORKS

Will you favour us with your enquiries regarding "Traction" Lamps for any "Vibration Area?"

THE
EDISON SWAN ELECTRIC CO. LTD.
PONDERS END, MIDDLESEX
'Phone - 520 ENFIELD

FULLY LICENSED UNDER BRITISH PATENTS NOS:- 21513/06 - 27712/03 AND OTHERS.

Digitized by Google

JOHN BAKER & CO.

(ROTHERHAM), LTD.

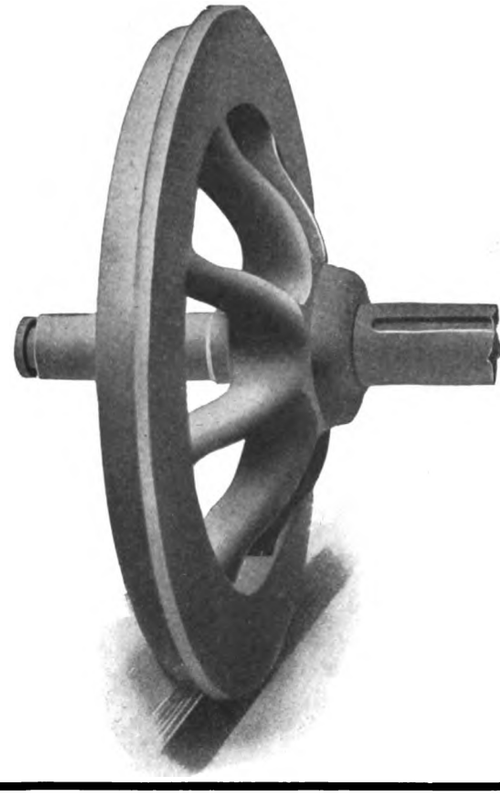

Brinsworth Iron & Wheel Works, ROTHERHAM
Kilnhurst Steel Works, near SHEFFIELD.

WHEELS WITH WROUGHT-IRON CENTRES.

AXLES TO BRITISH STANDARD SPECIFICATION FOR ORDINARY SERVICE.

Special (T) Brand Axles
— for Heavy Service. —

If you are troubled with Axle Breakages, try our Special Steel.

Tyres of Chrome Steel for High Mileage Results.

PEASE & PARTNERS, LTD.

WORKS:

TEES IRONWORKS, MIDDLESBRO'.

LICENSEES

OF THE

STEEL BACK

BRAKE BLOCK

FOR

RAILWAYS AND TRAMWAYS.

SOLE ENGLISH AGENTS:

ALFRED INGRAM & CO., Queen Annes Chambers, Westminster.

Digitized by Google

DIRECTORIES OF ELECTRIC TRAMWAYS

IN THE UNITED KINGDOM.

NAMES OF PRINCIPAL OFFICERS,

POSTAL ADDRESS, TELEGRAPHIC ADDRESS, AND TELEPHONE NUMBERS.

MUNICIPAL TRAMWAYS, pp. xxiii-xxiv. COMPANY TRAMWAYS, pp. xxiv-xxvi. PARTICULARS OF TRACK AND EQUIPMENT, pp. xxvii-xxx.

TRAMWAY ASSOCIATIONS, p. xxvi.

Aberdare Urban District Tramways, Gadlys Estate, Aberdare. [T.A., Tramways, Aberdare; T.N., 17.] *Gen. Manager and Elec. Engineer*, A. J. Abraham; *Traffic Supt.*, H. King; *Chairman Try. Com.*, Coun. E. Stonelake.

Aberdeen Corporation Tramways, Municipal Buildings, Union Street, Aberdeen. [T.A., Trams, Aberdeen; T.N. 826.] *Gen. Manager and Eng.*, R. S. Pilcher; *Per. Way Eng.*, J. Gordon; *Chairman Try. Com.*, Coun. Robertson.

Accrington Corporation Tramways, Market Hall, Accrington. [T.A., Trams, Accrington; T.N., 2212.] *Gen. Manager and Eng.*, H. Pilling; *Per. Way Eng.*, W. J. Newton; *Chairman Try. Com.*, Ald. T. E. Higham; *Vice-Chairman*, Coun. Morley.

Ashton-under-Lyne Corporation Tramways, Tramway Depot, Mossley Road, Ashton. [T.A., Tramways, Ashton; T.N., 325.] *Gen. Manager*, Ernest Holt; *Elec. Eng.*, N. Appelbee; *Chairman Try. Com.*, Ald. R. S. Oldham; *Vice-Chairman*, Ald. Waterhouse.

Ayr Corporation Tramways, Town Building, Ayr. [T.A., Trams, Ayr; T.N., 123.] *Gen. Manager and Eng.*, William Grant; *Burgh Elec. Eng.*, R. Marshall; *Per. Way Eng.*, John Young; *Rolling Stock Supt.*, Alf. Somerville; *Convener Try. Com.*, Coun. J. R. Learmont; *Vice-Chairman*, Bailie Murray.

Bacup Corporation Tramways.—Town Hall, Bacup, Lancs. [Lines leased to and worked by Rochdale Corporation.] *Town Clerk*, J. Entwistle; *Boro' Eng.*, W. H. Elce; *Chairman Try. Com.*, Ald. Sir H. Maden; *Vice-Chairman*, Coun. J. H. Lord (Mayor).

Barking Town Urban District Tramways, East Street, Barking. [T.N., 156 East Ham.] *Eng. and Manager*, W. Holmes; *Acting Engineer and Manager*, W. E. Kidner; *Chairman Try. Com.*, Coun. D. Gordon.

Barton-upon-Irwell District Council Light Railways, Barton-upon-Irwell.

[Line leased to and worked by the Lancashire United Tramways Co., *q.v.*]

Batley Corporation Tramways, Batley, Yorks. *Engineer*, S. D. Jones; *Chairman Try. Com.*, Coun. J. W. Turner; *Vice-Chairman*, Coun. F. W. H. Auty.

[Lines leased to and worked by the Yorkshire (Woollen District) Electric Tramways, Ltd., *q.v.*]

Belfast City Tramways, Tramways Office, Sandy Row, Belfast. [T.A., Nance, Tramway, Belfast; T.N., 2444.] *Gen. Manager*, Andrew Nance; *Traffic Manager*, R. McMaster; *City Elec. Eng.*, T. W. Bloxam; *Per. Way Eng.*, E. S. Pinkerton; *Chief Eng.*, A. A. Blackburn; *Chairman Try. Com.*, Coun. J. McCaughey; *Vice-Chairman*, Coun. J. Warwick.

Bexley Urban District Council Tramways, Car Sheds, Bexleyheath, Kent. [T.A., Stokes, Tramways, Bexleyheath; T.N., 79.] *Gen. Manager and Elec. Eng.*, H. P. Stokes; *Rolling Stock Supt.*, A. Williams; *Chairman Try. Com.*, Coun. E. T. Coote; *Vice-Chairman*, Coun. E. F. Reid.

Birkenhead Corporation Tramways, Laird Street, Birkenhead. [T.A., Tramways Manager, Birkenhead; T.N., 1110.] *Gen. Manager*, C. Clarke; *Borough Sur. and Eng.*, C. Brownridge; *Rolling Stock Supt.*, R. Chadwick; *Chairman Try. Com.*, Coun. H. Halsall; *Vice-Chairman*, Coun. R. Frame.

Birmingham Corporation Tramways, The Council House, Congreve Street, Birmingham. [T.A., Trams, Birmingham; T.N., Central 7,000.] *Gen. Manager*, A. Baker; *City Elec. Eng.*, R. A. Chattock; *Traffic Supt.*, J. McDonnell; *Per. Way Eng.*, C. E. S. Bill; *Rolling Stock Supt.*, R. H. Dickinson; *Chairman Try. Com.*, Coun. H. Barrow, J.P.; *Vice-Chairman*, Coun. A. G. Ellaway.

Blackburn Corporation Tramways, Tramways Office, Blackburn. [T.A., Tramways, Blackburn; T.N., 547.] *General Manager*, J. H. Cowell; *Elec. Eng.*, P. P. Wheelwright; *Traffic Manager*, E. Greek; *Car Shed Supt.*, H. W. Seymour; *Chairman Try. Com.*, Ald. W. Thompson; *Vice-Chairman*, Coun. C. Higham.

Blackpool Corporation Tramways, West Caroline Street, Blackpool. [T.N., 67.] *Gen. Manager*, C. Furness; *Traffic Supt.*, C. J. Baker; *Resident Eng.*, F. Field; *Chairman Try. Com.*, Ald. J. Brodie, J.P.; *Vice-Chairman*, Ald. R. Holt (Mayor).

Bolton Corporation Tramways, Bradshawgate, Bolton. [T.A., Manager, Tramways, Bolton; T.N., 490.] *General Manager*, J. Barnard; *Elec. Eng.*, W. J. H. Wood; *Per. Way Eng.*, E. Ll. Morgan; *Rolling Stock Supt.*, C. Beech; *Chairman Try. Com.*, Ald. J. Miles; *Vice-Chairman*, Coun. P. Higson.

Bootle Corporation Tramways, Electricity Works, Pine Grove, Bootle. [T.N., 424.] *Elec. Eng.*, T. D. Clothier; *Chairman Try. Com.*, Ald. Booth; *Vice-Chairman*, Coun. Pennington.

[Lines worked by Liverpool Corporation Tramways.]

Bournemouth Corporation Tramways, Tramways Offices, Lansdowne Crescent, Bournemouth [T.A., Tramways, Bournemouth; T.N., 1701.] *General Manager*, I. Bulfin; *Chief Assistant & Elec. Eng.*, H. Vickers; *Traffic Supt.*, R. O. Baldwin; *Chairman Try. Com.*, Coun. Bell; *Vice-Chairman*, Coun. McCabe.

Bradford Corporation Tramways, Central Office, 7, Hall Ings, Bradford. [T.A., Tramways, Bradford; T.N., 2381 and 2382.] *Gen. Manager*, C. J. Spencer; *Asst. Elec. Eng.*, J. W. Dawson; *Traffic Supt.*, T. Stirk; *City Elec. Eng.*, T. Roles; *Chairman Try. Com.*, Coun. Enoch Priestley; *Vice-Chairman*, Coun. J. Lund.

Brighton Corporation Tramways, Lewes Road, Brighton. [T.A., Tramways, Brighton; T.N., 353 P.O.] *Eng. & Manager*, William Marsh; *Traffic Supt.*, W. N. Brooks; *Rolling Stock Supt.*, W. Orchard; *Per. Way Eng.*, F. N. Hudson; *Chairman Try. Com.*, Coun. Martin.

Burnley Corporation Tramways, Queen's Gate, Burnley. [T.N., 46.] *Gen. Manager*, Henry Mozley; *Boro. Elec. Eng.*, J. E. Starkie; *Boro. Surveyor*, G. H. Pickles; *Chairman Try. Com.*, Coun. E. Heap; *Vice-Chairman*, Coun. Irving.

Burton-on-Trent Corporation Tramways, Guild Street, Burton-on-Trent. [T.N., 202.] *Manager*, A. B. Slater; *Engineer*, T. Hall; *Chairman Try. Com.*, Ald. J. S. Rowland (Mayor); *Vice-Chairman*, Ald. T. E. Lowe.

Bury Corporation Tramways, Market Place, Bury. [T.N., 26.] *Gen. Manager*, William Clough; *Boro. Elec. Eng.*, S. J. Watson; *Chairman Try. Com.*, Ald. T. S. Collinge; *Vice-Chairman*, Coun. Hargreaves.

Cardiff Corporation Tramways, Central Offices, The Hayes, Cardiff. [T.A., Tramways, Cardiff; T.N., 1211, 1240, 1350, and 377.] *Gen. Manager and Elec. Eng.*, A. Ellis; *Deputy Manager*, C. G. M. New; *Traffic Manager*, H. David; *Per. Way Eng.*, W. Harpur; *Rolling Stock Supt.*, Jas. Preston; *Chairman Try. Com.*, Ald. Sir J. W. Courtis, J.P.; *Vice-Chairman*, Coun. A. J. A. Stone.

Chester Corporation Tramways, Station Road, Chester. [T.N., 166.] *Traffic Supt.*, W. H. Ellis; *Elec. Eng.*, S. E. Britton; *Per. Way Eng.*, W. M. Jones; *Chairman Try. Com.*, Ald. J. Jones; *Vice-Chairman*, Coun. A. S. Dutton.

Chesterfield Corporation Tramways, Chatsworth Road, Chesterfield. [T.A., Tramways, Chesterfield; T.N., 78.] *Gen. Manager and Elec. Eng.*, R. L. Acland; *Traffic Manager*, F. Root; *Per. Way Eng.*, C. E. Crossley; *Chairman Try. Com.*, Ald. E. Shentall (Mayor); *Vice-Chairman*, Coun. Woodhead.

Colchester Corporation Tramways, Magdalen Street, Colchester. [T.A., Tramways, Colchester; T.N., 92.] *Gen. Manager and Engineer*, R. C. Bullough; *Chairman Try. Com.*, Coun. A. M. Jarmin; *Vice-Chairman*, Coun. J. T. Bailey.

Colne Corporation Tramways, Colne, Lancashire. *General Manager and Engineer*, T. G. Richardson; *Chairman Try. Com.*, Coun. R. Knight (Mayor).

Coventry Corporation Tramways, Priestley's Bridge, Coventry. [T.A., Tramways, Coventry; T.N., 1014.] *Engineer and General Manager*, T. R. Whitehead; *Assistant Engineer*, W. M. Milnes; *Chairman* Coun. C. V. Pugh; *Vice-Chairman*, Coun. H. W. Wale.

Croydon Corporation Tramways, Tramways Office, Thornton Heath, Surrey. [T.A., Tramways, Croydon; T.N., 406, Croydon.] *Tramways Manager*, T. B. Goodyer; *Chairman Try. Com.*, Ald. G. J. Allen; *Vice-Chairman*, Coun. A. A. Thomson.

Darlington Corporation Tramways, Haughton Road, Darlington. [T.A., Tramways, Darlington; T.N., 2435.] *General Manager and Elec. Eng.*, J. R. P. Lunn; *Traffic Supt.*, J. Fraser; *Chairman Try. Com.*, Ald. C. W. Starmer.

Dartford Urban District Council Tramways, Dartford. *Chairman Try. Com.*, Coun. R. Bennett; *Vice-Chairman*, Coun. J. B. Walton.

[Leased. See Dartford Tramways in list of Tramway Companies.]

Darwen Corporation Tramways, Lorne Street, Darwen. [T.N., 104.] *Gen. Manager and Eng.*, F. J. S. Hosken; *Boro. Elec. Eng.*, C. H. Garnett; *Chairman Try. Com.*, Ald. Jas. Tomlinson.

Derby Corporation Tramways, 4, Victoria Street, Derby. [T.N., 410.] *Gen. Manager*, F. Harding; *Elec. Eng.*, T. P. Wilmshurst; *Per. Way Eng.*, J. Ward; *Chairman Try. Com.*, Coun. J. Dean.

Doncaster Corporation Tramways, Grey Friar's Road, Doncaster. [T.A., Rayner, Doncaster, T.N., 43.] *Manager & Elec. Eng.*, E. S. Rayner; *Chairman Try. Com.*, Coun. P. Stirling (Mayor); *Vice-Chairman*, Coun. Balmforth.

Dover Corporation Tramways, Town Hall, Dover. [T.A., Trams, Dover; T.N., 294.] *Gen. Manager*, E. Carden; *Per. Way Eng.*, W. C. Hawke (Boro. Surveyor); *Chairman Try. Com.*, Coun. Barwick; *Vice-Chairman*, Coun. Norman.

Dundee Corporation Tramways, Town House Buildings, Dundee. [T.N., 1340]; *Gen. Manager and Eng.*, Peter Fisher; *Elec. Eng.*, H. Richardson; *City Eng.*, J. Thomson; *Chairman Try. Com.*, Coun. G. A. Johnston.

East Ham (County Borough of) Corporation Tramways, Nelson Street, East Ham. [T.N., 611 and 100, East Ham.] *Gen. Manager and Elec. Eng.*, W. C. Ullmann; *Chairman Try. Com.*, Ald. M. Oakes.

Eccles Corporation Tramways, Eccles. *Elec. Eng.*, H. W. Angus; *Per. Way Eng.*, T. S. Picton; *Chairman Try. Com.*, Ald. W. J. Nuttall, J.P.; *Vice-Chairman*, Coun. Alexander.

[Lines worked by Salford Corporation.]

Erith Urban District Council Tramways, Tramway Depôt, Walnut Tree Road, Erith. [T.A., Tramways, Erith; T.N., 36.] *Gen. Manager and Elec. Engineer*, J. C. Williams; *Chairman Try. Com.*, Coun. G. C. Humphreys.

Exeter Corporation Tramways, Paris Street. Exeter. *Manager*, H. C. Bartlett; *Elec. Eng.* H. D. Munro; *Per. Way Eng.*, T. Moulding; *Chairman Try. Com.*, Ald. H. B. Varwell; *Vice-Chairman*, Coun. F. G. Towill.

Farnworth Urban District Council Tramways, Albert Road, Farnworth. *Chairman Try. Com.*, Coun. S. C. Steele; *Vice-Chairman*, Coun. Stanley.

[Lines leased to the South Lancashire Tramways Co.]

Glasgow Corporation Tramways, 46, Bath Street, Glasgow. [T.A., Trams, Glasgow; T.N., 1040, Douglas.] *Gen. Manager*, J. Dalrymple; *Traffic Supt.*, L. Mackinnon; *Chief Eng.*, J. Ferguson; *Elec. Eng.*, E. T. Goslin; *Sec.*, J. N. Wilson; *Chairman Try. Com.*, Coun. Montgomery; *Vice-Chairman*, Bailie Kelly.

Gloucester Corporation Light Railway, Bristol Road Depôt, Gloucester. [T.A., Tramways, Gloucester; T.N. 155.] *Gen. Manager and Elec. Eng.*, F. H. Corson; *Chairman Try. Com.*, Coun. J. O. Roberts; *Vice-Chairman*, Coun. C. J. Ramstedt.

Great Yarmouth Corporation Tramways, Caister Road, Great Yarmouth. [T.N. 265.] *Gen. Manager*, F. L. Turner; *Elec. Eng.*, Gordon Bryant *Per. Way. Eng.*, J. W. Cockrill (Borough Surveyor); *Chairman Try. Com.*, Coun. J. T. C. Salmon.

Halifax Corporation Tramways, Skircoat Road, Halifax. [T.N., 36 and 382.] *Traffic Manager*, Jas. D. Caird; *Try. Eng.*, J. W. Galloway; *Per. Way Eng.*, J. Lord (Boro. Eng.); *Chairman Try. Com.*, Ald. C. F. Spencer; *Vice-Chairman*, Ald. A. Fawcett.

Haslingden Corporation Tramways, John Street, Haslingden. *Gen. Manager and Elec. Eng.*, Barnes Kay; *Per. Way Eng.*, J. S. Green (Borough Surveyor); *Chairman Try. Com.*, Coun. Waddington; *Vice-Chairman*, Coun. Haworth.

Herne Bay Pier Tramway (owned and worked by Herne Bay U.D.C.), Herne Bay. [T.N., 22.] *Res. Eng. and Manager*, H. C. Dufton.

Heywood Corporation Tramways, Heywood, Lancs. [T.N., 47.] *Gen. Manager*, ; *Per. Wa Eng.*, J. B. Nuttall; *Chairman Try. Com.*, Coun. J. Ashworth; *Vice-Chairman*, Ald. T. Popple, J.P.

Huddersfield Corporation Tramways, Northumberland Street, Huddersfield. [T.N., 698 and 398.] *Gen. Manager & Elec. Eng.*, R. H. Wilkinson; *Assist. Engineer*, A. P. Quilliam; *Traffic Supt.*, T. Hartley; *Borough Eng.*, K. F. Campbell; *Chairman Try. Com.*, Coun. E. H. Sellers; *Vice-Chairman*, Coun. T. Canby.

Hull Corporation Tramways, Alfred Gelder Street, Hull. [T.N., 444, Corporation.] *Manager*, Wm. J. McCombe; *Elec. Eng.*, J. Wilkinson; *Per. Way Eng.*, F. W. Bricknell (*City Engineer*); *Chairman Try. Com.*, Coun. W. Wheatley; *Vice-Chairman*, Coun. Hakes.

Ilford Urban District Council Tramways, Ley Street, Ilford. [T.N., 684.] *Manager and Engineer*, L. E. Harvey; *Chairman Try. Com.*, Coun. W. J. T. Cullis; *Vice-Chairman*, Coun. Owen Waters.

Ilkeston Corporation Tramways, Park Road Ilkeston. [T.A., Bellamy Ilkeston; T.N., 26.] *Manager and Elec. Eng.*, L. C. F. Bellamy; *Chairman Try. Com.*, Coun. J. E. Bestwick; *Vice-Chairman*, Coun. Kane.

Ipswich Corporation Tramways, Constantine Road, Ipswich. [T.A., Ayton, Tramways, Ipswich; T.N., 354.] *Gen. Manager and Elec. Eng.*, Frank Ayton; *Traffic Supt.*, A. Butler; *Rolling Stock Supt.*, W. A. Fairhead; *Chairman Try. Com.*, Coun. E. C. Ransome; *Vice-Chairman*, W. P. Burton.

Kearsley Urban District Council Tramways, Council Office, Kearsley, Farnworth, S.O. *Clerk U. D. C.*, H. Martin.

[Lines leased to and worked by the South Lancashire Tramways Co.]

Keighley Corporation Tramways, South Street, Keighley. [T.A., Tramways, Keighley; T.N., 17.] *Gen. Manager and Elec. Eng.*, H. Webber; *Chairman Try. Com.*, Coun. A. Smith.

Kilmarnock Corporation Tramways Electricity Works, Kilmarnock. [T.N., 95.] *Elec. Eng. and Manager*, W. C. Bexon; *Consulting Engineers*, Kennedy and Jenkin; *Convener Try. Com.*, Bailie Jones.

Digitized by Google

ELECTRIC TRAMWAYS IN THE UNITED KINGDOM.

Kirkcaldy Corporation Tramways, Electricity Works Victoria Road, Kirkcaldy. [T.A., Tramways, Kirkcaldy. T.N., 124, 174, and 175.] *Manager & Elec. Eng.*, O. F. Francis; *Traffic Manager*, Jas. Fisher; *Chairman Try. Com.*, Coun. G. Fergusson.

Lancaster Corporation Tramways, Electricity Works, Lancaster. [T.A., Milnes, Tramways, Lancaster; T.N., 1, L.] *Gen. Manager & Elec. Eng.*, G. C. Milnes; *Traffic Manager*, W. T. Charlton; *Chairman Try. Com.*, Coun. T. Wilkinson.

Leeds City Tramways, Swinegate, Leeds. [T.A., Tramways, Leeds; T.N., 1230; *General Manager*, J. B. Hamilton; *Traffic Supt.*, A. Daggett; *Elec. Eng.*, John Burbridge; *Highways and Per. Way Eng.*, R. B. Holt; *Car Works Supt.*, G. E. Watmough; *Chairman Try. Com.*, Ald. R. A. Smithson; *Vice-Chairman*, Ald. H. Brown.

Leicester Corporation Tramways, 20 and 22, Humberstone Gate, Leicester. [T.N., 2177.] *Manager & Sec.*, A. F. Lucas; *Boro. & Try. Eng.*, E. G. Mawbey; *Boro. Elec. Eng.*, T. R. Smith; *Cons. Engs.*, Kincaid, Waller & Manville; *Chairman Try. Com.*, Ald. S. Flint, J.P.; *Vice-Chairman*, Ald. G. Banton, J.P.

Leith Corporation Tramways, 165, Leith Walk, Leith. [T.N., 415.] *Gen. Manager*, F. A. Fitzpayne; *Per. Way Eng.*, J. R. Findlay (*Burgh Eng.*); *Chairman Try. Com.*, Judge Hall.

Leyton District Council Tramways, Car Depot, Lea Bridge Road, Leyton, E. [T.A., Tramways, Leyton; T.N., 17 Walthamstow.] *Manager*, F. Schofield; *Elec. Eng.*, F. Harman Lewis; *Per. Way Eng.*, E. H. Essex; *Chairman Try. Com.*, Coun. J. A. Hennah.

Lincoln Corporation Tramways, Brayford Side North, Lincoln. [T.A., Stanley Clegg, Lincoln; T.N., 109]. *General Manager and Elec. Eng.*, Stanley Clegg; *Chairman Try. Com.*, Ald. W. S. White; *Vice-Chairman*, Coun. M. A. Ashley.

Liverpool Corporation Tramways, 24, Hatton Garden, Liverpool. [T.A., Tramways, Liverpool; T.N., 6054 and 7701, Central.] *General Manager*, C. W. Mallins; *Per. Way Eng.*, J. A. Brodie (*City Engineer*); *City Electrical Engineer*, Harold Dickinson; *Rolling Stock Supt.*, T. Ridyard; *Chairman Try. Com.*, Coun. E. Russell Taylor; *Vice-Chairman*, Ald. F. Smith, J.P.

London County Council Tramways, 62, Finsbury Pavement, London, E.C. [T.A., Lotram Ave., London; T.N., 3321, 3322, and 3323 London Wall.] *Chief Officer*, A. L. C. Fell; *Deputy Chief Officer*, J. K. Bruce; *Traffic Assist.*, L. Slattery; *Rolling Stock Supt.*, W. E. Ireland; *Per. Way Eng.*, J. Welling; *Chairman Highways Com.*, G. H. Hume; *Vice-Chairman*, T. Prestige.

Lowestoft Corporation Tramways, Norwich Road, Lowestoft. [T.N., 87.] *Gen. Manager*, H. H. Saunders; *Elec. Eng.*, W. R. May; *Chairman Try. Com.*, Coun. F. Spashett.

Maidstone Corporation Tramways, Tramway Offices, Tonbridge Road, Maidstone. [T.A., Lambert, Tramways, Maidstone; T.N., 448] *Gen. Manager and Elec. Eng.*, A. T. Lambert; *Chairman Try. Com.*, Coun. D. T. J. Lyle; *Vice-Chairman*, Coun. Green.

Manchester Corporation Tramways, 55, Piccadilly, Manchester. [T.A., Tramways, Manchester; T.N., 7800 City.] *Gen. Manager*, J. M. McElroy; *Traffic Sup.*, J. T. Oakes; *Elec. Eng.*, J. J. McMahon; *Chief Civil Eng.*, H. Mattinson; *Rolling Stock Supt.*, G. R. Blackburn; *Chairman Try. Com.*, Ald. J. Bowes; *Vice-Chairman*, Ald. A. W. Chapman.

Middlesex County Council Light Railways, Middlesex Guildhall, Westminster, London, S.W. *County Eng.*, H. T. Wakelam, M.I.C.E.; *Chairman of Light Railways Com.*, County Ald. H. Burt; *Vice-Chairman*, County Coun. F. Goodyear.

Middleton Corporation Tramways. *Consulting Engs.*, Lacey, Sillar, and Leigh; *Chairman Try. Com.*, Ald. W. Wood, J.P. (Mayor); *Vice-Chairman*, Ald. Bentley, J.P.
[Worked by Manchester Corporation Tramways.]

Nelson Corporation Light Railways, Charles Street, Nelson. [T.N., 115.] *Manager and Elec. Eng.*, G. F. Nayler; *Per. Way Eng.*, W. Shackleton; *Chairman Try. Com.*, Coun. W. F. Cooke.

Newcastle-upon-Tyne Corporation Tramways, Manors, Newcastle. [T.A., Traction, Newcastle; T.N., 913 and 914 Central.] *Gen. Manager & Engineer*, Ernest Hatton; *Traffic Supt.*, T. Chalder; *Per. Way Eng.*, W. J. Steele; *Chairman Try. Com.*, Coun. R. Mayne; *Vice-Chairman*, Coun. A. M. Sutherland.

Newport (Mon.) Corporation Tramways, Town Hall, Newport, Mon. [T.A., Dynamo, Newport, Mon.; T.N., 990 L., Nat.] *Gen. Manager*, N. J. Young; *Boro. Elec. and Per. Way Eng.*, A. Nichols Moore; *Chairman Try. Com.*, Coun. J. Moxon; *Vice-Chairman*, Ald. F. Phillips.

Northampton Corporation Tramways, St. James', Northampton. [T.N., 279 & 280.] *Gen. Manager and Elec. Eng.*, J. F. Cameron; *Chairman Try. Com.*, Coun. T. D. Lewis; *Vice-Chairman*, Coun. W. Beale.

Nottingham Corporation Tramways, Beastmarket Hill, Nottingham. [Tramways, Nottingham; T.N., 225.] *General Manager & Elec. Eng.*, John Aldworth; *Traffic Supt.*, H. Morley; *Per. Way Eng.*, Arthur Brown (*City Eng.*); *Rolling Stock Supt.*, W. Boot; *Chairman Try. Com.*, Coun. R. H. Swain, J.P.; *Vice-Chairman*, Ald. F. R. Radford, J.P.

Oldham Corporation Tramways, Wallshaw Depot, Oldham. [T.A., Tramways, Oldham; T.N., 1495.] *Gen. Manager & Eng.*, P. Priestly; *Traffic Supt.*, J. Brierley; *Chairman Try. Com.*, Ald. F. G. Isherwood; *Vice-Chairman*, Coun. F. Elliot.

Perth Corporation Tramways, 128, High Street, Perth. [T.N., 226 & 101.] *Tramways Manager*, W. G. Snell; *Elec. & Tramways Eng.*, John Lambert; *Per. Way Eng.*, R. McKillop (*Burgh Surv.*); *Chairman Try. Com.*, Coun. Calderwood.

Plymouth Corporation Tramways, 15, Ebrington Street. Plymouth. [T.N. 518, Plymouth.] *General Manager*, C. R. Everson; *Elec. Eng.*, E. J. Okell; *Chairman Try. Com.*, Ald. S. H. Phillips, J.P.; *Vice-Chairman*, Coun. J. Moon.

Pontypridd Urban District Tramways, Generating Station, Treforest, Pontypridd. [T.N. 33.] *Gen. Manager and Elec. Eng.*, J. E. Teasdel; *Traffic Inspector*, W. May; *Per. Way Eng.*, W. E. Lowe (*Surveyor*); *Chairman Try. Com.*, Coun. M. L. Jones.

Portsmouth Corporation Tramways, Town Hall, Portsmouth. [T.N., 110 Corporation.] *Gen. Manager*, W. R. Spaven; *Elec. and Per. Way Eng., and Rolling Stock Supt.*, V. G. Lironi; *Traffic Supt.*, W. Munford; *Chairman Try. Com.*, Coun. J. Timpson; *Vice-Chairman*, Ald. R. Payne.

Preston Corporation Tramways, Holmrook Road, Preston. [T.A., Corporation Tramways, Preston; T.N., 273.] *Gen. Manager and Elec. Eng.*, J. F. Simpson; *Traffic Supt.*, C. H. Manning; *Chairman, Try. Com.*, Ald. J. Ormrod; *Vice-Chairman*, Coun. T. Parkinson.

Radcliffe Urban District Council Tramways, Council Offices, Radcliffe, Lancs. *Res. Eng.*, H. Wilkinson; *Per. Way Eng.*, W. L. Rothwell; *Clerk*, S. Mills; *Chairman Try. Com.*, Coun. Walker Allen, J.P.
[These tramways are worked as part of the Bury system.]

Rawtenstall Corporation Tramways, Bacup Road, Rawtenstall. [T.N., 81 and 85.] *Gen. Manager and Elec. Eng.*, C. L. E. Stewart; *Chairman Try. Com.*, Ald. H. Coupe, J.P.; *Vice-Chairman*, Coun. J. W. Stansfield.

Reading Corporation Tramways, Mill Lane, Reading. [T.A., Tramways Manager, Reading; T.N., 330.] *Gen. Manager & Elec. Eng.*, G. F. Craven; *Chairman Try. Com.*, Ald. C. G. Field, J.P. (Deputy Mayor).

Rochdale Corporation Tramways, Mellor Street, Rochdale. [T.A., Tramways, Rochdale; T.N., 48.] *Gen. Manager & Eng.*, G. Webster; *Traffic Manager*, R. Bentley; *Per. Way Eng.*, S. S. Platt; *Rolling Stock Supt.*, E. Sidgwick; *Chairman Try. Com.*, Ald. Taylor.

Rotherham Corporation Tramways, Rawmarsh Road, Rotherham. [T.A., Cross, Rotherham; T.N., 138, 152, and 241.] *General Manager & Elec. Eng.*, E. Cross; *Deputy Elec. Eng.*, J. R. Lilleker; *Traffic Superintendent*, H. Jagger; *Per. Way Eng.*, T. P. Collinge; *Rolling Stock Supt.*, C. A. Walker; *Chairman Try. Com.*, Ald. D. L. Winter; *Vice-Chairman*, Coun. T. Reeves.

St. Helens Corporation Tramways, Town Hall, St. Helens, Lancs. *Chairman Try. Com.*, Ald. Sir J. Beecham; *Vice-Chairman*, Coun. W. N. Pilkington.
[Lines worked by the New St. Helens and District Tramways Co.]

Salford Corporation Tramways, 32, Blackfriars Street, Salford. [T.A., Tramways, Salford; T.N., 5367 and 5368 Central.] *Gen. Manager*, Geo. W. Holford; *Elec. Eng.*, J. A. Robertson; *Traffic Supt.*, J. W. Blakemore; *Per. Way Supt.*, E. B. Martin; *Rolling Stock Supt.*, R. Chadwick; *Chairman Try. Com.*, Ald. H. Linsley, J.P.; *Vice-Chairman*, Coun. W. H. Barrett.

Sheffield Corporation Tramways, 8, Division Street, Sheffield. [T.A., Tramways, Sheffield; T.N., 4600.] *General Manager*, A. R. Fearnley; *Traffic Supt.*, A. Handford; *Per. Way Eng.*, W. J. Hadfield; *Rolling Stock Supt.*, J. Smith; *Chairman Try. Com.*, Ald. Sir W. Clegg, J.P.; *Vice-Chairman*, Coun. A. T. Bescoby, J.P.

Shipley Urban District Tramway, Dockfield, Shipley. [T.A., Electricity Works, Shipley; T.N., 190.] *Elec. Eng.*, Wm Redman; *Chairman Try. Com.*, H. Pitts.
[Lines leased to Bradford Corporation.]

Southampton Corporation Tramways, 161, Above Bar, Southampton. [T.A., Tramways, Southampton; T.N., 301.] *Gen. Manager*, W. T. Robson; *Boro. Elec. Engineer*, H. F. Street; *Traffic Manager*, C. G. Simpson; *Chairman Try. Com.*, Ald. F. A. Dunsford, J.P.

Southend-on-Sea Corporation Tramways, London Road, Southend-on-Sea. [T.N., 96.] *Gen. Manager and Elec. Eng.*, R. Birkett; *Traffic Manager*, J. Daniells,; *Per. Way Eng.*, E. J. Elford (*Boro. Surveyor*); *Rolling Stock Supt.*, J. Dobson; *Chairman Try. Com.*, Ald. A. Martin.

Southend Pier Electric Railway, (owned and worked by Southend-on-Sea Corporation), [T.A., Piermaster, Southend; T.N., 91.] Southend-on-Sea. *Elec. Eng.*, C. R. Norton; *Piermaster*, Capt. N. E. Hucker; *Chairman*, Coun. H. Dowsett.

Southport Corporation Tramway, 44, Chapel Street, Southport. [T.N., 116.] *Gen. Manager*, T. J. Kendrew; *Boro' Elec. Eng.*, A. S. Black; *Chairman Try. Com.*, Ald. Griffiths, J.P.; *Vice-Chairman*, Coun. Clayton.

South Shields Corporation Tramways, Dean Road, South Shields. [T.A., Tramways, South Shields; T.N., 157.] *Gen. Manager & Elec. Eng.*, J. C. Whiteley; *Boro. Elec. Eng.*, H. S. Ellis; *Chairman Try. Com.*, Ald. W. G. Wylie; *Vice-Chairman*, Ald. J. W. Henderson.

Stalybridge Hyde, Mossley, and Dukinfield Tramways and Electricity Board, Waterloo Road, Stalybridge. [T.N., 314.] *Commercial Manager*, F. Schofield; *Chief Eng.*, R. Blackmore; *Chairman Try. Com.*, Ald. R. Wood; *Vice-Chairman*, Coun. S. C. Homer.

Stockport Corporation Tramways, Mersey Square, Stockport. [T.N., 232 and 237.] *Manager*, A. T. Eardley; *Elec. Eng.*, R. Lomax; *Chairman Try. Com.*, Ald. Chas. Sharples; *Vice-Chairman*, Ald. W. E. Hamnett.

Sunderland Corporation Tramways, Tramway Offices, Monkwearmouth, Sunderland. [T.A., Trys. Manager, Sunderland; T.N., 948.] *Gen. Manager and Elec. Eng.*, A. R. Dayson; *Chairman Try. Com.*, Coun. G. New, J.P.; *Vice-Chairman*, Coun. W. Walker, J.P.

Swindon Corporation Tramways, Electricity Works, Swindon. [T.A., Tramways, Swindon; T.N., 4.] *Manager*, T. Medcalf; *Elec. Eng.*, A. Dimmack; *Consulting Engs.*, Lacey, Sillar, & Leigh; *Chairman Try. Com.*, Coun. A. D. Richards; *Vice-Chairman*, Coun. A. Bull.

Wallasey Corporation Tramways, Seaview Road, Wallasey. [T.A., Tramways, Liscard; T.N., 1431, Liscard.] *General Manager*, R. R. Greene; *Elec. Eng.*, J. H Crowther; *Per. Way Eng.*, W. H. Travers; *Chairman Try. Com.*, Coun. F. E. Howse; *Vice-Chairman*, Coun. H. W. Griffin.

Walsall Corporation Tramway, St. Paul's Buildings, The Bridge, Walsall. [T.A., Tramways, Walsall; T.N., 238 & 559.] *Gen. Manager*, R. L. Horsfield; *Elec. Eng.*, H. A. Howie; *Per. Way Eng.*, J. Taylor (*Boro. Surveyor*); *Chairman, Try. Com.*, Ald. J. Cope; *Vice-Chairman*, Ald. J. Williams.

Walthamstow Urban District Council Tramways, Chingford Road, Walthamstow, [T.A., Tramways, Walthamstow; T.N., 20.] *Tramways Manager*, W. Murray; *Elec. Eng.*, G. R. Spurr (Priory Avenue, Walthamstow); *Per. Way Eng.*, G. W. Holmes; *Chairman Trys. Com.*, Coun. Clarke; *Vice-Chairman*, Coun. R. J. Bishop.

Warrington Corporation Tramways, Mersey Street, Warrington. [T.N., 196] *Gen. Manager*, J. Telfer; *Elec. Eng.*, F. V. L. Mathias; *Chairman Try. Com.*, Coun. Dr. G. W. Joseph; *Vice-Chairman*, Coun. J. Wilkinson.

West Bromwich Corporation Tramway, Electricity Works, West Bromwich. [T.N., 100.] *Boro. Eng.*, A. D. Greatorex; *Boro. Elec. Eng.*, W. A. Jackson; *Chairman Try. Com.*, Ald. A. G. Turley, J.P. (Mayor); *Vice-Chairman*, Coun. G. Garratt.
[These tramways are leased to the South Staffs. (Lessee) Co., Ltd.]

West Ham Corporation Tramways, Greengate Street, Plaistow, London, E. [T.A., Trameurs, Plais., London; T.N., 868 East.] *General Manager*, J. S. D. Moffet; *Boro' Elec. Eng.*, J. W. Beauchamp; *Chairman Try. Com.*, Coun. Kensett.

West Hartlepool Corporation Tramways, Cleveland Road, West Hartlepool. [T.N., 6078.] *Gen. Manager & Eng.*, Chas. Burgess; *Chairman Try. Com.*, Ald. Martin; *Vice-Chairman*, Coun. Charlton.

Wigan Corporation Tramways, Market Place, Wigan; [T.N., 226.] *Gen. Manager*, F. Buckley; *Per. Way Eng.*, A. T. Gooseman; *Chairman Try. Com.*, Ald. R. T. Fletcher; *Vice-Chairman*, Coun. J. Walkden.

Wolverhampton Corporation Tramways, Municipal Tramway Offices, Cleveland Road, Wolverhampton. [T.N., 324.] *Gen. Manager and Engineer*, C. O. Silvers; *Boro. Elec. Eng.*, S. T. Allen; *Per. Way Eng.*, George Green; *Chairman Try. Com.*, Ald. Sir C. T. Mander, Bart., J.P.; *Vice-Chairman*, Ald. S. Craddock, J.P.

York Corporation Tramways, 8, Clifford Street, York. [T.N., 302] *Gen. Manager and Elec. Eng.*, J. W. Hame; *Traffic Supt.*, J. W. Horton; *Per. Way Eng.*, F. W. Spurr (City Surveyor); *Chairman Try. Com.*, Ald. S. W. Meyer; *Vice-Chairman*, Coun. W. H. Sessions.

COMPANY TRAMWAYS.

Aberdeen Suburban Tramways Company, 15, Golden Square, Aberdeen. [T.A., Judicial, Aberdeen; T.N., 447.] *Manager & Per. Way Eng.*, A. Wilkie; *Sec.*, G. Duncan; *Chairman*, James Mearns; *Directors*, W. Jackson, Dr. Christie, Jas. Sellar.

Airdrie and Coatbridge Tramways Company, Tramway Depôt, Main Street, Coatbridge [T.N., 105], and Electrical Federation Offices, Kingsway, London, W.C. *Gen. Manager*, A. Robertson; *Sec.*, P. N. Gray; *Chairman*, W. L. Madgen; *Directors*, H. S. Day, A. C. Miles, G. J. Somerville.

Barnsley and District Electric Traction Company, Ltd., Car Depot, Sheffield Road, Barnsley. [T.A., Tramways, Barnsley; T.N., 159.] *Acting Manager*, W. E. Nicoll; *Acting Sec.*, P. N. Gray; *Chairman*, E. Garcke; *Directors*, Col. Sir Thomas Pilkington, Bart., E. A. Paris.

Barrow-in-Furness Tramways, Salthouse Road Depot, Barrow, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Barrow; T.N., 125.] *Manager*, W. F. Bladon; *Sec.*, F. J. Cursons; *Acting Sec.*, J. S. Bowker; *Chairman*, H. S. Day; *Directors*, J. V. Kitchener, E. R. Soames.

Bath Electric Tramways Company, Ltd., Walcot Street, Bath, and 119-125, Finsbury Pavement, London, E.C. [T.A., Trams, Bath; T.N., 1214.] *Gen. Manager and Eng.*, W. E. Hardy; *Traffic Supt.*, E. Seckington; *Sec.*, H. J. Almond; *Chairman*, Hon. Sir J. Sivewright, K.C.M.G.; *Directors*, H. F. Clutterbuck, E. H. R. Trenow, A. A. C. Swinton, E. Callaird.

Bessbrook and Newry Tramway Company, Bessbrook, Co. Armagh. [T.A., Tramways, Bessbrook.] *Manager*, Robert Caven; *Elec. Eng.*, J. L. D. Meares; *Chairman*, J. N. Richardson; *Directors*, C. H. Richardson, R. T. Scott, T. W. Richardson, T. McGreggor Greer.

Birmingham District Power and Traction Company, Power Station, Downing Street, Smethwick, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Power Station, Smethwick; T.N., 65 Smethwick.] *Gen. Manager*, W. G. Bond; *Secretary*, B. Kingsford; *Chairman*, C. Shirreff Hilton; *Directors*, J. A. Lycett, W. L. Madgen, S. R. Blundstone, R. J. Howley.

Digitized by Google

ELECTRIC TRAMWAYS IN THE UNITED KINGDOM.

Blackpool and Fleetwood Tramroad Company, Ltd., Bispham, near Blackpool. [T.A., Cameron, Blackpool; T.N., 121.] *General Manager and Secretary*, J. Cameron; *Elec. Eng.*, A. Cameron; *Chairman*, John Greenwood; *Directors*, R. H. Prestwich, R. B. Barningham, R. S. Boddington, G. Richardson, G. Readman.

Blackpool and Fylde Light Railway Company, 5, Clifton Street, Blackpool. (No appointment of engineer or officials yet made.) *Secretary*, R. Bibby; *Chairman*, John Greenwood; *Directors*, T. Fisher, J.P., John Platt, J.P., W. Hardman, J.P., R. H. Mabbott.

Blackpool, St. Anne's, and Lytham Tramways Company, Ltd., Squires Gate, and 30, Birley Street, Blackpool. [T.N., 327 and 22]. *Gen. Manager and Elec. Eng.*, H. W. Laing; *Traffic Manager*, G. W. Wood; *Rolling Stock Supt.*, J. Partington; *Secretary*, Chas. E. Riding; *Chairman*, G. Nicholson; *Directors*, T. M. Smith, T. Preston.

Bray and Enniskerry Railway Company, 52, Westland Row, Dublin. *Sec.*, M. F. Keogh; *Chairman*, A. Killingley; *Director*, F. M'Crea.

Brighton Beach Electric Railway, Madeira Road, Brighton. [T.A., Volk, Brighton; T.N., 14 P.O.] *Manager and Eng.*, Magnus Volk; *Traffic Superintendent*, H. Sheppard; *Per. Way Eng.*, J. Barker; *Secretary*, A. Volk; *Chairman*, Magnus Volk; *Directors*, M. H. Volk, B. W. Symonds, A. Volk.

Bristol Tramways and Carriage Company, Ltd., Clare Street House, Bristol. [T.A., Cab, Bristol; T.N., 74 & 3074 Nat.] *Manager*, Chas. Challenger; *Assist. Manager*, S. E. Smith; *Electrical Engineer*, W. H. Munton; *Permanent Way Engineer*, G. T. C. Edwards; *Secretary*, H. F. Cooper; *Chairman*, Sir G. White, Bart.; *Directors*, W. G. Verdon Smith (*Managing*), S. White, J.P., J. H. Howell, J.P., G. Stanley White.

British Electric Traction Company, Ltd., Electrical Federation Offices, Kingsway, London, W.C. E. Garcke (*chairman*); *Directors*, C. Shirreff B. Hilton, W. L. Madgen, Sir Charles Ollivant, A. Shepherd, G. T. Symons, C. G. Tegetmeier, P. D. Tuckett; *Joint Managers*, C. H. Dade and R. J. Howley; *Acting Secretary*, T. Bower; *Accountant*, C. Walmsley.

This company is interested in the following tramways, particulars of which are given under their respective names:

Airdrie & Coatbridge.
Barnsley & District.
Barrow-in-Furness.
Birmingham & District Power & Traction Co.:
Birmingham & Midland
Dudley, Stourbridge, & District.
South Staffordshire.
Wolverhampton Dist.
Devonport & District.
Gateshead & District.
General Elec. Tramways.
Gravesend & Northfleet.
Greenock & Port Glasgow.
Jarrow & District.
Kidderminster & District.
Merthyr.
Middleton.
Oldham, Ashton, & Hyde.
Peterborough.
Potteries.
Rothesay.
Sheerness & District.
South Metropolitan.
Southport.
Swansea.
Taunton.
Tynemouth & District.
Weston-super-Mare & District.
Worcester.
Wrexham & District.
Yorkshire (Woollen Dist.)

Burton and Ashby Light Railways, Power Station, Swadlincote, nr. Burton-on-Trent. [T.A., Toulmin, Swadlincote; T.N., 1.] *Manager and Eng.*, Jas. Toulmin; *Secretary*, A. L. Charles; *Chairman*, G. Murray Smith.

[The line is owned and worked by the Midland Railway Company.]

Camborne and Redruth Tramways, Elec. Works, Carn Brea, R.S.O., Cornwall. [T.N., 3, Camborne.] (Owned by Urban Elec. Supply Co.) *Manager and Eng.*, L. A. Hards; *Sec.*, C. H. Jones; *Chairman*, P. D. Tuckett; *Directors*, E. Charrington, H. B. Grotian, Douglas Owen.

Carlisle Tramways Company, Ltd., City of, Depot and Offices, London Road, Carlisle. [T.A., Tramways, Carlisle; T.N., 0180.] *Engineer and Manager*, R. L. McCulloch.

Chatham and District Light Railways Company, Luton Road, Chatham, and 88, Cannon Street London, E.C. [T.A., Tramways, Chatham; T.N., 51.] *General Manager*, W. Jensen; *Assist. Manager*, A. J. Bousfield; *Traffic Manager*, W. G. Davies; *Secretary*, A. Clements; *Chairman*, A. R. Monks; *Directors*, H. C. Levis, J. F. Nauheim, W. B. H. Martindale.

Cheltenham and District Light Railway Company, Cheltenham. [T.N., 341.] *Directors*, A. H. Beatty (*Chairman*), W. Shearer, H. L. Williams, A. S. Guinness, H. J. McCormick; *Sec.*, Wm. C. Bryden, C. A., 66, Queen Street, London, E.C.; *Local Eng. and Manager*, Henry J. McCormick, St. George's Road, Cheltenham.

Clontarf and Hill of Howth Tramroad Company, 39, Dame Street, Dublin. [T.A., c/o Railways, Dublin; T.N., 917.] *Secretary*, J. P. Chapman; *Chairman*, W. L. Murphy; *Directors*, E. Anderson, J. J. Dudley.

Cork Electric Tramways and Lighting Company, Ltd., Albert Street, Cork. [T.A., Tramways, Cork; T.N., 78 and 535.] *Manager and Engineer*, H. H. Nalder; *Traffic Manager*, H. G. Whiting; *Per. Way Engineer*, H. Mack; *Secretary*, A. Clements; *Chairman*, A. R. Monks; *Directors*, E. Anderson, W. M. Murphy, Capt. W. Martindale, H. C. Levis.

Dartford Urban District Council Light Railways. Car Depot, Priory Road, Dartford. [T.N., 31 Dartford.] (Leased to and worked by Balfour, Beatty, & Co., Ltd., 66, Queen Street, London, E.C.) *Acting Manager*, F. A. Kincaid Fergusson.

Devonport and District Tramways Company, Electrical Federation Offices, London, W.C. [T.A., Head Office, Devonport c/o Tramway, London; T.N., Head Office, Holborn 2686. *Manager and Eng.*, George Cardwell; *Secretary*, S. M. Wright; *Acting Sec.*, P. N. Gray; *Chairman*, C. S. B. Hilton; *Directors*, J. S. Raworth, E. R. Soames, C. G. Tegetmeier, R. J. Sutcliffe.

[The Company's undertaking has been sold to Plymouth Corporation.]

Dewsbury, Batley, and Birstall Tramways Company, Ltd., Electrical Federation Offices, Kingsway, London, W.C.

[Lines worked by Yorkshire (Woollen District) Electric Tramways, Ltd., *q.v.*]

Dewsbury and Ossett Corporation and Soothill Nether Urban District Council Tramways, (Lessees: The National Elec. Construction Co., Ltd., 3, Laurence Pountney Hill, London, E.C.) [T.A., Overhauled, London; T.N., 5329 and 5330 Bank.] *Manager*, W. MacGibbon.

Douglas—Ramsey. (The Manx Elec. Rly. Company), 1, Strathallan Crescent, Douglas. (See Manx Electric Railway Company).

Douglas Southern Electric Tramways, Ltd., Marine Drive, Douglas, Isle of Man, and 24, Brazennose Street, Manchester. [T.A., Traffic, Douglas.] *Manager and Eng.*, R. Orton; *Sec.*, J. E. Sharples; *Chairman*, T. J. Hutchinson; *Directors*, I. E. Winslow, E. A. Hopkins.

Dublin and Lucan Electric Railway Company, 15, Conyngham Road, Dublin. [T.A., Lucan Tramway, Dublin; T.N. 2282 and 4006 Dublin, and 5 Lucan.] *Manager, Elec. Eng., and Sec.*, D. McDowall Grosart, J.P.; *Chairman*, J. W. Hill, J.P.; *Directors*, E. Anderson, A. B. Coyle, J.P., G. N. Murphy.

Dublin United Tramways Company (1896) Ltd., 9, Upper Sackville Street, Dublin. [T.A., Tramways, Dublin; T.N., 58 and 59.] *Gen. Manager*, G. Marshall Harriss; *Elec. Eng.*, R. Tanham; *Con. Eng.*, H. F. Parshall; *Per. Way Eng.*, P. F. O'Sullivan; *Secretary*, W. McHugh; *Chairman*, W. M. Murphy, J.P.; *Directors*, W. F. Cotton, J.P., J. Mooney, Rt. Hon. L. A. Waldron, P.C.

Dudley, Stourbridge and District Electric Traction Company, Ltd. (Section of The Birmingham and Midland Tramways Joint Committee), Power Station, Downing Street, Smethwick, Brierley Hill, Staffs., and Electrical Federation Offices, Kingsway, London, W.C. [T.N., 65 Smethwick.] *General Manager*, W. G. Bond; *Secretary*, E. H. Woodhall; *Chairman*, S. R. Blundstone; *Directors*, J. A. Lycett, R. J. Howley.

Dumbarton Burgh and County Tramways Company, Tramway Depot, Dumbarton, and 23, Rutland Street, Edinburgh. [T.A., Tramways, Dumbarton; T.N., 119.] *Gen. Manager and Elec. Eng.*, J. P. McMahon; *Secretary*, A. Dishart; *Chairman*, G. Balfour; *Directors*, K. Sanderson, K. A. Scott Moncrieff.

Dundee, Broughty Ferry & District Tramways Company, Milton, Monifieth, N.B. [T.N., 24 Monifieth.] *Gen. Manager & Engineer*, Daniel Fisher; *Secretary*, E. Cowan; *Chairman*, George Balfour; *Directors*, Edward Cowan, David Hynd.

Dunfermline and District Tramways Company, Tramway Depot, Cowdenbeath, Fife, and 8, New Row, Dunfermline. *Manager and Engineer*, J. H. Shepherd; *Secretary*, G. A. Nicolson; *Cons. Engs.*, Hawtayne & Zeden; *Directors*, Wm. Low, G. Balfour (*managing*), K. Sanderson, D. Hynd.

Falkirk & District Tramways Company, Larbert Road, Larbert, Stirlingshire. [T.A., Tramways Co., Falkirk; T.N., 154 Falkirk.] *Gen. Manager and Engineer*, D. Hays; *Chairman*, G. M. Brown; *Directors*, A. W. Tait, R. Hunter, G. Balfour, C. D. Geddes.

Felixstowe Pier Railway, Felixstowe. (The Coast Development Corporation, Ltd.) *Elec. Eng.*, E. A. Lambert.

Gateshead and District Tramways Company, Tramway Depôt, Sunderland Road, Gateshead, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramway Depôt, Gateshead; T.N., 125 & 408 Gateshead.] *General Manager*, William Morrison; *Secretary*, H. W. Davis; *Chairman*, H. S. Day; *Directors*, H. A. Stagg, C. R. Greene, Judge L. A. Atherley-Jones, K.C.

Giant's Causeway and Portrush Electric Tramway Company, Portrush. *Manager & Sec.*, W. McCurdy; *Elec. Eng.*, W. A. Traill; *Chairman*, F. J. S. Moore; *Directors*, C. M'D. Stuart, W. A. Traill.

Glossop Tramways, Electricity Works, Glossop (owned by the Urban Electric Supply Co.) [T.N., 34, Glossop.] *Manager and Res. Eng.*, C. E. Knowles; *Rolling Stock Supt.*, A. W. Bullough; *Secretary*, C. H. Jones; *Chairman*, P. D. Tuckett; *Directors*, E. Charrington, F. E. Gripper, H. B. Grotrian, D. Owen.

Gosport and Fareham Tramways, Tramways and Lighting Office, Gosport, Hants., and Moorgate Station Chambers, London, E.C. [T.A., Tramways, Gosport; T.N., 3, Post Office, Gosport.] *Eng. and Manager*, J. Fereday Glenn; *Sec.*, J. Barber Glenn; *Chairman*, A. Beattie, J.P., D.L.; *Directors*, J. Barber Glenn (*managing*), S. Hern.

Gravesend & Northfleet Electric Tramways, Ltd., Tramway Depot, Northfleet, Kent, and Electrical Federation Offices, Kingsway, London, W.C [T.N., 958, Gravesend.] *Manager*, J. R. Groves; *Sec.*, H. C. Walter; *Chairman*, W. L. Madgen; *Directors*, P. N. Gray, W. S. Wreathall.

Great Crosby Tramways, 31, James Street, Liverpool.

[This tramway is worked by the Liverpool Overhead Railway Company.]

Great Grimsby Street Tramway Co., Southampton House, Cleethorpes, and Moorgate Station Chambers, London, E.C. [T.A., Blanco, Cleethorpes; T.N., 16.] *Manager and Eng.*, H. L. White; *Elec. Eng.*, H. O. White; *Managing Director and Secretary*, J. B. Glenn; *Chairman*, A. Beattie, J.P., D.L.; *Director*, S. Hern.

Greenock and Port Glasgow Tramways Company, Ladyburn, Greenock, and Electrical Federation Offices, Kingsway, London, W.C. [T.A. Tramways, Greenock; T.N., 562]. *Manager*, A. Robertson; *Secretary*, P. N. Gray; *Chairman*, W. L. Madgen; *Directors*, G. J. Somerville, A. C. Miles, H. S. Day.

Guernsey Railway Company, Ltd., Hougue-a-la-Perre, Guernsey. *Manager and Elec. Eng.*, Arthur G. Bird; *Sec.*, J. de Mouilpied; *Chairman*, G. F. Peek; *Directors*, W. D. Murdoch, E. Valied, J. B. Collings, Q. Le Pelley.

Hampshire Light Railway (Electric) Company, Ltd., Moorgate Station Chambers, London, E.C. *Secretary*, J. B. Glenn; *Chairman*, A. Beattie, J.P.; *Directors*, J. Barber Glenn (*managing*), S. Hern.

[This company works the Portsdown and Horndean Light Railway.]

Hastings Tramways Company, Ltd., Beaufort Road, Silverhill, St. Leonards-on-Sea, and 1, Queen Victoria Street, London, E.C. [T.A., Tramways, Hastings, and Enshrine, London; T.N., 90 Hastings, and 3465, City]. *General Manager and Elec. Eng.*, W. Vincent Edwards; *Secretary*, W. R. Elston; *Cons. Engs.*, Kincaid, Waller, Manville, and Dawsen; *Chairman*, G. Kitchen; *Directors*, E. C. Morgan, J. C. Williamson, Dr. Moody.

Imperial Tramways Company, Ltd., Clare Street House, Bristol. *Secretary*, W. G. Verdon Smith; *Manager*, F. Freshwater; *Chairman*, Sir George White, Bart.; *Directors*, H. C. Godfray, J. H. Howell, S. White.

Isle of Thanet Electric Tramways and Lighting Company, Ltd., St. Peter's, Kent, and Moorgate Station Chambers, London, E.C. [T.A., Tramways, St. Peters, Kent; T.N., 29 Broadstairs]. *Gen. Manager and Elec. Eng.*, J. A. Forde; *Traffic Supt.*, ——————; *Secretary*, J. Barber Glenn; *Chairman*, A. R. Monks; *Directors*, Lord Arthur Butler, W. M. Murphy, H. Brown.

Jarrow and District Electric Traction Company, Ltd., Electrical Federation Offices, Kingsway, London, W.C. [T.A., Jarrow, c/o Tramway, London; T.N., 2686 Holborn.] *Traffic Manager*, G. McClelland; *Secretary*, C. W. Francis; *Acting Sec.*, H. A. Stagg; *Chairman*, G. J. Somerville; *Directors*, W. Morrison (*managing*), H. S. Day.

Kidderminster & District Electric Lighting and Traction Co., Ltd., Kidderminster and Electrical Federation Offices, Kingsway, London, W.C. [T.N., 108]. *General Manager*, W. G. Bond, *Secretary*, B. Kingsford; *Chairman*, E. Garcke; *Directors*, J. A. Lycett, H. S. Day, W. L. Madgen.

Kinver Tramway, Kinver, and Electrical Federation Offices, Kingsway, London, W.C., *q.v.*, Dudley, Stourbridge, and District Elec. Traction Co., Ltd.

Lanarkshire Tramways Company, Edinburgh Road, Motherwell, N.B., and 88, Cannon Street, London, E.C. [T.A., Tramways, Motherwell; T.N., 64.] *Gen. Manager and Eng.*, G. F. Moller; *Elec. Eng.*, E. H. Glennie; *Per. Way Eng.*, R. Foster; *Traffic Supt.*, J. L. White; *Sec.*, A. Clements; *Chairman*, A. R. Monks; *Directors*, Sir B. Cunard, H. C. Levis, W. H. Whaite, G. Franklin, J. F. Nauheim.

Lancashire United Tramways Limited, Atherton, Lancs. [T.A., Tramways, Atherton; T.N., 36, Atherton.] *Gen. Manager and Engineer*, E. H. Edwardes; *Secretary*, H. P. Conibear; *Chairman*, Hon. A. Stanley, M.P.; *Directors*, J. M. Henderson, M.P., Sir J. Beecham, J.P., R. Watson, J.P., A. Adam, J. S. Austen.

Liverpool and Prescot Light Railway.—This line, which with the St. Helens Tramways forms the connecting link between the City of Liverpool and South Lancashire Tramways, is owned and worked by the Lancashire United Tramways, Ltd.

Liverpool Overhead Railway Company, 31, James Street, Liverpool. [T.A., Motor, Liverpool; T.N., 5463 Central.] *Gen. Manager and Eng.*, E. J. Neachell; *Secretary*, W. H. Alexander; *Chairman*, H. C. Woodward; *Directors*, J. E. Anderson, G. D. Killey J. U. Hodgson, M. H. Maxwell.

Llandudno and Colwyn Bay Electric Railway, Limited, Tramway Depôt, Rhôs-on-Sea, Colwyn Bay, and Basildon House, Moorgate Street, London, E.C. *Gen. Manager*, Alex. G. Balfour; *Secretary*, A. W. R. Lovering; *Directors*, G. Balfour, A. W. Tait, T. Stoker.

Llanelly and District Electric Lighting and Traction Company, Ltd., Llanelly, and 66, Queen Street, London, E.C. *Engineer and Manager*, J. E. Stewart; *Secretary*, G. D. Prince; *Chairman*, A. R. Holland; *Directors*, A. V. Anderson, M. A. Edwards, A. H. Beatty.

London United Tramways Ltd., Electric Railway House, Broadway, Westminster, London, S.W. [T.N., 6800, Victoria.] *Managing Director*, J. Devonshire; *Secretary*, A. L. Barber; *Gen. Manager and Eng.*, A. H. Pott; *Chairman*, W. M. Acworth; *Directors*, Rt. Hon. Viscount Knutsford, Sir A. H. Stanley, F. V. Schuster.

Luton Corporation Tramways (leased to and worked by Balfour, Beatty & Co., Ltd., 22a, College Hill, London, E.C.), Tramway Offices, Park Street, Luton. [T.N., 230.] *Engineer and Manager*, A. E. Wray.

Mansfield & District Light Railway Co., Sutton Road, Mansfield. [T.A., Cars, Mansfield, T.N., 107.] *Gen. Manager and Sec.*, Stanley Dudman, *Chairman*, A. R. Holland; *Directors*, W. J. Chadburn, A. H. Beatty, G. Balfour.

Digitized by Google

ELECTRIC TRAMWAYS IN THE UNITED KINGDOM.

Manx Electric Railway Company, Ltd., 1, Strathallan Crescent, Douglas, Isle of Man, and 3, Finch Lane, London, E.C. [T.A., Electric, Douglas, Man.; T.N., 61.] *Gen. Manager & Eng.*, F. Edmondson; *Secretary*, C. A. Huni; *Chairman*, Col. Sir A. Griffith Boscawen; *Directors*, Sir W. H. Vaudrey, B. E. Greenwell, E. Remnant.

Merthyr Electric Traction and Lighting Company, Ltd., 53, Pontmorlais Circus, Merthyr, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramway Company, Merthyr; T.N., 0180, Merthyr Tydfil.] *Managing Eng.*, L. W. Dixon; *Secretary*, S. J. Clements; *Chairman*, G. J. Somerville; *Directors*, C. G. Tegetmeier, W. L. Madgen, E. R. Soames.

Metropolitan Electric Tramways, Limited, Electric Railway House, Broadway, Westminster, London, S.W. [T.A., Metrolito, London; T.N., 6800, Victoria.] Manor House Offices, Seven Sisters Road, N. [T.A., Lentiscus, London; T.N., 77 Tottenham.] *Gen. Manager and Eng.*, A. H. Pott; *Traffic Manager*, W. E. Hammond; *Secretary*, A. L. Barber; *Chairman*, E. Garcke; *Directors*, Sir E. Spencer, W. L. Madgen, C. G. Tegetmeier, J. Devonshire (*Managing Director*).

Mexborough and Swinton Tramways Company, Electricity Works, Rawmarsh, Yorks. [T.N., 266], and 3, Laurence Pountney Hill, Cannon Street, London, E.C. *Manager and Eng.*, G. H. Browne; *Cons. Elec. Eng.*, F. E. Stanley; *Commercial Manager*, Wm. T. Mitchell; *Traffic Supt.*, M. McLeod; *Secretary*, L. D. H. Jacobs; *Chairman*, L. B. Schlesinger; *Director (Managing)*, W. B. Cownie, C.A.

Middlesbro, Stockton, and Thornaby Electric Tramway, Bridge Road, Stockton-on-Tees, and Clare Street House, Bristol. [T.A., Tramways, Stockton; T.N., 129.] *Manager*, F. Freshwater; *Secretary*, W. G. Verdon Smith; *Chairman*, Sir Geo. White, Bart.; *Directors*, H. C. Godfray, S. White, H. C. Doggett.

Middleton Electric Traction Company, Ltd., Hiltonfold Lane, Middleton, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramway Depot, Middleton; T.N., 37 Middleton.] *Gen. Manager*, W. F. Endean; *Secretary*, G. R. Oliphant; *Acting Secretary*, J. S. Bowker; *Chairman*, Lord Vaux of Harrowden; *Directors*, J. V. Kitchener, W. S. Wreathall.

Morecambe Tramways Company, Heysham Road, Morecambe, and 62, Market Street, Lancaster. [T.N. 1, Morecambe and 71, Lancaster.] *Secretary and Manager*, G. H. Petty; *Chairman*, W. H. Pickles; *Directors*, J. Stott, S. Wright, O. Carr.

Musselburgh and District Electric Light and Traction Co., Ltd., High St., Musselburgh, N.B. [T.A., Tramways, Musselburgh; T.N., 115.] (Registered Office, 3, Laurence Pountney Hill, London, E.C. [T.N., 5329 and 5330, Bank.]) *Manager*, E. J. Walsh; *Resident Engineer*, E. J. Walsh; *Traffic Inspector*, W. Mittell; *Secretary*, L. D. H. Jacobs; *Chairman*, L. B. Schlesinger; *Directors*, B. Burnham, J. Anderson, W. B. Cownie, R. Watson.

New General Traction Company, Ltd., 8, Crosby Square, London, E.C. *Managing Director*, E. A. Hopkins; *Secretary*, J. G. Mills; *Chief Engineer*, I. E. Winslow; *Chairman*, Baron E. B. d'Erlanger. [This company controls the Norwich and the Douglas Southern Electric Tramways Companies.]

New St. Helens and District Tramways Company, Ltd., Atherton, Lancs. [T.A., Tramways, Atherton; T.N., 36 Atherton.] *Engineer and Manager*, C. D. Stanley; *Secretary*, H. P. Conibear; *Chairman*, Hon. Arthur Stanley, M.P.; *Directors*, J. Hunter, J.P., H. Martin, J.P., J. M. Henderson, M.P., J. S. Austen, and E. H. Edwardes (*Managing*).

North Shields Tramway Company owned and worked by Tynemouth and District Elec. Trac. Co. *q.v.*

Norwich Electric Tramway Company, 5, Orford Hill, Norwich, and 8, Crosby Square, London, E.C. [T.A., Tramways, Norwich; T.N., 475.] *Manager and Engineer*, F. W. Ketley; *Consulting Eng.*, I. E. Winslow; *Sec.*, J. G. Mills; *Directors*, E. A. Hopkins, Hon. A. G. Brand, F. FitzGerald, G. M. Chamberlin, and C. Pakeman.

Nottinghamshire and Derbyshire Tramways Company, Tramway Depot, Langley Mill, Derbyshire, and 66, Queen Street, London, E.C. [T.A., Tramways, Langley Mill; T.N., 53, Langley Mill.] *Manager*, C. R. Walker; *Secretary*, Wm. C. Bryden; *Directors*, A. R. Holland, A. H. Beatty, A. V. Anderson, and M. A. Edwards.

Oldham, Ashton and Hyde Electric Tramway, Ltd., Tramway Depot, Denton, Lancs., and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Denton; T.N., 265 Ashton.] *Supt.*, A. Anderson; *Secretary*, F. J. Cursons; *Acting Secretary*, J. S. Bowker; *Chairman*, E. Garcke; *Directors*, Judge L. A. Atherley Jones, K.C., W. S. Wreathall, J. V. Kitchener (*Managing Director.*)

Paisley District Tramways Company, Tramway Depôt, Paisley, and 83, Cannon Street, London, E.C. [T.N., 218 Paisley.] *Gen. Manager and Elec. Eng.*, Fred Coutts; *Traffic Supt.*, E. Jeffs; *Secretary*, A. Clements; *Con. Eng.*, H. F. Parshall; *Chairman*, O. H. Smith; *Directors*, Lord Arthur Butler, D. Johnston Smith, John Young.

Peterborough Electric Traction Company, Ltd., Lincoln Road, Peterborough, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Peterborough; T.N., 224.] *Gen. Manager*, T. G. Clabburn; *Secretary*, S. M. Wright; *Actiug Sec.*, P. N. Gray; *Chairman*, Lord Vaux of Harrowden; *Directors*, E. A. Paris, R. J. Howley.

Plymouth, Stonehouse and Devonport Tramways Co., 16, Edgcumbe Street, Stonehouse, Devon, and Moorgate Station Chambers, London, E.C. [T.N. 53.] *Manager*, G. H. Moreton; *Elec. Eng.*, J. Graham Pearce; *Sec.*, J. Barber Glenn; *Chairman*, Andrew Beattie, J.P., D.L.; *Directors*, S. Hern, J. B. Glenn (*Managing*).

Portsdown and Horndean Light Railway, Cosham, Hants.; Tramways and Lighting Office, Gosport, Hants., and Moorgate Station Chambers, London, E.C. [T.A., Tramways, Gosport; T.N., 3, Post Office, Gosport.] *Engineer and Manager*, J. Fereday Glenn; *Secretary*, J. Barber Glenn; *Chairman*, A. Beattie, J.P., D.L.; *Directors*, J. Barber Glenn (*Managing*), S. Hern.

Potteries Electric Traction Company, Tramway Depôt, Stoke-on-Trent, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Stoke-on-Trent; T.N., 141.] *Gen. Manager and Eng.*, W. Thom; *Power and Rolling Stock Supt.*, F. J. Chapple; *Traffic Manager*, F. Hatch; *Secretary*, B. Kingsford; *Chairman*, R. J. Howley; *Directors*, F. W. Chanter, S. Mear, J. V. Kitchener.

Rhondda Tramways Company, Ltd., Tramway Depot, Porth, Rhondda, and Laurence Pountney Hill, Cannon Street, London, E.C. [T.A., Tramways, Porth; T.N., 118.] *Manager and Engineer*, H. Holliday; *Secretary*, L. D. H. Jacobs; *Chairman*, L. B. Schlesinger; *Directors*, J. C. Saunders, W. B. Cownie, J. T. Jervis, H. T. Barnett.

Rothesay Tramways Company, Ltd., Point House, Rothesay, and Electrical Federation Offices, Kingsway, London, W.C. *Manager*, A. Robertson; *Sec.*, P. N. Gray; *Chairman*, A. C. Miles; *Directors*, W. L. Madgen, H. S. Day.

Ryde Pier Company, Ryde, Isle of Wight. *Manager*, W. D. Stanney; *Elec. Eng.*, C. Harrison; *Chairman*, G. E. Mears.

Scarborough Tramways Company, Scalby Road, Scarborough. [T.A., Electric Tramways, Scarborough; T.N., 294.] *Gen. Manager and Elec. Eng.*, J. V. Moinet; *Chairman*, F. E. Gripper; *Directors*, V. Fowler, M. T. Whittaker, J. C. Wigham.

Sheerness and District Electric Power and Traction Company, Ltd., Electricity Works, Sheerness East, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Sheerness; T.N.,45.] *Manager & Eng.*, A. Charlton; *Sec.*, H. A. Stagg; *Chairman*, G. J. Somerville; *Directors*, R. J. Howley, E. R. Soames.

Snaefell Mountain Railway (See Manx Electric Railway Company).

South Metropolitan Electric Tramways and Lighting Company, Ltd., 114, Church Street, Croydon, 30, High Street, Sutton, and Electric Railway House, Broadway, Westminster, London, S.W. [T.N., 304 Croydon, 14 Sutton and 6800, Victoria.] *Gen. Manager and Engineer*, A. V. Mason; *Secretary*, W. M. Wright; *Chairman*, C. G. Tegetmeier; *Directors*, J. Devonshire (*managing*), E. Garcke, A. L. Barber.

Southport Pier Co., Ltd., Southport. [T.A., Pier, Southport; T.N., 174.] *Manager*, A. T. Faiers; *Chairman*, A. Skinner; *Directors*, J. R. Haworth, S. J. Fane, G. Duckworth, J. Duckworth.

Southport Tramways Company, Ltd., The Depôt, Churchtown, Southport, and Electrical Federation Offices, Kingsway, London, W.C. *Manager*, J. Lloyd; *Secretary*, H. A. Stagg; *Chairman*, C. S. Hilton; *Directors*, J. S. Raworth, Lord Vaux of Harrowden, J. V. Kitchener, G. R. Hulme.

South Staffordshire Tramways (Lessee) Company, Ltd., Electrical Federation Offices, Kingsway, London, W.C. [T.N., 65 Smethwick.] *General Manager*, W. G. Bond; *Secretary*, E. H. Woodhall; *Chairman*, W. S. Schuster; *Directors*, J. A. Lycett, S. R. Blundstone, R. J. Howley, B. Kingsford.

Sunderland District Electric Tramways Ltd., Fence Houses, co. Durham. [T.A., Trams, Philadelphia, Shiney Row; T.N., 21, Houghton-le-Spring.] *Resident Manager and Engineer*, G. Stratton; *Traffic Manager*, E. A. Pearman; *Secretary*, H. J. Almond; *Directors*, H. R. Hogg, Hon. R. Parker, R. Tayler, A. Counter, C. Eves.

Sutton and Howth Electric Tramway Company (owned by the Great Northern Railway, Ireland), Sutton, county Dublin, and Amiens Street Station, Dublin. [T.A., Railroad, Dublin; T.N., 171, Dublin, and 16 Sutton.] *Gen. Manager*, John Bagwell; *Elec. Eng.*, A. W. Whieldon; *Chief Eng.* F. A. Campion; *Locomotive Eng.*, G. T. Glover; *Sec.*, T. Morrison; *Chairman*, F. Vernon; *Directors*, W. P. Cairnes (*Deputy Chairman*), W. B. Carson, H. S. Guinness, J. T. Reade, Capt. W. L. A. Goulding, Lt.-Col. J. C. W. Madden, R. A. Gradwell, J. Milne Barbour, T. F. Cooke, W. H. B. Moorhead, Lt.-Col. H. Plews, G. S. Clark.

Swansea Improvements and Tramways Company, 2, Rutland St., Swansea, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramway, Swansea; T.N., 268 Swansea.] *Gen. Manager*, D. James; *Elec. Eng.*, A. Johnston; *Secretary*, S. J. Clements; *Chairman*, C. G. Tegetmeier; *Directors*, G. J. Somerville, S. E. Garcke, E. R. Soames.

Taunton Electric Traction Company, Ltd., East Reach, Taunton, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Taunton, c/o "Tramways," London.] *Manager*, B. H. Griffith; *Acting Manager*, L. Marshall; *Secretary*, S. M. Wright; *Acting Sec.*, P. N. Gray; *Chairman*, G. J. Somerville; *Directors*, E. Garcke.

Torquay Tramways Co., Ltd., St. Marychurch Road, Torquay. [T.A., Carsheds, Torquay; T.N., 167 Torquay.] *Registered Office*, 3, Laurence Pountney Hill, Cannon Street, E.C. *Manager and Eng.*, H. J. Nisbett; *Secretary*, L. D. H. Jacobs; *Managing Director*, W. B. Cownie.

Trafford Park Company (Tramways), Trafford Park, Manchester. [T.A., Developing, Manchester; T.N., 61, Trafford Park.] *Secretary*, C. A. Grundy; *Chairman*, Marshall Stevens; *Directors*, Sir J. Lyons, H. McNiel, J. H. Balfour Browne, K.C.

[Lines worked by the Manchester and Salford Corporations.]

Tynemouth and District Electric Traction Company, Limited, John Street, Cullercoats, Northumberland, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tram Co., Cullercoats; T.N., 17 Whitley.] *Gen. Manager*, H. J. Smith *Sec.*, C. W. Francis; *Acting Sec.*, H. A. Stagg; *Chairman*, H. S. Day; *Directors*, J. H. Robinson, J. B. Williamson, R. J. Howley, Geo. J. Somerville.

Tyneside Tramways and Tramroad Company, Ltd., Neptune Bank, Wallsend. [T.A., Tramways, Wallsend; T.N., 84.] *Secretary & Res. Manager*, J. C. Little; *Elec. Eng.*, F. H. Briggs; *Cons. Eng.*, W. McLellan; *Chairman*, J. T. Merz; *Directors*, Lord Armstrong, J. H. Armstrong, G. E. Henderson, S. Hunter.

Wakefield and District Light Railway Company, Belle Isle, Wakefield.

[This company has been amalgamated with the Yorkshire (West Riding) Electric Tramways Co., Ltd.]

Walton-on-the-Naze Pier Tramway (Coast Development Corporation, Ltd.), The Pier, Walton-on-the-Naze. [T.A., Electricity Works, Walton-on-Naze.] *Eng.*, E. A. Lambert, A.M.I.E.E.

Wemyss and District Tramways Company, Ltd., Car Depot. Aberhill, Methill, N.B. [T.A., Tramways, Methill; T.N., 88 Leven.] *Gen. Manager*, W. T. Dawson; *Sec.*, J. O. Shepherd; *Chairman*, G. Balfour; *Directors*, W. Shepherd, G. Balfour, J. H. Guild.

Weston-super-Mare and District Electric Supply Co., Ltd., Locking Road, Weston-super-Mare, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Weston-s.-Mare; T.N., 79 & 181.] *Manager and Elec. Eng.*, G. Charlton; *Sec.*, H. A. Stagg; *Chairman*, G. J. Somerville; *Directors*, C. G. Tegetmeier, E. R. Soames.

Wolverhampton District Electric Tramways, Limited, Tramway Depot, Bilston, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Bilston; T.N., 56, Bilston.] *General Manager*, W. G. Bond; *Sec.*, E. H. Woodhall; *Chairman*, S. R. Blundstone; *Directors*, J. A. Lycett, R. J. Howley, B. Kingsford.

Worcester Electric Traction Company, Ltd., St. John's, Worcester, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Worcester; T.N., 81.] *Engineering Manager*, R. Simpson; *Secretary*, C. W. Francis; *Acting Sec.*, H. A. Stagg; *Chairman*, H. S. Day; *Directors*, J. A. Lycett, B. Kingsford, W. S. Wreathall.

Wrexham and District Transport Co., Ltd., 6, Lord Street, Wrexham, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Wrexham; T.N., 182, Wrexham.] *Manager*, A. A. Hawkins; *Sec.*, J. R. Oliphant; *Acting Sec.*, J. S. Bowker; *Chairman*, J. V. Kitchener; *Directors*, G. J Somerville, W. S. Wreathall.

Yorkshire (West Riding) Electric Tramways Co., Ltd., Belle Isle, Wakefield. [T.A., England, Belle Isle, Wakefield; T.N., 213.] *Gen. Manager and Sec.*, H. England; *Elec. Engs.*, C. J. Jewell and E. A. Wood; *Traffic Supt.*, W. J. McDonald; *Chairman*, Sir Herbert S. Leon; Bart.; *Directors*, B. Newgass, G. E. Leon, E. Remnant, W. Murray.

Yorkshire (Woollen District) Electric Tramways Limited, Frost Hill, Liversedge, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Heckmondwike; T.N., 8 Heckmondwike.] *Secretary*, P. N. Gray; *Chairman*, E. Garcke; *Directors*, Sir Thos. Pilkington, E. A. Paris (*managing*).

TRAMWAY ASSOCIATIONS.

MUNICIPAL TRAMWAYS ASSOCIATION.

President:
PETER FISHER
(General Manager, Dundee Corporation Tramways).

Vice-President:
HENRY MOZLEY
(General Manager, Burnley Corporation Tramways).

Hon. Secretary and Treasurer:
C. J. SPENCER
(General Manager, Bradford Corporation Tramways), 7, Hall Ings, Bradford.

TRAMWAYS AND LIGHT RAILWAYS ASSOCIATION.

President:
The Rt. Hon. VISCOUNT CHILSTON.

Chairman:
The Hon. ARTHUR STANLEY, M.P.

Vice-Chairman:
HARRY ENGLAND.

Hon. Solicitor: W. MORRIS, JUNR. *Hon. Auditor:* A. W. CHAMBERS, A.S.A.A.

Secretary:
A. DE TURCKHEIM.

Offices: Caxton House, Westminster, London, S.W Telephone No. 2110 Victoria.

Digitized by Google

LIST OF ELECTRIC TRAMWAYS & RAILWAYS.

PARTICULARS OF TRACK AND EQUIPMENT.

TRAMWAYS, pp. xxvii-xxx. RAILWAYS, p. xxx.

Location of Line and Name of Operating Company.	Date of Opening of First Section.	Length of Route.	Total length of Track.	Gauge.	Weight and Type of Rail.	Maximum Gradient.	Sharpest Curve.	No of Motor Cars.	No of Dynamos	No. of Engines	Type of Engines	Total Capacity Traction, kw.	Principal Contractors for Electrical Equipment.
TRAMWAYS.				ft. in.	lbs.	1 in	ft. rad.						
Aberdare Urban District Trys. ..	Oct., 1913	2·9	3·3	3 6	96 G	13	45	14	2	2	V.Cp.C.	400	Lanc. Dynamo Co.
Aberdeen Corporation	Dec., 1899	14·4	27·75	4 8½	96 G	13	42·5	83	*14	14	V.Cp.C.	4,610	British T-H. / Macartney & Co.
Aberdeen Suburban Trys. Co. ..	June, 1905	5	5	4 8½	95 G	28	90	9	..	..	..	..	J. G. White & Co. / Brush Co.
Accrington Corporation	Aug., 1907	7·53	10·53	4 0	95 G	14	..	32	*8	8	..	1,888	Brush Co.
Airdrie & Coatbridge Tramway Co.	Feb., 1904	3·63	4·94	4 8½	94 G	14	210	15	..	..	..	..	Brush Co.
Ashton-under-Lyne Corporation ..	Aug., 1902	7	8·15	4 7¾	96 G	10	40	25	5	5	..	400	Dick, Kerr, & Co. / Siemens Bros.
Ayr Corporation	Sept., 1901	6	7·612	4 8½	90 G	21	45	24	*8	8	..	400	British T-H.
Bacup Corporation	1910	1·50	2	4 8½	103 G	9	40	..	..	..	..	..	
Barking Town Urban District ..	Dec., 1903	2·6	3·125	4 8½	100 G	25	44	9	4	3	V.Cp.C.	200	Blackwell & Co.
Barnsley & Dist. Elec. Traction Co.	Nov., 1902	3·06	4·25	4 8½	97 G	10	60	13	*	..	..	..	J. G. White & Co. / Brush Co.
Barrow-in-Furness	Feb., 1904	6·9	10·32	4 0	90 G	13	50	24	*8	..	..	..	Brush Co. / Dick, Kerr, & Co.
Bath Electric Tramways, Ltd. ..	Jan., 1904	14·7	19·3	4 8½	95 G	10·7	38	40	4	4	H.T.Cp.	675	Westinghouse
Batley Corporation	Aug., 1903	6·536	10·47	4 8½	104 G	9	40	15	6	4	H. Cp.	240	B. I. W. Co. / British Elc.Cr.Co
Belfast City	Dec., 1905	49·65	98·54	4 8½	105 G	15	35	291	3	3	Tri.Exp.	3,000	J. G. White & Co. / Westinghouse
Bessbrook—Newry (1) .. .. Bessbrook and Newry Try. Co.	Oct., 1885	3	3	3 0	41 V	80	55	2 M / 2 T	2	1	Hyd.Turb.	..	Mather & Platt
Bexley Urban District	Oct., 1903	5·25	6·5	4 8½	90 G	14	40	21	3	3	V. Cp.	600	Dick, Kerr, & Co.
Birkenhead Corporation	Feb., 1901	13·8	24·09	4 8½	100 G	13½	40	65	6	6	V. Cp.	..	Blackwell & Co. / British T-H.
Birmingham Corporation	Jan., 1904	65·56	114·55	3 6	105 G	13	40	586	..	..	..	1,475	Dick, Kerr, & Co.
Birmingham and Midland Trys. Co.	Nov, 1904	10·32	16·45	3 6	85 & 94 G	15	31	62	6	6	Cp.	..	Brush Co.
Blackburn Corporation	March, 1899	14·67	24·75	4 0	92 G	15	30	61	*4	4	V.Cp.C.	..	British T-H. / Blackwell & Co.
Blackpool Corporation	Oct., 1885	14·75	21·38	4 8½	96 G	20	36	84	5	..	Turb.	3,250	Elwell-Parker / British T-H.
Blackpool & Fleetwood Tramrd. Co.	July, 1898	7·9	15	4 8½	70 V / 98 G	26	80	41	5	5	V. Cp.	600	Mather & Platt / D.K.&Co.-B.T-H.
Blackpool and Fylde Light Ry. Co.	Under cons.	14	14·5	4 8½	..	..	..	..	..	..	..	..	
Blackpool—St. Anne's & Lytham ..	May, 1903	7·47	14·03	4 8½	92 G	22	35	40	..	..	..	..	British T-H.
Bolton Corporation	Nov., 1899	26	47·21	4 8½	90G	14	35	112	*12	12	V.Cp.C.	3,800	Dick, Kerr, & Co. / Blackwell & Co.
Bootle Corporation	May, 1900	4·125	7·75	4 8½	95 G	20	40	55	*8	8	..	4,000	Blackwell & Co.
Bournemouth Corporation	July, 1902	21·66	31·75	3 6	100 G / 66 slot	10	40	91	5	4	V. Cp.	1,200	J. G. White & Co.
Bradford Corporation	July, 1898	59	108·75	4 0	102 G	9·8	40	‡272	11	11	V.Cp.C.	..	Westinghouse / Blackwell & Co.
Bray and Enniskerry Railway Co.	Under cons.	3·25	5	3 6	..	..	..	..	..	..	..	..	
Brighton Corporation	Nov., 1901	9·48	17·18	3 6	105 B.S. No. 4	9	40	53	5	5	Turb.	1,000	Macartney & Co. / Westinghouse / Blackwell & Co.
Brighton Beach (1)	Aug., 1883	1·75	2	2 8½	35 V	100	80	9	2	..	..	..	Siemens Bros.
Bristol—Bristol Trys. Co.	Oct., 1895	31	57·5	4 8½	92½ G	10	30	232	6	4	V.Cp.C.	..	British T-H. and / Blackwell & Co.
Burnley Corporation	Dec., 1901	12·50	22·16	4 0	102 & 107 G	9·8	35	67	*8	6	H.Cp.C.	1,500	British T-H.
Burton and Ashby Light Railway..	July, 1906	10·2	12·3	3 6	90 G	11	51	20	2	2	Diesel	330	Dick, Kerr & Co. / Brush Co.
Burton-on-Trent Corporation ..	Aug., 1903	6·67	9·75	3 6	90 & 100 G	11·7	40	20	3	3	V. Cp.	400	Dick, Kerr, & Co. / Blackwell & Co.
Bury Corporation	June, 1903	22·5	34·42	4 8½	102¾ G	12	40	54	6	6	..	1,500	Westinghouse
Camborne and Redruth	Nov., 1902	3·75	4	3 6	83 G	15	40	8	7	7	Cp.	1,525	Dick, Kerr, & Co / British T-H.
Cardiff Corporation	May, 1902	17·25	31·82	4 8½	100 G	23	35	130	9	9	V.Cp.C&T	2,200	British T-H. / Dick, Kerr, & Co
Carlisle, City of, Elec. Try. Co. ..	June, 1900	7·25	8·5	3 6	83 G	14	23	12	..	..	..	..	D.K.& Co.-B.T-H.
Cavehill & Whitewell Try. Co...	Feb., 1906	3·29	4·31	4 9	105 G	31	75	10	..	..	..	..	J. G. White & Co.
Chatham & District Light Rly. Co.	June, 1902	14·98	26	3 6	92½ & 105 G	9	35	50	5	4	H. Cp.	675	British T-H. Co. / Brush Co.
Cheltenham and District ..	Aug., 1901	10·22	12·25	3 6	80 & 90 G	8·9	37	20	2	2	V.Cp.	..	Westinghouse
Chester Corporation..	April, 1903	3·59	6·4	3 6	94 & 100 G	23	40	18	*7	6 / 1	V. Cp.C. / V.Tri.ExC	240	Blackwell & Co. / British T-H.
Chesterfield Corporation	Dec., 1904	3·6	5·1	4 8½	96 & 101 G	20	40	17	4	4	V.Cp. C.	800	Milnes & Co. / Westinghouse / Brush
Clontarf and Hill of Howth ..	July, 1900	5·5	6·5	5 3	90 & 60 G	13	34	12	..	..	..	..	W.M. Murphy & Co.
Colchester Corporation	July, 1904	6	7·94	3 6	95 G	12	43	18	8	8	V. Cp.	1,140	Dick, Kerr & Co. / J. G. White & Co.
Colne Corporation Tramways ..	Nov., 1903	5·2	6·7	4 0	102 G	13	60	13	*	..	..	..	Blackwell & B.T-H. / Glover & Co.
Cork Elec. Try. & Lighting Co. ..	Dec., 1898	10	15	2 11½	83 G	14	26	35	*9	9	H.Cp.C.	570	British T-H. / Blackwell & Co.
Coventry Corporation Tramways..	Dec., 1895	12·88	15·81	3 6	65 G / 81 G	16	35	51	5	3	H.&V.Cp.	1,500	Westinghouse / Blackwell & Co.
Croydon Corporation	Sept., 1901	11·87	19·12	4 8½	96·5 G	16	40	75	*13	13	..	2,000	British T-H. Co.
Darlington Corporation	June, 1904	4·875	8·88	3 6	90 G	14	52·8	18	1	..	..	250	Westinghouse

* Current from combined lighting and traction station. (1) Third rail system. † Includes 1·25 miles railless trolley line. ‡ Includes 20 railless cars.
M—Motor Cars. T—Trail Cars.

Digitized by Google

ELECTRIC TRAMWAYS & RAILWAYS.—Particulars of Track and Equipment.

Location of Line and Name of Operating Company.	Date of Opening of First Section.	Length of Route.	Total Length of Track.	Gauge.	Weight and Type of Rail.	Maximum Gradient.	Sharpest Curve.	No. of Motor Cars	No. of Dynamos	No. of Engines	Type of Engines.	Total Capacity Traction, kw.	Principal Contractors for Electrical Equipment.
TRAMWAYS—*continued.*				ft. in.	lbs.	1 in	ft. rad.						
Dartford U. D. C.	Feb., 1906	6·5	8·5	4 8½	100 G	12	35	12	4	..	..	..	British I. W.
Darwen Corporation	Oct., 1900	4·36	7·16	4 0	95 G	9	35	19	*4	4	H. Cp.	..	British T-H.
Derby and Ashbourne	..	..	14·5	4 8½									J. G. White & Co.
Derby Corporation	July, 1904	13	22·06	4 0	95 G	14	46	50	3	3	Turb.	..	Brush & B.T-H.
Devonport Corporation	June, 1901	..	7	3 6	97 G	10	50	12	..	..	..	..	Blackwell & Co.
Doncaster Corporation	June, 1902	8·25	12·52	4 8½	94 G	16	45	32	8	8	..	1,000	Blackwell & Co.
Dover Corporation	Sept., 1897	4·75	7	3 6	87 & 90 G	10	44	24	*2	2	H.CC.	..	D. K. & B. T-H
Douglas—Port Soderick .. Douglas Southern Elec. Trys. Co.	Aug., 1896	3·25	3·75	4 8½	65 V	12	45	8 M 8 T	2	2	H. Cp.	200	Westinghouse British T-H.
Dublin & Lucan Elec. Railway Co.	March, 1900	6·5	7	3 6	50 V	20	27	9 M 5 T	2	2	H. Cp. C.	240	Dick, Kerr, & Co.
Dublin United Tramways Co.	May, 1896	49·8	95·26	5 3	105 G	12·3	22	365	8	8	Cp. & Tur	5,500	Dick, Kerr, & Co. Blackwell & Co. British T-H.
Dudley and Stourbridge Trys. British Electric Traction Co.	July, 1899	22·88	30·97	3 6	90 G	11	50	59	4	4	H. Cp.	..	British T-H. Blackwell & Co.
Dumbarton	Feb., 1907	13	17	4 7¾	90 & 96	14	60	30	3	3	..	..	Dick, Kerr, & Co.
Dundalk	Under cons.	6	6·25	3 6	97 G	10	50	12					White & B.T-H.
Dundee, Broughty Ferry, and District	Dec., 1905	4·125	7·25	4 8½	90 G	16·5	30½	14	3	3	V. Cp. C.	..	J. G. White & Co British T-H. Co.
Dundee Corporation	July, 1900	16·3	30·25	4 8½	90 & 100 G	10	35	76	5	5	..	..	Blackwell & Co.
Dunfermline (Fife Try. & Power Co.)	Nov., 1909	14·6	17·4	..	90 G	10	25	28	..	..	..	..	British T-H.
East Ham Corporation	June, 1901	7·58	14·20	4 8½	90 & 105 G	25	40	45	*5	5	H. Cp.	750	Dick, Kerr, & Co.
Eccles Corporation	May, 1902	5	7·75	4 8½	100 G	..	..	..	..	..	..	..	
Edinburgh and District	June, 1910	1·25	1·5	4 8½	100 G	21	54	4	..	..	..	..	Dick, Kerr, & Co.
Erith Urban District Council	Aug., 1905	4·7	8·4	4 8½	100 G	17	40	17	3	5	..	..	Brush Co. Westinghouse Co.
Exeter Corporation	April, 1905	4·875	7	3 6	90 G	11·5	35	24	*4	4	H. Cp.	..	Dick, Kerr, & Co.
Falkirk and District	Oct. 1905	7·81	10·5	4 0	90 G.	11·3	48	18	*	..	..	..	Bruce-Peebles British T-H.
Farnworth Urban District	Jan., 1902	4·33	7·16	4 8½	98 G	29	36	..	..	..	..	..	
Felixstowe Pier	Aug., 1905	0·5	0·5	3 6	36	..	..	3	..	..	..	..	
Gateshead and District	May, 1901	12·38	20·02	4 8½	90 G	8	35	55	*	..	..	..	Dick, Kerr, & Co. Blackwell & Co.
Giant's Causeway Elec. Try. Co.	Sept., 1883	8	9	3 0	42 V 75 G	24	30	5 M 21 T	2	2	Hyd. Turb.	..	Siemens Bros. British T-H.
Glasgow Corporation	Oct., 1898	99·26	198·13	4 7¾	110 G	11·93	30¾	857	8	8	V. Cp. & T	21,700	British T-H. Westinghouse
Glossop Urban District	Aug., 1903	4·56	5·6	4 8½	90 G	13	40	8	4	4	V. Cp.	200	British T-H.
Gloucester Corporation Light Rly.	May, 1904	9	15	3 6	90 G	25	40	30	*2	2	Cp.	750	Brush Co. Dick, Kerr, & Co.
Gosport & Fareham Trys. Co.	Jan., 1906	7·5	11·5	4 7¾	96 G	16	37½	22	3	3	V. Cp. C.	750	Dick, Kerr, & Co.
Gravesend and Northfleet	Aug., 1902	6·5	9	4 8½	87 G	11	45	18	*				Brush Co.
Great Crosby	June, 1900	2·5	2·5	4 8½	92½ G	..	40	14	*7	7	H. & V. Cp.	160	Dick, Kerr, & Co. Blackwell & Co.
Great Grimsby	Dec., 1901	6	11	4 8½	90 G	15	26	32 M 6 T	3	3	..	400	Dick, Kerr, & Co.
Greenock and Port Glasgow	Oct., 1901	7·425	14·05	4 7¾	90 G	11	60	42	*	..	..	..	
Guernsey Railway Co.	Nov., 1892	3	3	4 8½	74 V 84 G	60	60	9 M 8 T	2	1	H. & V. Cp.	160	Siemens Bros. British T-H.
Halifax Corporation	June, 1898	37·53	55·5	3 6	95½ G	9·5	38·6	101	*7	7	H. & V. Cp. & T.	3,000	Electric Cons. Co. British T-H.
Hampshire Light Railway (Elec.) Co.	March, 1903	6	9	4 8½	..	..	..	10	*	..	..	..	
Haslingden Corporation	July, 1908	3	3	4 0	100 G	10	30	..	..	..	..	45	Dick, Kerr, & Co.
Hastings and District	July, 1905	19·33	34	3 6	90 G	8	30	65	6	6	V. Cp.	2,100	Dick, Kerr, & Co.
Herne Bay Pier (1)	March, 1899	·75	·75	3 0	60	..	..	3	1	1	Gas	50	British T-H.
Heywood Corporation	Dec., 1905	4·25	4·25	4 8½	90 G	17	..	..	1	1	..	300	Blackwell & Co. B.I. & H.C. Co.
Houghton-le-Spring (See Sunderland Dist. Elec. Trys.)													
Huddersfield Corporation	Feb., 1901	34·50	56	4 7¾	98 G	11	35	106	4	4	V. Cp. C.	2,200	British T-H.
Hull Corporation	July, 1899	13·46	30·5	4 8½	94 G	20	30	180	7	7	V. Cp. C.	2,560	British T-H. Westinghouse
Ilford Urban District	Mar., 1903	7·42	12·62	4 8½	95 G	13	33·3	28	*7	7	..	1,600	British T-H. Dick, Kerr, & Co.
Ilkeston Corporation	May, 1903	3·8	4·3	3 6	90 G	12	28	13	..	..	..	..	Dick, Kerr, & Co.
Ipswich Corporation	Nov., 1903	10·8	14·87	3 6	90 G	11·5	40	36	*10	10	Enclos'd	1,175	Westinghouse
Isle of Man— Manx Elc. Rly. Co. Douglas to Ramsey	July, 1893	18	35·75	3 0	62½ V	24	90	34 M 29 T	8	9	H. Cp.	1,300	Mather & Platt
Manx Elc. Rly. Co. Snaefell Mountain	Aug., 1895	4·5	9·5	3 6	56 V	12	90	6	5	4	H. Cp.	390	
Isle of Thanet Trys. & Ltg. Co.	April, 1901	11	20·67	3 6	90 & 100 G	11	38	59	*6	6	3 V. Cp. 3 H. Cp.	800	British T-H. Blackwell & Co.
Jarrow and District	Nov., 1906	2·54	3·42	4 8½	95 G	12·5	50	10	..	..	..	..	Brush Co. B.I. & H.C. Co.
Kearsley Urban District	Jan., 1902	1·75	1·75	4 8½	95 G	20	..	..	..	..	..	..	Westinghouse
Keighley Corporation	Oct., 1904	3·5	6·11	4 0	95 G	25	60	12	*4	4	V.	200	Blackwell & Co.
Kidderminster—Stourport British Electric Traction Co.	May, 1898	4·6	4·87	3 6	75 G	14	45	13	*5	5	Stm Turb.	..	Brush & B.T-H. Brush Elc. Eg. Co
Kilmarnock Corporation	Dec., 1904	4·18	5·5	4 8½	90 G	24	45	14	*3	3	..	250	Blackwell & Co.
King's Norton & Northfield U. D.	May, 1904	5·25	8·25	3 6	105 G	15&21	100&145	..	..	..	..	..	Blackwell & Co.
Kinver	April, 1901	4·25	6	3 6	63 & 90 G	..	..	6					
Kirkcaldy Corporation	Feb., 1903	6·11	8·56	3 6	100 G	11	40	26	*10	6	Cp. H.T.	2,290	British T-H. Co.
Lanarkshire Tramway Co.	July, 1903	28·431	43·120	4 7¾	96 & 101 G	9·4	37	76	4	4	3 H. Cp. 1 V. Cp.	825	British T-H. Co.
Lancashire United Tramways Co.	Oct., 1902	39	54	4 8½	90 G	15	50	82	*8	8	V. Cp. C & T	7,000	B. I. W. Co.
Lancaster Corporation	Jan., 1903	4	4·81	4 8½	90 G	8	30	12	4	4	V. Cp.	200	Greenwood & Batley, Ltd.
Leamington & Warwick Elec. T. Co.	July, 1905	3·04	6·1	3 6	65 G	12	47	12	3	3	Cp.	..	Brush Co.
Leeds City	Aug., 1897	69·02	114·62	4 8½	105 & 111 G	8·4	32	345	5 3	5 3	H. Cp C. Stm. Tur	6,150	Elec. Con. Co. Greenwood & Batley, British T-H Blackwell & Co.

* Current from combined lighting and traction station. (1) Third Rail system. M—Motor Cars. T—Trail Cars.

Digitized by Google

ELECTRIC TRAMWAYS & RAILWAYS.—Particulars of Track and Equipment.

Location of Line and Name of Operating Company.	Date of Opening of First Section.	Length of Route.	Total length of Track.	Gauge.	Weight and Type of Rail.	Maximum Gradient.	Sharpest Curve.	No. of Motor Cars.	No. of Dynamos	No. of Engines.	Type of Engines.	Total Capacity Traction, kw.	Principal Contractors for Electrical Equipment
TRAMWAYS—*continued.*				ft. in.	lbs.	1 in	ft. rad.						
Leicester Corporation	May, 1904	20·25	38	4 8½	100 G	16	35	160	7	7	V.Cp.C&T	9,250	Dick, Kerr, & Co. Blackwell & Co
Leith Corporation	Aug., 1905	9·08	17·9	4 8½	106·7 G	19	54	37	*11	11	..	1,600	Brush & B.T-H.
Leyton Urban District	Dec., 1906	8·95	17·694	4 8½	105 & 111 G	24	45	60	*4	4	Cp.T.E&T	2,040	..
Lincoln Corporation (1)	Nov., 1905	1·75	2·96	4 8½	100 G	..	36	8	*9	9	..	120	..
Liverpool Corporation	Nov., 1898	70	127	4 8½	95, 123 & 134 G	13	30	599	*42	42	Trip.Ex.	44,600	Blackwell & Co. British T-H. Dick, Kerr, & Co. Westinghouse
Liverpool Overh'd Ry. (Trol.Ln.Ex.)	June, 1900	2·5	2·5	4 8½	92½ G	Nil	40	14	7	7	H.&V.Cp.	160	Dick, Kerr, & Co.
Llandudno and Colwyn Bay ..	Oct., 1907	8·37	13·60	3 6	90 G	11·5	45	18	*	..	..	..	Bruce-Peebles.
Llanelly and District	July, 1911	6·25	6·75	4 8½	90 G	11·2	60	12	*2	2	Trip.Ex.	..	British T-H.
London County Council (2) ..	May, 1903	148·56	287·35	4 8½	105 G	10·6	45	1725M 150T	8	8	V. Cp. C. Turbine	43,000	Dick, Kerr, & Co. Westinghouse
London United Tramways Co. ..	April, 1901	55·25	102·45	4 8½	92½ & 100 G	18	28	339	7	5	V. Cp.	3,500	British T-H. Westinghouse. Blackwell & Co.
Lowestoft Corporation	July, 1903	4·75	5·07	3 6	100 G	27	36	19	*5	5	Cp.	..	Blackwell & Co.
Luton Corporation Tramways (Leased to J. G. White & Co., Ltd.) ..	Feb., 1908	5·25	6·25	4 8½	95 G	11	35	12	*1	1	..	..	J. G. White & Co. British T-H.
Maidstone Corporation	July, 1904	5·5	7·04	3 6½	96 G	9	35	19	3	3	..	750	Dick, Kerr & Co.
Manchester Corporation	June, 1901	120·05	244	4 8½	105 G	14·9	35	685	*22	22	Turb'nes	45,300	British T-H. Dick, Kerr, & Co
Mansfield and District Co. ..	July, 1905	10	12·25	4 8½	90 G	17	50	24	*3	3	..	..	
Merthyr	April, 1901	3·69	4·81	3 6	96 G	11	66	16	*4	4	H.S.V.	..	D. K. & B. T-H
Metropolitan Electric Trys., Ltd.	July, 1904	56·25	112·5	4 8½	100 G	12	40	312	5	5	1 Stm. Tur	..	British T-H. Brush Co.
Mexborough & Swinton Trys. Co.	Feb., 1907	7·75	10·75	4 8½	90 G	8·5	55	20	4	4	Turb.	700	Brush & B.T-H.
Middlesbro', Stockton, & Thornaby Electric Tramways Co.	July, 1898	10·5	15·825	3 6	92½ G	17	35	60	3	4	H.&V.Cp.	900	British T-H. Blackwell & Co.
Middlesex County Council.. ..	Aug., 1904	25·5	51	4 8½	..	..	..	..	..	..	..	..	
Middleton Corporation	March, 1902	2·5	5	4 8½	..	..	..	..	..	..	..	..	
Middleton Electric Traction Co. ..	March, 1902	8·5	10·53	4 8½	90 G	15	49½	28	3	3	..	500	Glover & Co.
Morecambe	Jan , 1912	1·20	..	4 8½	96 G	18	..	4	..	..	..	..	
Musselburgh and District ..	Dec., 1904	6·5	8·125	4 8½	90 G	34	45	16	4	3	..	400	B. T-H. Co., Nat Elec. Cons. Co
Nelson Corporation	Feb., 1903	2·74	3·86	4 0	106 G	11	41	11	*4	4	..	400	Blackwell & Co. British T-H. Co. Brush Co.
New St. Helens & District Trys. Co.	July, 1899	18	20	4 8½	95 G	13	35	36	*4	4	V. Cp. C.	..	Westinghouse British T-H.
Newcastle Corporation	Dec., 1901	32·75	62·875	4 8½	101 G	11	37	220M 2 T	6	6	V.Cp.Trip. Ex.&Turb.	11,000	Westinghouse British T-H.
Newport (Mon.) Corporation ..	April, 1903	7·5	14·35	4 8½	98 G	10·5	40	44	5	5	V. Cp.	1,750	Westinghouse
Northampton Corporation	July, 1904	6·5	11·16	3 6	90 & 96 G	18	50	33	4	4	V.C.C.&T	1,020	Dick, Kerr, & Co. Brush Co.
North Shields Tramways Co. ..	March, 1901	..	7·75	3 6	90 G	10	36	22					
North Staff. Trys. (*vide* Potteries)													
Norwich Electric Tramways Co. ..	July, 1900	14·5	19·25	3 6	65½ & 90 G	12·6	38	42	6	5	H.TCp&T	1,000	Westinghouse Blackwell & Co.
Nottingham Corporation	Jan., 1901	21·5	41·5	4 8½	107 G	11·5	40	155	*3	3	..	..	British T-H. Dick, Kerr, & Co.
Nottinghamshire & Derbyshire Tramways Co.	Aug., 1913	12·8	16·10	4 8½	G	..	..	24	*	..	..	..	British T-H.
Oldham, Ashton & Hyde Trys. Co.	June, 1899	9·12	11·75	4 8½	97 G	11	28	46	*3	3	V. Cp. C.	..	British T-H.
Oldham Corporation	Dec., 1900	24	37	4 8½	100 & 105 G	10·5	40	109	*4	4	..	2,220	Dick, Kerr, & Co.
Paisley & District Tramways Co.	June, 1904	18·25	32·50	4 7½	90 G	10	34	60	..	..	..	..	British T-H.
Perth Corporation	Oct., 1905	4·846	6·75	3 6	90 G	16	25	12	5	5	Cp.	500	Blackwell & Co.
Peterborough Elec. Traction Co. ..	Jan., 1903	5·33	6·71	3 6	94 G	31	35	14	..	..	..	..	Blackwell & Co. Dick, Kerr, & Co
Plymouth Corporation	Sept., 1899	7·75	15	3 6	92 G	9	35	42	3	3	V. Cp.	..	Elec. Cons. Co. Westinghouse
Plymouth, Stonehouse, and Devonport	Nov., 1901	1·5	3·62	3 6	84 G	11	34	15	..	..	..	..	Blackwell & Co. Dick, Kerr, & Co
Pontypridd Urban District ..	March, 1905	5·5	8·6	3 6	96 & 100 G	10	27·6	26	4	5	V.C.Cp.	450	B.I.W. & B.T-H. Blackwell & Co.
Portmadoc & South Snowdon Rly.	Under cons.	13·25	15	1 11½	41	28	200	6	..	..	..	..	
Portsdown & Horndean Tramway	March, 1903	6	7·5	4 7½	96 G	16	40	16	2	2	Oil	200	Dick, Kerr, & Co. Brush Co.
Portsmouth Corporation	Sept., 1901	17·65	34·63	4 7½	96 & 100 G	17	35	100	5	4	V.& H.Cp.	2,075	Macartney & Co. Dick, Kerr, & Co.
Potteries Electric Traction Co. ..	May, 1899	31·67	41·48	4 0	87, 90, 100, & 110 G	11	45	110	8	8	H.Cp. V.Cp.	2,275	Dick, Kerr, & Co. Blackwell & B.T-H.
Preston Corporation..	June, 1904	10·54	17·2	4 8½	B.S.S. No. 2	16	28	39	2	2	H.Cp.	600	Dick, Kerr, & Co.
Radcliffe Urban District ..	April, 1905	5	6·5	4 8½	100 G	15	40	..	*4	4	V. Cp.	600	Mather & Platt
Rawtenstall Corporation	May, 1909	12	15·9	4 0	100 G	15	38	24	*3	3	..	850	Westinghouse
Reading Corporation	July, 1903	7·44	13·175	4 0	96 G	16	35	36	4	4	V. Cp.	400	Blackwell & Co. Dick, Kerr, & Co Westinghouse
Rhondda Tramways Co.	July, 1908	21	28·75	3 6	95 G	9	38½	54	7	4	Trip.Ex.	1,230	British T-H. Brush
Rochdale Corporation	May, 1902	19·58 (A)	22·74 (A)	4 8½	103½ G	11·7	30	69	*	..	..	..	British T-H. Dick, Kerr, & Co Brush Co.
Rotherham Corporation	Jan., 1903	10	12	4 8½	100 G	9·5	45	36	*6	6	H.S.Cp.	1,485	Dick, Kerr, & Co.
Rothesay	June, 1902	4·81	9·68	3 6	94 G 77 G	24	34	20	3	3	V. & Oil	350	Dick, Kerr, & Co.
Ryde Pier, Isle of Wight Ryde Pier Co. (3) ..	March, 1886	·5	1	4 8½	30 & 34 V	..	..	4	2	2	Gas	..	Westinghouse Siemens Bros.
Salford Corporation	Oct., 1901	41·90	75·79	4 8½	103 G	20	42·5	220	*7	7	C. & Turb.	3,000	Westinghouse Mather & Platt
Scarborough Tramways Co. ..	May 1904	5	7·75	3 6	90 G	10·5	35	22	2	2	Stm.Turb.	..	Brush & B.T-H.
Sheerness and District	April, 1903	2·5	2·704	3 6	94 G	43	40	8	6	5	V.Cp.C.	100	Siemens & Halske Brush Co.
Sheffield Corporation	Sept., 1899	40	77·84	4 8½	110 & 120	9·5	35	339	..	..	..	..	British T-H

* Current from combined lighting and traction station. (1) G.B. surface contact system. (2) Mainly Conduit system, but there are now several Trolley lines.
Besides the electric lines the London County Council has also 4·45 route miles of horse tramways. (3) Third rail system. (A) Not including 17·1 miles track leased.
M—Motor Cars. T—Trail Cars.

Digitized by Google

ELECTRIC TRAMWAYS (contd.).	Date of Opening of First Section.	Length of Route.	Total Length of Track.	Gauge.	Weight and Type of Rail	Maximum Gradient.	Sharpest Curve.	No. of Motor Cars.	No. of Dynamos	No. of Engines.	Type of Engines.	Total Capacity Traction, KW.	Principal Contractors for Electrical Equipment.
				ft. in.	lbs.	1 in	ft. rad.						
Shipley Urban District	May, 1902	6	10	4 0	98 G	15	..	..	6	6	Turbine	1,800	British T-H.
Soothill Nether U.D.C. & Dewsbury & Ossett Corporations ..	Nov., 1908	3·125	4·45	4 8½	90 G	13	50	8	*	..	..	..	Nat. Elec. Cons. Co.
Southampton Corporation	Jan., 1899	10·25	18·75	4 8½	96 G & 105 B.S. No. 4	13	40	73	6	6	H. Cp. C.	1,000	Westinghouse
Southend Corporation	July, 1901	7·01	13·52	3 6	90 G	18	48	42	*6	7	V.Cp.	2,075	British T-H.
Southend Pier (1) Southend Corp.	Aug., 1890	1·25	1·25	3 6	60 G	Lev.	..	28	..	..	..	..	British T-H.
South Metropolitan Elec. Try. Co.	Feb., 1906	13·09	26	4 8½	95 G	16	42	51	*8	6	Stm Tbs	1,650	Dick, Kerr & Co. / Brush Co.
Southport Corporation (5)	July, 1900	13·5	10·75	4 8½	87 & 90 G	25	45	30	*3	3	H. Cp.	600	Dick, Kerr, & Co.
Southport Electric Tramway Co...	July, 1901	8·17	12·52	4 8½	87 G	Nil	40	21	*				
Southport Pier	1905	..	·75	4 0	..	..	..	1 M 2 T	..	..	..	..	Westinghouse
South Shields Corporation ..	March, 1906	5·7	10·25	4 8½	95 G	15	35	40	2	2	V. Cp. C.	1,100	Dick, Kerr & Co.
South Staffordshire	Jan., 1893	16·90	26·87	3 6	97 & 90 G	17	46	46	3	3	C.H. Cp.	..	Blackwell & Co. / E. C. C.
Stalybridge, Hyde, Mossley, and Dukinfield	May, 1904	21·186	27·75	4 8½	99 G	9	27½	59	8	..	Turb.	1,000	Dick, Kerr, & Co.
Stockport Corporation	Aug., 1901	16	27·62	4 8½	96 G	10·8	35	50	*5	5	Cp.	1,000	Dick, Kerr, & Co.
Sunderland Corporation	Aug., 1900	10·92	20·35	4 8½	96 G	12	36	70	*	..	..	936	Dick, Kerr, & Co.
Sunderland District Electric Trys.	June, 1905	14·27	15·97	4 8½	90 G	11	40	33	*	..	..	..	British T-H.
Sutton & Howth (G.N.R., Ireland)	June, 1901	5·3	6	5 3	72 B	16·7	300	11	3	3	V.Cp.	500	British T-H. / Westinghouse
Swansea Tramways Company ..	June, 1900	13·02	20·38	4 8½	84 & 86 G	14	45	75	3	3	H. Cp. C.	620	British T-H.
Swindon Corporation	Sept., 1904	3·7	4·4	3 6	105 G	14	37	12	5	4	..	600	Dick, Kerr & Co.
Taunton Electric Traction Co.	Aug., 1901	1·66	2	3 6	90 G	25	35	6	*	..	..	..	Blackwell & Co.
Torquay Tramways	April, 1907	9·76	17·04	3 6	90 G	10	31	33	*	..	..	..	British T-H.
Trafford Park Estates, Ltd. (Trys.)	July, 1903	2·5	2·75	4 8½	100 G	Nil	35	..	..	..	..	..	
Tynemouth and District	March, 1901	4·21	7·83	3 6	90 G	10	30	21	*3	3	..	..	Blackwell & B.T-H.
Tyneside Tramways & Tramroads Co.	Sept., 1902	10·97	16·23	4 8½	95 G	10	40	24	*				
Wallasey Corporation	March, 1902	12	20	4 8½	98 G	11	40	67	*1	1	Turbine	1,000	Blackwell & Co.
Walsall Corporation	Jan., 1904	13·5	19·5	3 6	90 & 92 G	18·5	32	39	*7	7	V. & Tur.	2,490	British T-H.
Walthamstow U.D.C. Light Rly...	June, 1905	9·14	12·53	4 8½	100 G	18	40	38	*15	12	(Gas & Turb's)	1,560	Westinghouse
Walton-on-Naze Pier	Aug., 1898	·5	·5	3 6	36 V	..	..	3	3	2	..	100	Blackwell & Co.
Warrington Corporation	April, 1902	6·5	9·6	4 8½	90 G	27	50	21	*6	6	V.C.	500	British T-H.
Wemyss and District	Aug., 1906	7·5	13	3 6	95 & 97 G	18	85	17	3	3	2 V.Cp.	..	BrucePeebles&Co
West Bromwich Corporation ..	Dec., 1902	7	12·5	3 6	98 G	20	49	29	8	8	Turb'nes	750	Dick, Kerr, & Co. / B. I. W. Co.
West Ham Corporation	Feb., 1904	16·8	30·0	4 8½	100 G	18	40	118	*3	3	V.C.Cp.	1,500	Brush & B.T-H.
West Hartlepool Corporation ..	May, 1896	6·72	8.3	3 6	87 & 90 G	15	35	25	*	..	..	..	Elec. Cons. Co. / Dick Kerr & Co.
Weston-super-Mare	May, 1902	2·92	3·53	4 8½	90 G	25	40	12	5	4	Cp. & T.	..	Blackwell & Co. / British T-H. / Brush Co.
Wigan Corporation	Jan., 1901	30·9	45·42	3 6 / 4 8½	105 G	12	45	73	*8	8	..	740	Blackwell & Co.
Wolverhampton Corporation (3) ..	April, 1902	13·5	22	3 6	91 G	15	37·5	52	*10	10	(H.&V.C. & Turb's)	2,900	British T-H. / Electric Cons. Co.
Wolverhampton District	Oct., 1900	15·51	22·72	3 6	90 G	20	40	30	*4	..	..	..	B.I.W. & B.T-H. / Westinghouse
Worcester Electric Traction Co. ..	Feb., 1904	5·86	8·58	3 6	94 G	13	45	15	*3	3	..	..	Brush Co. / Dick, Kerr, & Co.
Wrexham and District	April, 1903	4·44	6·16	3 6	96 G	9·11	50	10	*6	..	..	..	British T-H.
Yarmouth Corporation	June, 1902	10	14·4	3 6	90 & 95 G	27	48	35	3	3	Comp.	..	Brush Co. / B.I.W. Co.
York Corporation	Jan., 1910	6	9·9	3 6	100	18	40	3 M. 4 T.	*8	8	V.C.	..	Dick, Kerr, & Co. / Brush & B.T-H.
Yorkshire (West Riding)	Aug., 1904	24·69	40·382	4 8½	96 G	15·5	40	69	9	6	..	1,800	Dick Kerr & Co.
Yorkshire Woollen District ..	Feb., 1903	22·25	36	4 8½	94 & 100 G	8	30	69	*	..	..	..	Brush Co. / Dick, Kerr, & Co.
RAILWAYS.													
LONDON AND VICINITY:													
Central London Rly. Co. (1) ..	July, 1900	6·5	13	4 8½	100 V	30	..	68 M. 172 T.	6	6	H. Cp. C.	..	British T-H
City & South London Rly. Co. (1	Dec., 1890	7·25	14·75	4 8½	60 V / 80 V	30	120	52 L. 142 T.	(a)	..	..	..	Mather & Platt. / Elec. Cons. Co / British T-H.
East London Railway (2) ..	April, 1913	5·75	11·5	4 8½	90 B	..	..	(c)	..	..	..	..	
Gt. Northern & City Rly. Co. (2)	Feb., 1904	3·5	7·75	4 8½	85 V	52	660	35 M 45 T	6	..	..	..	British T-H.
Great Western Railway .. (Hammersmith and City line.)	Nov., 1906	4·9	10·5	4 8½	97½ B	60	400	40 M. 80 T	10	10	V.Cp.	..	British T-H. / Elec. Con. Co.
London & North Western Rly. (Euston-Watford line in progress) (2)	May, 1914	41·5	80	4 8½	..	..	..	..	..	..	Turbine	..	Siemens Works / Westinghouse
London & South Western Rly.	Nov., 1915	47	150	4 8½	..	..	168	84	..	..	Turbine	..	Dick, Kerr & Co. / British T-H.
London, Brighton, and South Coast Railway (4) .. .. (Extensions in progress)	Dec., 1909	22	70	4 8½	..	..	..	16 M. 8 T.	*(d)	..	..	..	Westinghouse / British T-H. / Blackwell & Co.
London Electric Railway Co.: Baker St. & Waterloo Ry. (2)	March, 1906	7	14·0	4 8½	90 B	60	330	86 M. 72 T.	(a)	..	..	..	Westinghouse / British T-H.
Charing Cross—Hampstead Railway (2)	June, 1907	8	16·5	4 8½	90 B	33	330	60 M. 90 T.	(a)	..	..	..	Westinghouse / British T-H.
Great Northern, Piccadilly & Brompton Rly. (2)	Dec., 1906	9·25	18·5	4 8½	90 B	33	330	72 M. 144 T.	(a)	..	..	..	Westinghouse / British T-H.
Metropolitan Railway (2) ..	Jan., 1905	26	59	4 8½	86 B	44	363	86 M. 172 T.	4	4	Turbine	..	Westinghouse / British T-H.
Metropolitan District Railway (and running powers) (2)	July, 1905	41	80·46	4 8½	86 B	40	330	284 M. 236 T.	(a)	..	Turbine	..	British T-H. / Westinghouse
Waterloo and City Rly. (1) ..	Aug., 1898	1·5	3	4 8½	87 B	30	321	17 M. 12 T.	6	6	V. C.	..	Siemens Bros. / Dick, Kerr & Co.
PROVINCES:													
Lancashire and Yorkshire (2) .. (Extensions in progress)	March, 1904	43	85	4 8½	86 B	85	840	88 M. 52 T.	6	5	1 V.C. 4 H.C.	..	Dick, Kerr, & Co.
Liverpool Overhead Rly. Co. (1)	March, 1893	6·5	13·05	4 8½	60 V	40	429	46 M 7 T	7	7	H.Cp. V.Cp.	..	Electric Cons. Co. / Dick, Kerr, & Co.
Mersey Railway (1)	April, 1903	4·5	9	4 8½	86 B	27	528	34 M. 87 T.	5	5	V.Cp.	..	Westinghouse
Midland Rly.—Morecambe and Heysham Branch (4)	June, 1908	9·75	19·5	4 8½	..	..	..	3 M. 6 T.	4	4	Gas.	..	Westinghouse / Siemens Bros.
North Eastern Railway (1) ..	March, 1904	..	..	4 8½	90 B	..	..	..	(b)	..	..	..	British T-H. Co.

*Power from combined lighting and power station. (1) Third rail system. (2) Third and fourth rails system. (3) Lorain surface contact system. (4) Single phase. (5) Not including 9 miles owned but leased. (a) Power supplied by Chelsea Power Station (80,000 H.P.) (b) Power purchased from the Newcastle-upon-Tyne Electric Supply Company, Limited. (c) Rolling stock supplied by Metropolitan Railway. (d) Power supplied by London Electric Supply Corporation.
M—Motor Cars. T—Trail Cars.

Digitized by Google

H.C. Copper Trolley Wire

Round, Grooved, or Channel Sections.

Overhead Fittings.

We have in hand orders - - for the - - overhead equipment of 500 MILES of Railway.

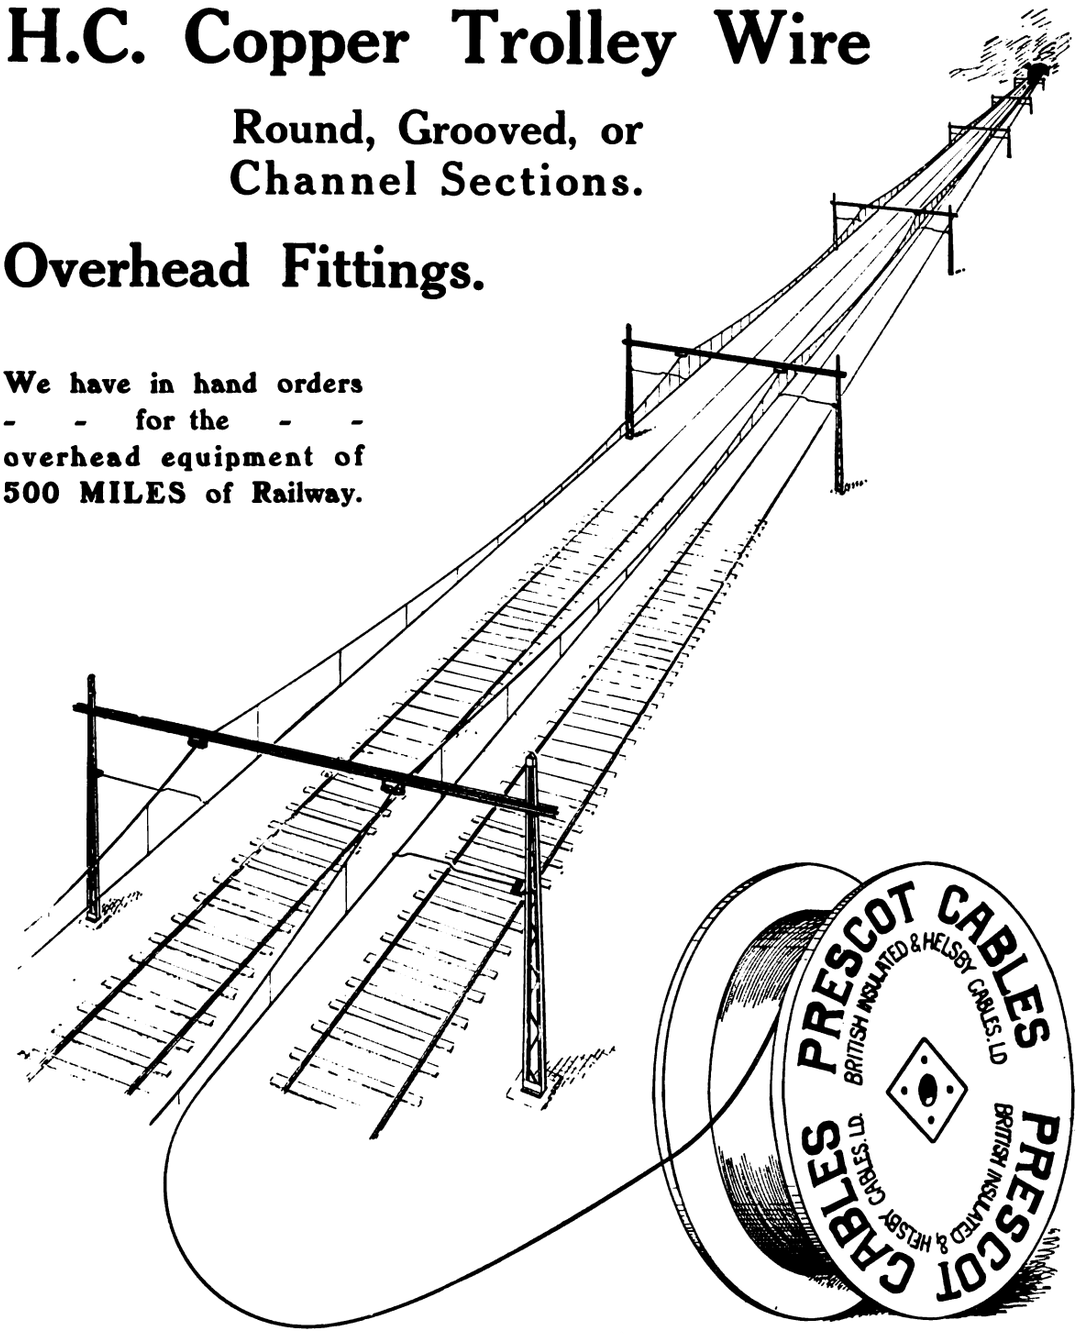

British Insulated & Helsby Cables Ltd.

CABLEMAKERS AND ENGINEERS

Contractors for the overhead equipment of Railways & Tramways.

Head Office: PRESCOT, LANCASHIRE, ENGLAND.
Works: PRESCOT and HELSBY.

Digitized by Google

R.E.T.

RAILLESS ELECTRIC TRACTION for passengers and freight.

Rubber Tyres. No Rails.

Also Battery Driven Vehicles and MOTOR LORRIES of all kinds.

The R.E.T. CONSTRUCTION CO. LTD.
Balm Road, Hunslet, LEEDS

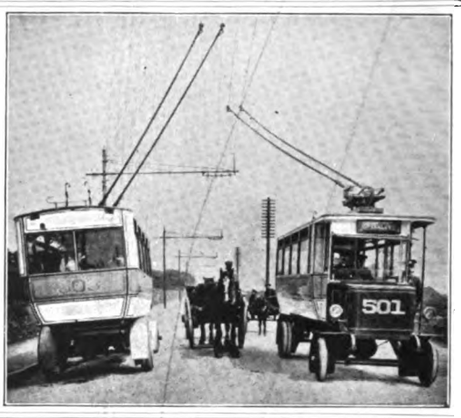

TRACTION SUPPLIES

SECTION INSULATORS
FROGS & CROSSINGS

Q-FEL

IN STOCK
At Pre-War Prices.

GEO. W. GREEN & CO., (FELTHAM) LTD.

Q-FEL WORKS,
FELTHAM, MIDDLESEX.
Tel.: "CUFEL, FELTHAM."

FREDERICK SMITH AND COMPANY,

WIRE MANUFACTURERS
(Incorporated in the LONDON ELECTRIC WIRE CO. and SMITHS, Ltd.),
Contractors to British and Foreign Governments and Railway Companies.
Telegraphic Address: "ANACONDA, MANCHESTER."

COPPER WIRE

100 Per Cent. Conductivity.
ALL SIZES TO ·001.

Hard Drawn H.C. Copper Line Wire; Special Tinned Wire.

COPPER TROLLEY WIRE

Specially Prepared and Tested; Half-Mile and Mile Lengths.

BRONZE TROLLEY WIRE

HIGH STRAIN. Unequalled for Durability Combined with Conductivity.

SILICIUM BRONZE WIRE

("COG WHEEL BRAND"), C QUALITY, for TELEPHONE LINES, &c.

PHOSPHOR BRONZE SPRING WIRE.
ALUMINIUM WIRE AND STRIP FOR ALL ELECTRICAL PURPOSES.

Anaconda Works, Salford, MANCHESTER.

Digitized by Google

The United Electric Car Co. Ltd.

Telegrams "Prescar, Preston." **WORKS: PRESTON, ENGLAND** Telephone No. — 219. —

MANUFACTURERS of Carbodies and Trucks for Steam and Electric Railways, Street Tramways and Light Railways; also of bodies for Motor Buses, Petrol Rail Motor Cars and Railless Electric Traction Cars.

SPECIALITIES: Preston Flexible Axle Truck, Preston Patent Destination Indicator, "Triumph" Reversible Seat, "Leatheroid," "Duroid," and Cotton Duck Blinds.

SPARE PARTS for both Carbodies and Trucks supplied.

HOW TO CROSS LONDON

BY UNDERGROUND

ROUTES

FROM / TO	EUSTON	(ST. PANCRAS) KING'S CROSS	PADDINGTON
WATERLOO	By Hampstead Rly. changing at Charing Cross to Bakerloo Rly. Fare 2d.	By Piccadilly Rly. changing at Piccadilly Circus to Bakerloo Rly. Fare 2d.	By Bakerloo Rly. (direct). Fare 2½d.
CHARING CROSS	By Hampstead Rly. (direct). Fare 1½d.	By Piccadilly Rly. changing at Leicester Square to Hampstead Rly. Fare 2d.	By Bakerloo Rly. (direct). Fare 2d.
VICTORIA	By Hampstead Rly changing at Charing Cross to District Rly. Fare 2½d.	By Piccadilly Rly. changing at Leicester Square and Charing Cross. Fare 3d.	By Bakerloo Rly. changing at Charing Cross to District Rly. Fare 3d.

EXAMPLE.—From Paddington to Charing Cross.—The square in the column headed Paddington and opposite Charing Cross contains the necessary directions.

Electric Railway House,
Broadway Westminster, S.W.

Digitized by Google

MACINTOSH
CABLES

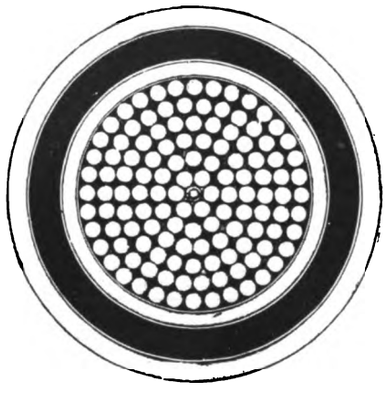

Section of positive feeder cable now being supplied and installed for the London and South Western Railway suburban electrification.

CHAS. MACINTOSH & CO., LTD.,

Electrical Engineers & Cable Manufacturers.

Works:
MANCHESTER,
DERBY,
LIVERPOOL.

London Office:
22-23, JEWIN STREET,
E.C.

Digitized by Google

THE Tramway & Railway World
WITH MOTOR TRAFFIC SECTION

Founded 1892. LONDON, SEPTEMBER 14, 1916. VOL. XL.

ELECTRIFICATION OF THE CHICAGO, MILWAUKEE AND ST. PAUL RAILWAY.

HIGH-TENSION DIRECT-CURRENT INSTALLATION OF UNPRECEDENTED MAGNITUDE.

In our issues of February 11 and December 9, 1915, some account was given of the work of converting to electric traction the mountain section of the Chicago, Milwaukee, and St. Paul Railway. This great undertaking is now well advanced, and we are enabled through the courtesy of the General Electric Company to give further particulars. With these are here incorporated some of the facts contained in our previous articles, so that the present description may be as far as practicable complete in itself. This scheme of steam railway electrification is the greatest which has yet been undertaken, and it presents a notable advance in the application of the high-tension direct-current method of traction.

Goods Trains drawn by Electric Locomotives at the Entrance to Silver Bow Canyon.

The Chicago, Milwaukee and St. Paul Railway extends from Chicago westwards across the plains, then over the Rocky Mountains, and on to the Pacific Coast at Tacoma and Seattle. The company work about 10,000 miles of track in all. The section chosen for electrification is the 440-mile stretch of the main line over three successive ranges of mountains, first the Belt Mountains, then the Rocky Mountains proper, and third and westernmost the Bitter Root Mountains. As will be seen from the accompanying profile and maps, the electric zone starts from Harlowton, 4,163 ft. above sea level. The line rises to 5,789 ft. on the Belt Mountains, passes the summit in a tunnel, drops to 4,000 ft., ascends again to 6,352 ft. at the Rockies' summit in a tunnel, then, after a long descent, to 2,700 ft., rises to 4,169 ft. in crossing the Bitter Root Mountains.

The construction of the tracks through such a country was one of the most difficult problems which

Digitized by Google

have ever confronted railway engineers. Out of this section, including many long grades and short radius curves, four steam engine divisions were selected for electrification, aggregating 440 miles in length. Steam engines were first abandoned on the Three Forks and Deer Lodge Division, 115 miles long, and crossing the main Continental Divide, thus giving the electrical equipment its initial trial under the severest conditions

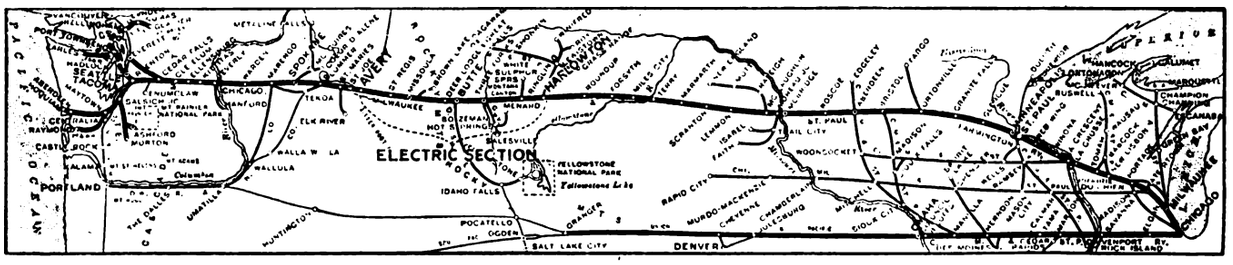

Outline Map of Chicago, Milwaukee and St. Paul Railway, showing Situation of Electric Section.

of the entire system. The first electric locomotives were placed in regular service on December 9, 1915, and during the month of April, 1916, service was extended to Harlowton, making a total of 220 miles of electrically operated road. By November 1, 1916, it is expected that steam engines will be superseded

from Boston to Washington, or in this country from London to Perth.

In crossing the three mountain ranges included in the electric zone, there are several grades of 1 per cent. or more, the most difficult of which is the 21-mile 2 per cent. grade between Piedmont and Donald, and the longest the 40-mile 1 per cent. grade on the west slope of the Belt Mountains. The curves are necessarily severe, the radius of the sharpest being 574 ft. There are 36 tunnels in the electric zone, of which the longest is the St. Paul Pass tunnel, a mile and a half long, through the ridge of the Bitter Root Mountains.

The order for the electrification of the line (which involves 650 miles of single track), including the supply

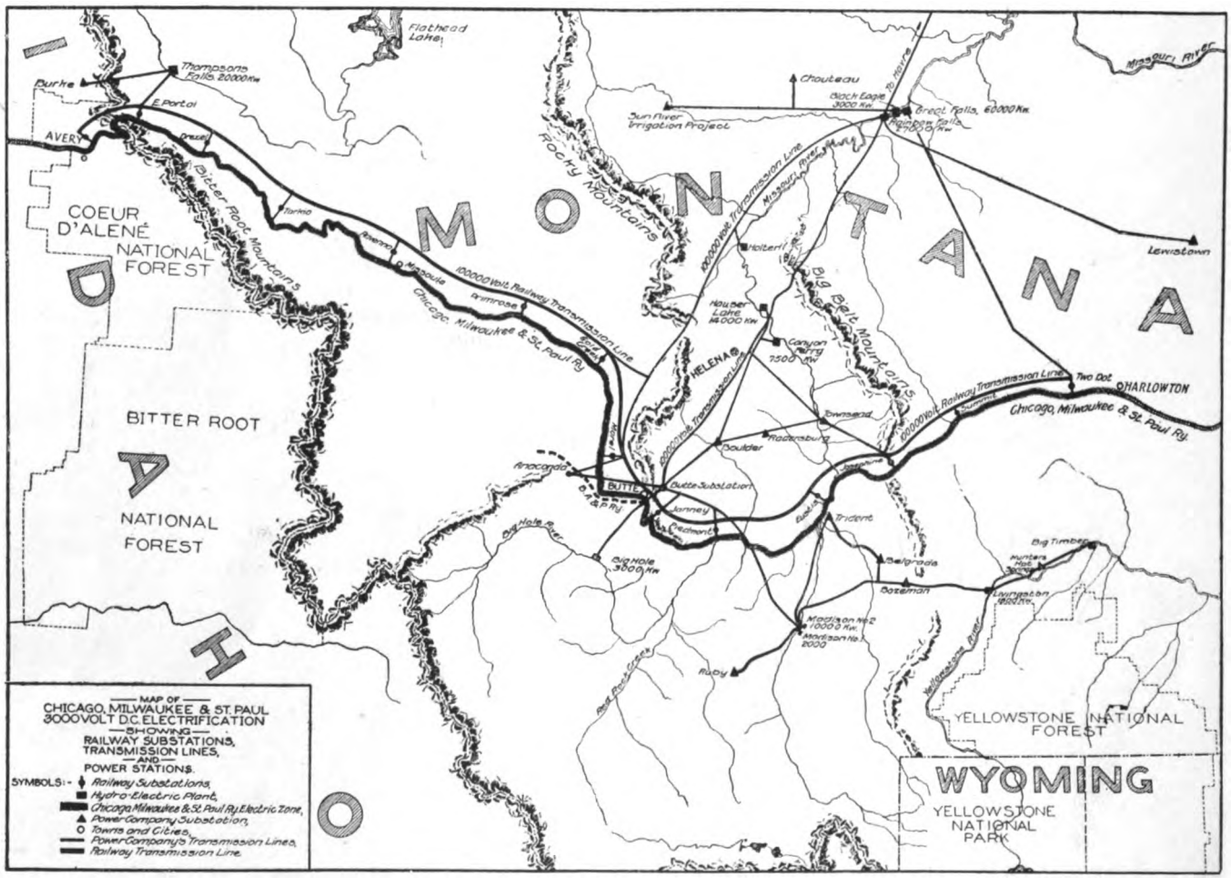

Map of Electric Section, Harlowton to Avery, in Mountain District Chicago, Milwaukee and St. Paul Railway.

over the entire distance of 440 miles from Harlowton, Montana, to Avery, Idaho.

This project is the most extensive steam railway electrification in the world, the length of haul being nearly six times as great as any trunk line now operating with electric locomotives. The length of track between Harlowton, Montana, and Avery, Idaho, is approximately equal to that from New York to Buffalo, or

of locomotives, was given to the General Electric Company, of Schenectady and New York, in September, 1914, and the original expectation was that the work would be completed by the beginning of 1918. So rapid has been the progress, however, that, as noted above, it is now anticipated that electric traction will be in use over the whole 440-mile stretch by November next.

Digitized by Google

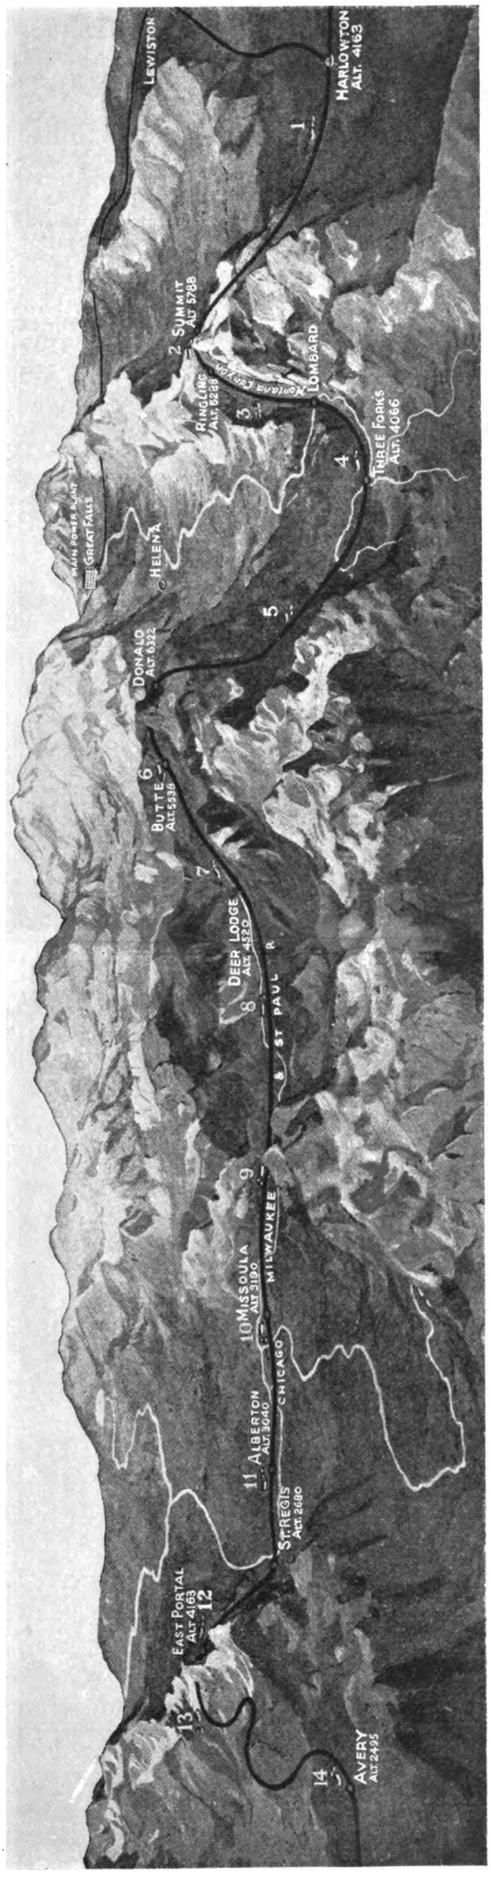

Relief Map of Electrified Mountain Section of Chicago, Milwaukee and St. Paul Railway.

[Showing Situation and Altitude and Main Power Station and Sub-stations.]

Electrical Operation.

The passenger service consists of two all-steel finely equipped transcontinental trains in each direction, the "Olympian" and "Columbian," and a local passenger train in each direction daily between Deer Lodge and Harlowton. Freight traffic through the electric zone comprises from four to six trains daily in each direction. Westbound, the tonnage is made up of manufactured products and merchandise for Pacific Coast points and foreign shipment. Eastbound tonnage includes grain, lumber, products of the mines and some live stock.

As a larger part of the traffic is through goods, trains are made up of an assortment of cars of various railroads, including box and flat cars, coal and ore hoppers, stock cars, refrigerators, etc., varying in weight from 11 to 25 tons empty and as high as 70 tons loaded, These cars being owned by many different railway systems are equipped with air brakes adjusted for different conditions of operation, and in accordance with different standards as to braking power and type of equipment, thus making the problem of holding the long trains on the heavy down grades by air brakes a most difficult one. It is here that the regenerative control is of so much value.

Electrification promises a material reduction in running time. It has been found, for example, that on the 21 mile 2 per cent. grade from Piedmont to Donald, the electric locomotive can reduce the running time of passenger trains from an hour and five minutes to approximately 40 minutes. On the run from Deer Lodge to Butte which, under the steam locomotive schedule, required an hour and 20 minutes, a saving of approximately 30 minutes can be made.

In the goods service it has been found that on the first division, where the steam locomotives required 10 to 12 hours to make 115 miles, electric locomotives can meet a schedule of from seven to eight hours for the same distance. The heavy grades and frequent curves at certain points offer serious obstacles to steam locomotive operation even in the summer time, but with winter temperatures and heavy snow falls in the Bitter Root Mountains, serious delays have occurred, owing to engine failures or to inability to make steam. The capabilities of the electric locomotives are in no way impaired by cold weather or by inability to obtain fuel or water in case of snow blockades. During a series of record-breaking temperatures in December, 1915, Mallet engines were frozen up at different points on the system and the new electric equipment was rapidly pressed into service to replace them. On several occasions electric locomotives hauled in disabled steam engines and trains which would otherwise have tied up the line.

During initial operation on the Rocky Mountain division, the capacity of the new locomotives has been thoroughly tested. Trains of 3,000-tons trailing have been hauled east and 2,800 tons west, using a helper on the heavy grades. From the operating data obtained on the first division, it is evident that much heavier trains can be hauled with the electric locomotives than with steam engines, and all passing tracks are being lengthened to take advantage of longer trains. On some of the runs where the grades are less than 1 per cent., trains of as many as 130 cars and as heavy as 4,000 tons have been hauled with a single locomotive.

The four through passenger trains, "Olympian" and "Columbian," are taken across the two mountain ranges by a single passenger locomotive. These trains at present consist of eight vestibuled steel coaches, weighing approximately 650 tons. Instead of changing locomotives at Three Forks, as has been the practice under steam operation, the same locomotive is run through the 220 miles from Deer Lodge to Harlowton,

Digitized by Google

changing crews midway. Passenger trains will travel over the entire electrified division in approximately 15 hours, including all stops, and the tourist will thus have an opportunity of traversing by daylight some of the most beautiful scenic regions in the United States, and without suffering the annoyance of cinders and smoke incident to the use of steam locomotives. The local passenger train operating in the electric zone between Deer Lodge and Harlowton is drawn by a half unit weighing about 150 tons.

The Power Supply.

The most careful precautions were taken by the railway company in making plans for this electrification to insure a reliable source of power. The Montana Power Company, with whom a contract was arranged for the supply of electric power, has a network of transmission lines covering a large part of Montana, which are fed from a main station at Great Falls, and a number of other widely-separated water power-stations that have an adequate capacity at all seasons of the year. A notable feature of this pioneer electrification is therefore the conservation of fuel consequent upon the utilisation of water powers. The railway company pay to the power company only 1·3 farthings (·325d.) per kilowatt-hour of energy purchased. The economy is such that it is hoped that the saving as compared with steam locomotives will be sufficient to pay a handsome return on the cost of conversion, which is put at £2,400,000. In addition there will be the other economies associated with heavy electric traction, and there is the ability to haul much heavier trains than can be drawn by steam locomotives.

The Montana Power Company have such a series of generating stations, nearly all of them depending on water power—abundant among the mountains—that it is of interest to set out a list, giving the capacity of the apparatus installed at each station :—

Completed Hydro-Electric Plants.	Capacity. KW.
Great Falls, on Missouri River	60,000
Rainbow Falls, on Missouri River near Great Falls (completed in 1910)	27,000
Black Eagle Falls, on Missouri River near Great Falls (reconstructed in 1913)	3,000
Black Eagle Falls, hydraulic power, 8,000 h.p.	—
Hauser Lake, on Missouri River, north-east of Helena (completed in 1911)	18,000
Canyon Ferry, on Missouri River, north-east of Helena (completed in 1898 and enlarged in 1901)	7,500
Madison No. 1, on Madison River, 60 miles south-east of Butte (completed in 1901 and re-modelled in 1907)	2,000
Madison No. 2, on Madison River, 60 miles south-east of Butte (completed in 1906)	10,000
Big Hole, on Big Hole River, 22 miles south-west of Butte (completed in 1898)	3,000
Livingston, on Yellowstone River (completed in 1906 and enlarged in 1908)	1,500
Billings No. 1, on Yellowstone River (completed in 1907)	1,080
Lewistown, on Spring Creek (completed in 1906 and re-modelled in 1913)	450
Thompson Falls, on Clark's Fork of Columbia River ...	20,000
Total of present capacity of 12 stations	153,530

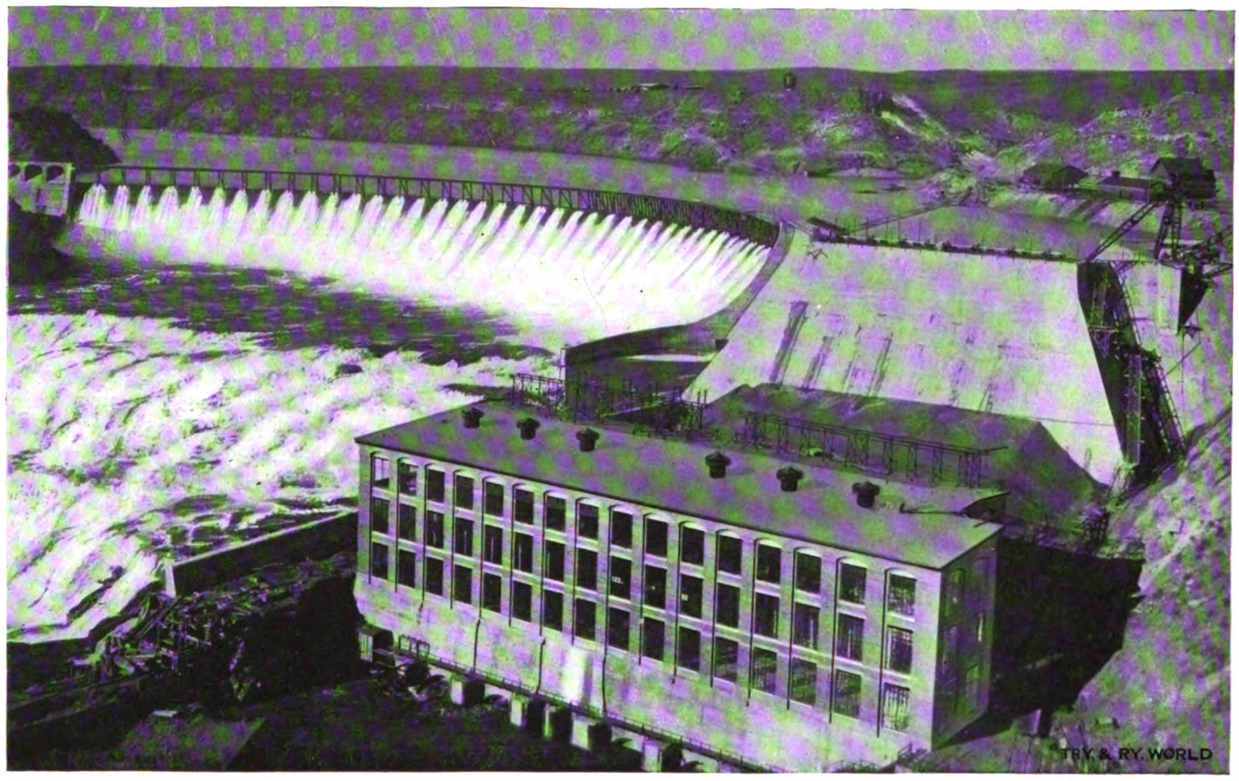

Hydro-Electric Power Station at Great Falls on the Missouri River.

Steam Plants.		
Butte (completed in 1907)	5,000	
Billings (completed in 1906)	560	
Conrad (completed in 1910)	110	
Phœnix, in Butte (completed in 1895)	250	
	—	5,920
Total		159,450

Hydro-Electric Powers in Course of Development and Definitely Projected.	Capacity KW.
Thompson Falls, on Clark's Fork of Columbia River* ...	10,000
Holter, on Missouri River near Helena (under construction, to be completed in 1917)	40,000
Total	50,000

* Additional units to be installed in 1917.

Digitized by Google

HYDRO-ELECTRIC POWER SITES UNDEVELOPED.

Site "C" at Great Falls, on Missouri River, between Rainbow and Great Falls	28,500
Below Great Falls, on Missouri River	28,500
On Missouri River about 30 miles north-west of Missoula	13,500
Madison No. 3, on Madison River	18,500
Black Eagle Plant, reconstruction	10,000
Snake River Falls, on Henry's Fork of Snake River, 20 miles north of St. Anthony, Idaho	22,500
Total	121,500

SUMMARY.

Completed hydro-electric and steam plants	159,450
Hydro-electric powers in course of development ...	50,000
Hydro-electric power sites undeveloped	121,500
Total	330,950

SUMMARY OF TRANSMISSION LINES IN SERVICE, JANUARY 1, 1916.

Steel tower lines, 100,000 volts	305 miles
Steel tower lines, 50,000 volts	35 miles
Pole lines, pin type, 11,000 to 60,000 volts ...	635 miles
Pole lines, suspension insulator type, 50,000 to 100,000	312 miles
Bridge type, 100,000 volts	341 miles
Total	1,828 miles

current at 3,000 volts pressure. It is then distributed by catenary overhead construction from which it is collected by the locomotives. This is the highest working pressure for direct current yet used on commercial traction work.

Fourteen sub-stations are equipped for converting the 100,000-volt alternating-current to 3,000 volts direct-current. They are distributed along the route at average intervals of 32 miles. Each station contains step-down transformers, motor-generator sets, switchboard, and the necessary controlling and switching equipment. The transformers receive the line current at 100,000 volts, and supply the synchronous motors at 2,300 volts. Each synchronous motor drives two 1,500-volt, direct-current generators connected permanently in series, thus supplying 3,000-volt current for the locomotives. The fields of both the synchronous motors and the direct-current generators are separately excited by small direct-current generators direct-connected to each end of the motor-generator shafts.

The following table gives a list of the sub-stations, the distance of each from Harlowton, the number and size of the units, and the total capacity of each sub-station. It will be noted that the unusual interval of 32 miles is only rendered possible by the high pressure of 3,000 volts.

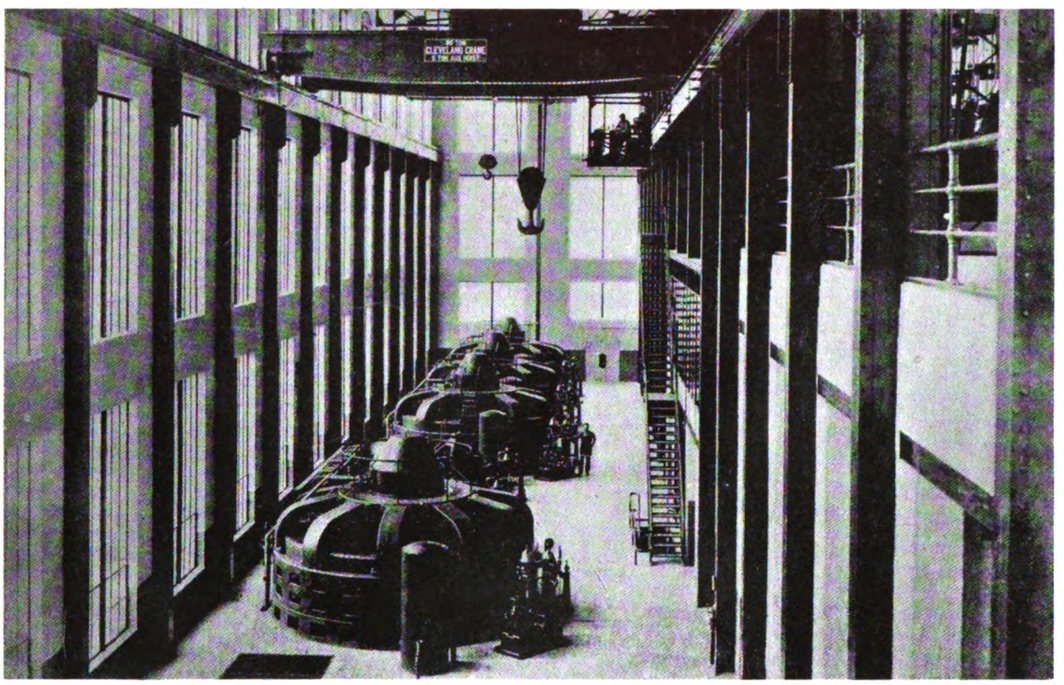

Four 10,000 kva. Water-wheel Driven Generators in Great Falls Power Station

The available capacity of the storage reservoirs in service is 447,150 acre feet, of which the largest, the Hebgen reservoir on Madison River, contributes 325,000 acre feet. There is a further undeveloped capacity of 78,500 acre feet.

The Montana Power Company's transmission lines, which are carried in some cases on steel towers and in others on wooden poles, tap into the railway system at seven different points where the power is most needed. The railway company's transmission line extends the entire length of the system on wood poles. In most cases this line is built on the company's right of way, although at several points there are cut-offs which make a considerable saving in the length of line. With this completely inter-connected transmission system, each sub-station may be fed from either direction, and also at the tie-in points from a third source of power.

The power is transmitted in the form of three-phase alternating current at 100,000 volts and 60 cycles per second, and is converted at the sub-stations to direct

LOCATION AND EQUIPMENT OF THE FOURTEEN SUB-STATIONS.

Sub-Station.	Miles from Harlowton.	No. and Size of Units in KW.	Capacity in KW.
Two Dot ...	12	2–2,000	4,000
Summit ...	45·6	2–2,000	4,000
Josephine ...	75·8	2–2,000	4,000
Eustis	105·8	2–2,000	4,000
Piedmont ...	148·5	3–1,500	4,500
Janney ...	175·9	3–1,500	4,500
Morel	209·3	2–2,000	4,000
Gold Creek ...	244·9	2–2,000	4,000
Ravenna ...	277·6	2–2,000	4,000
Primrose ...	315·4	2–2,000	4,000
Tarkio	352·0	2–2,000	4,000
Drexel	390·1	2–2,000	4,000
East Portal ...	413·9	3–2,000	6,000
Avery	437·6	3–1,500	4,500
		32	59,500

Digitized by Google

Each of the motor-generator sets consists of a 60-cycle, three-phase, 2,300-volt synchronous motor direct-connected to two 1,500-volt generators. The latter are connected permanently in series to supply direct current at 3,000 volts to the trolley wires. Each set is provided with an exciter at each end, one providing excitation for the revolving field of the motor, and the other supplying the separately excited fields of the d.-c. machines. Longitudinal ventilation of the core and field coils is provided, and this has effected a considerable reduction in the floor space required per kilowatt. The generators have commutating poles and compensated pole-face windings to ensure sparkless commutation under heavy overloads. This overload capacity is 150 per cent. for two hours, and 300 per cent. for five minutes. Thus the necessary margin is provided for starting a train of maximum tonnage on the most difficult gradients. As the scheme provides for power regeneration, the motor-generator sets are designed to operate inverted in case the regenerated power exceeds that required by other trains working near by. The excess energy is transmitted to the 100,000-volt system.

The main direct-current switchboard in each sub-station represents the latest practice in high-voltage direct-current switching apparatus. A panel is provided for each set, and two panels are provided for feeders in each direction. The circuit breakers and switches are mounted on separate panels, situated above and a short distance behind the main panels. The control handles for operating the breakers and switches are on the main panels, and are connected to the circuit-breaker panels through insulated wooden rods. Switchboards are also furnished for the synchronous motors and auxiliary circuits. Oil switches and other standard 100,000-volt equipment are installed for the high-tension circuits.

There are twenty-three 2,500-KVA., and nine 1,000-KVA. transformers in the various sub-stations. They are of the three-phase core type, with a ratio of voltages of 102,000 to 2,300. For regulating purposes taps are provided for 97,200 and 94,200 volts. Taps are also brought out on the secondary windings to give 1,150 volts for starting the motor-generator sets. The transformers are oil cooled, and the tanks are of the

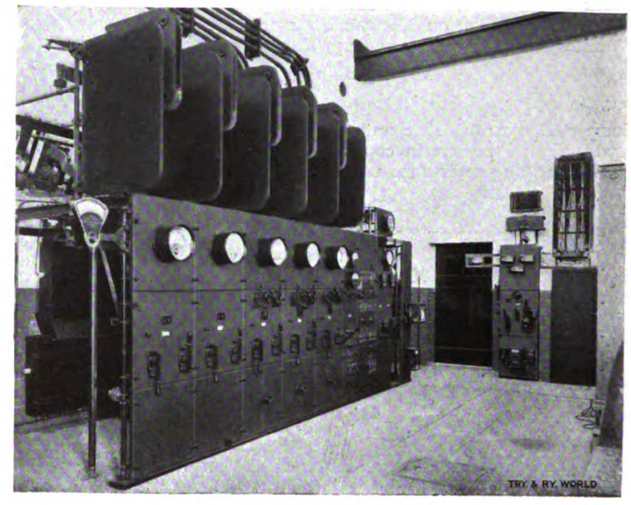

Switchboard in Sub-station.

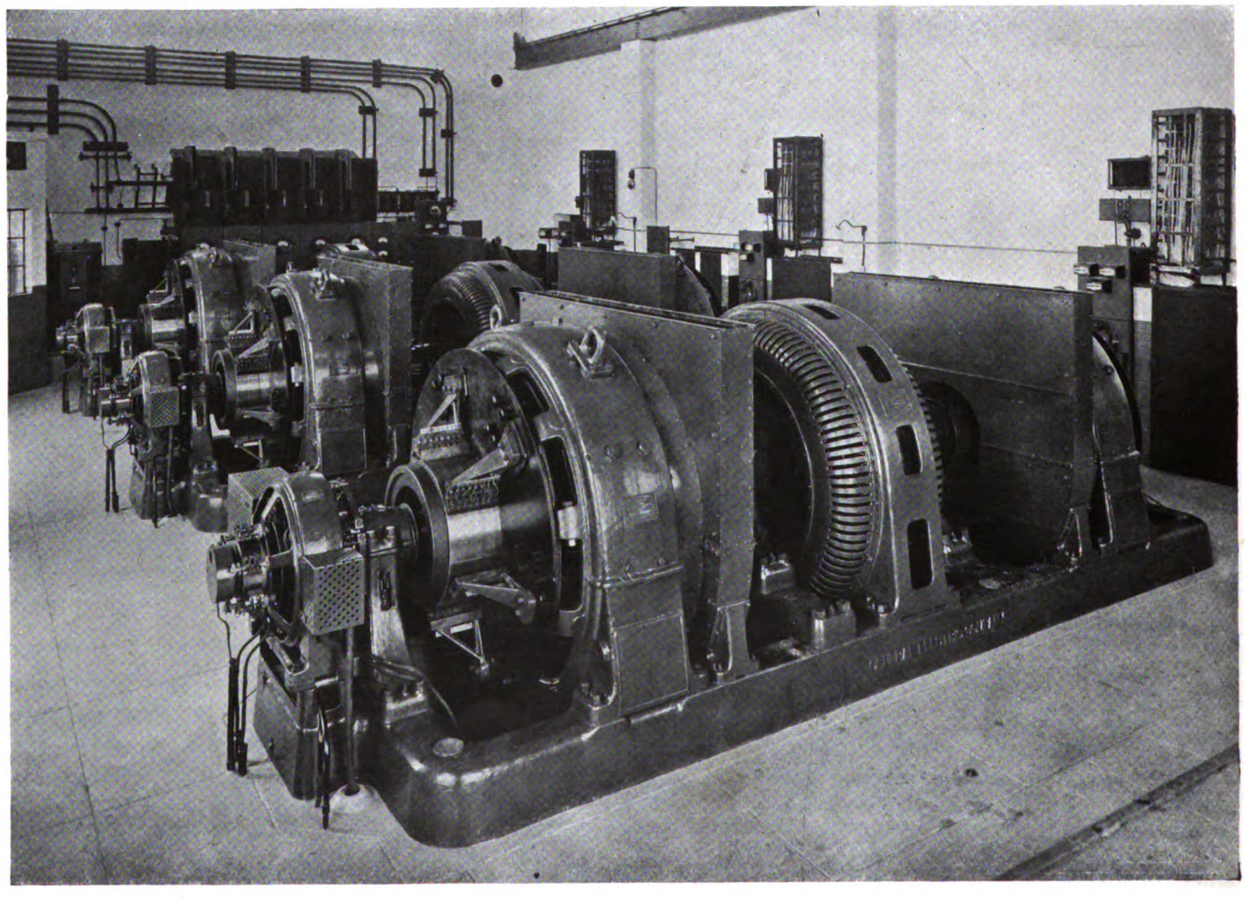

Motor Generators in Piedmont Sub-station.

Digitized by Google

tubular type, the main body consisting of steel plate with tubes welded to the side of the tank at the top and bottom, giving absolutely oil-tight joints. An air dryer and breather is attached to the tank, so that

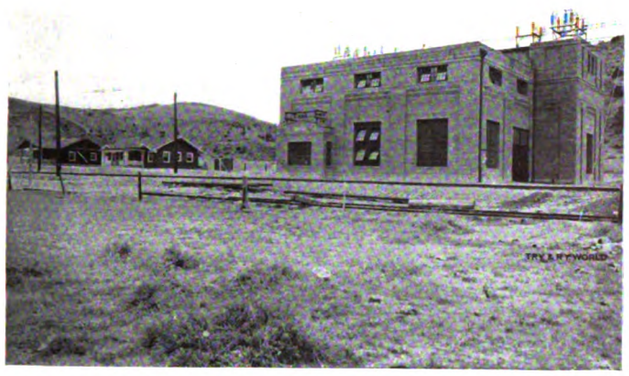

Eustis Sub-station and Bungalows of Operating Staff.

all interchange of air between the interior and the outside must take place through this channel. The dryer is provided with chambers containing a moisture-extracting medium, thereby preventing the entrance of moisture to the tank.

Each sub-station is also furnished with a 10-KW. three-phase transformer, stepping down from 2,300 to 110 volts for lighting and auxiliary power circuits. For operating the railway signal circuits a 25-KW. single-phase transformer is installed in each sub-station, stepping up from 2,300 to 4,400 volts.

The Overhead Construction.

The outgoing 3,000 volt current from the sub-stations is tapped into a feeder of 500,000 circular mils cross

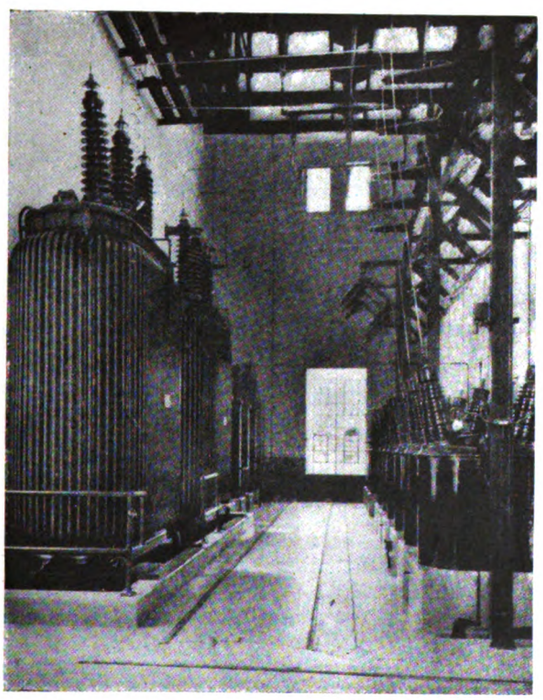

Transformer Room at Piedmont Sub-station.

section, which extends over the entire length of the electrification. On the heavy gradients there is a supplementary feeder. The main feeder is tapped to the trolley wire at every seventh pole, or approximately every 1,000 ft. On the top of the poles is carried a supplementary 4/0 negative feeder, which is tapped to the middle point of every second reactance bond. These bonds are used for insulating the 60-cycle signal circuits, and are installed at points from 5,000 to 6,000 ft. apart.

Except in yards, where the number of tracks to be spanned exceeds the possibilities of wood pole construction, and where accordingly steel supports are employed, wood poles are used throughout. Bracket construction is adopted wherever track alignment will permit, while on the sharper curves and in yards the cross-span method is used. As the result of investigation and experiment a novel flexible catenary system of wiring, designed by the General Electric Company and installed under the direction of the railway company's engineers, has been adopted. With this construction the current is collected both by high-speed passenger locomotives and by heavy freight locomotives without any sparking.

Instead of one wire, two trolley wires are employed. These twin 4/0 copper wires are flexibly suspended side by side from the same catenary by independent hangers alternately connected to each trolley wire. The hangers of one trolley wire are placed at points mid-span of the other. In the shunting yards only one

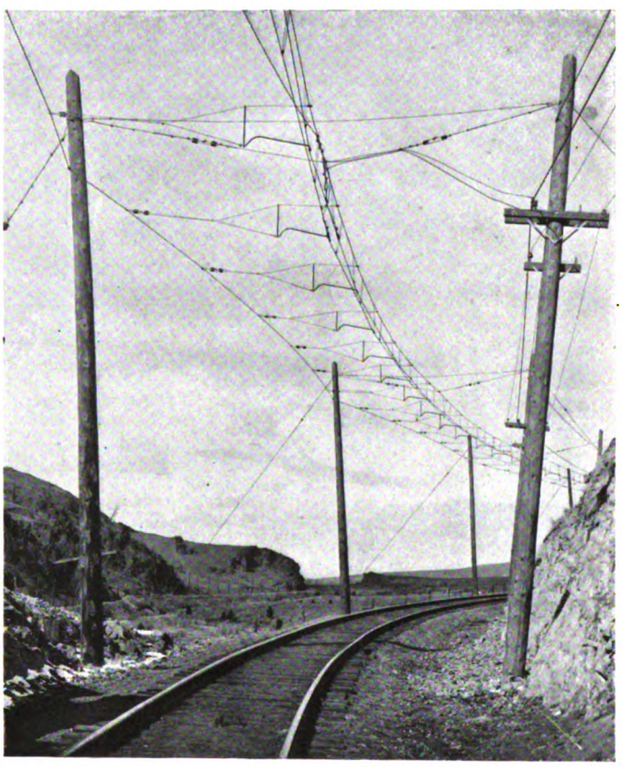

Overhead Construction on Curve.

trolley wire is used. The advantage of the double wire construction is due partly to the greater surface for the collection of current, but largely to the very great flexibility of the alternately suspended trolley wires.

In regard to the track work, each rail joint is bonded with a 250,000 circular mils bond, and double bonds are used on the heavier gradients.

The Locomotives.

The electric locomotives which have been provided are the most powerful traction machines, steam or electric, that have ever been built. They are constructed in two units permanently coupled together, the halves being duplicates and each capable of

Digitized by Google

independent operation. Each half has eight driving wheels and a four-wheeled bogie at the end, so that the complete locomotive has 24 wheels.

The following are the leading dimensions, weights, and other data :—

MAIN LINE FREIGHT LOCOMOTIVES.

Type of locomotive	3,000 volts d-c.
Length over all	112 ft.
Total wheel base	102 ft. 8 in.
Rigid wheel base	10 ft. 6 in.
Total weight	564,000 lb.
Weight on drivers	448,000 lb.
Weight per driving axle	56,000 lb.
Weight per guiding axle	29,000 lb.
Diameter of driving wheel	52 in.
Diameter of guiding wheel	36 in.
Number of driving motors	8
Total output (continuous rating)	3,000 H.P.
Total output (1 hour rating)	3,440 H.P.
Tractive effort (continuous rating)	71,000 lb.
Per cent. of weight on drivers (trac. coef.)	15·83
Speed at this tractive effort at 3,000 volts	15·75 m.p.h.
Tractive effort (1 hour rating)	85,000 lb.
Per cent. of weight upon drivers (trac. coef.)	19
Speed at this tractive effort at 3,000 volts	15·25 m.p.h.
Tractive effort available for starting (30% coef.)	136,000 lb.

service with direct current motors operating at a potential as high as 3,000 volts and the first to use direct current regeneration. The passenger locomotives are equipped with a gear ratio permitting the operation of 800-ton trailing trains at speeds of approximately 60 miles per hour on tangent level track. The average passenger train weighs from 650 to 700 tons and is hauled over the 2 per cent. grade without a helper. The freight locomotives are designed to haul a 2,500-ton trailing train at approximately 16 miles per hour on all grades up to and including 1 per cent. On 2 per cent. grades the trailing load was limited to 1,250 tons, although this figure has been exceeded in actual operation.

The cab consists of two similar sections extending practically the full length of the locomotive. Each section is 52 ft. long, and the cab roof is 14 ft. above rail level, exclusive of the housings for ventilation. The pantagraph collector bases are 5 ft. above the roof, owing to the unusual height of the trolley wire. The outer end of each cab contains a compartment for the driver, while the remainder is occupied by the electric control equipment, train heater, air brake apparatus, etc.

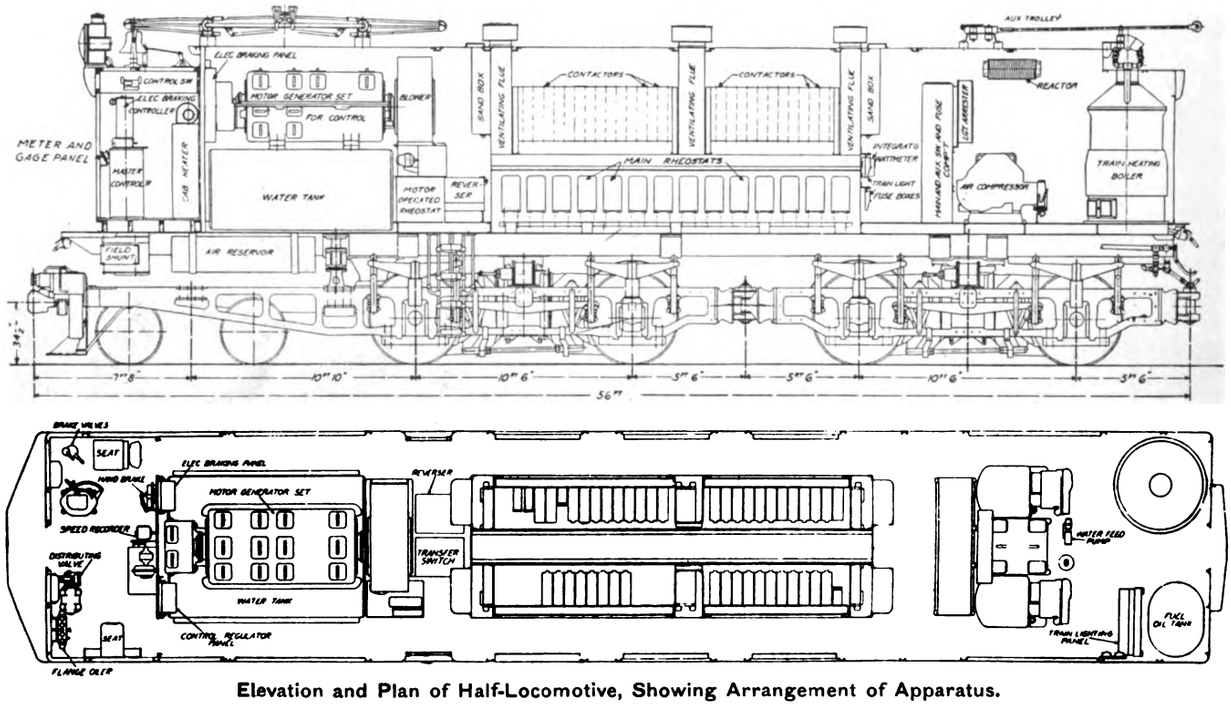

Elevation and Plan of Half-Locomotive, Showing Arrangement of Apparatus.

The passenger and freight locomotives are identical, with the exception of gear ratio and the addition of an oil-fired steam boiler in each half of the passenger locomotive for heating the coaches. The two boilers are capable of evaporating 4,000 pounds of water per hour, and this equipment, with tanks for oil and water, bring the weight of the locomotive up to approximately 300 tons (of 2,000 lb. each).

An interesting comparison to show the tractive effort of these enormous machines may be made by mentioning that the American wood-burning locomotive of 50 years ago weighed 20 tons and had a tractive effort of only 5,000 lb. The modern Mallet steam locomotive weighing 278 tons with tender, which has been displaced, has a tractive force of 76,200 lb., while the electric locomotive, weighing 282 tons (252 British tons), has a running tractive force of 85,000 lb. or a starting tractive force of 136,000 lb.

There are 42 of these main line locomotives (30 freight and 12 passenger) and two switching locomotives. The locomotives are the first to be used for railroad

Each locomotive is equipped with eight type GE-253-A, 1,500-volt motors, insulated for 3,000 volts to ground. This motor has a normal one hour rating of 430 H.P. and a continuous rating of 375 H.P., so that the locomotive power plant has a normal one hour rating of 3,440 H.P. and a continuous rating of 3,000 H.P. Each motor is twin geared to its driving axle in the same manner as on the Butte, Anaconda and Pacific, the Detroit River Tunnel, and the Baltimore and Ohio locomotives, a pinion being mounted on each end of the armature shaft. Additional flexibility is obtained by the use of a spring gear and a spring nose suspension, which minimise the effect of all shocks and also reduce gear wear to a minimum. The motor is of the commutating-pole type and is constructed with longitudinal ventilating ducts in the armature for forced ventilation from a blower in the cab.

The control equipment is the Sprague General Electric type **M** arranged for multiple unit operation. The main control switches are mounted in steel compartments inside the locomotive cab, with convenient aisles for

Digitized by Google

inspection and repairs. A motor-generator set in each half of the locomotive furnishes low-voltage current for the control circuits, headlights, cab lighting, and for charging the storage batteries on the passenger coaches. Under steam operation, the charging current for these batteries is furnished by a turbo-generator unit on the locomotive. The blower for ventilating the traction motors is also direct connected to one end of this set.

The pantagraph collectors, one of which is mounted on each half of the locomotive, are of the double-pan type with a working range of from 17 ft. to 25 ft. above the rail. The contact elements are of the same metal as the trolley wire, so that current passes from copper to copper. The air brake equipment is practically the same as that used on steam locomotives, except that motor-driven air compressors are used to furnish compressed air. Aside from the air brakes, compressed air is also used for signals, whistles, bell-ringers, sanders, flange oilers, pantagraph trolleys, part of the control equipment, and on the passenger locomotives for the oil-fired steam boilers.

Front View of Locomotive showing Pantograph Collector Extended.
(A Goods Train Photographed at Donald, the Summit of the "Continental Divide.")

Shunting Locomotives.

The shunting locomotives, which are used in the yards, are of the swivel truck type, weigh 70 tons each, and are equipped with four geared motors. A single pantagraph of construction similar to that used on the main line locomotives is mounted on the cab and in other ways the locomotives represent the standard construction commonly used with the steeple cab type of shunter. The motors (known as type GE-255) are of box frame, commutating-pole, single-geared type designed for 1,500 volts with an insulation of 3,000 volts to the ground. Many of the shunting locomotive parts are interchangeable with those used on the main line locomotives; for example, the air compressors, small switches, headlights and cab heaters.

The following are details relating to the shunting locomotives :—

Shunting Locomotives.

Length inside knuckles	40 ft.
Height over cab	13 ft. 10 in.
Height—trolley down	16 ft. 8 in.
Width overall	10 ft.
Total wheel base	29 ft. 4 in.
Rigid wheel base	8 ft.
Diameter of wheels	40 in.
Weight of locomotive complete	140,000 lb.
Weight per driving axle	35,000 lb.
One hour rating of locomotive	542 H.P.
Tractive effort at one hour rating	18,400 lb.
Speed at this rating	12 m.p.h.
Continuous tractive effort	13,480 lb.
Speed at continuous rating	13·2 m.p.h.
Tractive effort (30 per cent.)	42,000 lb.

Regeneration.

In past years regenerative control for tramcars on gradients has been tried in this country, but the use of the method has not spread. On such a railway as the one now under discussion, and with such heavy trains, the problem of braking and the advantages of regeneration assume new and supremely important features. The way in which those responsible for this railway and its equipment look at the matter is this. Regeneration, or the recovery of energy on the descending grades, by reversing the function of the electric motors reduces the cost of operation and furnishes a ready solution of the difficult braking problem. On the long continuous grades encountered in crossing the three mountain ranges, great skill is required to handle either the heavy and varied freight or the high speed passenger trains with the usual air brakes. The entire energy of the descending train must be dissipated by the friction of the brake shoes on the wheels, and it approximates 3,500 K.W. or 4,700 H.P. for a 2,500-ton train running at 17 miles per hour on a 2 per cent. grade, thus

Digitized by Google

explaining why brake shoes frequently become red-hot and other serious damage is done.

With regenerative braking, the motors become generators which absorb the energy of the descending train and convert it into electricity, thus restricting the train to a safe speed down the grade, and at the same time returning electric power to the trolley for use by other trains. The strain on draw bars and couplings is reduced to a minimum, since the entire train is bunched behind the locomotive and held to a uniform speed. The electric-braking mechanism automatically controls the speed by regulating the amount of energy fed back to the line. This smooth and easy descent is in marked contrast to the periodical slowing down and speeding up of a train controlled by air brakes.

The usual speed of the electrically hauled freight train is 15 miles per hour ascending and 17 miles per hour descending the maximum grade, but half these speeds can easily be maintained with series connections of the motors should conditions require it.

In case there are no other trains between the sub-stations to absorb the power generated by a descending

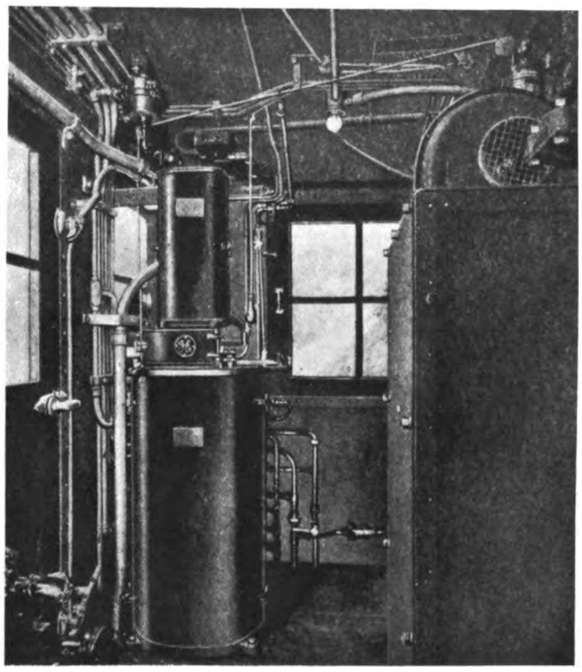

Interior of Driver's Cab.

train, this power passes through the sub-station machinery, is converted from direct to alternating current and fed into the distribution system connecting all sub-stations. The power company's lines are so extensive and the load of such a diversified character, that any surplus power returned by regenerating locomotives can readily be absorbed by the system. Credit is given for all energy returned.

The advantages of regenerative braking are summarised as follows :—

Elimination of difficulties incident to the use of air brakes on heavy freight trains when descending mountain grades.

Elimination of brake shoe and wheel wear with resultant reduction in maintenance.

Reduced wear on tracks, especially on severe curves.

A probable saving of approximately 15 per cent. in the total power consumption.

Maximum safety in operation assured by a duplicate braking system relieving the air brakes.

The entire absence of grinding of the brakes, which is especially disagreeable on a heavy passenger train.

Increased comfort to passengers and reduced wear and tear on freight equipment, owing to uniform speed on grades.

The following is a summary of the advantages of electric traction on such a railway as the mountain section of the Chicago, Milwaukee and St. Paul line :—

Reduction in cost of electricity as compared with cost of coal.

Reduction in maintenance cost of locomotives.

Elimination of delays due to coaling, taking water, oil, etc.

Elimination of delays due to natural causes, such as freezing of locomotives, loss of steam in cold weather, bucking snowdrifts.

Elimination of non-revenue trains hauling coal and water for steam locomotives.

Increased tonnage per train.

Increased train speed on grades.

Greater reliability and certainty of maintaining schedules.

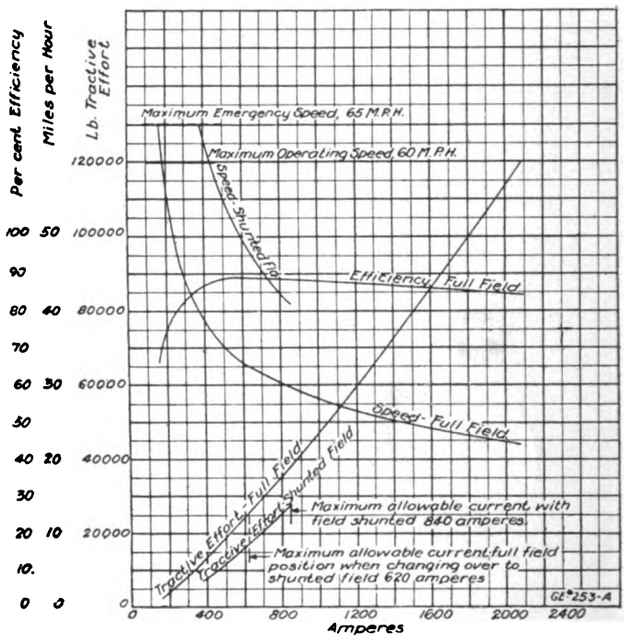

Characteristic Curves of Main Line Passenger Locomotive.

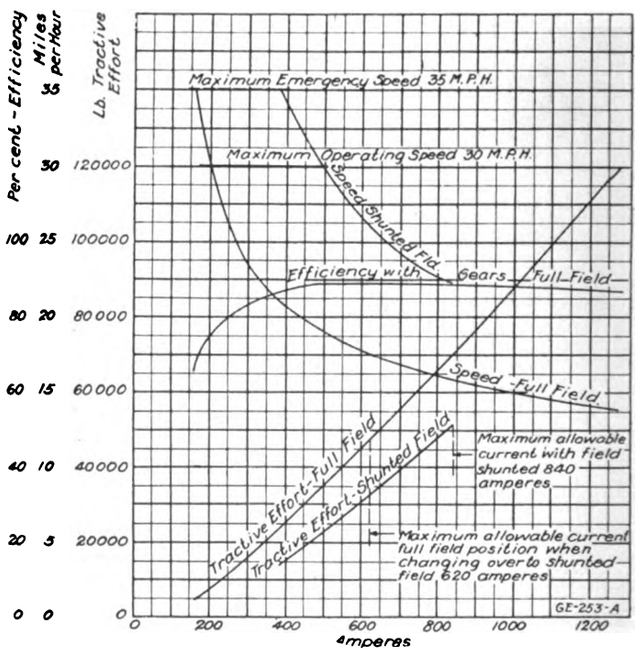

Characteristic Curves of Main Line Goods Locomotive.

Reduction in train crew hours per ton mile.

Reduction in damage to rolling stock due to rough handling by steam engines.

Increased safety of operation on grades due to regenerative braking.

Saving in power and reduction in wheel and track wear by use of regenerative braking.

Improvement of tunnel conditions due to smoke and gas, absence of smoke and cinders which obscure scenic attractions, uniform speed, and absence of grinding brake shoes on grades, all of which accrue to the benefit of the traveller.

Digitized by Google

WEST HAM TRAMWAY ROLLING STOCK.

A Novel Method of Car Reconstruction.

About two years ago Mr. J. S. D. Moffet, manager of the West Ham Corporation Tramways, presented a report to the Tramways Committee on the condition of their rolling stock, much of which had been in use since 1904 when the tramways were electrified. Many of the cars, particularly the bodies, were admittedly the worse for wear owing to heavy service conditions, and Mr. Moffet emphasised the necessity of thoroughly overhauling them in order to provide for an efficient service. The bodies of a large number of the cars had become very loose, showing in some cases excessive play both longitudinally and transversely. In addition to this there was tilting of the platforms partly caused by the hogging of the bodies, this having the effect of displacing the cross beams, which took an upward thrust to the end of the platform beams at each end of the lower saloon, causing a bad break in the floor level at these points. One of the chief causes of the longitudinal and transverse movements was due to the fact that the first 93 cars were open top cars, and consequently they were not built to withstand the extra stresses set up in the body by the added weight of the top covers. West Ham, of course, is not the only tramway undertaking that has had this experience. All over the country top covers have been added to open top cars, and it speaks well for their original construction that the cars have stood the strain of the additional loads as well as they have done.

The trucks of the West Ham cars have also given excellent service, but many of them were showing the effect of the severe conditions. They have suffered particularly from the sharp curves, corrugations, and the general condition of disrepair into which the tracks had fallen after long service.

The maintenance of the rolling stock had been specially difficult owing to the diversity in the design of the cars and trucks. The car bodies had been supplied by no fewer than five makers, and not only the bodies but wheels, axles, and trucks were of different design and dimensions. Of the trucks there were no fewer than seven different types, and there were five different types of motors. While giving great credit to the Council for the effort they had made to keep abreast of the times and for the zeal that had been displayed in experimenting with different types of equipment, Mr. Moffet considered that the time had now arrived when it was advisable that the equipment should be standardised. In view of the geographical situation in relation to London on the west side, and other tramways on the east and north-east side, it seemed desirable that a larger car should be obtained to cope with the extraordinary ebb and flow of traffic night and morning. Two classes of cars, with two different types of equipment, or three at the outside, should be standardised to meet adequately the special features of the West Ham tramways. He accordingly recommended that the two classes to be standardised should be as follow :—Class A—A single truck, rigid wheel base, top-covered car with seating accommodation for 60 passengers ; Class B—A bogie car of the London County Council type, with seating accommodation for 78 passengers. The motor equipment for the smaller cars would be 35 H.P. motors, and for

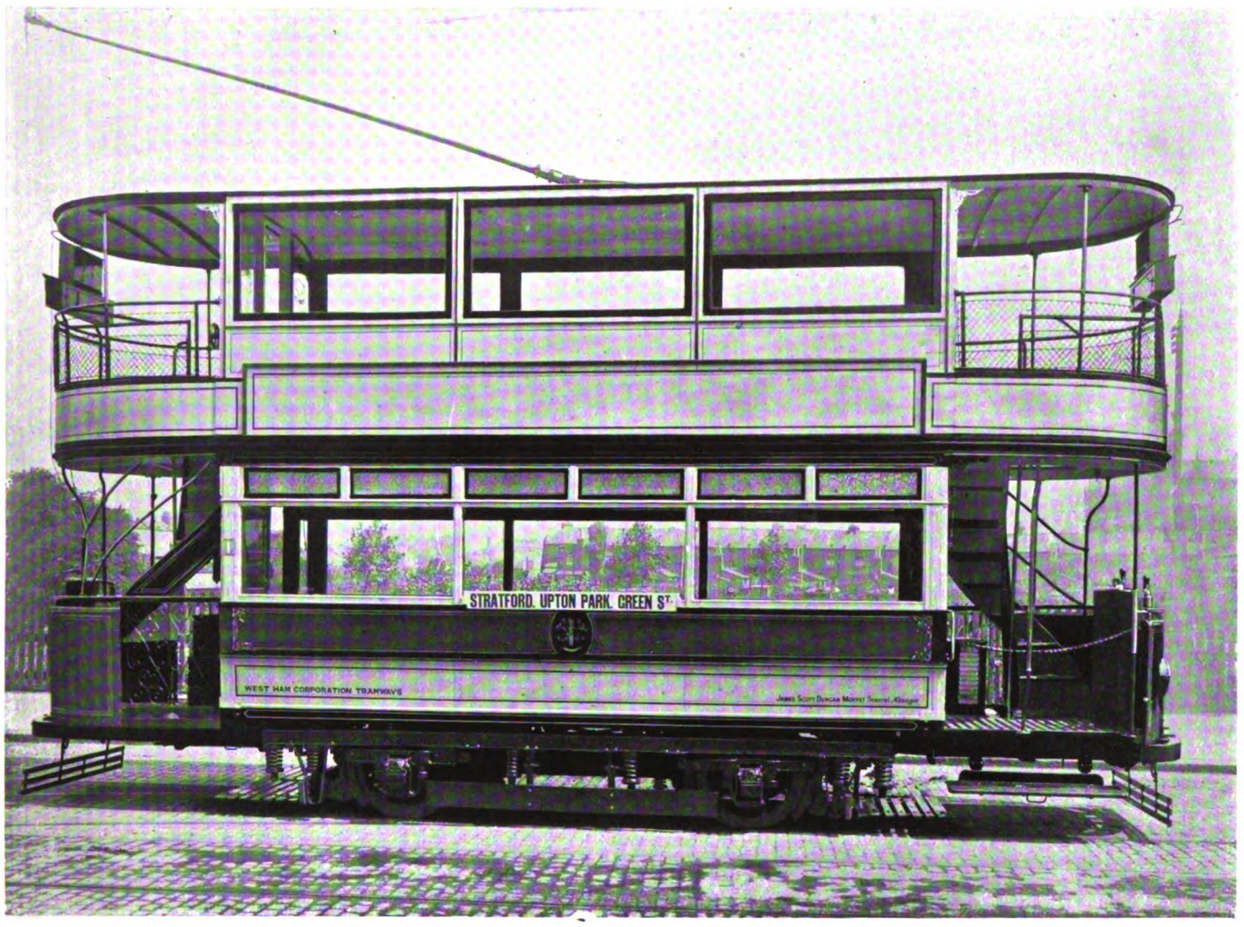

West Ham Standard Single Truck Car Reconstructed with Steel Frame.

Digitized by Google

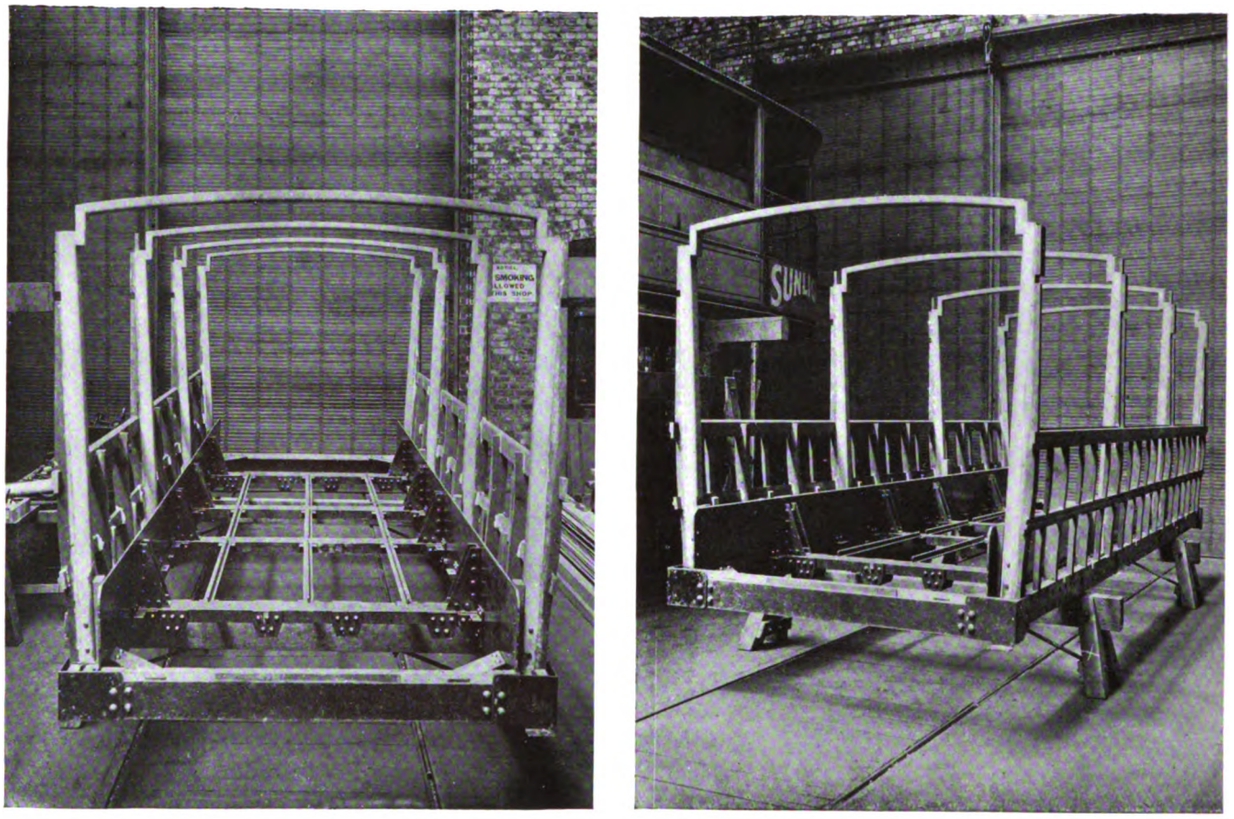

Steel Underframe Pillars and Carlines for Reconstruction of West Ham Cars.

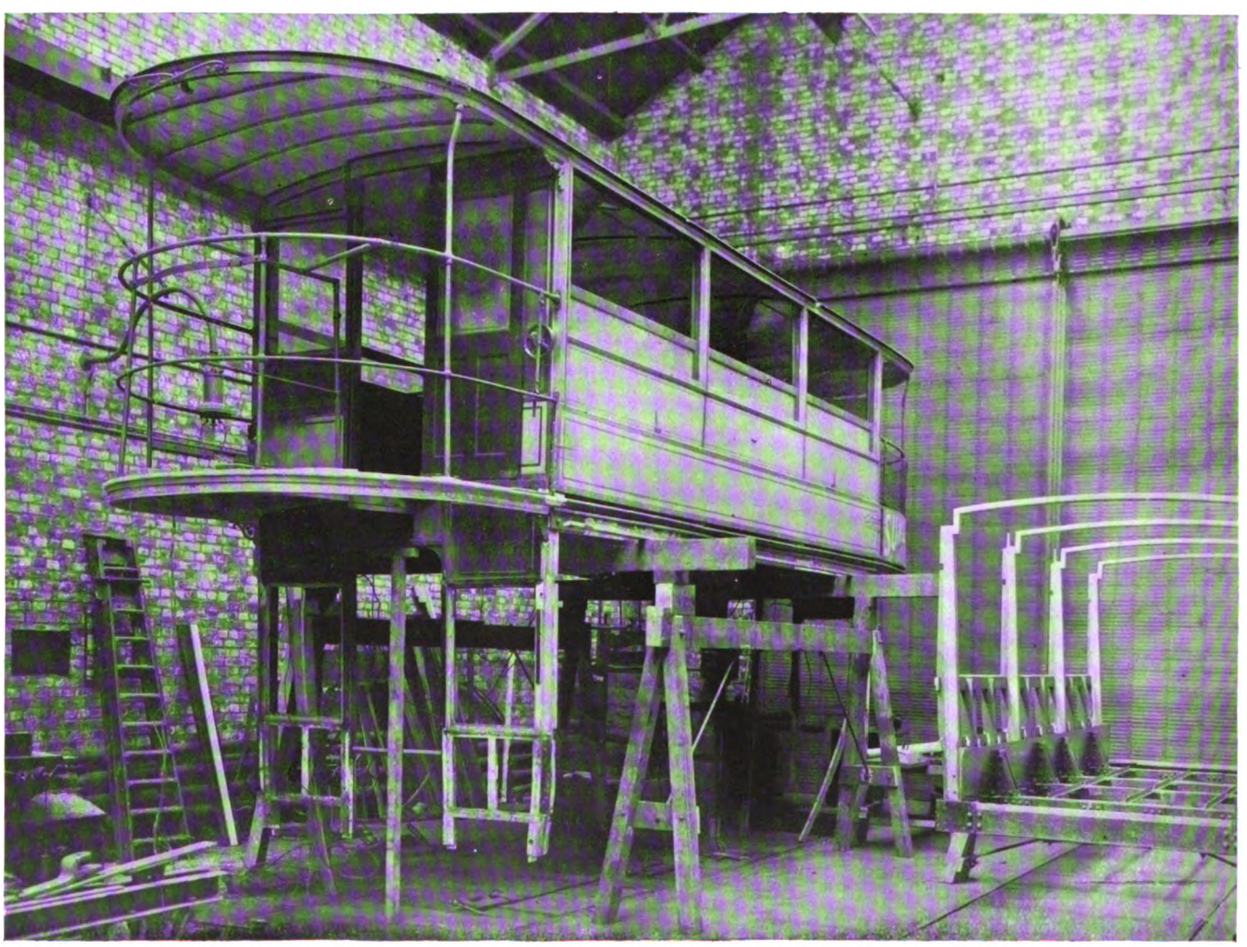

Old Car Ready to Receive New Steel Frame.

Digitized by Google

the larger cars, 45 H.P. motors. It was proposed that the existing stock of cars and equipments should be gradually brought into line with the above standards as opportunity arose, or replaced as circumstances required from time to time.

The outbreak of war delayed the carrying out of the full programme, but in the meantime the work of overhauling the rolling stock has proceeded as rapidly as circumstances permitted. During the past year forty-four single truck cars have been equipped with new motors of the G.E. 200 ventilated type, which has been adopted as the standard for the ordinary four-wheel single truck car, and 50 cars in all have been fitted with two TG controllers. Plans were completed for putting in hand the work of replacing and where necessary reconstructing the car bodies, and this work has also proceeded as rapidly as circumstances allowed.

In reconstruction, the object in view has been to

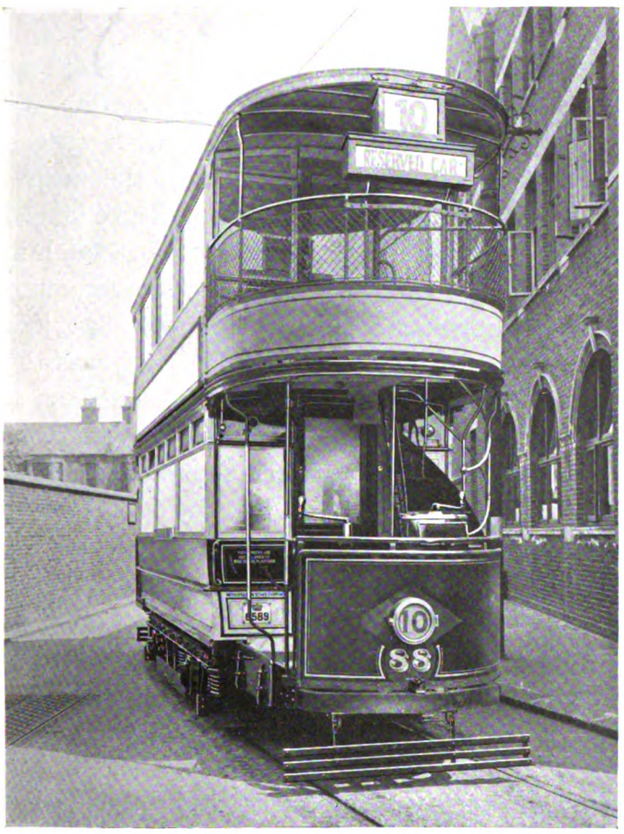

End View of Reconstructed West Ham Car.

carry out the work at as small a cost as possible, and yet at the same time to put the car bodies into such a condition that they would have practically as long a life as new cars. The method of reconstruction adopted by Mr. Moffet will be readily understood from the accompanying illustrations. Originally the bodies were, of course, entirely of wood, and they have stood the strain well; but on thorough examination it was found that the end and side pillars would need to be replaced, while the underframes were practically useless. The body, the rocker panels, and much of the inside finishing could, however, be utilised, and the upper saloon was in fair repair. In these conditions the plan was adopted of building a new underframe of steel, providing end and side pillars of channel steel and steel car-lines of suitable section. The underframe is constructed of two side girders secured by brackets to cross girders braced longitudinally as shown in the photographs. Outside the steel frames are the old wooden sills reinforced by steel side and end pieces. From these are erected the end and side pillars of channel steel, to which are welded the channel steel car-lines. The old side and end pillars are fitted into the channel pillars, and the pillars are rigidly secured in the sill. To complete the work, the girder framework of the platform is bolted to the end sills and to the first of the cross girders. The reconstruction of the cars is being carried out under the supervision of the tramways manager by the works superintendent, Mr. T. C. Winfield.

SYDNEY ELECTRIC RAILWAY SCHEME.

A copy has reached us of the report by Mr. J. J. C. Bradfield, M.Inst.C.E., on the proposed electric railways for Sydney, New South Wales, which was issued there earlier in the year. The report is elaborately produced on thick paper, and is accompanied by nearly 90 plates, the whole forming an imposing volume, as is fitting in view of the importance of the undertaking. The questions of a city electric railway and of the electrification of the suburban steam lines, particularly the former, have been discussed for years, and experts and commissions of inquiry have reported on these matters and recommended schemes from time to time. Now, however, something definite has been reached, because the work recommended by Mr. Bradfield has been approved, and in an introduction to the report, Mr. J. Davis, M.Inst.C.E., director-general of public works, states that the work will be carried out in the following order:—The electrification of the inner zone suburban railways to Parramatta, Hornsby, Sutherland, and Bankstown; the construction of the city electric railway and of electric railways to the eastern, western, and northern suburbs; the construction of two long-span cantilever bridges across the harbour of 1,600 ft. and 1,350 ft. centre spans respectively; the electrification of the outer zone suburban railways to Penrith, Campbelltown, Waterfall, the Hawkesbury River, and various other small branches; and the construction of underground tramways for the relief of street congestion. The whole scheme is estimated to cost about £20,000,000, exclusive of land resumption. Legislative powers have already been obtained for work on the city and inner suburban lines of the value of £10,000,000, this including power plant and equipment.

Mr. Davis, writing in December last, said it was anticipated that plans would be sufficiently far advanced to enable a commencement to be made at the end of April, 1916, and that four years would be occupied on the city and suburban electric railways. The work was to be carried out in accordance with an agreement between the New South Wales Government and Messrs. Norton Griffiths and Company, London, the latter to receive a payment of 5 per cent. on the value of the work performed. The contractors have now begun the preliminary work.

Mr. Bradfield during 1914 carried out investigations on city transportation both in Europe and the United States, and his report touches upon many topics. There are elaborate statistics as to Sydney passenger traffic, as to the power required, and recommendations as to the types of rolling stock to be adopted. It is not clear what is the total length of all the railways and tramways concerned, but the inner zone railways measure 63 miles of route, or 200 miles of track, while the outer zone extends to 95 miles of route, or 200 miles of track. The new city railway is to be a loop line round the city.

Digitized by Google

THE
Tramway and Railway World

FOUNDED IN 1892 AND PUBLISHED BY
THE TRAMWAY AND RAILWAY WORLD PUBLISHING COMPANY, LIMITED,
AMBERLEY HOUSE, NORFOLK STREET, LONDON, W.C.

SUBSCRIPTION:

THE TRAMWAY AND RAILWAY WORLD can be obtained, post free, at the following rates:

FOR THE UNITED KINGDOM—Twenty-five Shillings per annum.

THE ANNUAL SUBSCRIPTION INCLUDES 64 ISSUES, OF WHICH 12 ARE ILLUSTRATED NUMBERS.

FOR ALL PLACES ABROAD—Thirty Shillings per annum.

Single Copies—One Shilling (Postage, 2 pence—Abroad, 5 pence).

THE EDITORIAL AND PUBLISHING OFFICES OF
THE TRAMWAY AND RAILWAY WORLD
ARE AT AMBERLEY HOUSE, NORFOLK STREET,
LONDON, W.C.

Telephone No.: GERRARD 2048.
Telegraphic Address: "TRAMIGRO, ESTRAND, LONDON."

LONDON, SEPTEMBER 14, 1916.

A Great Railway Electrification.

A comprehensive description is given in our present issue of the electrification of the mountain section of the Chicago, Milwaukee and St. Paul Railway. This is the most extensive scheme of the sort that has yet been carried out, and in many other respects it presents features of peculiar interest. The section runs for 440 miles through wild mountains, crossing three ranges in succession, and the gradients accordingly are excessive. Electric traction has been adopted, not because a frequent service of trains is required, but because greater economy and efficiency are to be obtained in hauling the few enormously heavy trains employed. A great step in advance for the high-tension direct-current system is marked by the employment of direct current at 3,000 volts on the trolley wire. Such a high direct-current pressure has not hitherto been used on a commercial scale, although it was successfully employed experimentally on a Lancashire branch line. Sub-stations are correspondingly far apart. The locomotives are the most powerful that have ever been built. Each develops normally 3,000 H.P. and can haul an 800-ton passenger train at 60 miles per hour, or a 2,500-ton freight train at 16 miles per hour. Regenerative control in descending gradients promises to play an important part in the system, and in such circumstances it ought to prove of much value. Mechanical braking of a 2,500-ton train down long gradients of 2 per cent. is a serious matter. Not only because the electricity required for traction can be got very cheaply from hydro-electric stations, but because of the heavier trains which can be hauled, the higher speeds, and other features, such economies are expected as will far more than pay interest on the additional capital invested. Electric traction on such a scale presents many problems, and the working of the railway will be watched with interest by engineers throughout the world.

"The Right Man in the Right Place."

Many will recall an amusing skit in *Punch* some weeks ago on the way in which men with special knowledge are often utilised in the army. A public school man was represented as engaged on "kitchen fatigue duty," when to him entered a friend with similar training, who inquired how on earth he had got that job. "Influence, dear boy, sheer influence," was the reply. The joke was no doubt founded on a knowledge of the sort of thing that is going on. In the domain of engineering numerous cases can be found of men of the highest training being kept on duties where their knowledge is thrown away. We know of one instance among others in which an electrical engineer, an honours graduate in science of London University, and a man with workshop and practical experience, who, enlisting in the Royal Engineers, was kept after his period of training partly at kitchen work and partly at erecting tents and keeping them in order. The supreme elevation he appears to have reached is that of an ordinary sapper in a tunnelling company. In another case, a chartered accountant from the city of London was kept washing dishes for three months. One of our contemporaries mentions the case of an electrical engineer, a London B.Sc., with first-class honours, much of whose time is taken up by listening to elementary lectures on electricity. Yet we are told this is an engineer's war. A wireless telegraph expert—a class of man it is said urgently needed in the army—has been for two years a private in an infantry regiment, and this in spite of representations in the proper quarter. Some time

Digitized by Google

ago, before compulsory service was introduced, a letter from an engineer was published in the newspapers stating that in view of a remark in a speech by Mr. Lloyd George that engineers with knowledge of works management were urgently needed for munition factories, he had offered his services, but had received no reply beyond formal acknowledgment of his letter. Many similar incidents could be cited, and it is little wonder that it has become a standing joke in some regiments that the authorities first find out what sort of work a man is specially suited for and then put him to something else. Evidently there is little hope for the engineer in the army unless he can enter by some favoured channel or, if fortunate, through the medium of a training corps. One of the men above referred to declined to enter a training corps when he enlisted now nearly a year ago, as he wished to learn a sapper's duties from top to bottom in the first place, and prospects of promotion were held out to him. Needless to say, the prospects have not materialised. Facts such as these indicate that through sheer lack of thought we are wasting a great number of men who possess special knowledge that is urgently needed in a hundred places. Officers in positions of great responsibility appeal for men with such knowledge day after day. Such men are available in large numbers. Is it unreasonable to expect that some method should be evolved of discovering them and of putting them where their knowledge and experience can be used to the best advantage?

Collection of Used Tickets.

Among the numerous matters in which the war has forced home the truth of the saying that an ounce of practice is worth a ton of precept is that of the supply of tickets. Pulp for the manufacture of tickets is one of the imports upon which restrictions have been placed in order to limit the strain upon the mercantile marine. While it does not appear that ticket using organisations have yet had their supplies cut down by one-half, as the contractors feared would be the case in February last, an increase in the price has been inevitable. It is perhaps unavoidable that a large proportion of the tickets issued on one metropolitan undertaking should be so thin that conductors have difficulty in cancelling them without tearing the material. When the call for the exercise of economy is insistent it is the reverse of pleasing to see passengers alight and litter the pavement and roadway with their tickets at a time when there is difficulty in finding labour to keep the thoroughfares clean. Again, the cars are rendered untidy by both the single and return ticket holders, the latter postponing the throwing away process until they come on a car the following day, only a small minority possessing sense enough to make a practice of discarding the old ticket before they leave home. Under present-day conditions, general managers would be glad to learn of the experiences of those tramways where used ticket boxes are in vogue. What has happened at Glasgow would seem to offer encouragement for the adoption of that system. Shortly after the receptacles had been placed on the city's cars we reported that in the first week the proceeds of the sale of the used tickets were sufficient to pay the cost of providing the boxes. We should imagine, however, that in the average English town it is useless to adopt this course and to expect passengers to place used tickets straightaway in the boxes. They would doubtless require some reiterated exhortation. An even more effective method of economy would be to adopt the method pursued at Burnley by Mr. Mozley, and to have all tickets collected by the conductors, thus providing a check on fares, as is the case in railway travelling. It would be interesting to learn whether Mr. Mozley has carried out the idea on the Burnley Corporation Tramways, and, if so, how he overcame difficulties that suggest themselves to any manager who considers the advisability of adopting that course.

The Partially Disabled as Motormen.

Greater value would have been attached to the report of the Home Office Committee on the question of the licensing of partially disabled men as drivers of public motor vehicles if the Committee had published the minutes of the evidence, particularly in relation to tramcars and motor omnibuses. "For reasons of national economy the minutes of evidence taken before us have not been printed," the Committee state; and they consequently "made the report more full in order to explain the nature

Digitized by Google

of the evidence tendered." Elsewhere in this issue is reproduced fully such portions of the document as relate to public service vehicles. One reason why we should like to have had the evidence on which those portions of the report are based is that in one respect there was a difference of opinion among the witnesses who were called to speak on the tramway side. Although the scope of the Committee's investigations was limited by the Home Secretary to the Metropolitan police area, witnesses were called from, and evidence was tendered by, the Chief Constables' Association, which is a provincial body, while the tramway evidence included that of the general manager at Liverpool, the deputy chief officer of the London County Council, and the general manager at West Ham. The divergency of opinion among the tramway witnesses related to the possibility of a man with an artificial foot being able to drive. In this connection there is one point that none of the witnesses nor the Committee seem to have considered, and that is the short life of an artificial leg. During the war it has been found that the substitutes in ordinary use have to be renewed every five months. In the case of a motorman there is reason to believe that the wear and tear would be greater, for while he supports himself mainly on his left leg, the right foot has to engage the pawl of the hand brake. There is an even more busy claim upon one foot or other for sounding the bell, while the sanding is also a matter for the feet. Upon these two last-mentioned points the report is silent. With the main conclusions of the Committee no fault will be found, for all who are associated with the work of conveying passengers will agree that the work of a driver is so exacting that it is not fair, either to the man himself or to the public, that he should be under the disadvantage of even partial physical incapacity.

New Administrative Power.—The Police (Miscellaneous Provisions) Act, which came into operation on August 3, gives to the Home Secretary power to order occupiers of factories to make special provision for meals, rest-rooms, etc. The Act seems to have been instituted to meet special conditions of war work. In munitions and controlled factories the need has been experienced of a skilled supervisor to keep a guiding hand on the welfare of the workers, and in order to train them in Leeds a new department has been set up in the local University. It may be worth while for tramway authorities to consider whether the employment of women conductors comes within the Act. In many places special provision has been made for their requirements, extending to the provision of food and rest-rooms.

TRADE AFTER THE WAR.

In British industrial and commercial circles the continued unwillingness of the Government to constitute a Ministry of Commerce is causing no little disappointment and anxiety. The Prime Minister seems to be specially opposed to the idea, though his antagonism to the scheme appears to arise mainly from the fact that there are Ministers enough already. Yet the Government are evidently gravitating towards the constitution of a Ministry of Labour, as witness the recent formal recognition of Mr. Arthur Henderson as labour adviser to the Government, his resignation of the office of President of the Board of Education and his appointment as Paymaster-General. There does not appear to be any particular objection to having a Minister of Labour, and the existence of such an office may be helpful in effecting readjustments after the war. The Board of Trade is heavily burdened with its multifarious duties and responsibilities. But labour is only a part of the great machine of commerce and industry, and on the prosperity of the latter labour must depend. It is, therefore, with the creation of a Ministry of Commerce that a beginning should be made, and we are glad to observe that the Associated Chambers of Commerce do not intend to allow the matter to rest. In the latter part of August they presented a memorial to the Prime Minister urging the Government to take immediate steps to create a Ministry of Commerce and Industry, with an advisory council consisting of representatives of the Foreign Office, the Colonial Office, the India Office, the Dominions, and the leading commercial interests of the Empire. Various detail proposals are made, and it is clear that such a Ministry so advised could be of enormous assistance in promoting Empire trade.

In the meantime, the leading organisers of industry are gradually putting themselves in a position to exert the influence which, for the benefit of the Empire and its workers, it is to be hoped that they will exercise in the fullest measure. The Federation of British Industries Association, which has been established as a central organisation of manufacturing interests, promises to be a valuable force. Among the bodies that have been absorbed in the new association are the Institute of Industry and commercial and powerful industrial groups in Manchester and Birmingham. The Institue of Industry imposed the condition that it imposed, viz., that the minimum amount of the fund to be raised under the new arrangement should be £100,000, and this has been more than fulfilled. The main object of the new organisation is the investigation and the prosecution of a definite line of policy in regard to the various matters affecting British industry, both now and after the war. It is a guarantee of the soundness of its policy that Mr. F. Dudley Docker has been appointed president and Sir William Peat chairman. Under such leadership neither courage nor energy will be lacking for what promises to be a movement which will have momentous consequences in the commercial struggle upon which we shall enter after the war. The commercial community will need indeed to cultivate greater breadth of mind, to take a more serious and a finer view of its responsibilities; but it will need above all intelligent and forcible leadership. The times have changed, and we must change with them or yield the palm to younger nations. The Federation of British Industries Association has been formed in the fullness of time. Its work lies ready to hand.

Some importance attaches to the proceedings at a luncheon given in London on August 17 by the British Empire Producers' Association for the purpose

Digitized by Google

of meeting Mr. G. H. Pritchard, delegate for Australia at the Sugar Producers' Conference, on the eve of his return to Australia. The programme of the Association for the development of Empire trade is well in line with that of other bodies, and for this reason it would be well to have more co-operation among the different associations with similar aims, with union where practicable and with federation in other cases. The United British Industries Association affords a precedent and encouragement in this direction.

THE FUTURE OF EDINBURGH TRAMWAYS.

THE POSITION AT THE END OF THE LEASE.

The Edinburgh tramway question in one form or another goes back for nearly a quarter of a century. At present the lease of the lines to the Edinburgh and District Tramways Company has only three years more to run, and the Corporation are much preoccupied with the question of future arrangements. They are reported to be still uncertain as to what system of traction they will adopt for the tramways when the present lease expires in 1919. The interim report on the subject by Mr. J. B. Hamilton, general manager of Leeds City Tramways; Mr. J. A. Brodie, city engineer of Liverpool; and Mr. A. H. Campbell, burgh engineer of Edinburgh, to which we referred in our issue of August 10, appeared to be definite enough; and more enlightenment may be looked for in the full report, which is promised at an early day. The question will remain whether the Corporation will adopt and act on the report. Some facts on the situation are worth considering.

When in the early 'nineties the Corporation took over the then existing tramways, mostly worked by horses, though with a few miles of steep gradient lines operated by the cable system, electric traction was in its infancy. The overhead wire system was beginning to come into use in Britain, but Edinburgh would have nothing to do with it. Overhead wires in Princes Street were regarded as unthinkable. The electric conduit system was unknown except in theory. The steep gradients on many of the routes rendered the problem of braking a serious one if electric or any kind of automobile cars were employed. The cable system was a pronounced success in America on lines where there was sufficient traffic, and it was in use with good financial results on a few routes in this country. It also had the advantage of great safety on steep gradients. In the circumstances of the time and place we advocated the adoption of the cable system for Edinburgh, and the Corporation took the same view. The result was that the whole of the tramways of Edinburgh came to be worked by cable traction, and the scheme was more elaborate than anything of the kind in this country.

The Corporation spent a great deal of capital on the work. The street construction was the best obtainable; the pits at junctions with an elaborate scheme of auxiliary cables were large and costly; the power-station buildings represented the last word on the subject, even architecturally. The undertaking was leased to the Edinburgh and District Tramways Company, who had only to provide the cars, and the rent eventually agreed upon was no less than 7½ per cent. per annum on the capital expenditure. Municipal operation had not in those days reached its present vogue. It certainly says much for the economy of operation of the cable system that, in a town of the population of Edinburgh and with suburban routes having a light traffic, the company should have been able to pay the rent on a relatively huge capital, and secure a small profit for the shareholders. In 1915 the total receipts amounted to £311,877, but £114,174 were required to meet the rent charge, and the working expenses were £169,583. The gross balance was thus only £28,120, while the net profit was £5,800. As the company's issued capital stands at £92,500, the return to the shareholders is comparatively small.

Seven years after the cable system was completed, when overhead wire electric traction had been adopted in many other towns, scoffers regarded the Edinburgh undertaking as out of date. The main reasons for condemning it appeared to be the following :—(1) The cables running in the conduits made a noise; (2) there was delay at junctions owing to the use of the slow-speed auxiliary cables for rounding sharp curves; (3) the speed was slow; (4) the system was subject to breakdowns. In regard to the first of these, the noise is undeniable, but it is only audible when there is no or next to no wheel traffic in the street. Some noise of the kind is inevitable. As to the second point, with the method employed the delays are unavoidable, but that they are unimportant is proved by the fact that the third objection is unfounded. The cars are not slow. It has been proved statistically that the average car speed, including stops, is higher than that on many electric tramways in large towns. There are, of course, no fast rushes for short distances, as the maximum speed is that of the cable, but this is compensated by the facts that acceleration after each stop is rapid, and that there are comparatively few involuntary stoppages in Edinburgh caused by other traffic being in the way.

In regard to breakdowns, the complaint has been made with some justice during the last year or two, as insufficient attention appears to have been given to maintenance of pulleys in the cable conduits. Recently, however, marked improvement in this matter has been, and is continuing to be, effected. The tracks and cable machinery have already been put in first-class running order; and a very great improvement in reliability and punctuality has been obtained. It will accordingly be noticed that none of the objections mentioned are of substance, except possibly the noise caused by the cables, and to most people that is not a serious matter if the pulleys are properly maintained.

The question now is what the Corporation will do. At the end of the lease they will no doubt take the working of the tramways into their own hands. That we may regard as determined upon. The continued use or supercession of the cable system is, however, an open question, and it will be long and strenuously discussed in the Council and by the public. The experts to whose report we have referred have apparently formed the opinion that it is practicable to instal another system while the cable cars continue to be worked, so that immediately on the expiry of the lease an electric service could be commenced. They think also that it would be possible to design the electric system in such a way that ultimately there would be no overhead wires in the central parts of the city. As it would not be practicable to make such a change immediately on expiry of the lease, they propose that the overhead system should be used in the first place throughout the city, the formation of electric conduit sections being proceeded with later if desired. No automobile system is suggested. What the experts advise is apparently the abolition of the cable system as early as possible. Poles and wires would be erected while the cable cars continue their service, and when the lease expires and the electric installation is complete the electric cars would at once be run on the same rails as are now used by the cable cars. The

Digitized by Google

objection to such a course is that the rails are not suitable for electric traction. They could not withstand the wear for more than a few months, and even if an electric car of much lighter weight than has hitherto been used were designed, rails of the present type would be quite inadequate. The wear on rails of cable and electric cars is not comparable; in the latter case every car is a locomotive, dependent for its motion on adhesion between wheel and rail. A heavy rail is therefore indispensable. If electric traction is decided upon, thorough rail renewal can hardly be escaped.

Here is the crux of the matter. Is it likely that the Corporation, which now has a workable tramway system constructed from the proceeds of loans of which a large portion yet remains to be repaid, will be permitted to raise new capital during the continuance of the war or for some time after it? Under regulations now in force no local authority can raise fresh capital except with the consent of the Local Government Board and of the Treasury. That consent is not given unless it can be shown that the work to be carried out is of urgent necessity.

It seems hardly probable that these Government departments will consider that the installation of electric traction is of urgent public necessity, seeing that a tramway system capable of carrying all the people who desire to use it is already in existence. Supposing, however, that that difficulty were got over, and that the money could be borrowed, it might be found difficult or impossible during the war and for some time after to get from manufacturers the electric cars, the poles, the wire, or any of the equipment required. The lease has only three years to run, the end of the war is not yet, and it may be some little time after its end before manufacturers are ready to execute big orders of the sort.

On the whole it would seem wise to go on with the cable system in the meantime. It can be put into thorough repair, and its operation can be continued by the Corporation until times are more favourable for making a change. That, at all events, would seem to be a conclusion that must commend itself to ratepayers under the present conditions of financial stress.

PARTIALLY DISABLED MEN AS DRIVERS.

Report of the Home Office Committee.

On August 11 a report was issued by the Committee appointed by the Home Secretary to consider whether, having regard to the normal conditions of traffic in the Metropolis, licences to drive motor cabs, motor omnibuses, or tramcars should be granted to men who suffer from some partial physical disability by loss of a limb or other similar cause, and, if so, within what limitations. The members of the Committee were Messrs. F. L. D. Elliott (chairman), C. W. Bowerman, M.P., J. W. Orde (secretary of the R.A.C.), R. J. Simpson, and A. Smith (president of the Union of Licensed Vehicle Workers), Major A. Tudor Craig, Sir Frederick Eve, F.R.C.S., and Sir Albert Stanley. Mr. H. A. Tripp, of the Metropolitan Police Office, was secretary to the Committee. In the course of their report they state that "we entered upon our inquiry with a strong and natural sympathy for the men who, having suffered some serious physical disability in the service of king and country, are liable to be thenceforward handicapped in earning their livelihood. While it is greatly to be desired that these men should not suffer in the matter of earning their livelihood, it is of paramount importance that the public should not be exposed to undue risks. It is essential not to reduce the standard of efficiency in drivers of public vehicles, since even under the present system (which virtually excludes men so incapacitated) there is no margin of safety to spare. While the total number of accidents shows a tendency to decline, the numbers of serious cases shows an upward tendency. In the case of private motor cars and trade and commercial motor vehicles, we feel that the increase in the aggregate must be assigned (partially at least) to the introduction of labour of an inferior—or less highly trained—quality. This consideration has a direct bearing on our investigation.

Safety of the Public the First Consideration.

We feel no doubt that in the case of public vehicles, the logical outcome of introducing drivers who are less efficient would be an increase of the street casualties and a serious additional toll of fatalities. With this opinion definitely formed in our minds, we are not prepared to take the responsibility of recommending that less efficient drivers should be admitted. There is no margin of safety at present, and the licensing authority is not—in our view—justified in taking any steps which may increase the number of accidents and fatalities in the streets of the Metropolis. This conclusion, at which we arrive at the outset, obviously narrows the field of our labours. Our problem has reference now only to the question of absolute efficiency. If a disabled man is equal to a sound man, there can be no objection to his admission as a driver. If, on the other hand, motives of sympathy and sentiment should induce the licensing authority to admit a man of impaired efficiency – even though the handicap were slight—then, as we have said he would take a responsibility which we could not recommend. The safety of the public is the first consideration. It seems to us highly important at this point that one fact should not be lost sight of. The driving of public vehicles is incomparably more exacting than the driving of private or even trade vehicles. The driver of a vehicle of the latter classes is able, to a considerable extent, to choose his own routes if not his own times; he is able generally to avoid known centres of congestion, and can always stop if he is in a difficulty. The driver of a public vehicle, on the contrary, must proceed by whatever route his employer or his fare directs. His driving is, moreover, for the most part in populous districts where traffic is heavy. This distinction appears to us to be a matter of the first importance."

Summary of Recommendations.

"We arrive at our conclusions with considerable regret. We are, however, deeply impressed by the potential risk to the public if drivers who had lost limbs were employed, and we have constantly borne in mind the responsibility which devolves by statute on the Commissioner of Police to satisfy himself as to the 'fitness for such situation' of each candidate for licensing whose application he approves. Were we not fully satisfied that the interest and safety of the public are at stake, we would gladly refrain from recommending that the door should be shut on this avenue of employment for men who have suffered in their country's cause and possess a moral claim on their countrymen. But, being entirely convinced, we have no option, and can only record our considered opinion that—having regard to the normal conditions of traffic in the Metropolis—licenses to drive motor cabs, motor omnibuses, or tramway cars should not be granted to men who have suffered the loss of an arm, hand, leg, foot, or eye. In the case of injury to one eye, provided the other eye is sound and the injured eye retains fair vision, we think a licence might be granted, each case being, of course, decided on its merits. As regards other minor disabilities, such as loss of one or more fingers, or other damage to the hands, limitation of movements of joints of the upper or lower extremities, or shortening of the lower extremities, and the results of injuries to nerves of limbs, we recommend that the existing practice continue to be followed, and that each case be dealt with on its merits at the discretion of the Commissioner of Police with, in doubtful cases, a power of reference to a special medical referee."

Outline of the Inquiry.

The Committee heard evidence from representatives of the licensing authority of the Metropolitan Police, the owners of public service vehicles, the licensed men, the provincial police and licensing authorities, the Royal Naval and Army Medical Services, the medical advisers to the London County Council, and the London General Omnibus Company, and the insurance companies. Evidence was invited from incapacitated persons who had informed the Committee that they were competent drivers and were willing to help in the inquiry, but none accepted the invitation to give evidence. The instructor at Roehampton House, who trains men who have lost a limb to become motor drivers, attended, and the Committee witnessed a driving demonstration by drivers who had lost a leg during the war. For reasons of national economy the minutes of evidence have not been printed, but the report is made more full in order to explain the nature of the evidence tendered. The Committee place on record their appreciation of the zeal, tact, and efficiency of the secretary, and they "were impressed by the complete grasp of the subject" shown by Superintendent Bassoon, of the Public Carriage Branch, Scotland Yard, his evidence being referred to as "admirably fair and lucid."

In addition to representatives of motor cab companies and drivers, and of motor omnibus drivers, the witnesses included Mr. H. E. Blain, operating manager of the London General Omnibus Company, Mr. T. Clarkson, managing director of the National Steam Car Company; Mr. J. S. D. Moffet, general manager of West Ham Corporation Tramways; Mr. J. K. Bruce, deputy chief officer, London County Council Tramways; the chief constables of Liverpool, Manchester, and Bristol, as representing the Chief Constables Association, who submitted a body of written opinions from their colleagues in various parts of the country; three officers of the R.A.M.C., Royal Navy, and A.S.C.; Sir John Collie, consulting physician to London County Council; Dr. Davis, medical adviser to the London General Omnibus Company; and Mr. A. C. Young, of the Accident Offices Association.

Digitized by Google

Attention was first directed to the statutory powers under which the Commissioner of Police exercises his licensing functions, and to the procedure before a licence is granted. A man applying for motor omnibus or cab driver's licence is required to pass a practical examination of his ability to manage the vehicle, and to possess a satisfactory knowledge of localities. An applicant for a licence to drive a tramcar propelled by other than animal power can only be granted such licence on producing a certificate of competency from the company or proprietor who intends to employ him. The Commissioner of Police reserves the right to test tramway motormen by his own officers should he consider it desirable to do so. An applicant for a licence is given a form of medical examination which must be signed by a qualified registered medical practitioner.

Omnibus Control.

The report gave a *résumé* of the weights, methods of control, etc., of motor cabs and omnibuses, the latter including the L.G.O.C. "B" and "X" types, Daimler "CC" type, Straker-Squire "Y" and "CO" types, the De Dion, Clarkson steam, and Tilling's petrol-electric. Reference was made to the pressure required to perform the various operations of cranking, and working the clutch and brake pedals. The gross weight of an omnibus is six tons, of which approximately one-third is on the front axle and two-thirds on the rear axle. The estimated pressure requisite to withdraw the clutch is 55 to 65 lb., and the pressure required to apply the footbrake increases according to weight, speed, gradient, and the distance within which the vehicle is to stop. There is no retaining gear to keep the clutch and brake pedals depressed, and the pressure must therefore be maintained by foot power. Cranking an omnibus engine required great strength and skill to enable one man to perform it, and when the engine is cold two men have often to perform the task. The licensing authority deems it essential that every driver should be capable of starting the engine, as dislocation of traffic would otherwise quickly result in the event of involuntary stoppage. Adverting to steering, the report observes that the steering of a 6-ton vehicle on heavy solid tires requires much more physical strength than steering a cab of about 25 cwt. In order to render the former as easy as possible the speed of the worm is altered, requiring more turns of the steering wheel, but less effort. It is impossible with vehicles of this type for a man to make a turn without the use of both hands.

Physical Effort of a Motorman.

No printed conditions are issued by the licensing authority as to the construction of tramcars, but the Committee submit an explanation as to control by the motorman to indicate the physical effort required to drive those vehicles. The weight when laden is from 14 to nearly 20 tons, and the highest speed permitted by Board of Trade Regulations is 16 miles per hour, except in the case of subway cars, which are allowed higher speed in the subway. Each car is fitted with two brakes, viz., a hand and an electric brake. The hand brake upon each type is similar in principle, but differs slightly in detail. It consists of an upright spindle, at the top of which is a wheel or cranked lever. At the lower end above the platform is a toothed wheel into which engages a pawl or "dog" for the purpose of retaining it in position. Underneath the platform is a coarse worm, around which is wound a chain or similar pulley by which the brake blocks are drawn on to the wheels. In all cases this operation is performed by the right hand, and the pawl or "dog" worked with the right foot.

Electric brakes may be divided into two classes, rheostatic and magnetic. In the former case the fact of the current being cut off from the motors, while the wheels rotate the armature, causes the motors to be turned into dynamos, each generating its own current. The "work" thus performed acts as a retarding force to the car and brings it to rest, but as soon as this happens the hand brake must be used to retain it at rest, because the stoppage of rotation naturally stops the generation or "work" done. In the magnetic brake the first principle of the rheostatic also applies, but the current generated by the motors being turned into dynamos is utilised to magnetise iron shoes which are thus strongly attracted to the rails, and give, in addition to the retardation by the "work" done, a strong frictional resistance to the progress of the car by means of the attraction of the magnetised shoes to the rails. In some cases the magnetised shoes are made to operate the ordinary brake shoes on the periphery of the wheels through rocking levers. In this class also the hand brake must be used to retain the car as soon as it has been brought to rest. As a tramway car will "get away" upon even a very slight gradient, the operation must proceed practically simultaneously.

Upon the tramway systems where the cars are fitted with the magnetic brake, that brake is used as the "service" brake, but upon other systems (such as the London United Tramways) the hand brake is the "service" brake, the rheostatic being an emergency one. The operations of the rheostatic and magnetic brakes so far as the driver is concerned are similar and simple, requiring very little physical effort.

At the top of the controller are two handles or levers, the larger called the controller handle, the smaller the reversing lever or key. In ordinary running the reversing lever is pushed forward and the controller handle can then be turned notch by notch on the power side until the full parallel position is reached. By this operation the car is put in forward motion. When the car is to be stopped the controller handle is brought back to the "off" position, and then continued through the brake notches until the car is brought to rest; but, as already pointed out, the necessity for manipulating the hand brake almost simultneously with the power brake renders the full use of both hands necessary. At that moment the whole weight of the body is thrown on the left leg. Again, as a last resource, in the event of other brake methods failing, when the driver must stop his car as best he can, he has to "short circuit" his motors; to do this he pulls the reverse lever in the direction contrary to that in which the car is travelling, and throws his controller handle over to the power. This, though likely to damage the motors, is pretty effective in stopping the car dead.

Quickness of movement with both hands, coupled with a readiness to use the hand brake or perform such other movement as circumstances require, are obviously essential to this manœuvre. The driver has also under his feet the "sander" and gong pedals, which are operated by the right or left foot as may be convenient. Some cars have an automatic "sander," whereby sand is caused to flow whenever the electric brake is applied, but these are uncommon.

Types of Disability—Question of a Seat for Motormen.

A return of the licensed men who, so far as the police are aware, have joined H.M. forces, shows that after deducting the number of conductors, a total of 7,157 drivers is left, of whom 5,149 were motor omnibus and tramcar drivers, and just under 2,000 were motor cab drivers. The great majority had entered the army as drivers of mechanical transport vehicles, and the Committee assume that the wastage amongst such drivers will not be abnormally heavy. It is therefore to be hoped that the great majority will return to their civil occupations.

The report proceeds to consider seriatim the various types of partial physical disability from which men presenting themselves for licences might be expected to suffer, namely, loss of hand or arm below the elbow, loss of arm above the elbow, loss of foot or of leg below the knee, loss of leg above the knee, loss of eye, and minor disabilities, such as one limb shorter than the other, loss of some fingers, stiff joints, etc.

Reasons are given in each instance why the Committee arrived at the conclusions already reproduced. It is mentioned that the National Steam Car Company took the view that a man with an artificial foot would be capable of driving a steam omnibus. It would apparently be necessary to provide a hand throttle instead of a foot throttle, imposing increased labour on the hands. The Committee are definitely of opinion that the statutory duty imposed on the Commissioner not to license men who cannot satisfy him as to their fitness must preclude him from licensing a man who has lost either foot.

Turning to the case of a similar disablement in relation to tramcar driving, the Committee say:—"Here again we find divergency of opinion, but the objections as well as the arguments in favour come from different sources. A representative of the London County Council was fully prepared to entertain the possibility of a man with an artificial foot being able to drive, while the manager of the Liverpool Tramways is inclined to take the same view, at all events as regards the left foot. The manager of the West Ham Corporation Tramways, speaking for the Tramways Association, and the Chief Constable of Bristol speaking on behalf of the Bristol tramways, are of opinion that a man must be in possession of all his limbs.

"As we have pointed out, the tramcar driver supports himself mainly on his left leg, while the right foot has the very important function of engaging the pawl or "dog" of the brake. As regards the hands, the left hand is required for the controller handle and the right for the brake. There can be little doubt (as already said) that the tramcar driver must have both his hands, and we are of opinion that upon the tramcars as at present designed it is also essential that he should have both his legs and feet. The question has been raised whether it would be possible to license men if a seat could be provided. We think it hardly necessary to take this point into consideration, as we are informed that the tramcar would probably have to be re-designed; and since we understand that a tramcar is continually being renewed in its various parts, and thus has an almost indefinite lease of life, the question hardly seems to come into the region of practical politics. If a seat were provided on a tramcar of the present design, the man would be continually jumping up, and would get very little relief. In these circumstances we are forced to conclude that a man who has lost either foot could not safely be licensed to drive a cab, omnibus, or tramcar."

Seventeen pages are devoted to various appliances relating to the mechanical and other conditions required in motor cabs and omnibuses submitted for licensing, passes and failures at driving examinations, refusals of driving licences, numbers of licences issued, and returns showing the number of persons killed and injured by vehicles in the Metropolitan police area during the years 1913, 1914, and 1915. Power-driven vehicles killed 424 persons in 1913, 463 in 1914, and 660 in 1915. Fatalities attributed to horse vehicles in the three years were 184, 146, and 185. Persons injured by power-driven vehicles totalled 13,183 in 1913, 14,638 in 1914, and 10,366 in 1915. Horse vehicles caused 10,582 cases of injury in 1913, 10,832 in 1914, and 9,501 in 1915.

Digitized by Google

TRAMWAYMEN WITH THE COLOURS.

ROLL OF HONOUR OF THE FALLEN.

From ninety-one municipal and seventy-three company tramways in the United Kingdom 27,814 employees had joined the Army or Navy up to the beginning of August. For the returns from which these figures are compiled we are indebted to the courtesy of the tramway managers, from whose ranks representatives have also gone to take their part in upholding the honour of the Empire and the liberties of Europe. The electrical officers of the undertakings are more numerously represented by those who have transferred to the national services, for in their ranks are to be found a larger number of men of the required age. It is necessary to mention that the foregoing figures do not include the whole of the power-station staffs, who in many towns are grouped as employees of the electricity committees, as distinct from the tramways committees. From the figures relating to tramwaymen with the colours that were published in our issue of May 13, 1915, it will be seen that up to the end of April of that year 18,057 men had enlisted from 161 undertakings. The latest figures show an increase of 9,757.

In commenting upon the former returns we remarked that "to the uninitiated it may seem a mystery how the tramway services can be carried on without the enlisted men; but much has been done by engaging temporary workers, by modifying services, and by the hard and faithful work of the men who remain." At that time only a very small number of women were working as conductors. The Edinburgh Tramways Company seem to have been the first to experiment with them, the work being done at first by independent women as a form of patriotic endeavour. That was about the third week in February, 1915, and in March the general manager at Glasgow reported that many of the men were working seven days a week. Subsequently a deputation from the Women's National Aid Corps suggested that women should be employed as conductors at the same wages and on the same conditions as men. A week later the Glasgow Corporation Tramways had begun an experiment on those lines, and before the end of April, 1915, that example was being followed at Newcastle-on-Tyne, Salford, and other places. Thenceforward the movement spread until it has now embraced nearly every tramway undertaking in Great Britain, to say nothing of motor omnibus companies and railways.

It is largely due to the work of the women that tramways have been able not only to continue a surprisingly full list of services, but in the great centres to transport a vast and increasing army of munition workers. Nor are the services of women restricted to the duties of conductors. Several hundreds are working as cleaners, while at Glasgow the number acting as drivers will reach two hundred before the winter arrives. Up to the beginning of August 8,768 women conductors and 189 women drivers were employed by municipal undertakings, the latter numbering 150 at Glasgow, 16 at Ayr, eight at Cardiff, six at Doncaster, six at York, and three at Blackburn. In addition there are 1,205 women employed in other capacities, not including clerical work.

Corporation Employees.

Corporation.	No. enlisted.	Per cent. of total No.
Aberdare U.D.C.	40	82
Aberdeen	166	64·5
Accrington	48	48
Ashton-under-Lyne	45	55
Ayr	51	68
Barking Town U.D.C.	6	22
Belfast	273	27·5
Bexley U.D.C.	24	26
Birkenhead	67	33
Birmingham	1,407	44
Blackburn	150	50
Blackpool	65	35
Bolton	160	34
Bournemouth	247	53·78
Bradford	542	40
Brighton	208	91
Burnley	273	72·80
Burton-on-Trent	35	40
Bury	112	43
Cardiff	277	36
Chester	24	44
Chesterfield	41	30
Colchester	56	81
Colne	18	36
Coventry	96	34
Croydon	195	51
Darlington	44	63
Darwen	30	48
Derby	92	37
Doncaster	70	55
Dover	26	43
Dundee	132	50
East Ham	103	38·3
(*a*) Erith U.D.C.	5	8·33
Glasgow	2,809	45·78
Gloucester	44	36
Great Yarmouth	79	53
Halifax	151	53
Haslingden	2	—
Heywood	1	—
Huddersfield	155	34
Hull	271	41·7
(*b*) Ilford U.D.C.	32	25
Ilkeston	14	30
Ipswich	61	33
Keighley	21	36
Kilmarnock	22	50
Kirkcaldy	20	33·3
Lancaster	10	25
Leeds	790	40
Leicester	501	50
Leith	61	47
Leyton U.D.C.	179	51
Lincoln	7	21
Liverpool	2,000	75
London County Council	2,847	22
Lowestoft	37	70
Maidstone	41	71
Manchester	2,294	44·08
Nelson	24	60
Newcastle	481	44
Newport, Mon.	90	41
Northampton	56	43
Nottingham	284	40
Oldham	260	59
Pontypridd	40	53·3
Portsmouth	280	50·45
Preston	120	48
Rawtenstall	33	28·5
Reading	123	62
Rochdale	112	42
Rotherham	60	36·8
Salford	547	46
Sheffield	480	28
Southampton	140	40
Southend-on-Sea	84	45
Southport	47	55
South Shields	76	60
Stalybridge	111	48·26
Stockport	95	40
Sunderland	121	43
Swindon	18	46·5
Wallasey	127	51
Walsall	50	33·33
Walthamstow	57	46
Warrington	34	40·5
West Ham	373	49·6
West Hartlepool	33	45
Wigan	70	29
Wolverhampton	88	40
York	44	37
	22,135	

(*a*) 75 per cent. of the men have left to join the local munition works.
(*b*) 23 men have left to work at munitions.

Company Employees.

Company.	No. enlisted.	Per cent. of total No.
Aberdeen Suburban	24	75
Airdrie and Coatbridge	14	23
Barnsley	52	43
Barrow-in-Furness	29	23
Bath	184	60·5
Bideford, Westward Ho!	10	35
Birmingham District	49	26
Blackpool, St. Anne's, and Lytham	115	76
Brighton Beach	8	50
Camborne and Redruth	5	34
Chatham and District	140	60
Cheltenham and District	60	70
Cork Electric	82	27
Dewsbury and Ossett	18	70
Dublin and Lucan	6	16
Dublin United	141	8·9
Dudley and Stourbridge	48	22
Dumbarton	25	25
Dunfermline and District	50	70
Falkirk and District	42	70
Gateshead and District	61	40
Giant's Causeway and Portrush	17	60
Glossop	15	50
Gosport and Fareham	64	61
Gravesend and Northfleet	22	25
Great Grimsby	66	40
Greenock and Port Glasgow	52	23
Guernsey	26	20
Hastings	126	50
Isle of Thanet	66	24
Jarrow and District	14	46·66
Kidderminster	24	40
Lancashire United	150	30
Liverpool Overhead	60	17
London United	730	48·53
Luton	9	51
Mansfield and District	14	45
Manx Electric Railway	48	48
Merthyr	32	28
Metropolitan Electric	684	35·48
Mexborough and Swinton	25	110
Middlesbrough, Stockton, and Thornaby	389	126
Middleton	32	36
Musselburgh	20	60
New St. Helens	81	41
Norwich	163	81
Nottinghamshire and Derbyshire	10	7
Oldham, Ashton, and Hyde	44	26
Paisley District	130	60
Peterborough	10	16
Plymouth, Stonehouse, and Devonport	16	45
Portsdown and Horndean	25	48
Potteries	180	23
Rhondda	160	50
Rothesay	11	12
Scarborough	23	50
Sheerness	6	40
South Metropolitan	120	52·5
Southport	27	40
South Staffordshire	57	35
Sunderland District	96	75
Swansea	86	30
Taunton	16	50
Torquay	102	91
Tynemouth	22	45
Tyneside	39	30·5
Wemyss	30	50
Weston-super-Mare	32	45
Wolverhampton District	22	23
Worcester	27	50
Wrexham and District	56	70
Yorkshire (West Riding)	125	40
Yorkshire (Woollen District)	81	27·93
	5,679	

Digitized by Google

MEN WHO GAVE THEMSELVES FOR THEIR COUNTRY.

The names of tramway employees who had made the great sacrifice for their country were published in our issue of May 13, 1915. The following list records the names of many others who have since fallen. They include only those who were in the service of municipal tramways, and even as regards these the list is not wholly complete. In a later issue the names of others not now ascertained will be given, as well as of many who went from the tramway companies. Lengthy as is the roll, it is destined to increase before peace again smiles upon three continents torn by war. The end of these men will stir feelings of pride rather than grief. Innumerable letters from those in the trenches and at sea received by their relatives have shown that Britain's citizen soldiers, as well as her magnificent bluejackets, have no fear for themselves; their whole anxiety is for those they have left behind. While honouring the memory of the departed patriots, the country has not forgotten the claims of their families and dependants; and their former employers have not been slow to express their sympathy and to manifest such marks of care as can only be offered by those who were locally associated with them.

TRAMWAYMEN'S ROLL OF HONOUR.

Corporation.	Name.	Designation.	Cause of Death.
ABERDEEN	C. M. Morrison	Inspector	Killed in action.
	D. Jamieson	Motorman	Died in Germany.
	A. Coutts	Motorman	Died in France.
	R. Murdoch	Motorman	Died of pneumonia.
	G. Rae	Repairer	Died of fever.
ACCRINGTON	J. M. Fawcett	Motorman	Killed in action.
AYR	H. Clark	Motorman	Killed in action.
	H. Jones	Conductor	" "
BELFAST	T. M'Keavney	Motorman	Killed in action.
	W. L. M'Pherson	Motorman	" "
	J. Ardis	Conductor	" "
	D. M'Keown	Conductor	" "
	W. Cummins	Skilled Labourer	" "
	J. Bell	Skilled Labourer	" "
BIRKENHEAD	W. G. Hoskins	Car Washer	Killed in action.
	C. Richardson	Conductor	" "
	G. W. Blackburn	Conductor	" "
	J. Woodcock	Point Attendant	" "
	D. Sharp	Clerical Staff	" "
BIRMINGHAM	E. Blackwell	Conductor	Killed in action.
	W. E. Browning	Motorman	" "
	H. Bignell	Conductor	" "
	G. Bell	Conductor	" "
	W. Bolton	Conductor	Died of wounds.
	H. Brice	Permanent Way	Killed in action.
	B. E. Clark	Conductor	Died of wounds.
	J. H. Frampton	Shedman	Died from gas poisoning.
	R. Gorman	Conductor	Killed in action.
	T. H. Hirst	Motorman	" "
	H. Hill	Conductor	" "
	W. R. Lee	Conductor	" "
	C. H. Morgan	Conductor	" "
	J. Manning	Conductor	" "
	H. Mills	Conductor	" "
	F. O'Dell	Conductor	" "
	R. Puffett	Motorman	" "
	A. Phillips	Conductor	" "
	A. Parkes	Motorman	Died of wounds.
	W. H. Parkes	Permanent Way	Killed in action.
	T. Rafferty	Motorman	" "
	F. H. W. Rose	Permanent Way	" "
	J. T. Smith	Conductor	Died of wounds.
	A. Steenton	Shedman	Killed in action.
	E. A. Tovey	Conductor	Lost with the "Royal Edward."
	B. Walker	Motorman	Killed in action.
	W. Ward	Motorman	" "
	W. Williams	Conductor	" "
	F. Wilkinson	Conductor	" "
	W. Alderwick	Shedman	" "
	R. R. Burlison	Motorman	" "
	C. Bonnard	Motorman	" "
	W. J. Bottomley	Conductor	" "
	F. Cooley	Permanent Way	" "
	A. G. Davis	Conductor	" "
	A. J. Ellesmere	Motorman	" "
	A. Fancote	Brakesman	" "
	J. H. H. Holmes	Conductor	" "
	W. Hobday	Shedman	" "
	W. C. Lowe	Motorman	Died of wounds.
	A. E. Rogers	Shedman	Killed in action.
	A. Thomas	Permanent Way	" "
	A. Taylor	Car Cleaner	Died on service.
	T. Lewis	Conductor	Killed in action.
	F. Jackson	Permanent Way	" "
	A. E. Sharratt	Car Cleaner	Died of wounds.
	G. Lowe	Conductor	" "
	W. Fiveash	Conductor	Killed in action.
	H. Clark	Overhead	Died of wounds.
	A. Burrows	Motorman	Killed in action.
	T. Cotterill	Permanent Way	" "
	R. A. Lawley	Conductor	" "
	W. J. Breeze	Permanent Way	" "
	E. E. Maley	Conductor	" "
	A. Cox	Conductor	Died of wounds.
	H. Bass	Conductor	" "
	A. A. Plant	Conductor	Killed in action.
	D. Farrell	Conductor	" "
	H. Mavity	Conductor	" "
	G. Powell	Pointsman	" "
	T. Peach	Conductor	" "
	R. F. L. Browning	Conductor	" "
	A. W. Knighton	Conductor	" "
	W. Russell	Car Cleaner	" "
	P. A. Davies	Conductor	" "
	R. Smith	Permanent Way	" "
	W. B. Curry	Car Cleaner	" "
	G. Snape	Overhead	" "
	W. Newbold	Conductor	" "
	F. Austin	Conductor	" "
	C. H. Downard	Motorman	" "

Corporation.	Name.	Designation.	Cause of Death.
BOLTON	John Leach	Motorman	Killed in action.
	Joseph Simmons	Motorman	" "
	Herbert Shanley	Conductor	" "
	Edward Mee	Clerk	" "
BOURNEMOUTH	R. W. Tarrant	Permanent Way	Killed in action.
	R. Fendley	Permanent Way	" "
	H. Smith	Conductor	" "
	W. G. Taylor	Conductor	" "
	C. Jones	Conductor	" "
	C. Beven	Motorman	" "
BRIGHTON	—. Summersby	Motorman	Killed in action.
	—. Bean	Conductor	" "
	—. Cooper	Conductor	Accidentally killed.
BURNLEY	J. Bradburn	Driver	Died of wounds.
	W. A. Brierley	Conductor	Killed in action.
	O. Ingham	Conductor	" "
	F. McKenna	Conductor	" "
	J. Riding	Driver	" "
	R. Wood	Driver	" "
BURY	H. Tennant	Motorman	Killed in action.
	D. Dickie	Motorman	" "
	S. Bracewell	Motorman	" "
	J. Orrell	Motorman	" "
	G. V. Ash	Chief Clerk	" "
	J. Scowcroft	Labourer	" "
CARDIFF	A. Davies	Driver	Killed in action.
	W. Gadd	Driver	" "
	R. Francis	Driver	" "
	J. W. Smith	Conductor	" "
	D. McCarthy	Conductor	" "
	G. Power	Conductor	" "
	A. Thomas	Conductor	" "
CHESTERFIELD	W. H. Mellors		Killed in action.
	W. Wheatley		" "
	R. Ellis		" "
	J. Adlington		" "
COVENTRY	H. J. Rottenbury	Motorman	Died on service.
	F. Swingler	Clerk	Killed in action.
	W. Humphries	Car Greaser	" "
CROYDON	J. J. McNamara	Conductor	Killed in action.
	W. Rudkin	Conductor	" "
	G. Wilkinson	Point Lad	" "
	H. Blundell	Controller Cleaner	" "
	J. E. Kurn	Motorman	Died in India.
DERBY	R. W. Annison	Motorman	Killed in action.
	G. Collins	Conductor	" "
	C. Kerry	Conductor	" "
	C. Saysell	Conductor	" "
	J. H. Sims	Car Cleaner	" "
DOVER	R. Brann	Conductor	Killed in action.
DUNDEE	Alexander Brown	Motorman	Killed in action.
	James Mathers	Motorman	" "
	James G. Craig	Cleaner	" "
	James Taylor	Cleaner	" "
	Charles Smith	Cleaner	" "
	John Weir	Conductor	" "
	James Petrie	Conductor	" "
EAST HAM	W. Dyer	Motorman	Killed in action.
	R. Chittock	Pointsman	" "
GLOUCESTER	W. Fisher	Cleaner	Killed in action.
	H. Gibbons	Conductor	" "
	W. Coldrick	Depot Labourer	" "
	C. Aston	Motorman	" "
GREAT YARMOUTH	James Mulliner	Conductor	Killed in action.
	J. Bass	Conductor	" "
HALIFAX	Charles McCusker	Motorman	Killed in action.
	John Little	Motorman	" "
	Harry Tiley	Motorman	" "
	Fred. Beaumont	Motorman	" "
	Robert Ingham	Conductor	" "
	Ephraim Atkinson	Conductor	" "
	Thomas Boyd	Conductor	" "
	Harold Iredale	Conductor	" "
	Clarence Walker	Conductor	" "
	Fred Ogden	Conductor	" "
HUDDERSFIELD	James Slater	Car Cleaner	Killed in action.
	Claude McVeagh	Conductor	" "

Digitized by Google

ROLL OF HONOUR—*continued.*

Corporation.	Name.	Designation.	Cause of Death.
HULL	A. Donaldson	Conductor	Killed in action.
	John Reader	Conductor	" "
ILFORD	R. Armour	Conductor	Killed in action.
	—. Gander	Conductor	" "
	—. Hawkes	Conductor	" "
	T. J. Cole	Motorman	" "
IPSWICH	E. Bloomfield	Conductor	Killed in action.
	W. G. Bird	Conductor	" "
	G. Filby	Conductor	" "
	E. Chamberlain	Car Cleaner	" "
KILMARNOCK	Samuel Bole		Killed in action.
	James Connel		" "
	William Cummings		" "
	John Reunie		" "
LEEDS	J. Clarke	Conductor	Killed in action.
	E. H. Potter	Conductor	" "
	L. Taylor	Works Staff	Drowned whilst training.
	T. Ashforth	Motorman	Killed in action.
	R. Wilson	Clerk	" "
	J. H. Flintham	Conductor	" "
	G. W. Fowler	Conductor	" "
	G. Shepherd	Conductor	Drowned on transport.
	R. Dalby	Inspector	Killed in action.
	C. Ratcliffe	Conductor	" "
	H. V. Lumb	Clerk	Died from poisoning.
	C. Taylor	Conductor	Killed in action.
	G. Coultate	Permanent Way	" "
	F. Dawes	Motorman	" "
	J. Stephenson	Conductor	" "
	W. Gooch	Conductor	" "
	G. F. Easy	Motorman	" "
	H. Rhodes	Works Staff	" "
	L. H. Kirk	Conductor	Died of wounds.
	J. H. Williamson	Motorman	Killed in action.
	J. Kendall	Motorman	Died of wounds.
	A. Ager	Conductor	Killed in action.
	S. Chafer	Conductor	" "
	S. Grant	Works Staff	" "
	T. W. Troughton	Works Staff	Died of wounds.
LEICESTER	G. F. Cook	Motorman	Killed in action.
	F. Upton	Conductor	" "
	H. Hornsey	Labourer	" "
	H. Graves	Motorman	" "
	F. Freeman	Conductor	" "
	H. Makepeace	Painter	" "
	S. Riley	Bodymaker	" "
	S. Bustin	Greaser	" "
	W. Renwick	Clerk	" "
	N. Booth	Motorman	" "
	W. Birch	Motorman	" "
LEYTON	G. Aly	Conductor	Killed in action.
	G. Davis	Car Cleaner	" "
	C. F. Edney	Clerk	" "
	H. J. H. McPherson	Labourer	" "
	F. Newhouse	Car Cleaner	" "
	B. Smith	Motorman	" "
	W. Wyborn	Motorman	" "
LIVERPOOL	T. H. Corley	Office Staff	Killed in action.
	J. Evans	Conductor	" "
	M. McGuinn	Driver	" "
	F. Metcalfe	Shedman	" "
	J. Moss	Conductor	" "
	J. E. Booth	Assistant	" "
	J. G. W. V. Harris	Fitter	" "
	F. C. Jones	Shed Assistant	" "
	J. H. Livingstone	Shed Assistant	" "
	T. Walsh	Driver	" "
	F. H. Joynson	Shed Attendant	" "
	W. J. Kavll	Driver	" "
	S. Abrahams	Driver	" "
	A. Jamieson	Conductor	" "
	J. Moorhouse	Shed Attendant	" "
	H. A. R. Spencer	Driver	" "
	J. J. Smith	Conductor	" "
	J. G. Mason	Conductor	" "
	C. H. Housden	Office Staff	" "
	T. Odgers	Conductor	" "
	E. Lawrence	Conductor	" "
	J. J. Kelly	Driver	" "
	P. O'Brien	Shed Attendant	" "
	R. O. Thomas	Driver	" "
	W. Usherwood	Conductor	" "
	T. Wadman	Office Staff	" "
	E. C. Reilly	Driver	" "
	F. Cregeen	Conductor	" "
	R. Greaves	Shed Attendant	" "
	R. Jones	Conductor	" "
	W. E. Jones	Driver	" "
	G. A. Johnson	Works Assistant	" "
	J. Neville	Driver	" "
	J. H. Hull	Conductor	" "
LONDON	J. T. Pascoe	Ticket Inspector	Died of wounds.
	I. G. Everett	Car Washer	Killed in action.
	G. Hood	Permanent Way	" "
	W. G. Dickens	Permanent Way	" "
	J. Gray	Car Washer	" "
	G. Guyver	Car Washer	" "
	C. W. H. Juniper	Point Adjuster	" "
	J. J. Shrimpton	Switchboard Att.	" "
	H. J. Lock	Conductor	" "
	A. Forse	Motorman	Died of wounds.
	G. Moore	Motorman	Killed in action.
	Geo. Cox	Car Washer	" "
	Geo. Klein	Car Washer	" "
	A. J. Shepherd	Conductor	" "
	T. S. Waterhouse	Conductor	" "
	W. A. V. Luckhurst	Asst. Conductor	" "
	J. Aubury	Improver	" "
	A. Bickmore	Clerk	" "
	J. H. Rowe	Clerk	Died of wounds
	S. Clark	Conductor	" "
LONDON (*continued*)	W. Allan	Cable-hand	Died of wounds.
	J. Tott	Conduit Cleaner	Killed in action.
	W. Everitt	Motorman	" "
	F. Rushton	Motorman	" "
	A. Herriott	Clerk	" "
	W. H. Ferry	Labourer	" "
	W. Allison	Car Washer	Died of wounds.
	S. W. Jones	Youth	" "
	J. E. Matthews	Conductor	Killed in action.
	H. Gosling	Labourer	" "
	J. Walker	Pointsman	Died of wounds.
	W. Wilson	Motorman	Killed in action.
	C. J. Dawes	Motorman	Died in hospital.
	H. J. Simons	Conductor	Died of wounds.
	H. Marsh	Warehouse Clerk	Killed in action.
	A. S. Plumb	Car Washer	Died of wounds.
	S. J. Baker	Controller Cleaner	" "
	A. J. King	Labourer	Killed in action.
	W. J. Fillee	Car Washer	Died of wounds.
	H. E. Cannard	Labourer	Killed in action.
	J. G. Jones	Shunter	" "
	A. E. Coventry	Conductor	" "
	H. J. R. Marson	Permanent St. ff	Died of dysentery.
	S. H. Townsend	Conduit Cleaner	Killed in action.
	H. Fuller	Conductor	Died of wounds.
	A. Olney	Labourer	Lost with the "Royal Edward."
	J. R. Marshall	Motorman	Died of wounds.
	W. W. Davis	Motorman	Killed in action.
	E. Moore	Motorman	Died from hæmorrhage.
	M. Dacey	Motorman	Died from pneumonia.
	W. S. Richardson	Conductor	Died from valvular disease of the heart.
	J. Skeggs	Conductor	Died of wounds.
	H. White	Conductor	Killed in action.
	A. Cooper	Labourer	Died of wounds.
	J. G. J. Waite	Labourer	Killed in action.
	S. A. Parkington	Labourer	" "
	A. Bolt	Cablehand	Lost his life at sea.
	F. Ashby	Conductor	Died of wounds.
	J. A. Braybrooke	Labourer	" "
	G. E. Rolfe	Labourer	" "
	G. Wright	Hammerman	Killed in action.
	C. J. Andrews	Fitter	Died from peritonitis.
	C. Hodgkinson	Lt. & Power Attd.	Died of wounds.
	H. M. F. Quick	Motorman	Killed in action.
	J. Smythe	Regulator	" "
	W. A. Butlin	Car Washer	" "
	A. W. Roberts	Labourer	Died of wounds.
	M. Cutler	Conductor	Killed in action.
	I. Cromarty	Labourer	Died of suffocation.
	E. Kirby	Conductor	Died of wounds.
	E. W. Whitlock	Motorman	Lost in the "Queen Mary."
	E. C. Laver	Conductor	Died of wounds.
	W. C. Haward	Motorman	Accidently drowned.
	F. Pearce	Motorman	Killed in action.
	M. Humphrey	Conductor	Died of wounds.
	H. A. Cole	Fitter	" "
	W. C. Rice	Youth	Killed in action.
LOWESTOFT	—. Stannard	Motorman	Killed in action.
	—. Freestone	Conductor	" "
MANCHESTER	A. E. Smith	Guard	
	H. Thorp	Guard	
	M. Kerrigan	Labourer	
	J. R. H. Heseltine	Trolley Boy	
	J. F. Parsonage	Trolley Boy	
	J. Craven	Brakesman	
	W. E. Kerridge	Guard	
	W. T. Horrocks	Driver	
	H. Haynes	Trolley Boy	
	J. Barrett	Driver	
	A. Davies	Trolley Boy	
	S. Pickford	Van Driver	
	A. Upton	Handyman	
	J. Gorman	Guard	
	W. Burns	Guard	
	T. Brownhill	Guard	
	W. Heald	Guard	
	C. Stubbs	Driver	
	W. H. Wadham	Guard	
	J. R. Groom	Guard	
	A. Rounsevell	Driver	
	J. Powell	Brakesman	
	R. Longshaw	Driver	
	B. J. Butler	Brakesman	
	E. H. Furnival	Washer	
	A. McCluskey	Guard	
	T. Barton	Driver	
	R. Naylor	Fitter	Killed in action or died of wounds.
	W. Walker	Trolley Boy	
	W. Sanderson	Car Cleaner	
	J. G. Macdonald	Driver	
	E. Bloor	Trolley Boy	
	W. McDonald	Guard	
	J. Ogden	Pavior	
	W. Whettall	Driver	
	F. Smethurst	Driver	
	P. Horner	Labourer	
	G. C. Bouchier	Trolley Boy	
	T. Conway	Handyman	
	H. Greenfield	Guard	
	T. E. Hughes	Car Cleaner	
	W. H. Hamilton	Guard	
	E. Hayes	Guard	
	W. Cain	Guard	
	L. Beddows	Guard	
	G. F. Newman	Trolley Boy	
	J. Nicholson	Driver	
	W. Renshaw	Trolley Boy	
	T. Dunn	Trolley Boy	
	T. Rae	Trolley Boy	
	R. Hudson	Trolley Boy	
	W. M. Pinkerton	Trolley Boy	
	A. Corner	Handyman	
	H. Walton	Trolley Boy	

Digitized by Google

ROLL OF HONOUR—*continued.*

Corporation.	Name.	Designation.	Cause of Death.
MANCHESTER (*continued*)	B. Matthews	Guard	
	M. Joyce	Cleaner	
	W. Davies	Bodymaker	
	J. Nicholson	Driver	
	W. Kenny	Guard	
	T. Wootton	Guard	
	J. Moran	Labourer	
	D. Paton	Trolley Boy	
	L. S. Lloyd	Trolley Boy	
	E. Valentine	Car Cleaner	
	F. Moffatt	Trolley Boy	
	O. J. Glancy	Platelayer	
	R. Sharpley	Guard	
	J. C. Olev	Driver	
	W. Penny	Pavior	
	R. Cooper	Guard	
	F. T. Lever	Guard	
	S. M. Bleasdale	Driver	Killed in action or died of wounds.
	T. Thorneycroft	Rubber (Works)	
	G. Lewis	Trolley Boy	
	A. J. Westmacott	Cleaner	
	S. Burgess	Boilerman	
	J. W. Forghan	Cleaner	
	J. R. Wroe	Guard	
	F. Dent	Car Cleaner	
	F. Male	Apprentice Painter	
	J. Irlam	Guard	
	J. Kirkpatrick	Trolley Boy	
	G. Rastall	Driver	
	S. Williams	Trolley Boy	
	J. Nicholson	Driver	
	P. C. Swift	Trolley Boy	
	A. Rippon	Bodymaker	
	A. Cornthwaite	Brakesman	
	R. S. Thompson	Cleaner	
	W. Rothwell	Handyman	Drowned.
	G. E. Broom	Clerk	Died from dysentery.
	H. Hallworth	Trolley Boy	Died while training.
	P. W. Longshaw	Driver	Killed in action.
	H. R. Ringer	Driver	" "
	E. Fitton	Driver	" "
	C. O'Connor	Driver	" "
	T. Wingrave	Labourer	" "
NEWCASTLE	N. Ross	Motorman	Killed in action.
	T. Nesbitt	Motorman	" "
	S. Cooper	Motorman	" "
	J. Bell	Conductor	" "
	F. Brown	Motorman	" "
	S. Webb	Motorman	" "
	R. Nealings	Motorman	" "
	F. W. Robinson	Motorman	Died of wounds.
NOTTINGHAM	T. Duffin	Conductor	Killed in action.
	L. Andrews	Conductor	" "
	R. Slater	Conductor	" "
	H. Tutin	Conductor	" "
	W. Cannadine	Motorman	" "
	A. Lymn	Labourer	" "
OLDHAM	Harry Slinger	Conductor	Killed in action.
	John Lowe Taylor	Conductor	" "
	John Wright Wood	Conductor	" "
	Harold Shaw	Conductor	" "
	Alfred Dale	Conductor	" "
	Edward Custy	Conductor	" "
	John Cartledge	Way Labourer	" "
	John William Rose	Way Labourer	" "
	Sidney Crawshaw	Junior Clerk	" "
	James Wilson	Conductor	" "
PORTSMOUTH	A. C. Taplin	Conductor	Drowned on H.M.S. "Good Hope."
	Chas. Parks	Conductor	" " "
	E. B. Green	Conductor	Died of consumption.
	John Nolan	Conductor	Died of wounds.
	George Cook	Conductor	" "
	—. Cornhill	Conductor	Died of pneumonia.
READING	L. Gibbons	Conductor	Killed in action.
	W. L. Streake	Conductor	Died of enteric fever.
ROCHDALE	A. Swaine	Conductor	Killed in action.
	J. W. Boothman	Motorman	Died of wounds.
	H. Hardiker	Motorman	" "
	J. Fitton	Labourer	Killed in action.
	A. E. Riley	Conductor	Died of wounds.
SALFORD	F. Anderton	Motorman	
	F. Rogers	Motorman	
	J. Hancock	Motorman	
	H. Hessey	Motorman	
	B. Devine	Motorman	
	A. Platt	Motorman	
	P. Whatmough	Motorman	
	C. K. Tomlinson	Motorman	
	W. Corbett	Conductor	
	J. Taylor	Conductor	Killed in action or died.
	G. Hall	Conductor	
	G. A. Ong	Conductor	
	J. Dickson	Conductor	
	W. H. Watson	Conductor	
	A. Stewart	Conductor	
	H. Mutch	Night Staff	
	H. C. Darbyshire	Office Staff	
	W. Johnson	Youth	
	J. Fender	Youth	
	L. A. Wilson	Youth	
SHEFFIELD	R. Ketterick	Motorman	
	H. Bates	Motorman	
	J. E. Colton	Motorman	
	F. Evans	Motorman	
	G. Shannon	Motorman	
	C. Wagstaffe	Motorman	
	J. Holmes	Motorman	
	J. Morley	Motorman	
	J. Hawtin	Motorman	
	R. Briggs	Motorman	
	J. W. Powell	Conductor	
	A. Dawson	Conductor	Killed in action or missing.
	J. W. Holmes	Conductor	
	J. S. Glanville	Conductor	
	E. Barlow	Conductor	
	T. J. Morrisey	Conductor	
	B. Wright	Conductor	
	W. Marsden	Conductor	
	P. Dallyn	Conductor	
	G. J. Warneford	Conductor	
	J. L. Hall	Joiner	
	W. E. Turner	Cleaner	
	H. Rowbotham	Shedman	
	E. Donhue	Apprentice	
SOUTHAMPTON	John Cox	Motorman	Killed in naval action.
	H. L. Warwick	Motorman	Died of wounds.
	—. Webb	Blacksmith	Died in hospital.
	—. Richards	Fitter's Mate	Killed in action.
	—. Page	Conductor	" "
	—. Merritt	Car Cleaner	" "
SOUTHPORT	Eric Sucksmith		Killed in action.
STALYBRIDGE, HYDE, MOSSLEY, AND DUKINFIELD	J. Shaw	Motorman	Killed in action.
	H. Mather	Motorman	" "
	A. Wright	Conductor	" "
	E. Hadfield	Conductor	" "
	H. Shaw	Conductor	" "
	H. Smith	Conductor	" "
SUNDERLAND	E. Read	Motorman	Killed in action.
SWINDON	J. W. Law	Conductor	Killed in action.
	A. Wright	Conductor	" "
WALLASEY	M. Doyle	Driver	Killed in action.
	R. Corfield	Driver	" "
	J. H. Dean	Driver	" "
	H. Laurence	Conductor	" "
	W. Thompson	Conductor	" "
	G. Taker	Shedman	" "
	L. Hughes	Shedman	" "
WALSALL	G. Allsopp	Motorman	Died of fever.
	S. Rider	Motorman	Died of wounds.
	R. Poole	Shed Staff	Killed in action.
WALTHAMSTOW	James Grey	Motorman	Killed in action.
	A. J. Wicks	Conductor	" "
WEST HAM	J. Underwood	Conductor	Killed in action.
	F. W. Gould	Shed Labourer	" "
	F. Knight	Track Examiner	" "
	W. J. Coker	Motorman	" "
WEST HARTLEPOOL	T. Buttery	Motorman	Killed in action.
	J. Mawhinney	Motorman	" "
WIGAN	Miles J. Smith	Conductor	Died in France.
	Thomas Graham	Motorman	Killed in action.
	Joseph Vernon	Coach Putr. Appr.	" "
WOLVERHAMPTON	F. Bolland	Conductor	Died in hospital.
	F. Knipe	Conductor	Killed in action.
	H. Walker	Cleaner	" "
YORK	G. Britton	Motorman	Killed in action.
	R. H. Cairns	Conductor	" "
	W. Ireland	Conductor	" "
	H. Lawson	Conductor	" "
	F. C. White	Conductor	Died of fever in Germany.
BRADFORD	R. Raw	Conductor	
	A. Simpson	Conductor	
	H. Neale	Conductor	
	B. Conboy	Conductor	
	W. S. Marshall	Driver	
	R. Helliwell	Parcel Messenger	
	C. Pape	Clerk	
	J. Holdsworth	Parcel Messenger	
	H. Holland	Conductor	
	R. B. Hargrave	Driver	
	A. Barker	Parcel Messenger	
	P. Smith	Parcel Clerk	Killed in action.

Digitized by Google

A NOTABLE YEAR AT PORTSMOUTH.

The Portsmouth Tramways Committee, Mr. W. R. Spaven, the general manager, and Mr. V. G. Lironi, the electrical and permanent way engineer and rolling stock superintendent, merit the thanks and congratulations of the Town Council and the ratepayers. The electric tramways were opened in September, 1901, and the results both as regards finance and public service have realised the expectations that were entertained when the Corporation purchased the undertaking. Yet although the fifteenth anniversary is close at hand there is no indication that the authorities have reached such a degree of satisfaction with things as they are as to prevent them from anticipating further improvements after the war. Besides possessing well-tried officials, the Corporation of the great naval centre are fortunate in their representative who fills the chair of the Tramways Committee; and it is an advantage to the continuity of their policy that Councillor J. Timpson, who was elected chairman last November, occupied the position of vice-chairman for a number of years. The committee's policy has always included an adherence to sound financial provision, thorough maintenance, and the promotion of a high standard of efficiency. Not the least important influence in this direction is the manner in which the general manager labours to promote *esprit de corps* among the employees, a matter of great difficulty during such a period as the past two years, when the majority of the men have left the service and placed their lives at the disposal of their country. To fill the gap the women of Portsmouth have rendered invaluable assistance.

One way by which the employees have been encouraged to maintain their interest in the work is the provision of new uniforms simultaneously to the entire staff. This was recently done for the first time at a cost of nearly £1,000, the contractors being Messrs. J. Cantor and Company, of Old Nichol Street, London, E. It speaks well for the contractors that not only were the whole of the uniforms delivered well in advance of the contract date, but that not one of them required to be altered in any particular, so carefully had the measurements been taken and the work executed. It was fitting that the employees on the first occasion after such an event should be given an opportunity of seeing themselves collectively. For this purpose the general manager called a parade at the North End depot before they went on duty on a recent Sunday, the arrangement meeting with the ready approval of the committee. The motormen and conductors numbered 355, and with the indoor staff the total strength was nearly 400.

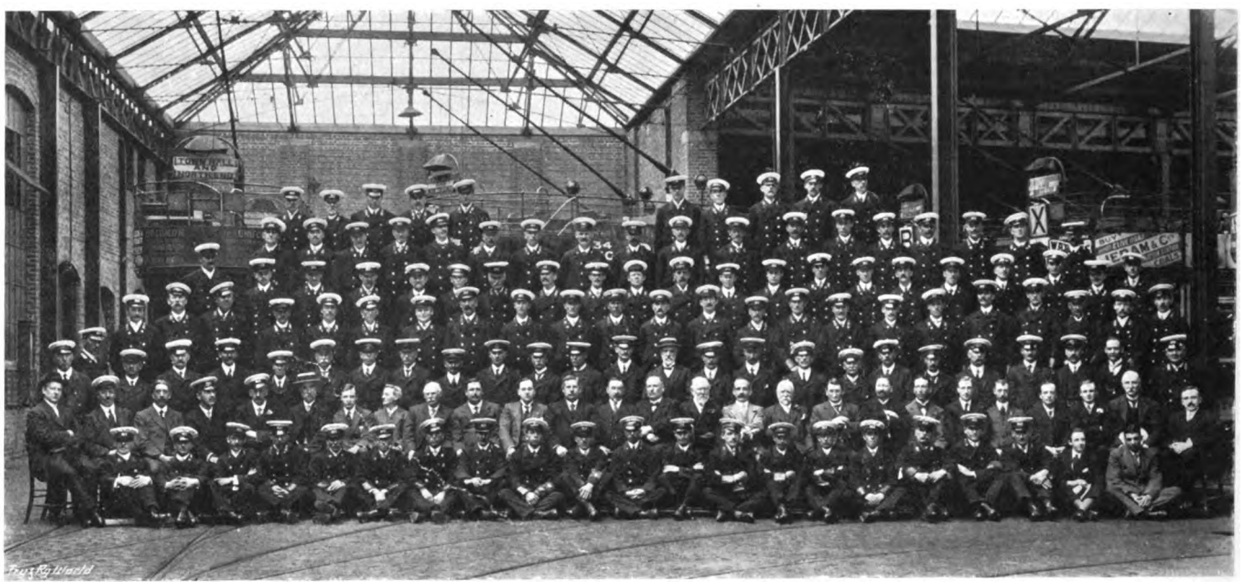

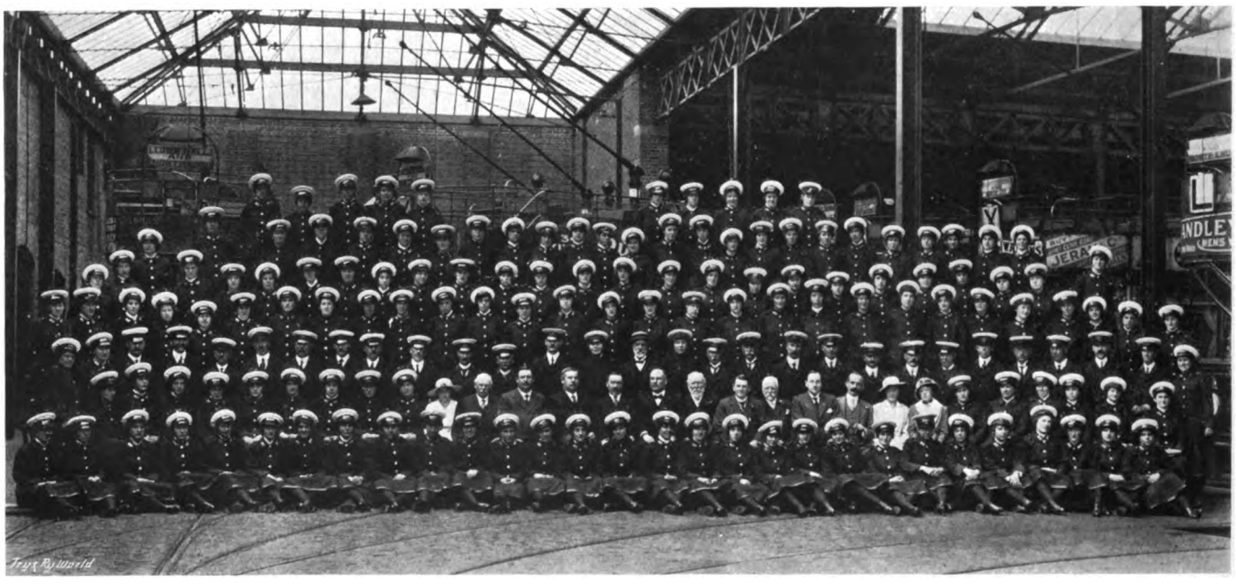

Portsmouth Corporation Tramways Committee, Staff and Employees.

Before the company was dismissed to duty the parade was photographed, and the chairman expressed the committee's satisfaction with the smart appearance of the new uniforms. He also spoke of the very satisfactory manner in which the whole of the staff and employees had rendered assistance in coping with the demands of the traffic during the past two years under the many difficulties arising out of the war. Finally Councillor Timpson thanked everyone for the untiring efforts they had put forth to meet every requirement of the department, and he assured them of the committee's appreciation of their work. Brakes were provided for conveying the employees to and from the parade and to headquarters for going on duty afterwards. The women conductors' uniforms are of dark grey material edged in red.

Digitized by Google

Other matters may be mentioned in which enterprise has been shown. The first is that a score of voluntary motormen are engaged in car driving, following careful tuition. These substitutes are rendering very valuable service. Another point is the successful working of the barrier system at North End to regulate the boarding of the cars. When peace is restored progress will be made with the plans for a modern terminal at Cosham.

As to the financial aspect of the undertaking the past year's receipts show a disposable balance of £31,345. After allowing for the usual charges, including £6,060 to renewals, a balance of £20,278 remains to be dealt with as follows:—Relief of the rates, £13,000 (equivalent to nearly a 4d. rate); reserve and insurance fund, £3,000; carry forward, £4,278. The highest sum previously allocated to the relief of the rates was £10,000. The renewals fund amounts to £67,424, and the reserve and insurance fund to £24,233. During the year important concessions were made in regard to

Mr. W. R. Spaven
(General Manager).

Coun. J. Timpson
(Chairman).

cheap tickets and section extensions, yet the total revenue of £127,546 was far in excess of any previous year. The committee and the manager deserve hearty congratulations upon achieving such a successful result in a year of unexampled difficulty.

It may be mentioned that Mr. W. R. Spaven, the general manager, recently completed thirty-eight years of tramway service. For some years he was assistant manager of Leeds tramways, taking part in the conversion of the system to electric traction, and the institution of the new and improved service. A few years later, when the Portsmouth tramways were in their turn converted to electric traction, he was appointed general manager, and he has now occupied this position for nearly fifteen years. Throughout that period the tramway department has been uniformly successful and the general manager has had the gratification of receiving many well-merited expressions of approval from his committee and the public.

FINANCIAL REPORTS AND MEETINGS.

Hadfields, Limited, have declared a dividend of 1s. per share on the ordinary shares, free of tax.

Swansea and Mumbles Railway.—An interim dividend has been declared at the rate of 9⅜ per cent. per annum on ordinary shares for the half-year.

Paisley District Tramways.—The directors have declared an interim dividend at the full rate of 5 per cent. per annum on preference shares for the half-year.

Stewarts and Lloyds, Limited.—The board announce an interim dividend at the rate of 6 per cent. per annum on the preference shares and 10 per cent. per annum on the preferred ordinary shares for the six months ended June 30.

Guest, Keen and Nettlefolds, Limited.—The directors, at the annual meeting, which took place on August 31, recommended the payment of final dividends as follows:—On preference shares at the rate of 5 per cent. per annum for the half-year ended June 30, and on ordinary shares at the rate of 10 per cent. per annum, for the half-year ended June 30, together with a bonus of one shilling per share on ordinary shares, all free of income-tax. Similar distributions to the foregoing have been made for many years.

Millars' Timber and Trading Company.—The report for 1915 states that the balance of profit, before deducting interest on debenture stock or depreciation, is £75,172, which, with £73,414 brought forward, makes £148,583. Interest on debenture stock and the amount payable to the sinking fund in lieu of interest on debenture stock cancelled amount to £21,773; there has been carried to depreciation reserve account £25,000; the dividend on preference shares for the year amounted to £51,000; leaving a balance to carry forward of £50,810.

Aberdeen Suburban Tramways Company.—The report for the half-year ended July 31 gives the profit as £1,054, while the balance to the credit of profit and loss account is £3,209. This sum has been applied as follows:—£1,200 to the renewal and depreciation account, which will then stand at £16,700; a dividend at the rate of 5 per cent. for the past year on the paid-up capital, £1,561 18s.; directors' fees, £31 10s.; leaving to be carried forward £415 14s. 3d.

L.C.C. Tramways Record Week.—For the week ended August 2 the traffic revenue for the tramways of the London County Council amounted to about £52,300. This is a record for the undertaking. During the week 729,177 children travelled by tramway at reduced fares. Advantage of these reduced fares has been taken to a greater extent since the schools were closed for the summer holidays by children going to parks, open spaces, and places of interest. A great portion of the increased receipts is due to the presence of the captured submarine minelayer at the Temple pier.

Tyneside Tramways and Tramroads Company.—In their half-yearly report the directors state that the surplus of receipts over expenses is £4,129, which, with the balance brought forward (£625), makes a total to the credit of profit and loss account of £4,755. After deducting interest on debentures, loans, etc., amounting to £1,013, there remains £3,742. This profit the directors proposed to appropriate as follows:—Dividend on the preference shares at the rate of 5 per cent. per annum, less income-tax, £601; dividend on ordinary shares at the rate of 1¾ per cent. per annum, less income-tax, £1,172; reserve for renewals, depreciation, and other contingencies, £939 (this, with £435 interest on investments, will increase the fund to £23,936); reduction of registration and formation expenses, etc., £330; leaving to be carried forward, £700. The traffic receipts show a decrease of £1,017 14s., as compared with the corresponding period of last year; due to the loss of pleasure traffic. Dr. Merz, presiding at the annual meeting on August 15, said they need not be discouraged by the reduction of the dividend, because it was largely explained by the fact that the holiday traffic had practically disappeared for the present. The ordinary traffic had been reduced by £645. There was a small increase in the workmen's traffic. The week-end traffic was now regular and larger than last year, especially in fine weather. To date the traffics had increased. On the whole they might look forward to a better time during the second half of the year. Mr. J. E. Henderson (deputy chairman) seconded, and the report was adopted. The chairman moved and Lord Armstrong seconded the payment of the dividends. A donation of £10 10s. was voted to the Royal Victoria Infirmary, and the directors were empowered to contribute £200 to charitable purposes in connection with the war.

South Shields Tramways.—Notwithstanding the difficulties caused by the war, the results of the year's work have been very satisfactory. Mr. J. C. Whiteley was appointed general manager and engineer about fifteen months ago, and the report now published covers the first year of his management. Alderman Wylie, chairman of the tramways committee, in moving the adoption of the annual report at a recent Council meeting, described the past year as a very strenuous one. The difficulties that had been met with had been almost insurmountable, but the revenue had been greater than in any previous year. The expenses had been heavier by £801, because they had paid £1,922 to make up the wages of men who had joined the colours; but working expenses were actually less. They finished the year with a surplus of £6,504, after paying interest and sinking fund charges, which he thought was very creditable. Of this amount £2,400 would go to the relief of rates and the balance to the reserve fund, which would in consequence be raised to £35,600, this being equivalent to 19·6 per cent. of the capital outlay. As they were only allowed to accumulate as a reserve an amount equal to 20 per cent. of their expenditure, they could only place another £700 to that fund. They carried people a greater distance for a penny than any other tramway undertaking, viz., 3·1 miles. These results were due to careful management and the good work of every member of the staff. A summary of the results for the past three years is appended:—

	1915-16.	1914-15.	1913-14.
Capital expenditure	£181,607	£181,097	£173,599
Loans outstanding	£148,577	£155,213	£146,912
Total track mileage	10·25	10·25	10·25
Number of cars in stock ...	40	40	35
Traffic revenue	£41,326	£39,275	£37,744
Total revenue	£41,826	£39,846	£38,331
Working expenses	£24,385	£24,864	£22,585
War allowances	£1,932	£646	—
Gross balance	£15,509	£14,336	£15,746
Net profit	£6,504	£5,594	£7,107
Passengers carried	11,163,378	10,479,421	10,005,164
Average fare per passenger ...	·8739d.	·8995d.	·9054d.
Car mileage	824,887	927,728	898,015
Units per car-mile	1·347	1·293	1·231
Power cost per car-mile ...	1·9069d.	1·7798d.	1·710d.
Traffic receipts per track mile	£4,026	£3,826	£3,677
Traffic receipts per car-mile	12·0237d.	10·1603d.	10·0873d.
Expenses per car-mile ...	7·0948d.	6·4322d.	6·0360d.
Ratio of expenses to revenue	58%	62·4%	58·92%

Digitized by Google

Croydon Corporation Tramways.—The annual report of the general manager, Mr. T. B. Goodyer, for the year ended March 31, shows that the total receipts were £94,416. This is an increase of £5,801 over the previous year, in spite of the recent strike. Deducting working expenses, £72,509, war allowances, £4,982, and bank interest and income-tax on stock, there remains a gross balance of £18,278. Interest, sinking fund, and income-tax reduces this to a net surplus of £844, which has been carried to the renewals fund. In view of the difficulties of the past year and of the strike, which was partially continued for several weeks, the result is an excellent showing.

Aberdeen Corporation Tramways.—In moving the adoption of the accounts of the tramway committee for the year ended May 31, at the August meeting of the City Council, Councillor Robertson said the revenue showed an increase of £6,326, which was a very large one considering the number of men away from the town. Expenses were up £6,673, mainly owing to income-tax, war bonus, repairs to the track, and dependants' allowances. The profit of £9,697 was not quite so large as in the previous year. Out of that profit the Corporation had power to dispose of £3,232, and the committee recommended that £2,000 be allocated to the common good, and £1,232 in carrying out city improvements. The accumulated funds had reached £267,567, while the capital expenditure was only £368,769. Appended is a summary of the reports for three years :—

	1916-15.	1915-14.	1914-13.
Capital expenditure	£368,769	£366,332	£357,191
Amount outstanding	£201,972	£213,335	£216,711
Traffic revenue	£92,784	£86,614	£84,275
Total revenue	£94,328	£88,002	£85,266
Working expenses	£55,602	£51,525	£47,036
War allowances	£2,595	£875	—
Gross balance	£36,130	£36,477	£38,230
Income-tax	£3,275	£1,626	£983
Net profit	£9,697	£11,000	£14,062
Passengers carried	26,593,730	24,048,816	22,218,142
Fare per passenger	·83d.	·86d.	·91d.
Car mileage	1,968,615	1,909,009	1,832,587
Units per car mile	1·260	—	1·184
Power cost per car-mile ...	1·061d.	1·027d.	·956d.
Traffic receipts per track mile	£3,313	£3,121	£3,064
Traffic receipts per car-mile ...	11·31d.	10·89d.	11·04d.
Expenses per car mile ...	7·09d.	6·48d.	6·16d.
Ratio of working expenses ...	61·70%	58·54%	55·16%
Track mileage	14m. 4f.	14m. 3f.	14m. 3f.
Number of cars in stock ...	83	83	77

Dundee Corporation Tramways.—In submitting the report for the year ended May 15 to the City Council, Councillor G. A. Johnston, chairman of the tramways committee, stated that the department is in a strong position. In ten years the revenue has increased from £50,154 to £71,940, and in that time £103,642 has been contributed to the sinking fund, while to the accident, renewals, and depreciation funds there has been paid £97,894. We append a table showing the principal items in the accounts for the past three years. This shows that although having to contend with increased charges for energy and materials, besides paying more than double the sum required for war allowances and bonus in the previous year, £5,200 was added to the reserve fund, £8,188 was expended on general repairs and maintenance, an increase of £744 on 1914-15, and only £1,288 less than in the pre-war period. Car mileage increased by 27,542 miles, passengers by 873,500, and the receipts by £3,667. In August, 1915, the department took over and began working 1,514 yards of double line that previously belonged to the Dundee, Broughty Ferry and District Tramways Company, and a scale of through fares to West Ferry and Broughty Ferry was agreed to in November last.

	1915-16.	1915-14.	1914-13.
Capital expenditure	£383,486	£371,145	£362,116
Amount outstanding	£279,844	£274,383	£272,053
Reserve or renewals fund ...	£97,894	£92,694	£82,966
Traffic revenue	£70,455	£66,552	67,754
Total revenue	£71,940	£68,273	£69,504
Working expenses	£48,431	£43,358	£43,438
War allowances	£2,783	£1,116	—
Gross balance	£23,509	£24,915	£26,066
Net profit	£6,777	£8,902	£10.713
Passengers carried	19,626,640	18,753,140	19,042,344
Fare per passenger	·861d.	·851d.	·853d.
Car mileage	1,415,887	1,388,345	1,387,980
Units per car-mile	1·912	1·847	1·815
Power cost per car-mile ...	2·061d.	1·847d.	1·815d.
Receipts per mile of single track	£2,348	£2,345	£2,387
Traffic receipts per car-mile ...	11·942d.	11·504d.	11·715d.
Expenses per car-mile, excluding power	6·148d.	5·648d.	5·696d.
Ratio of working expenses ...	67·3%	63·5%	62·49%
Total track mileage	16½m.	15⅝m.	15⅝m.
Number of cars in stock ...	76	72	68

CONTRACTS AND ORDERS.

British Insulated and Helsby Cables, Limited, have a contract from Sunderland Council for a supply of cables.

Edison and Swan Company, Limited, have a contract for the supply of metal-filament lamps to Melbourne City Council.

Aberdeen Council have placed a contract with C. A. Parsons and Company, Limited, for a 5,000 KW. turbo-generator set, at £18,000.

Peckham Truck and Engineering Company, Limited, have a contract to supply fifteen Peckham trucks to Sheffield Tramways Committee.

Bradford Tramways Committee have arranged for Messrs. Clay and Atkinson to continue to supply phosphor-bronze castings until December 31 next.

British Westinghouse Company are supplying a rotary converter to Barrow Council and a 1,000 KW. rotary converter and transformer to Salford Council.

Sheffield Electricity Committee have accepted the offer of the British Electric Transformer Company, Limited, to extend their contract for two years.

Crypto Electrical Company have an order from the Metropolitan Asylums Board for an electric motor for working tire inflators at four ambulance stations.

The Improved Wood Paving Company, Limited, are supplying 100,000 creosoted deal paving blocks to Lambeth Borough Council. at £19 11s. 9d. per 1,000 blocks.

The Midland Railway Company have again made an arrangement with Shepherd's Parging Block Company, Limited, of Milkstone, Rochdale, for the supply of their block parging.

Salford Tramways Committee have allotted a contract to J. Russell and Sons, Wednesbury, for the supply and delivery of forty tramway standards, at £12 17s. 2d. per standard.

Wolverhampton Council have placed a contract with Herbert Morris, Limited, for a 40-ton travelling crane, at £1,450, and with J. E. Perry and Son for the erection of a steel chimney, at £540.

Sunderland Tramways Committee have placed the following contracts :—Men's uniforms, H. Lotery, London ; men's overcoats, J. Cantor and Company, London ; female conductors' uniforms, Bainbridge, Newcastle ; female conductors' overcoats, H. Lotery, London.

Electrical Supplies to the War Office.—A recent list of War Department contracts includes the following :—Electric cable, Siemens Brothers and Company, Limited, and Liverpool Electric Cable Company, Limited ; electric light and power sundries and rotary converter at Woolwich, General Electric Company, Limited ; generating sets, W. H. Dorman and Company, Limited ; electric generators and motors and parts, British Thomson-Houston Company, Limited.

Aberdeen Clothing Contract.—The Tramways Committee have accepted the following tenders for the supply of employees' uniforms :—Inspectors', motormen's, conductors', and parcel boys' tunics and trousers, Anderson and Thomson, Aberdeen ; overcoats for inspectors, motormen, and conductors, Moore, Taggart and Company, Glasgow ; waterproofs for inspectors and motormen, London Rubber Company, Aberdeen ; caps, Army and Navy Stores, London.

Shepherd's Parging Block Company, Limited, have received orders for a large quantity of block parging from Coventry, Rochdale, and Gloucester Corporation Tramways, and the company's block parging has been specified for two other Corporation tramway extensions. The company ask us to point out that the block parging does not prevent bedding from being squeezed out from under the paving and up into the cavities of the tramway rail, thus letting down the sett. The block parging is a modern way of filling the space between the base and the head of the rail,.

Victorian Railway Commissioners have placed the following contracts :—Cowley's Eureka Ironworks Company, mild steel masts, bridges and brackets for overhead equipment of Melbourne suburban railways ; British Insulated and Helsby Cables, Limited, three-core cable for Newport workshops, £2,865 11s. per mile ; J. Miller, acetylene welding of rail joints, Sandringham-Black Rock Railway, £1 13s. per joint ; Australian General Electric Company, electrical supplies for point indication during five years, and various equipment for Jolimont car shops and Newport signal shops ; Edison and Swan United Electric Light Company, motor generator and switchboard for Jolimont car shops.

Manchester Electricity Committee have awarded the following contracts :—Hydraulic Engineering Company, coal unloading plant (with licence to sub-let turntable to Dick, Kerr and Company, Limited) ; five 1,000 KW. transformers, Ferranti, Limited ; 250 KW. and 500 KW. transformers, Ferranti, Limited ; cable, British Insulated and Helsby Cables, Limited, and C. Macintosh and Company, Limited ; varnish, Pinchin, Johnson and Company, Limited. The following are twelve months' contracts for supplies :—Electrical accessories, General Electric Company, Limited ; incandescent and radiator lamps, British Thomson-Houston Company ; bitumen tape and linen tape, W. T. Henley's Telegraph Works Company, Limited.

Digitized by Google

PERSONAL.

Mr. H. Evans, superintendent of tramways and ferries, Khartoum, arrived home in August on leave.

Sir Alexander B. W. Kennedy has been appointed chief engineer to the St. James's and Pall Mall Electric Light Company.

Mr. John Harris, City Sheriff of Lincoln, and secretary to Messrs. Clayton and Shuttleworth, has been added to the Commission of the Peace for Lincoln.

Mr. W. Fraser, station superintendent, Barking Council electricity department, has been appointed electrician in charge of a range of Midland shell factories.

Mr. R. B. Leach, general manager, Heywood Corporation Tramways, and borough electrical engineer, has been appointed electrical engineer for Loughborough.

Mr. W. O. Strangward, late secretary to the Prahan and Malvern Tramways Board, has been appointed secretary of the Melbourne Tramways Board, the annual salary being £1,200.

Mr. G. Lewis, who retired at the end of August from the position of an inspector to Manchester Corporation Tramways, has been continuously employed on the city tramways since 1876.

Mr. H. A. Wilcox, manager of the Melbourne Tramways and Omnibus Company, has been appointed general manager to the Tramways Board which is taking over the company's undertaking. The salary is £2,500 per annum.

Mr. Frederick Whitridge, president of the Third Avenue Electric Railroad, who was stated to be spending a vacation in England, was blamed by the public authorities of New York for the strike of tramway employees in that city. It is alleged that his company had ignored the arbitration agreement with the men.

Sir Maurice Fitzmaurice, late chief engineer to the London County Council, is chairman of the engineering committee of the Advisory Council to the Committee of the Privy Council for Scientific and Industrial Research. The Council has just issued its first annual report, which contains some important recommendations.

Mr. F. P. Dolamore, the new borough engineer of Bournemouth, has been in the service of the Corporation for twenty-five years. He became deputy borough engineer nineteen years ago, and under the late Mr. F. W. Lacey he took part in remodelling the main drainage, construction of the tramway track with necessary street widenings, and other important works.

Mr. Peter Fisher, general manager, Dundee Corporation Tramways, is the president this year of the Municipal Tramways Association. At the August meeting of the City Council Bailie Buist remarked that in ordinary circumstances the conference would have been held in Dundee instead of in London. He therefore suggested that the Lord Provost should accompany the chairman and the manager to the conference, but the suggestion was not adopted.

Mr. Arthur du Cros, M.P., who was one of the recipients of a knighthood on the occasion of the King's birthday, occupies a post at the Ministry of Munitions, where he has helped to speed up the production of motor transport and munitions. Sir Arthur is best known as the managing director of the Dunlop Rubber Company. Recently he assisted in securing for the nation Dante Gabriel Rossetti's famous collection of pictures, and is an honorary member of the National Art Collections Fund.

Dr. J. Theodore Merz, D.C.L., who presided as chairman at the annual meeting of the Tyneside Tramways and Tramroads Company, has devoted many years of his life to the organisation and promotion of scientific manufactures. The honorary degree of D.C.L. of Durham University was conferred upon him in recognition of his services in that respect. He has been closely identified with Armstrong College, and has achieved literary distinction through "A History of European Thought in the Nineteenth Century"—*Newcastle Daily Journal.*

Chief Inspecting Officer of Railways. Colonel P. G. von Donop, R.E., having retired under the age limit regulation from the position of chief inspecting officer of railways, Colonel J. W. Pringle, R.E., has been promoted to that position. Since the outbreak of the war Colonel Pringle's services had been lent to the War Office by the Board of Trade, to which department he has now returned. Colonel von Donop went to the Railway Department of the Board of Trade in July, 1899, and he became chief inspecting officer of railways when Sir Arthur Yorke retired in July, 1913.

Alderman H. W. Littler, who has been a member of the Electric Lighting and Tramways Committee of West Ham since its inception and chairman for seven years in all, resigned his position as chairman on March 21 last owing to his removal into the country. The committee expressed appreciation of his services in the following resolution, which has been published in the annual report of the department:—"In parting with their chairman, the committee place on record their very high appreciation of the excellent services rendered by him both as a member and chairman, and of the great interest which he has at all times taken in the efficient development and the successful working of the electricity and tramway undertakings."

Mr. J. Brierley, traffic superintendent, and **Mr. J. W. Thorpe,** works manager, Oldham Corporation Tramways, have received recognition from the Council of the services they rendered during the three months preceding the appointment of Mr. P. Priestly as general manager and engineer. Both officers have been awarded an increase of salary, and Mr. Brierley also received an honorarium. The recommendations were made by Mr. Priestly, and Alderman Isherwood informed the Corporation that the two gentlemen had had very serious difficulties to face on account of the shortage of labour at the sheds, and they had put in a great deal of extra time and given extra services. Even with the advances recommended they would be still below the salaries paid in other towns of approximately the same size as Oldham.

Inspector H. Pilcher, on leaving Dover Corporation Tramways after 19½ years' service, has been presented with a watch, cigarette holder, etc., by the tramway staff. Mr. E. Carden, general manager, in making the presentation, said they were sorry to lose Mr. Pilcher, and he felt that his experience would be a great help in his future employment. He had done his work with a tact and carefulness that would be an immense help to him. For 17½ years he had served as inspector. In reply, Mr. Pilcher referred to the absence of serious accidents as evidence of the efficiency of the staff. Mr. Carden added that the freedom from serious accidents was due to the careful work of the employees. There had been no accident due to negligence. There had been two children accidentally killed, and one had fallen alongside a car. As the average number of passengers carried was three millions a year, this spoke well for the carefulness of the men.

Mr. R. S. Pilcher, general manager and engineer, Aberdeen Corporation Tramways, was congratulated by Councillor Robertson, chairman of the tramways committee, on the occasion of the presentation of the yearly accounts to the Corporation. That the undertaking had been so successful, the chairman remarked, was entirely due to the management of the general manager, supported by a loyal staff. Late and early they would always find Mr. Pilcher on duty. His work had been exceptionally trying, with so many of the staff on service, and no doubt at the end of the year the Corporation would recognise Mr. Pilcher and his staff for the extra work they had so willingly carried out. The Council applauded the latter remark, and the applause was renewed at the end of observations that fell from the Lord Provost, who said the success of the tramways was in a great measure due to the efficient manner in which the manager had carried out his duties. They would have noticed how very nearly they had lost Mr. Pilcher to Ireland, and while they regretted that he failed narrowly to get the promotion he deserved, they were thankful to be able to keep him.

Mr. J. S. D. Moffet, general manager, West Ham Corporation Tramways, who has been appointed to similar duties at Belfast, was the recipient on August 7 of a silver rose-bowl and a pair of binoculars from the shed, traffic, and works employees. Mrs. Moffet was presented with a silver dressing table set. The ceremony was attended in the recreation room by a large gathering of employees and their wives, and the presentation was made by Mr. W. T. Young, traffic superintendent, who referred to the happy relations that had existed between Mr. Moffet and his staff. In thanking the subscribers, Mr. Moffet regretted that the war would prevent him officially saying good-bye to 375 employees who would otherwise have been there. Owing to the war the social club, founded by Mr. Blain, his predecessor, had not been quite so prominent as it might otherwise have been, but he had to record that the name of Motorman Blunden, one of their most popular members, would long live in the memory of those employees who had been in the trenches for his work in collecting and sending out comforts subscribed for by every member of the staff. Referring to the somewhat strenuous three years he had spent at West Ham, Mr. Moffet regretted that he would not be there to see the fruition of the schemes he had inaugurated with the support of the Corporation for the benefit of the undertaking. These plans related to the remodelling of the cars, restoring the permanent way, and securing revenue by the new fares scheme that would come into force at an early date. He impressed upon all branches of the department that unless they all pulled together and loyally supported his successor no scheme could be a success. Mr. Moffet again thanked the subscribers for the handsome gifts, which would always remind him of the pleasant times he had spent in West Ham. Mrs. Moffet also expressed gratitude for the gift presented to her, and said that her chief regret in leaving was that she would not be able to assist in welcoming back the men who had gone to fight for their country.

WITH THE FORCES.

Lieutenant H. A. Holmes, Royal Fusiliers, who was wounded in the recent advance, is the second son of Mr. Henry Holmes, superintendent of the line, London and South Western Railway.

Lieutenant C. W. P. May, Royal Flying Corps, son of Mr. Wm. C. May, chief traffic manager of the Great Eastern Railway, has been awarded the Military Cross for conspicuous bravery and skill.

Digitized by Google

Lieutenant D. Hughes, Gordon Highlanders, who during the first week in August was reported wounded and missing, was formerly assistant electrical engineer at Llandudno. He enlisted soon after the outbreak of war, and won promotion.

Lance-Corporal A. Wigton, Royal Scots, formerly a motorman on the Glasgow Corporation Tramways, has been awarded the Military Medal for bravery. He has also received the French Medal Militaire. He has won distinction as a grenadier in France.

Second Lieutenant (Temp. Captain) H. C. Sparks, London Regiment, has been awarded the D.S.O. for conspicuous gallantry during an attack on the German trenches. The gallant officer is the brother and partner of Mr. C. P. Sparks, president of the Institute of Electrical Engineers.

Mr. E. S. Haslam, assistant electrical engineer, George Town electricity and tramways departments, Penang, is stated in the annual report of Mr. O. V. Thomas, chief engineer and manager, to have been in England on leave at the outbreak of the war. He joined the colours, and is now in France.

Private E. Smith, a Birkenhead Corporation motorman, early in the war joined the 13th Cheshire Regiment, and was discharged as physically unfit for war service. Although he was over forty years of age, he then entered the motor transport section of the A.S.C., and has been in France and Belgium since March last.

Corporal O. G. Kingston, Gloucester Regiment, formerly a conductor on Gloucester Corporation Tramways, has received the Military Medal by immediate award on the field. Subsequently he was wounded, and was temporarily buried by the blowing up of a dug-out in which he was receiving attention from the medical officer. The medical officer has informed the corporal's mother that her son "worked like a horse for three days and nights with hardly any sleep or food, and at the end did not come out with the battalion, but stayed behind voluntarily to help another regiment. He was perfectly calm in the hottest fire, and gave confidence to all around him. He is a very great loss to the battalion, every man in which recognises how splendidly he behaved."

Since the British advance in France in July there has been an increasing list of killed and wounded among tramway soldiers who are sustaining the honour of the Empire on the field of battle.

Captain A. E. Stone, who has been killed in France, was for many years private secretary to Sir George White, chairman of Bristol Tramways and Carriage Company, and head of the firm of Messrs. George White & Co.

Captain J. A. Rutherford, who has been killed in action at the age of 27 years, was an electrical engineer in the service of the Rangoon Electric Tramways and Supply Company. He held the degree of Master of Engineering of Liverpool University.

Sergeant G. H. Rastall, Royal Lancaster Regiment, who has been killed in the fighting on the western front, was formerly employed by the Manchester Corporation Tramways department. Besides having gained the D.C.M., he had been decorated with the Russian Order of St. George (Fourth Class).

Corporal F. Perry, son of a Cardiff motorman, and formerly a conductor himself, has died of dysentery in Mesopotamia. Corporal Perry enlisted in the R.F.A. about six months before the outbreak of war. He was wounded at Armentieres, and on recovery returned to France, proceeding to the East three months ago.

Corporal J. Riley, King's Own Yorkshire Light Infantry, and for several years a motorman on the Ilkeston Council Tramways, was killed in action in France on July 3. A letter from his company commander states that he was gallantly doing his duty, and that all the officers of the company held a high opinion of him. The gallant soldier leaves a wife and two children.

Second Lieutenant Lycett, who has died from wounds sustained in France, was a young engineer connected with the firm of Tilling-Stevens, Limited, by whom his services were greatly appreciated. Mr. Lycett was the son of Mr. J. A. Lycett, a member of the Council of the British Electrical Federation, Limited, and managing director of several of the affiliated electric traction companies.

Inspector D. Menzies, who has died of sunstroke, enlisted a year ago in the Royal Flying Corps, and was attached to the Indian Expeditionary Force. Mr. Menzies, who belonged to Dundee, was for years connected with the Broughty Ferry Tramways, and was an inspector when he left to take over the duties of chief inspector of Dunfermline and West Fife Tramways upon that company being founded.

All tramway workers will be interested in the appended extract from a letter from Lieut.-Col. W. D. Sanderson, commanding the Loyal North Lancashire Regiment, announcing the death of **Private J. Livesay,** formerly an employee on the Blackburn Corporation Tramways. The deceased was the colonel's orderly, and he "always accompanied me on my visits to the trenches. I feel I have lost a personal friend. He was always so cheerful and ready for his duty at any time. Please accept my deep sympathy."

Lieutenant G. S. Kaye Butterworth, who was killed in action on August 4th, was the only son of Sir Alexander Kaye Butterworth, general manager of the North Eastern Railway. Lieut. Butterworth was educated at Eton and Trinity College, Oxford, and from an early age he evinced great musical talent. When war was declared Lieut. Butterworth enlisted in the Duke of Cornwall's L.I., and was soon given a commission in the Durham L.I. He was abroad for a year and was slightly wounded. A week later he was killed after successfully taking an enemy trench at the head of a bombing party.

RAILWAY OFFICERS AND STAFF.

Lord George Hamilton, chairman of the Metropolitan District Railway, has been appointed chairman of the commission of inquiry into the Mesopotamia campaign.

Mr. W. W. Thornton, general manager, Great Eastern Railway, has been appointed Honorary Lieutenant-Colonel in the Engineer and Railway Staff Corps.

Sir Sam Fay, the general manager of the Great Central Railway, is stated to have been chiefly instrumental in persuading the Government to adopt the Summer Time Act for the duration of the war.

Sir Gilbert Claughton, chairman of the London and North Western Railway, is a member of the committee appointed by the Government to inquire into the position occupied by natural science in our educational system.

Mr. E. C. Geddes, deputy general manager, North Eastern Railway, since 1910, who is one of the new knights, on the formation of the Ministry of Munitions was appointed one of Mr. Lloyd George's principal assistants. He has served as claims agent, commercial agent, and chief goods manager of the N.E.R., which he joined in 1904. Previously he was employed for fourteen years on American and Indian Railways, and he began life as a station porter. He has also worked in an American lumberyard.

BRISTOL TRAMWAYS.

Corporation's Preliminary Expenditure of £8,067.

Bristol City Council on July 25 received a report from the Tramways Option Committee, who were appointed in February, 1913, to consider the question of the advisability or otherwise of the Corporation exercising their option of purchasing the Bristol tramways undertaking, stating that the total expenses incurred by the Corporation had been £8,067 18s. 3d. The following detailed statement was given:—

Expenses Incurred by the Council in Connection with the Bristol Corporation (Tramways) Act, 1914.

	£ s. d.	£ s. d.
Counsels' Fees—		
Hon. J. D. Fitzgerald, K.C.	444 13 6	
G. J. Talbot, K.C.	295 1 0	
T. E. Squarey	239 8 0	
W. E. Tyldesley Jones	201 1 6	
		1,180 4 0
Parliamentary Agents' Fees and Disbursements—		
Messrs. Dyson and Company	1,007 10 6	
Messrs. Robins, Hay and Company	12 18 6	
		1,020 9 0
Expert Witnesses' Fees—		
Sir John Snell	274 10 5	
Mr. J. B. Hamilton	646 17 6	
Mr. J. M. McElroy	244 13 0	
		1,166 0 11
Census of tramcar and motor omnibus traffic, 1914		447 3 0
Advertising and billposting		48 9 5
Miscellaneous expenses (maps, etc.)		400 1 10
		4,262 8 6
Poll of City—June, 1914		869 5 0
Total		£5,121 13 6

Expenses Incurred by Tramways Option Committee from February, 1913, to July, 1916.

	£ s. d.	£ s. d.
Experts' Fees—		
Sir John Snell	923 16 1	
Mr. J. B. Hamilton	695 13 6	
Mr. J. M. McElroy	85 2 0	
Mr. C. P. Sparks, including retaining fee	343 17 0	
Sir Maurice FitzMaurice, retaining fee	157 10 0	
Mr. Andrew Young, retaining fee	105 0 0	
		2,310 18 7
Counsels' Fees—		
Sir R. B. Finlay, K.C.	18 12 0	
Hon. J. D. Fitzgerald, K.C.	13 7 0	
G. J. Talbot, K.C.	5 10 0	
		37 9 0
Printing		291 1 10
Census of tramcars and omnibuses, 1913		31 13 0
Miscellaneous expenses		275 2 4
Total		£2,946 4 9

Summary.

	£ s. d.
Expenses incurred by the Council	5,121 13 6
Expenses incurred by the Tramways Option Committee	2,946 4 9
Grand total	£8,067 18 3

The committee point out that the expenses incurred in obtaining the Act were considerably increased by the fact that the Corporation had to meet considerable opposition by the Tramways Company and by certain ratepayers and others. They add that but for such opposition the cost would probably not have exceeded £2,000.

Digitized by Google

TRAMWAY AND LIGHT RAILWAY NOTES.

ABERDEEN.

URGENT NEED FOR NEW CARS.

On the termination of the war the Corporation Tramways Committee will require a large number of new cars, according to the annual statement of their chairman. During the past year the cars ran 59,605 additional miles, and the manager is now running practically the whole of the stock at rush times and on Saturdays. At present he can see no prospect of obtaining any more cars.

BLACKPOOL.

RESPONSIBILITY FOR RESTRICTED LIGHTING.

At the hearing of a summons against the motorman of a Corporation tramcar for a breach of the restricted lighting regulations, the defence was that the conductor was responsible for the lighting arrangements of the car. Evidence to that effect was given by Chief Inspector Birtles, of the tramways department, who added that the shade on the top deck light was taken off by a passenger. This was frequently done by people who wanted to read newspapers. Replying to the clerk, the witness admitted that the driver would not be justified in starting the car if the light was not there when leaving the depot. A police-sergeant informed the court that the drivers reported ten minutes before the time for starting duty, and should see that all brakes and lights were in perfect working order, and if anything went wrong during the day they had to report it at night. The clerk advised the police to summons both motorman and conductor in future cases, and a fine of £1 was imposed.

CROYDON.

EMPLOYEES' SUGGESTIONS INVITED—LOYAL WORKERS REWARDED —INCREASED FARES ON CARS AND OMNIBUSES.

Mr. T. B. Goodyer, tramways manager of Croydon Corporation, has invited the staff to appoint delegates to meet him from time to time to discuss freely matters connected with staff working. One motorman and one conductor is to be selected from each depot to act as delegates, and it is proposed that these should meet at the manager's office at arranged periods. A box is to be provided at each depot, in which suggestions may be placed for consideration at the conferences. The boxes will be cleared by the depot inspector several days before the meetings, and the contents will be handed to the manager, so that the matter which it is suggested should be dealt with may be previously considered. The Corporation have adopted a recommendation by the tramways committee that the sum of £350 be allocated to the employees who remained at work and undertook extra duty during the recent strike. The allocation is as subjoined :—Twenty-five motormen, a £3 bonus ; five male conductors at £3 each ; thirty-six women conductors at £2 ; fourteen inspectors, two weeks' wages ; twelve regulators, ditto ; also three point lads, two men of the depot staff, and the official staff. The increased fares on the Corporation Tramways, the Metropolitan Electric Tramways, and the motor omnibuses running in the Croydon area took effect on August 14. The increases were due to the need for Croydon Corporation Tramways to secure an increased revenue in order to meet the cost of concessions made to the employees.

EDINBURGH.

TRAMWAY COMPANY SUED FOR CAB FARES.

Judgment has been given in Edinburgh Sheriff Court in the action in which Mr. Hendry sued the Edinburgh and District Tramways Company for 2s., the cost of two cab fares expended by him on two separate occasions, when, being the holder of a three-halfpenny transfer ticket, the car system on the second portion of the journey had broken down. Sheriff Guy has sustained the pursuer's plea that the defenders were in breach of contract, and allowed a proof of the loss and damage sustained.

GLASGOW.

SUGGESTED CURTAILMENT OF SERVICES—REQUEST FOR ALL-NIGHT CARS—WOMEN DRIVERS—AIR RAID INSURANCE.

The curtailment of the services from midnight to 11 p.m. has been suggested to the tramways committee by Mr. J. Dalrymple, the general manager. This is in consequence of the increasing great depletion of the staff due to military and naval service, and the dangers attending traffic during the restricted lighting in the winter. A further consideration is that nearly 600 of the traffic staff are working seven days per week. Under these circumstances there is no prospect of the tramways committee giving encouragement to a request for an all-night service to the Springburn district. A deputation was to have waited on the committee on August 16 to urge the need for all-night cars, but the manager has announced that it is only with great difficulty that even the day services can be maintained. It is of interest to mention that in December last the London County Council abolished workmen's tickets on the cars specially run as all-night cars, and decided that ordinary fares should be charged on cars scheduled to arrive at or leave central termini up to 3.30 a.m. In the United States there is an increasing objection on the part of road car undertakings to the running of the unprofitable "owl" cars, as the late cars are termed, and applications have been made in several instances for sanction to their discontinuance. An indication of the shortage of car hands in Glasgow is given by the announcement that on Aug. 24, 160 women were employed as drivers, and that many more are being trained in view of vacancies that will be caused as more men are called to the colours. The department expended during the year ended May 30 the sum of £3,467 on insurance against damage by aircraft.

HUDDERSFIELD.

ORDERLY LOADING AT WEST VALE.

A correspondent of a Halifax newspaper has testified to seeing 314 people awaiting a Huddersfield car at West Vale. They were standing most orderly two or three deep, and no official was present to encourage this formation.

LONDON.

COST OF A QUARTER'S ACCIDENTS—LEAVING BY THE FRONT DOOR TO MANIPULATE POINTS—HALFPENNY FARES.

At their last meeting before the recess within the three months ended June 30, London County Council Tramways Department settled 1,333 claims in respect of accidents arising in connection with the tramways, the total sum paid being £10,438. In 29 other cases actions were brought against the Council. In 13 of these a verdict against the Council was given, and sums amounting to £1,921 and costs had to be paid. Claims made in respect of damage done to tramways property were settled for £807. A knock-for-knock agreement with a firm of brewers in regard to claims not exceeding £5 has been terminated, and in future no claim will be made by either party if the extent of the damage to property does not exceed £5. In an action brought against them in Bow County Court, West Ham Corporation agreed to pay £8 damages and costs to a passenger who had had the forefinger of her right hand caught in the front door of a car. Evidence was heard to decide whether there had been negligence. Plaintiff stated that while the car was slowing up the conductor, in order to alight to shift the points, opened the front door and slammed it behind him. As he did so the car was pulled up suddenly. The jolt caused plaintiff to stretch out a hand to save herself, the forefinger being caught by the closing door. The conductor gave evidence that plaintiff stated neither he nor the driver was to blame, and that there was no jolt. Judge Graham directed the jury that the conductor should have looked before closing the door, and they found that defendants had been negligent. London County Council on August 1, by 52 votes to 34, instructed the Highways Committee to report, after conference with the Leyton Urban Council, and with West Ham and East Ham Corporations, as to the desirableness or otherwise of abolishing or suspending halfpenny or other particular fares or of varying fare stages on the through routes with which those authorities are concerned. This decision was arrived at in consequence of a communication received from Leyton and West Ham stating that they were agreeable to the abolition of halfpenny fares. While agreeing to a conference, the County Council affirmed that no sufficient cause had yet been shown for abolishing halfpenny fares.

MANCHESTER.

PAYMENT OF FARES ON THE PLATFORM—FRONT EXIT EXPERIMENT.

Notices recently posted in Manchester cars indicate that passengers may where convenient pay their fares on the platform when entering the cars. Since women conductors have been employed considerate passengers have handed their fares to the conductors, the women thus being saved unnecessary journeys up and down stairs. This practice, hitherto contrary to the regulations, has been "legalised" by the following notice :—"Payment of fares by outside passengers. —In order to assist the guards, passengers intending to travel on the upper decks of the cars are requested to hand the exact amount of the fare to the guard on the platform before proceeding upstairs. This method of payment is, however, not to be resorted to at busy loading places." In connection with the discussion of the payment on entry system, Mr. J. M. McElroy has stated that just before the war he was experimenting with a car that gave an outlet towards the nearest footpath at each end. The object was to lessen the time occupied in loading and unloading at busy places by requiring passengers to leave at the front end. Owing to the war further expenditure on the experiment had been stopped.

NEWCASTLE-ON-TYNE.

CITY ENGINEER'S REPORT ON THE PERMANENT WAY—PROSPECTIVE RENEWALS AND THE WAR.

In his annual report Mr. W. J. Steele, city engineer, states that the length of tramway opened for service measured as single track was 60¾ miles. The cost of maintenance of the permanent way was £9,545, equivalent to £143 per mile of single track, or 0·40d. per car-mile. In addition to ordinary maintenance, £1,581 was expended in renewals, equivalent to £24 per mile of single track, or 0·09d. per car-mile, so that the total cost of the permanent way (exclusive of capital charges) was £11,126, equivalent to £167 6s. 1d. per mile of single track, or 0·46d. per car-mile. A considerable length of the permanent way was in urgent need of renewal, but the great difficulty in obtaining a sufficient supply of labour prevented that necessary work being undertaken. The major portion of the track had been in use for nearly fifteen years, consequently

Digitized by Google

the fact that the present heavy service on a permanent way having many steep gradients was maintained at such a comparatively small cost was satisfactory, but it was inevitable that the cost would be greatly increased as soon as opportunity would permit of renewals being carried out.

PAISLEY.

TIMELY ADVERTISING FOR TRAFFIC.

In pursuance of their old policy of inducing traffic by means of advertising, the Paisley District Electric Tramways Company's management has been paying special attention to the matter since the abolition of excursion fares on the railways. The cars now carry a series of posters on the upper part of the lower saloon windows, and the inscriptions can be read by people in the streets. One placard advises munition workers to keep up their health by indulging in a trip to a popular spot; another refers to the value of a breezy run for "tuning you up." An exhortation is given to passengers to have their fares ready, and "safety first" is promoted by the appended announcement:—"Only fools and athletes board or leave a car in motion. The former run the risk of being injured, the latter of being fined."

PORTSMOUTH.

SPECIAL CARS FOR WOUNDED SERVICE MEN.

The tramways department on August 21 introduced an arrangement for placing six cars a week at the disposal of the patients in the military and naval hospitals. This is done between 1.30 p.m. and 4 p.m., the cars conveying the passengers to the South Parade pier or to any other place where there is a terminus. The vehicles there await the return of the patients from the pier concerts or other attractions to which they are admitted free. On these occasions the drivers are taken from among the volunteer motormen who are assisting the department.

SHEFFIELD.

HIGHER CHARGE FOR TRAMWAYS ENERGY—TEMPORARY SUSPENSION OF SERVICES—DANGER AT THE REAR.

The Corporation has adopted a recommendation by the Electricity Committee to charge higher rates for energy to all consumers. To the Tramways Committee the decision is estimated to entail an increased expenditure of £7,000 during the ensuing half-year. Councillor Evans, chairman of the Electricity Committee, stated that 109 undertakings had increased their charges during the war. If the committee's station had not been coupled up with that recently taken over from the tramways, the latter body would have had to spend £70,000 on new plant. During the discussion it was stated that the Tramways Committee agreed to pay more than the average price owing to the extra cost of 10 per cent. entailed by the conversion into alternating current at their station. Sir Wm. Clegg, chairman of the Tramways Committee, said he was prepared to consider favourably a revision of the terms. Under the agreement they had paid £6,000 more than if they had retained control of their station. By a majority of three the Council refused to refer the matter to the two committees for consideration and report. There was a temporary suspension of the tramway service for over an hour at midday on August 12 on all but the eastern routes, due to the necessity for remedying faults that had developed at the generating station owing to the strain of the extra load entailed during the past two years. In order to warn passengers passing behind a car to beware of vehicles coming from the opposite direction, a Sheffield inventor has devised a removable and folding arm. This is attached above the fender or in any other suitable position at the rear. It bears the inscription "Danger," and at night it can be illuminated

ORIGIN AND DEVELOPMENT OF TICKETS.

At the concluding session of the series of operating efficiency meetings of the London Underground Railways and General Omnibus Group for the season 1915-1916, a paper on "Tickets—Their Origin, Use, and Development," was read by Mr. F. C. Bingham (Passenger Agent's Department), Mr. H. E. Blain, the operating manager, presiding over a good attendance. The paper, which was illustrated by a large number of slides, traced the development that had taken place in the booking of passengers from stage coach days to the present. On stage coaches, a system of booking was in operation that took the form of entries in a book, a waybill with corresponding particulars being given to the guard. These waybills contained the names and addresses and destinations of the passengers. Travellers from intermediate stopping points were only accommodated in the event of the coaches being short of their full complement of passengers. The first reliable information with regard to railway tickets being actually issued was in connection with a line called the Leicester and Swannington Railway, which really formed the nucleus of the present Midland Railway. This line was opened in 1832. Tickets of a metal form were introduced, the size being about one and a half inches in diameter. The first use of card tickets after the pattern of the present day tickets was about 1840, the idea being due to Thomas Edmondson, a Quaker, who was appointed station master of Milton, on the Newcastle and Carlisle Railway. The inventor rented his patent at 10s. per mile per annum. Hardly any change in railway tickets has taken place in the eighty years which have elapsed. Details of tickets used on the Underground Railways were given, these being of two kinds, one being known to the printing trade as "pulp" and the other as "ordinary card," the former being the cheaper and thinner production, and being used for local bookings. The method of requisition and supply to stations was described, and the author discussed various descriptions of tickets issued, including scheme tickets, workmen's tickets, and miscellaneous tickets.

Slides were shown of a number of ticket-issuing machines, including the standard electrical machine, the pull-bar machine, and the British electrical automatic machine, the first-named being the one in general use on the Underground. It is constructed to issue any of the ordinary forms of tickets, the principle being that a coin weighs down a balance, causing electrical contact and resulting in a slide pushing a ticket forward for delivery. The pull-bar type is constructed on similar lines to the ordinary sweetmeat machine, whilst the British electrical automatic machine prints and delivers a ticket.

The object of the various forms of railway ticket "cancels" (the name of the ticket nipping arrangement in general use) was:—(1) To reveal whether the tickets were being punched at other than the stations at which they were issued; (2) to prevent the use of tickets for a second journey; and (3) to show in the case of traffic where several interests are involved and tickets are cancelled two or three times on a journey, the route which has been actually traversed, this being the determining factor in the division of receipts. The methods and object of railway ticket-sorting offices were also described, and, amongst other interesting points mentioned, was the fact that the issue of the tickets on the Underground Railways amounted to about 300,000,000 per annum, as against 80,000,000 per annum on the whole of the London and North Western Railway.

On the omnibus side, the issue of omnibus tickets was not introduced by the L.G.O.C. until 1891, prior to which date a passenger paid his fare to the conductor, no voucher or ticket being given. Roll tickets were originally introduced by the London Roadcar Company, and their introduction in 1891 on the L.G.O.C. led to a strike in June of that year, which lasted for about ten days. The roll system was only, however, continued until 1893, when the bell punch system was adopted. The various changes in this type of ticket were described, and illustrations shown of the different forms of ticket in use, including two-journey, combined omnibus and rail, and other special tickets.

Various forms of punch were discussed, and in the subsequent discussion it was pointed out that although many attempts had been made to evolve an apparatus which would print and issue tickets of different denominations on some simple method, this had not yet been produced in a form which met with general approval, and the whole ticket system was one which called for close attention in the hope of improvement being effected.

PATENT LIST.

Abstracted for "The Tramway and Railway World" from the Official Journal of Patents.

*** If the inventions have been communicated the names of the communicators are given below in *italics*.

APPLICATIONS FOR LETTERS PATENT.

Brake mechanism for railway vehicles, etc. (10,910)—J. G. Brill Company and A. F. H. Head.
Safety guards for vehicles (10,782)—W. Brookes.
Motor vehicles (10,952)—C. G. Conradi.
Electric signalling apparatus (11,052)—E. A. Graham.
Cross ties and rail fastenings (10,901)—K. Jarvi and K. Makinen.
Variable speed gearing for motor vehicles (10,989)—R. F. Rowe.
Piston rods for use with vacuum brake cylinders (10,964)—Vacuum Brake Company (*Billinton*).
Electric lighting and heating of railway vehicles (10,855)—C. H. Vidal.
Self-acting brake for motor cars (11,166)—W. H. T. Beattie.
Vehicle wheels (11,270)—Dunlop Rubber Company.
Petrol motor starter (11,367)—W. Emery.
Apparatus for lighting, heating, and starting motor road vehicles (11,393)—J. Firth and W. F. W. Rhodes.
Means for propulsion of motor vehicles, etc. (11,216)—H. E. Freakley.
Self-acting brake for motor cars (11,166)—R. C. Pessell.
Air brakes (11,188)—H. Pieper.
Springs for road vehicles (11,184)—J. M. Sanders.
Direction indicating apparatus for road vehicles (11,255)—A. D. Thompson.
Four-wheel driving devices for motor vehicles (11,310)—J. L. Ware.
Means for telephonic communication to and from moving trains (11,397 and 11,658)—V. G. Werner.
Signal automatic vacuum train stop (11,589)—R. Barlow and W. E. Walker.

Digitized by Google

Chairs for railway rails (11,545)—G. Black.
Air-relief valves for liquid fuel tanks of motor vehicles (11,677)—Boulton and Paul and A. Doe.
Brakes and non-skid devices for motor road vehicles (11,760)—W. Dawson.
Driving and braking mechanism (11,513)—W. F. Emerson.
Haulage of motor vehicles (11,808)—Ford Motor Company (*Ford Motor Company*).
Weight distribution on live axles of motor cars (11,733)—T. Ford.
Side-splash guards for road vehicles (11,796)—H. V. N. Graveley.
Rail joints (11,483)—D. P. Parker.
Concrete sleeper for railways and tramways (11,469)—R. S. Santalo.

FOR HIGH-CLASS
CONDENSING PLANT
WRITE TO
THE MIRRLEES WATSON CO., LTD.,
SCOTLAND STREET, GLASGOW.

Electrically operated indicator mechanism (11,617)—W. R. Sykes Interlocking Signal Company and R. W. Tarrant.
Apparatus for actuating signals on trains (12,014)—W. H. Biddle.
Means for producing audible signals on trains (12,015)—W. H. Biddle.
Automatic train stopping devices (11,859)—C. I. Costello and A. L. Lyttle.
Spirit for the propulsion of motor vehicles (12,039)—W. S. Gibbs.
Axle boxes for railway vehicles (12,026)—H. R. Haigh.
Anti-skidding devices for vehicle wheels (11,928)—F. Nace.
Railroad ties (11,926)—P. V. Troupe.
Pneumatic wheels or tires applicable as road wheels to motor vehicles (11,819)—W. Willoughby.

Specifications Published.

1914.

Life-guards for use on motor vehicles (18,068)—Drandorff.

1915.

Tires for the wheels of motor road vehicles (11,299)—Ellis.
Speed-reducing gearing (13,735)—Dey.
Fenders for motor omnibuses (14,372)—Dimberline.
Road trains (15,620)—Fageol.
Anti-skid attachments for tires (6,987)—Gorecki.
Compressed air brakes (10,542 and 10,610)—Hildebrand.
Means for suspending and adjusting overhead conductors (11,172)—British Insulated and Helsby Cables, Limited, and Astley.
Electro-magnetically operated brake (13,679)—Lewis.
Conductors for the ignition system of motor vehicles (13,799)—North.
Signalling mechanism for railways (14,261)—Hollands.
Motor road vehicles (10,890)—Booth.
Detonator apparatus for railways (11,760)—Rouledge and Mackie.
Cantilever springs for motor vehicles (15,736)—North.
Fluid-pressure braking apparatus (16,608)—Westinghouse Brake Company.
Compressed air brakes (3,579)—Chapsal and Saillot.
Apparatus for stopping trains independently of drivers (9,275)—Nevitt.
Radiators for motor vehicles (12,067)—Harvey.

1916.

In the following list the numbers in italics are those that the specifications will finally bear and under which they will be indexed and abridged before acceptance and finally printed. The application numbers should, however, still be used for correspondence purposes.
Fluid-pressure braking apparatus (588—*100,818*)—Westinghouse Brake Company.
Couplings for road trailing vehicles (2,237—*100,855*)—P. de Monts.
Railway signalling (3,002—*100,856*)—A. Kerr.
Machines for dressing rails (322—*100,971*)—J. W. Eunson and Woods-Gilbert Rail Planer Company.
Steering gears for motor vehicles (3,815—*100,979*)—W. O. Kuhn.

Colonial and Foreign Tramways Traffic Returns.

NAME OF COMPANY.	1915. WEEKS ENDED.					1916. WEEKS ENDED.					AGGREGATE.		
	Aug. 7	Aug. 14	Aug. 21	Aug. 28		Aug. 5	Aug. 12	Aug. 19	Aug. 26		Wks.	1916.	Increase or Decrease.
	£	£	£	£		£	£	£	£			£	£
Anglo-Argentine	51,413	50,848	50,932	48,885	...	49,487	48,752	48,713	48,713	...	35	1,724,056	− 9,636
Auckland	20,408	(28 days)	...	...	...	21,507	(28 days)	...	...	...	4	21,507	− 646
Burma... ... ... Rs.	...	...	...	...	...	...	...	...	...	...	—	—	
Calcutta ... ... Rs.	65,826	66,307	68,785	66,852	...	72,869	69,547	69,919	65,092	...	35	2,296,320	+101,598
Hong Kong ... ... $	...	...	...	...	...	...	...	...	...	...	33	420,128	+ 95,286
Madras ... ... Rs.	(2 weeks)	30,869	...	...	...	(2 weeks)	32,269	...	...	...	33	469,380	+ 33,100
Pernambuco ... ... $	2,850	2,902	2,813	2,719	...	3,125	3,140	3,193	2,996	...	34	101,562	− 4,228

Companies Issuing Monthly Statements.

	1915.						1916.						Wks.	AGGREGATE.	
	March.	April.	May.	June.	July.	Aug.	March.	April.	May.	June.	July.	Aug.		1916.	+ or −.
	£	£	£	£	£	£	£	£	£	£	£	£		£	£
Brazilian Traction Mlrs.	6294910	6333460	6670110	6591940	6703000	...	6711000	6678000	7091000	6961000	7195000	...	31	47,145,000	+2,757,890
Brisbane	30,740	29,890	31,780	29,880	31,150	...	34,275	32,575	33,510	31,390	32 880	...	31	227,230	+ 17,580
British Columbia $	557,135	540,861	512,568	498,093	510,723	...	577,117	549,046	542,353	529,078	538,293	...	5	538,293	+ 27,570
Buenos Aires Pt. & C.	...	...	...	...	...	...	...	...	...	...	...	...	—	—	
Buenos Ayres Lacroze	44,332	41,765	44,480	40,421	41,460	41,468	42,219	40,220	41,503	36,213	38,439	36,431	9	74,870	− 8,058
Cape Town	...	...	...	...	...	...	14,994	...	...	12,920	13,357	...	—	—	
Carthagena & Herrerias	2,436	1,496	1,931	2,059	2,157	1,523	2,991	2,513	2,927	3,512	2,371	2,081	35	20,821	+ 6,493
Cordoba	12,746	13,609	14,494	14,059	14,375	...	13,598	14,053	14,868	14,129	14,263	...	18	57,313	− 776
East India	1,846	1,864	2,119	2,194	2,231	2,266	2,196	2,116	2,161	2,283	2,220	2,522	4	2,522	+ 256
Kalgoorlie	2,638	2,841	3,269	...	...	...	2,479	2,553	2,921	...	...	...	21	12,437	+ 1,035
La Plata	4,582	4,269	4,489	3,875	4,054	4,164	4,613	4,354	4,343	3,735	3,909	3,792	35	33,627	− 357
Lima	34,185	31,633	...	...	...	...	34,159	33,556	...	...	...	...	18	134,629	+ 5,614
Manaos	...	...	...	...	...	...	157,156	155,030	152,854	...	...	...	—	—	
Manila	...	...	...	...	23,750	...	...	...	...	...	33,700	...	31	887,739	+ 39,986
Melbourne	...	...	...	...	...	...	69,542	...	69,275	...	...	...	—	—	
Mexico ... $	...	...	...	...	...	...	...	...	...	...	...	...	—	—	
Monte Video	29,716	26,786	27,771	24,266	25,161	...	31,956	28,997	28,349	25,300	25,220	...	39	266,288	+ 14,435
Port Elizabeth ...	...	...	...	...	...	...	...	...	2,809	3,166	...	...	—	—	
Puebla ... $	...	...	...	...	...	...	...	...	...	...	...	...	—	—	
Rangoon	5,217	4,964	4,887	4,997	4,629	4,510	5,501	4,849	4,589	4 205	4.357	4,253	35	37,191	− 1,693
Toronto ... $	820,750	795,816	795,262	787,558	773,013	...	910,969	883,209	903,924	884,491	867,789	...	31	6,202,988	+ 619,912
Winnipeg ... $	303,209	264,856	263,302	255,549	248,022	...	296,500	282,498	276,980	254,686	242,688	...	31	1,944,162	− 56,116

(Continued on page 200)

Digitized by Google

TRAFFIC RETURNS—*continued.*

Tramways and Omnibus Undertakings in the United Kingdom.

NAME OF COMPANY OR CORPORATION.	1915. WEEKS ENDED.				1916. WEEKS ENDED.				AGGREGATE.		
	Aug. 7	Aug. 14	Aug. 21	Aug. 28	Aug. 5	Aug. 12	Aug. 19	Aug. 26	Wks.	1916.	Increase or Decrease.
	£	£	£	£	£	£	£	£		£	£
Aberdare U.D. Council	396	290	334	364	420	436	412	446	21	8,135	+ 810
Aberdeen Corporation	2,041	1,878	1,905	1,961	2,074	2,232	2,092	1,987	12	23,781	+ 697
Accrington Corporation	633	559	593	569	563	631	639	629	21	12,378	+ 392
Ayr Corporation	607	526	655	523	683	773	681	1,003	15	8,209	+ 500
Bath Electric	*	...	...	...	...	...	...	...	—	—	—
Birkenhead Corporation	1,488	1,419	1,428	1,462	1,663	1,699	1,642	1,613	21½	32,949	+ 2,924
Birmingham Corporation	15,371	14,383	14,739	15,105	17,010	17,394	16,636	16,900	21	349,440	+ 57,659
Birmingham Corp. Motor Omnibuses	1,059	907	914	951	1,186	1,405	1,089	1,067	21	21,275	+ 2,837
Blackburn Corporation	1,919	1,307	1,296	1,238	1,347	1,391	1,358	...	20½	26,966	− 996
Blackpool and Fleetwood	2,264	2,343	2,003	1,899	1,662	2,652	2,679	2,374	34	28,954	+ 2,603
Blackpool Corporation	5,074	4,390	4,006	3,555	3,587	5,541	6,394	...	20	46,603	+ 8,434
Bolton Corporation	2,771	2,657	2,819	2,860	3,096	3,076	3,036	3,038	22	62,768	+ 3,882
Bournemouth Corporation	2,952	2,859	2,986	2,704	3,303	3,350	3,288	2,969	22	53,376	+ 2,939
Bradford Corporation	7,415	6,579	7,139	6,748	7,355	7,294	7,223	8,017	21	148,245	+ 3,038
Brighton Corporation	1,776	1,577	1,624	1,602	1,817	2,093	1,942	1,898	21½	28,635	+ 2,494
Bristol	13,930	10,406	10,279	10,222	12,144	12,902	10,841	11,085	34	339,560	+ 13,824
Burnley Corporation	1,645	1,590	1,570	1,558	1,797	1,740	1,770	1,703	22	37,771	+ 1,790
Burton-on-Trent Corporation	365	311	299	298	300	323	322	319	21	5,843	− 552
Bury Corporation	1,423	1,445	1,501	1,457	1,560	1,561	1,568	...	21½	30,215	+ 1,200
Cardiff Corporation	3,087	2,909	2,889	3,005	3,365	3,589	3,252	3,365	21	64,333	+ 4,882
Chatham and District	1,628	1,390	1,350	1,426	1,528	1,668	1,469	1,498	34	41,110	+ 1,649
Chesterfield Corporation	339	280	275	...	365	320	306	...	—	—	—
Colne Corporation	322	282	272	279	313	320	308	314	—	—	—
Cork Electric	530	560	554	562	643	650	557	580	34	17,178	+ 143
Croydon Corporation	*	...	...	...	...	...	...	...	—	—	—
Derby Corporation	1,293	1,150	1,092	1,126	1,281	1,347	1,281	1,287	21½	24,685	+ 1,496
Dover Corporation	*	...	...	...	...	...	...	...	—	—	—
Dublin and Lucan	219	151	167	177	220	219	190	205	8	1,586	+ 196
Dublin United	7,291	6,215	6,349	6,551	7,516	7,820	7,018	7,073	34	202,854	− 3,847
Dundee City	1,379	1,334	1,373	1,445	1,523	1,573	1,473	1,491	14½	20,389	+ 585
East Ham Corporation	1,494	1,320	1,387	1,389	1,457	1,445	1,371	1,406	21½	28,548	+ 65
Exeter Corporation	462	449	465	462	499	511	485	475	21	8,606	+ 58
Gearless Motor 'Buses	*	...	...	...	...	...	...	...	—	—	—
Glasgow Corporation	21,000	21,415	21,763	21,341	23,931	24,110	23,638	20,766	12½	289,693	+ 23,133
Glasgow Subway	948	935	958	979	1,018	976	1,032	799	34	38,931	+ 3,751
Glossop (Urban Elec. Supply Co.)	141	135	138	157	152	154	153	143	35	4,792	+ 480
Halifax Corporation	2,520	2,532	2,520	2,526	2,551	2,647	2,875	2,753	20½	48,751	+ 570
Halifax Corp. Motor Omnibuses	57	71	59	47	59	59	72	63	20½	1,045	− 55
Hastings and District	1,794	1,621	1,566	1,644	1,623	2,082	1,930	1,909	34	34,785	+ 1,771
Huddersfield Corporation	2,992	2,927	2,752	2,782	3,246	3,357	3,387	3,044	21	63,805	+ 5,787
Hull Corporation	3,376	2,931	2,904	3,092	3,202	3,444	3,286	3,157	21	66,859	+ 1,007
Ilford U.D. Council	837	688	685	709	787	799	741	748	21	15,108	+ 775
Ilkeston Corporation	141	144	145	142	167	172	159	157	22	3,133	+ 159
Ipswich Corporation	830	708	666	717	612	669	605	590	21	11,883	− 396
Isle of Thanet	1,198	1,042	1,079	1,063	791	1,023	1,002	987	47	16,656	− 2,942
Kilmarnock Corporation	174	160	164	168	192	180	188	188	14½	2,640	− 16
Lanarkshire	2,071	2,103	2,179	2,173	2,481	2,773	2,593	2,631	34	77,599	+ 12,174
Lancashire United	2,313	1,739	1,811	1,943	2,061	2,328	2,052	2,036	34	60,754	+ 2,382
Leeds City	10,922	8,574	9,402	9,625	10,625	11,232	10,491	10,610	22	212,238	+ 18,560
Leicester Corporation	*	...	...	...	...	...	...	...	—	—	—
Leith Corporation	762	774	783	753	992	999	939	900	14½	13,373	+ 1,590
Leyton U.D. Council	2,062	1,668	1,912	2,138	1,999	2,120	1,868	1,904	21	36,267	+ 321
Liverpool Corporation	14,997	13,542	13,848	14,083	15,726	16,286	15,204	15,106	34½	478,451	+ 23,913
Llandudno and Colwyn Bay	570	805	681	706	580	643	967	877	37½	12,425	+ 82
London County Council	*	...	...	...	...	...	...	...	—	—	—
London General Omnibus	*	...	...	...	...	...	...	...	—	—	—
London United	*	...	...	...	...	...	...	...	—	—	—
Lowestoft Corporation	*	...	...	...	...	...	...	...	—	—	—
Maidstone Corporation	306	253	239	244	256	261	249	244	21	4,695	− 152
Manchester Corporation	18,324	17,693	17,971	18,255	19,671	20,134	19,235	19,575	21	405,742	+ 23,200
Metropolitan Electric Tramways	*	...	...	...	...	...	...	...	—	—	—
National Steam Car	*	...	...	...	...	...	...	...	—	—	—
Nelson Corporation	...	...	...	...	...	...	...	...	—	—	—
Newcastle-on-Tyne Corporation	6,572	6,415	6,524	6,566	7,322	7,055	7,008	6,996	21	141,002	+ 4,555
Newport (Mon.) Corporation	963	881	889	926	1,040	1,166	1,023	1,048	21	20,160	+ 1,670
New St. Helens and District	1,716	1,093	1,114	1,204	1,260	1,661	1,369	1,195	8	9,725	+ 456
Northampton Corporation	962	736	711	711	785	928	758	762	21	15,107	+ 1,363
Nottingham Corporation	4,419	3,663	3,758	3,949	4,187	4,444	4,158	4,213	21	82,265	+ 1,586
Oldham Corporation	2,381	2,324	2,475	2,510	2,726	2,614	2,529	2,788	22	56,768	+ 3,658
Portsmouth Corporation	3,301	3,171	3,087	...	3,644	3,807	3,422	...	—	—	—
Preston Corporation	982	1,082	1,013	975	1,120	1,120	1,258	1,177	20½	22,921	+ 2,454
Provincial	3,235	2,855	2,768	2,919	3,092	3,309	2,989	3,012	47	107,607	+ 5,801
Reading Corporation	1,023	894	874	872	978	1,001	945	991	20½	17,846	+ 791
Rhondda Tramways	1,134	1,215	1,179	1,187	1,428	1,408	1,518	1,366	33	41,371	+ 3,119
Rochdale Corporation	1,728	1,791	2,001	1,715	1,927	1,946	1,979	2,029	21½	39,583	+ 1,478
Rotherham Corporation	1,216	1,236	1,259	1,200	1,784	1,705	1,764	1,740	21½	33,253	+ 7,969
Salford Corporation	5,080	5,136	5,424	5,319	6,089	5,814	5,601	5,660	20½	120,666	+ 6,841
Sheffield Corporation	9,691	9,037	9,326	9,311	10,782	11,177	10,825	11,150	22½	232,972	+ 38,000
Southampton Corporation	1,814	1,715	1,649	1,779	1,935	1,986	1,939	1,969	20½	34,879	+ 2,786
Southend-on-Sea Corporation	1,796	1,415	1,332	1,288	1,430	2,024	1,960	1,860	21	21,626	+ 1,883
South Metropolitan Tramways	*	...	...	...	...	...	...	...	—	—	—
South Shields Corporation	1,015	868	872	922	1,012	1,018	933	952	21½	18,031	+ 648
Sunderland Corporation	1,949	1,667	1,574	1,622	1,939	2,003	1,789	1,729	21	35,376	+ 2,229
Sunderland District	812	657	...	667	785	833	752	716	43	25,992	...
Swindon Corporation	199	222	211	222	216	236	236	242	20½	4,276	+ 44
Torquay Tramways	782	882	926	933	863	1,072	1,040	1,098	34	19,620	+ 1,080
Tramways (M.E.T.) Omnibus Co.	*	...	...	...	...	...	...	...	—	—	—
Tyneside Tramways and Tramroads	811	628	678	712	808	867	789	688	8	5,864	+ 405
Wallasey Corporation	1,885	1,475	1,508	1,536	1,759	2,004	1,768	1,719	21½	30,997	+ 1,584
Walsall Corporation	1,026	789	847	838	871	1,050	884	928	35	28,023	+ 2,855
Walthamstow U.D. Council	1,286	1,002	1,184	1,169	1,425	1,551	1,196	1,296	21	24,374	+ 3,370
Warrington Corporation	513	459	468	455	521	535	533	519	21	10,305	+ 767
West Ham Corporation	3,595	3,096	3,476	3,737	3,571	3,567	3,329	3,374	20½	69,123	+ 2,190
Wigan Corporation	1,195	1,490	1,514	1,574	1,706	1,991	1,660	1,673	21	35,321	+ 2,952
Wolverhampton Corporation	*	...	...	...	...	...	...	...	—	—	—
Yorkshire (West Riding)	2,355	1,608	1,696	1,736	2,090	2,192	1,903	1,983	35	61,091	+ 5,495

* TRAFFIC RETURNS SUSPENDED.

Owing to the European war, the Government have taken over the railways of Great Britain as from August 4, 1914, and the issue of traffic returns has been suspended. Consequently the traffic returns of the electric railways which usually appear on this page cannot be given.

The Publication of the Traffic Returns of the Tramways marked with an asterisk in the above table have also been suspended during the war.

TRAMWAY DIRECTORIES.

A useful feature of this issue is the directory of electric railways and electric tramways which will be found among the advertising pages. This directory contains the names of the chief officials and the principal particulars relating to each undertaking.

THE TRAMWAY AND RAILWAY WORLD

can be obtained, post free, at the following rates:

For the United Kingdom—
Twenty-five Shillings per annum (including 64 issues, of which 12 are large illustrated numbers).

For Places Abroad—
Thirty Shillings per annum.

Tel. No.: **2948** Gerrard.
Telegraphic Address: **"Tramigro," London.**

Amberley House, Norfolk St., W.C.

Digitized by Google

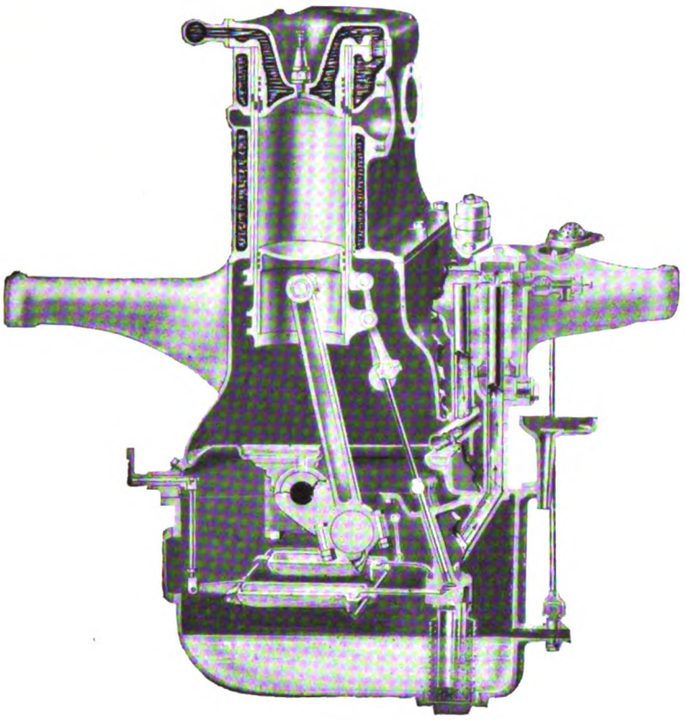

The Efficiency of the Daimler Sleeve-Valve Engine

Exclusive Features in principle and design which created a new standard—a superior class

THERE is a simplicity in the design of the Daimler Sleeve-Valve Engine which is apparent to every Commercial Vehicle user.

The sliding sleeve-valves have eliminated the troublesome springs and tappets, giving a permanent valve setting which is mathematically correct and unvarying for every cylinder.

The combustion chambers are absolutely uniform and perfectly machined. There is no roughness on which carbon deposit can be built up.

There is no valve cap as in the ordinary poppet-valve engine, but *there is* a constant maintenance of compression.

The efficiency of the cooling system is obvious. There can be no overheating or distortion, the wide waterways covering the inlet and exhaust ports and surrounding the sparking plug. It will be noticed that the sparking plug is directly in the centre of the spherical combustion chamber.

Detachability is supremely simple, but there is no necessity for cleaning until after 25,000 miles have been covered.

The Daimler Company, Ltd.

Coventry

Daimler

11

Digitized by Google

BRITISH **NAPIER** BUILT

BUSINESS VEHICLES

Railway Delays!

These are **Acute** now. Be Independent by Purchasing a

3½ TON **NAPIER** BUSINESS VEHICLE.

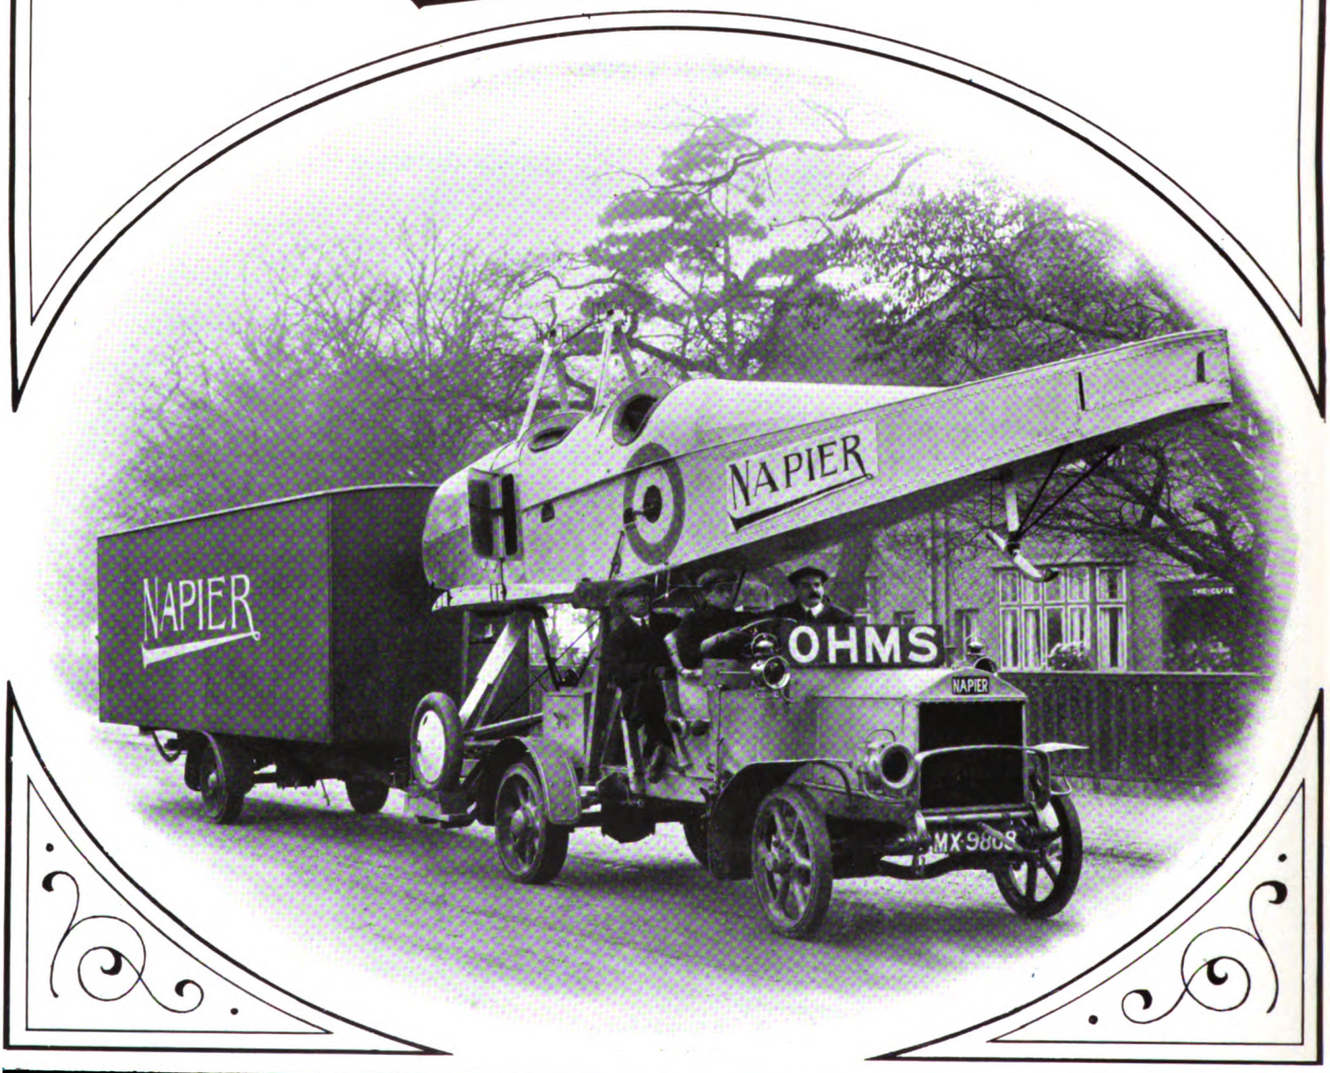

Full particulars from

WORKS:-
ACTON, LONDON, W.

D. NAPIER & SON, LTD.,
14, NEW BURLINGTON STREET, LONDON, W.

Digitized by Google

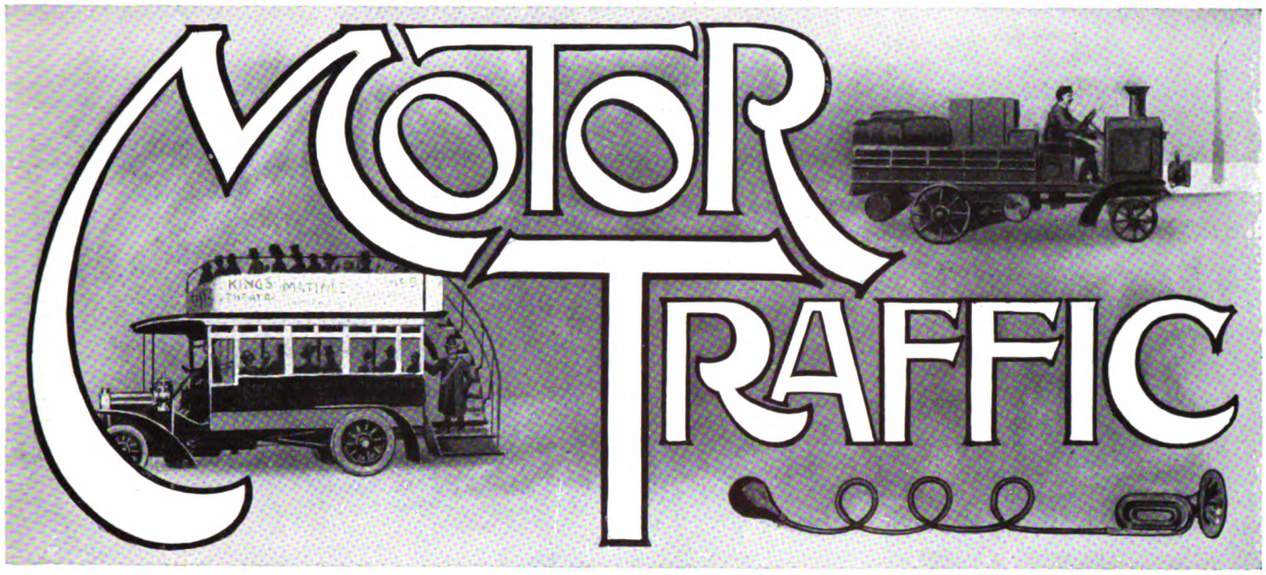

Although it is not proposed to interfere with the British manufacturers who are building subsidy type machines that are strictly in accordance with the War Office requirements as previously laid down, we understand that the scheme of the Munitions Motor Transport Department for the building of a new 4-ton model that will be equally suitable for service in Russia or France is finding favour with influential makers. The opinion is held that both from the efficiency and economic points of view a standard British machine is essential. It is a well-known fact that large consignments of American machines have been supplied to Russia, and as the advance of our Eastern ally proceeds the demands upon motor transport will be increasingly greater. Efforts should therefore be made to fill this demand from British factories. It is the opinion of those who favour this scheme that by standardising one type of machine and utilising all the available resources on an organised plan, the maximum demand can be met not only for our own requirements but for those of our allies.

* * * * * *

The special feature of the new model is the engine, which is much more powerful than is usually fitted to a 4-ton chassis. It is of the four-cylinder type, 5-in. bore with 6-in. stroke, and is designed to cope with the heaviest duty likely to be met with by a 4-ton wagon on either of the battle fronts. Only the high-tension magneto ignition is fitted. There is a four-speed gear box, and the final drive is by overhead worm. All steel wheels are specified. As it is only reasonable to expect, great care has been taken to eliminate all parts that have been found to be a source of trouble in actual practice. The design includes apparently nothing that has not been thoroughly tested in the light of practical experience under war conditions. The Motor Transport Department, as remarked in our issue of November 5, 1914, has had the best civil experience to draw upon, and with the advent of this new model the statement then made that "a right appreciation of the advantages to commercial motor manufacturers of the dissemination of the information and experience gained both with the British and captured vehicles may contribute towards gaining the ultimate victory for the allies" can now be taken in the prophetic sense.

* * * * * *

The task of the Departmental Committee appointed by the Home Office to inquire into the "Licensing of partially disabled motormen as drivers of public motor vehicles," which is referred to at length elsewhere in this issue, was difficult and far from enviable. At the same time it was very necessary, in the interests even of the men who might come under such category, that there should be a careful and impartial inquiry into their case. Otherwise, they were faced with the risk of arbitrary refusal of licenses by the police on public grounds, or, on the other hand, as a concession to sentiment, of being permitted to undertake duties for which they were unfitted. The latter contingency could only be dangerous from a general public and traffic point of view, and disastrous in the long run to the men themselves. The course adopted by the Home Office in appointing the Committee was both wise and humane, and its composition gave ample assurance both as to its competence and its disinterestedness. Its terms of reference were :—"To consider and report whether, having regard to the normal conditions of traffic in the Metropolis, licenses to drive motor cabs, motor omnibuses, or tramway cars should be granted to men who suffer from some partial physical disability by loss of a limb or other similar cause, and, if so, within what limitations." To those acquainted with London traffic conditions the conclusion by the Committee to the effect that licenses to drive public service vehicles should not be granted to men who have suffered the loss of an arm, hand, leg, foot, or eye, will occasion little surprise. It is, of course, regrettable that the circumstances permit of no other decision. The Committee were naturally reluctant to recommend that the door should be shut to this particular avenue of employment for men who have suffered in their country's cause. But they were convinced that the interest and safety of the public were at stake, and that they had therefore no option in the matter. Nobody will disagree with the remark in the Committee's report that for men compelled by reason of partial disablement to take up a new trade motor driving is the least suitable. It applies, of course, to private as well as public vehicles. Men who have never driven motor vehicles before should certainly not be encouraged at present to seek a means of livelihood in that direction. The supply of all kinds of drivers after the war is likely to be much in excess of demand, apart from any adventitious increase of numbers. There will, moreover, be a certain number of ex-public service drivers who, although no longer suited for that work, may reasonably be employed to drive trade vans or private cars, while others may perhaps be absorbed

Digitized by Google

MOTOR TRAFFIC.

by finding them work other than driving, in and about garages, or possibly as inspectors and conductors. Everything possible should be done to keep men in the same sphere of employment, even though it may be no longer practicable to utilise them in their old capacities.

* * * * * *

The stoppage of the chars-a-bancs gives to the motor industry another event to associate with the war. Motor undertakings have had to put up with much in one way or another in the past two years, but there is probably some grounds for the belief prevailing among optimists that the worst is now known. So far as chars-a-banc enterprises are concerned, this particular vehicle has come in for so much criticism—not all of it well-informed or just—that far from being surprised at the recent suppression, most of us find it rather remarkable that it has been so long delayed. Owners of these vehicles are apt to feel aggrieved in being singled out for such drastic treatment. But, after all, they have had the best of their season, and to all accounts have done very well. The prohibition applies only to purely pleasure trips, and where passenger services of real public utility are involved there will be no suspension or curtailment beyond that occasioned by the petrol restrictions as applied to such services. As to those which are entitled to benefit by this definition a certificate issued by a chief officer of police will be necessary, and it is possible that some trouble may be experienced in connection therewith. It is placing a somewhat delicate responsibility upon an individual official in asking him to determine how far certain chars-a-banc services are "necessary or desirable in the interests of the travelling public." There are, for instance, certain all-the-year-round services between coast towns that may not be essential but are intensely convenient. Given an official with a mind of the type that regards the fact that people managed to do without them until a year or two ago as conclusive proof of redundancy, the proprietors may experience considerable difficulty in getting the necessary permission to run their vehicles. On the other hand, there may be a temptation to interpret the qualifications "necessary or desirable" too liberally. No provision is made for any appeal against decisions that may be grossly perverse, and, such being the case, it would have been better had some other means been chosen of settling this particular question than that of referring it to the chief constable, or, in fact, any other individual.

WAR TIME MOTOR CENSUS.

Motor Traction has published the 12th annual census of motor traffic taken by Mr. H. H. Griffin at Putney Bridge, London, S.W., on Sunday, June 25, during a period of twelve hours. The results reveal the disappearance of the horsed cab. Motor omnibuses numbered 1,701, an increase of 39; while motor cars totalled 1,109, the smallest figure since 1910. That the decrease was not greater afforded proof of the need for the compulsory economising of the petrol supply, especially as taxicabs showed the highest total ever recorded. Their number was 754, as against 703 in 1915. In 1905 and 1906 there was not one mechanical van. On this occasion there were 83, as against 47 last year. The increase was due to army lorries. Motor cycles increased from 413 to 516. In all there were 4,571 mechanical vehicles (against 4,318) and 99 horsed vehicles, the latter showing an increase of 31. The percentage of horse traffic was 2·30, as against 80·85 in 1905, while the mechanical vehicles showed a percentage of 97·61, as compared with 13·15 in 1905.

THE PETROL RESTRICTIONS.

PROHIBITION OF CHARS-A-BANCS PLEASURE TRAFFIC.

Under the Defence of the Realm Act, a regulation was promulgated on August 19 declaring that after September 1 motor spirit shall not be used for the purpose of chars-a-bancs or other like vehicles on any excursion or trips of any sort except (a) trips in connection with ambulance or hospital work or the conveyance of wounded soldiers; or (b) trips in connection with naval, military or munition service or the conveyance of munition workers to or from their work; or (c) trips that are certified by the chief officer of police for the police area in which the motor spirit is used to be necessary or desirable in the interests of the travelling public. Any person using, causing or permitting to be used, motor spirit in contravention of this regulation will be guilty of a summary offence.

The regulation has caused the abandonment of excursions run not only by a great number of seaside firms but by tramway companies that have taken up this form of enterprise. Prominent among the number is the Bristol Tramways and Carriage Company, which had already stopped pleasure excursions when the petrol licences were instituted. The company has branches at Bath, Cheltenham, Gloucester, and Weston-super-Mare. At the latter place September is the busiest month of the year. Before the war a chars-a-banc trip often extended over several days. As far as possible the company has maintained its day and night services of omnibuses and taxi-cabs.

The rationing of petrol appears to have been unnecessarily restricted. Reports indicate that there are large supplies in the hands of the distributors, and if the additional supplies expected are received within the next two months, a more generous allotment of spirit, at least to commercial users, may be anticipated.

FULL ALLOWANCE RESTORED TO SHEFFIELD CORPORATION.

The Petrol Control Committee having informed the Sheffield Corporation Tramways department that their supply of petrol for motor omnibuses would be reduced by one-half, Mr. A. R. Fearnley, general manager, informed the committee that the reduction would seriously restrict the conveyance of munition workers and the conveyance of wounded soldiers to hospital. The sequel was seen in a statement made by Sir Wm. Clegg, chairman of the Tramways Committee, at the August meeting of the Corporation. Sir William announced that a representative of the Ministry of Munitions had been in the city during the last few days to inquire about the matter. He had realised the importance of continuing the omnibus service in its entirety, and that day the committee had received an intimation from the Ministry that their petrol would be restored to its usual quantity. The tramways department therefore hoped to be able to resume the whole service on August 11.

Sheffield Electricity Committee applied for a licence for 440 gallons of petrol per month in respect of the cars and lorries used by the electric supply department. In reply they received permits for 776 gallons for four months for the lorries and 84 gallons for three months for the cars. After considering representations made by Mr. S. E. Fedden, the electrical engineer, the Petrol Control Committee replied that arrangements had been made by which all industrial users recommended by the local representative of the Ministry of Munitions would have their requirements fully met.

WITHDRAWAL OF MOTOR MAIL VANS AND MOTOR CABS.

Numerous motor mail services have been discontinued by the Post Office, and the business has reverted to the railway companies. The motor services were instituted on account of the high charges made by the railway companies, as well as to give more convenient and direct communication with many towns.

On account of the restricted supply of fuel, 2,000 of the 7,000 motor cabs in the Metropolitan area are being withdrawn early in the evening. The vehicles affected are those for which only one driver is available. These are granted only two gallons of petrol per day, while those that have two drivers in the 24 hours receive double that supply.

On August 13 further withdrawals and readjustments were made in 11 more of the services of the London General Omnibus Company. The company hope that it will be possible to maintain the remaining services at their present strength.

Twenty-four thousand owners of motor vehicles neglected to make returns of their petrol requirements during the stipulated period. Applications from them only began to be considered by the Control Committee on August 14.

Thomas Tilling, Limited, have been allowed by Reigate Corporation to take up licences for vehicles, drivers and conductors, that were held until recently by the London General Omnibus Company.

The Scottish Motor Traction Company, whose fuel supplies have been reduced by some 55 per cent., have withdrawn their vehicles from the less frequented routes, and suspended all private hire business for the time being.

Digitized by Google

MOTOR TRAFFIC.

AUTOMOBILE EXPERIENCES IN THE WAR.

STEEL SUPPLANTING WOOD FOR WHEELS—TIRE TROUBLES—SHELTER AND LOCKERS FOR DRIVERS—CONVEYANCE OF TROOPS—FOUR-WHEEL-DRIVEN TRACTORS FOR GUNS—INCREASING USE OF TRAILERS.

In this issue we give the concluding portion of the paper on "Automobile Experiences in the Great War," read at the summer meeting of the American Society of Automobile Engineers by Mr. W. F. Bradley. The first instalment appeared in THE TRAMWAY AND RAILWAY WORLD of August 10. Alluding to the wood wheel, the author states that it is doomed for army vehicles. The primary objection brought against it is that it requires attention from time to time to keep it in proper condition. This defect is most apparent when trucks have to remain out of doors day and night, indeed on all occasions except when in the repair shop. Another objection is that if the vehicle catches fire—and the enemy's guns are constantly on the search for convoys working back of the lines—the wheels are liable to be destroyed, and it becomes a difficult matter to get the truck away. With metal wheels it is nearly always possible when the fire has burned itself out to tow the vehicle home. Apart from the body, it is surprising how little a burned-out truck will suffer. Practically no army trucks are now being built in Europe with wood wheels. All the Austin and other trucks supplied to the Royal Naval Air Service for use in France had their wood wheels changed for the steel disc type. Generally when replacements become necessary cast-steel or disc wheels are substituted for wood. For trucks of 3½-ton capacity and upward the cast-steel wheel of the spoke variety is extensively employed by French and Italian makers, and also by the British. The latter, however, are also partisans of the disc type.

EFFECT OF CAMBER AND SHELL HOLES UPON SOLID TIRES.

Not many years ago the French military authorities were inclined to favour the use of steel tires. The results were not satisfactory, the initial economy being more than offset by the greater cost of upkeep and the difficulty of operating the vehicles on greasy granite-paved roads. The war has proved the necessity of using rubber on all trucks and on all wheels. Block tires, for which many claims were made at one time, have not proved satisfactory. The alleged advantage of being able to replace a block has not been substantiated. One reason is that the new block always has a greater thickness than the worn unit it has to replace.

All kinds of tire troubles have developed, and, moreover, kinds unknown under peace conditions. Mileage has dropped very low, and many trucks in the north of France are not averaging more than 1,500 miles on a set of band tires. On some of the heavy gun cars 800 miles is considered a fair average and 1,500 miles excellent service. These, however, are special vehicles having a load of 7 tons and more, obliged to operate in a fire-swept zone not negotiated by any vehicles other than the two-wheeled carts of the A.S.C. One section of Pierce-Arrow 5-ton trucks doing ordinary transport service averaged 5,000 miles on a set of tires, but 4,000 miles can be considered a fair average. It has been suggested that the rubber is not equal in quality to that of peace times. There is nothing substantial in support of this contention, however. It is true that some damage is done by improper press work. The hydraulic presses to be found in all the repair depots are often in the care of men who cannot be considered experts, and who shorten the life of a tire in the fitting process. Tires do not perish principally by having their tread worn down. They chip away laterally; they come away from their base, sometimes for short distances, sometimes for their entire circumference; and generally they wear unevenly.

On all the cambered roads of France the inner one of dual tires carries the greater portion of the load, and, of course, wears down before the outer one. It is worth suggesting that some means of equalising wear be devised; a detachable and reversible wheel, separate from the bearing housing, would make it possible to get the full life out of a pair of bands, instead of having to scrap both when only one was worn. When dropping into shell holes and bumping over obstructions it was common to see chunks of rubber torn out of front tires, causing them to be withdrawn from service more frequently than the rear ones. The experiment was therefore made of fitting wider front tires and narrower rear ones. In the place of the original set of 36 × 5 front and 40 × 6 dual rear, the engineer had fitted 36 × 6 front and 40 × 5 dual rear. This change was satisfactory, the mileage being greater and the cost less. There was less tendency for the front wheels to bog, and drivers said that road shocks at the steering wheel were less. The angle of wear for the inner tire was reduced, the outer one taking the load sooner owing to the narrow tread. The tendency to skid was also considerably reduced.

FITTINGS FOR CARRYING WOUNDED ON RETURN JOURNEYS.

The body dimensions fixed for French trucks and confirmed by the war are a platform of 138 × 67 in. with removable sides 24 in. high. The driver's seat must be 55 in. wide. The hoops carrying the canvas top have to be of sufficient strength for each of them to carry a load of 660 lb., the central hoop receiving 1,300 lb. This allows wounded men on stretchers to be brought to the rear when trucks are returning after delivering supplies, and was done extensively during the series of battles for the possession of Verdun. Owing to this specification the hoops are generally of steel and are fitted with rings.

Many of the American trucks supplied to the Allied armies had a prairie schooner type of body, with a single top covering the load and the driver. This was a mistake, as the driver was left without protection when the nature of the load necessitated the removal of the top. With no division behind them, the men on the front seat were in the mouth of a draughty alley. It is essential that the two tops be independent, and that there be a vertical division just at the back of the driver. Drivers need much more protection than is given on the standard commercial vehicle. This protection has not been given by American makers.

The British have a preference for a permanent driver's cab with side doors and canvas extension above the dash, so that in bad weather only the upper portion of the driver's head is exposed. The roof of the cab carries a rifle rack. It is a primary condition that the rear wheels must not break the uniformity of the body platform. On this account the body is raised a little above the frame members. Advantage should be taken of the lateral overhang of the body to fit stout lockers alongside the frame members. This has been done in many cases to provide storage space for the regulation spares the truck must carry. Few makers appear to have realised, however, that a couple of men having to live and eat aboard the truck also need spares, and that no space is provided for their storage. This could easily be remedied by fixing additional lockers alongside. The lids should open upward.

Although special vehicles are provided for rapid transportation of troops, all trucks are liable to be called upon for this work. The body should be so designed that it can receive either a couple of longitudinal seats down the centre and about 6 in. apart or transverse seats. The fittings should not interfere with the normal service of the truck. The brightly tinted yellow or sandstone canvas tops supplied with many American trucks are a danger under European war conditions. The correct tint is grey, or blue-grey; or, better still, variegated, with blue-grey as the dominant note.

DEVELOPMENT OF FOUR-WHEEL-DRIVEN TRACTORS.

The rear-drive truck is the most satisfactory and the most economical type for the general transportation of food, ammunition, and men. The four-wheel-driven tractor first came into use five or six years ago, when the French sought to abolish the use of horses in the haulage of heavy field pieces. The artillery in the majority of cases has to work on no roads at all. The abolition of horses for haulage of the guns also implied the abolition of horses for the transportation of munitions; thus the tractors had to be capable of hauling trailers loaded with shells. It was not by any means sufficient to duplicate the points of application of the power in order to obtain a vehicle that could travel over any kind of country and surmount any obstacle. The four-wheel-driven tractor's real work begins when the going is such that the ordinary truck would have ceased to be of any use. A large amount of experience has been acquired in the use of chains, paddles, and caterpillar bands for the road wheels in order to allow these tractors to operate under all kinds of cross-country conditions. The results justify the belief that the horse has ceased to be necessary to the heavy batteries.

The French army has developed a heavy tractor capable of hauling not less than 12 tons, generally on two trailers, and a light tractor hauling a minimum of 8 tons. The unloaded weight of the heavy tractor is limited to 5⅓ tons, and the light tractor must not scale more than 3½ tons, these weights comprising the complete vehicle, two drivers, gasoline, oil, tools, and spares. Four-cylinder engines are employed exclusively. Every tractor is fitted with a power-driven winch or capstan. The winch placed horizontally across the front of the frame has been the most successful type. Towing hooks are fitted front and rear, an artillery-type elastic coupling is provided at the rear, a powerful sprag or ratchet is fitted, and the tractors have equal size dual tires. The use of these tractors has been confined largely to the haulage of 120 and 155 mm. field guns—heavy artillery that must nevertheless possess a reasonable amount of mobility.

PETROL TRACTORS FOR HEAVY GUNS—CATERPILLAR TRACTORS.

A certain number of the 75 mm. batteries have been motorised. The weight of this gun, without its carriage, is only 1,014 lbs. Thus it can easily be carried on a chassis designed for a 3½-ton load.

Digitized by Google

MOTOR TRAFFIC.

The problem to be solved was a system of quick-acting jacks that would take all the weight off the springs when the gun went into action and give the same rigidity as with the ordinary gun carriage. For these guns the authorities have selected De Dion Bouton and Schneider 3½-ton chassis similar in general design. The engine is a four-cylinder of, roughly, 4¼ by 6 in. bore and stroke; the gear box provides four speeds; and final drive is by internal gears. These batteries have been successfully employed for anti-aircraft work. The ammunition wagons are of the same general design as the gun-carrying chassis. The hood is armour-plated. The gasoline tank is placed at the rear inside a steel box without a top. This gives it adequate protection against bullets and shell splinters.

For the haulage of heavy artillery—14, 15, and 16 in. guns—steam has been abandoned in favour of the internal combustion engine. Even the British, who have always shown a partiality toward steam, have adopted gasoline tractors for the haulage of heavy guns. In one case a traction engine chassis, made by a steam traction engine manufacturer, is employed, and is fitted with a six-cylinder Knight engine of about 6 by 6½ in. bore and stroke. The engine operates the large metal road wheels through internal gearing, and also drives a powerful winding drum. The tractors haul loads of 25 to 30 tons distributed over two or three trailers. Their rate of travel is three to four miles per hour. On certain occasions, when the enemy's lines have been broken by artillery fire, followed by infantry attacks, it has been found difficult to make this temporary success a permanent advance by reason of the slow rate at which the supporting artillery has been brought up over the broken country. It is under such conditions that the caterpillar tractor is used to best advantage. There is no kind of country over which it cannot move. A battery with forty-five tractors will have attached to it about forty 5-ton trucks and twenty 3-ton trucks for bringing up ammunition and supplies, as well as about fifteen trucks for repair service.

Before the armies went into the trenches armoured cars played an important part. The author gave particulars of their construction, and said it is an advantage for the car to be built to steer from both ends. He also observed that trailers are now attached to all kinds of motors, including ¾ and 1 ton vehicles mounted on pneumatic tires and fitted with the special army-type elastic coupling at the rear. These vehicles will take one or two two-wheeled pneumatic tired trailers, and are largely used for the transporting of men working in the rear of the lines and for general haulage around depots.

ROADS CONSTRUCTION AT THE FRONT.

With the aid of many road engineers from Great Britain, and a large force of civil and military labour, some excellent roads have been built up both out of and in range of the enemy's artillery. Steam road rollers have lately been supplemented with petrol motor rollers. With every capture of ground the need arises for further road construction, and there are places where the track runs over and along the rear of the trenches vacated by the Germans. Motor vehicles, however, use old tracks, no matter in how bad a condition they may be, long before temporary and permanent resurfacing is undertaken. The consequence is that great damage is done to tires, especially the pneumatics on the ambulance vehicles, a set often being rendered useless in twenty-four hours. Now that the British artillery has gained the ascendancy less damage is done by the enemy to the roads between the rest camps and the trenches, but in the first eighteen months or more of the conflict the condition of the roads owing to gunfire was the cause of much injury to tires of all descriptions. Some indication of this is given in the continuation in this issue of the paper read before the summer meeting of the American Society of Automobile Engineers by Mr. W. F. Bradley, on "Automobile Experiences in the War."

Italian Roadmakers' Great Work.

In an article written in August, when on a visit to the Italian front, Lord Northcliffe says:—"The full story of the rapid concentration of Italian forces, the organisation of fresh bases of supply, including water, of which there is none on the Asiago plateau, and particularly the problem of the conversion of mountain mule-tracks overnight into splendid motor roads cannot yet be told. When told it will form one of the most thrilling chapters of the war. It was roads versus big guns. Roads won. In face of the strengthening of the Italian counter-pressure the Austrians hesitated to bring forward their heavy batteries. Hesitation proved fatal to their plans. The completion of the roads enabled General Cadorna to hold them, to baffle them, until the Russian offensive prevented the Austrians from making good their severe losses and relieved the pressure on the Italians. The only door into Italy was slammed in the enemy's face. Now it is bolted and barred."

LONDON WAR WORKERS' OMNIBUSES.

Little publicity has been given to the great services that the London General Omnibus Company and Thos. Tilling's Omnibus Company have rendered to munition workers and to the country. Tilling's motor omnibuses have been running for years between Croydon and Woolwich, and during the war the service has been greatly augmented, thus providing facilities for a large area of the south-eastern part of the metropolis which was without convenient railway communication with the Arsenal and the numerous munition works outside of the district of the London County Council.

The greatest increase of the omnibus service has, of course, been provided by the London General Omnibus Company, whose vehicles link up all parts of the metropolis with the various munition areas. An indication of the extent to which the services running to Woolwich have been added to will be gathered from the appended figures. On routes 53 and 53A the increase since the outbreak of war has amounted to 37 per cent., on routes 101 and 101B to 59 per cent., while on routes 75 and 75A the increase is no less than 140 per cent. In addition, three entirely new services have been established. In view of these figures, the statement in a report recently made to the London County Council that accommodation provided by motor omnibuses in the Woolwich district showed only a slight increase, appears to have been based on insufficient knowledge of the facts. The war services performed by the Council's tramways have been so great that there could hardly be any temptation on its part intentionally to depreciate the services of other traffic authorities.

One of the developments during the past three months has had an important bearing on the question of national economy. At the instance of the Ministry of Munitions two tramway undertakings in north-east Kent gave up their intention to obtain powers to enable them to run omnibuses in order to link up with munition works, and arrangements were made with the omnibus companies to extend their services. Two new services recently put on in south-east London provide more direct and rapid communication with the Arsenal and factories than is given by the County Council and other tramways. On August 15 yet another service was instituted by the L.G.O.C. for munition workers and the public in a very wide area. The vehicles run between Farnborough (Kent) and Crayford, by way of Orpington, St. Mary Cray, and Bexley. This links up with Woolwich, Dartford, and Gravesend tramways. The fare is 6d., and the first omnibus starts at 5.15 a.m. The new service is the outcome of negotiations between the Minister of Munitions, Vickers, Limited, and other firms and the local councils.

ROAD CHARGES FOR OMNIBUSES.

On the recommendation of the Watch Committee, Grantham Corporation has consented to allow motor omnibuses to ply for hire on the highways on routes beyond those used on or before March 1, 1914, on payment of the following annual fees:—Under a ton weight, £5; over a ton and under 2 tons, £7; over 2 and under 2½ tons, £10; over 2½ and under 3 tons, £15; over 3 and under 4 tons, £20; over 4 tons, £25. The payments are to be made in advance by two equal half-yearly instalments in May and November. Omnibuses must be submitted for inspection in May and November, and certified as sound and in good running order.

York Tramways Committee have been asked by the Streets Committee of the Corporation to make a contribution in respect of road wear occasioned by the electrically-driven omnibuses.

South Wales Motor Transport Company has informed a conference of the local authorities in the Rhymney Valley that the directors cannot make any grant or contribution to the various authorities for the upkeep of the roads used by their omnibuses. The conference then decided to make it clear to the company that the amount asked for by way of contribution was for the whole route, and not for each Council. It was also decided to recommend each Council to renew the license to run the omnibuses for periods which would expire simultaneously on November 1, so that joint action could be taken in the matter at that time if thought desirable.

Hon. A. Stanley's Appeal for Russian Ambulances.—As chairman of the Royal Automobile Club, the Hon. Arthur Stanley, M.P., has received an appeal from the Russian Red Cross Society for several motor ambulance cars. As the result of the Club's appeal in September last ambulances were sent to the Russian forces in Persia and Asia Minor. Mr. Stanley states that if the much-needed ambulances are to be used by our splendid Russian Allies during the coming winter they should be despatched as soon as possible, and he asks that donations should be sent to the Secretary, Royal A.C., Pall Mall, London, S.W.

Digitized by Google

MOTOR TRAFFIC.

LONDON OMNIBUS TRAFFIC.

A Reminder of its Usefulness by Sir A. Stanley.

Assuming that the Petrol Control Committee have to adhere to their intention to reduce the supplies of petrol to commercial vehicles 50 per cent., Sir Albert Stanley, managing director of the London Traffic group, has stated in an interview that if the London General Omnibus Company cannot obtain sufficient supplies of a reliable substitute they will only be able to employ half the number of omnibuses. Sir Albert continued:—"It is only when it is considered how London has grown and developed by means of the new arteries connected up only through the motor omnibus that the importance of the service becomes strikingly manifest. Take the extreme case of the bungalow town at Aperfield Court, near Westerham. The nearest station is seven miles distant. The people there are entirely dependent upon our service. Motor omnibuses are the connecting link between Cranbrook Park and Ilford, and Bromley and Farnborough, where there are so many munition workers. And it must be remembered that there are others who have always looked to the services to save them from being stranded in case of serious railway congestion or breakdown. Coming nearer London, think of the hundreds of thousands waiting to jump on to passing omnibuses! In no city in the world is there such a spectacle."

"The most important part of our work from the point of view of the national emergency," said Sir Albert, "is the services in the great munition areas. These services must be the last to suffer, because tens of thousands of war-workers are dependent upon us for taking them to and from their work, a journey of several miles in a great many instances. In Woolwich the demand has been so enormous that a quarter of our entire service has been specially adapted to deal with it. The L.C.C. tramways were quite unable to cope with the sudden expansion of the traffic. We go to any place within seven miles of Woolwich, and there are hundreds of omnibuses carrying these munition workers."

In spite of considerable withdrawals of omnibuses for service in France, the General Company have given greatly increased facilities in the munition areas, and in some cases the services have been trebled. In connection with the country services, on weekdays only 6 per cent. of the vehicles work on country routes, while on Sundays only 8 per cent. operate on routes that are not worked on weekdays.

STRAKER-SQUIRE DELIVERIES.

Omnibuses for Military Use.

By permission of the authorities, Straker-Squire (1913), Limited, were able to deliver a number of single deck omnibuses, which are being used for the conveyance of officers and soldiers from their various camps in Wales and Shropshire. From the accompanying photograph the reader will observe that the body has two compartments, the one in front being for smokers. Each compartment has a separate door, which does away with the objections to smoking that are urged when indulgence is permitted in an undivided saloon. We have before referred to the economical running of single-deck omnibuses manufactured by Straker-Squire, Limited, but it is surprising to find that this characteristic is still apparent when the machine is greatly overloaded. Although the bodywork provides for a seating capacity of 30, this omnibus has been known to carry more than 60 "Tommies," 20 of the number finding places on the luggage grid. The road is much cut up and rough, and there is a six-mile continuous pull, notwithstanding which the driver averages eight to ten miles to the gallon of petrol. This record is the more satisfactory when the fact is remembered that a very heavy and substantial body has been fitted for this special traffic.

TRY. & RY. WORLD

Straker-Squire Omnibus in Military Service in Wales and Shropshire.

Electric Vehicle Charging at Ipswich.—The Electric Supply and Tramways Committee's report for the year ended March 31 refers to a new source of revenue in the charging of battery vehicles. There are now four electric vehicles running in the town, the owners being the electric supply department to the borough surveyor's department and the Co-operative Society. Another vehicle for Ipswich is on order with Messrs. Ransomes, Sims and Jefferies.

Digitized by Google

MOTOR TRAFFIC.

YORK ELECTRIC OMNIBUSES.

Councillor W. H. Sessions, deputy chairman, York Corporation Tramways, stated at a recent meeting of the Council that there was last year a loss of £450 on the electric omnibuses. After five years they would no longer have to pay sinking fund charges and interest in connection with the purchase of the vehicles, and they would then be able to recoup themselves for any present losses.

Particulars regarding the omnibuses supplied to the *Electric Vehicle* by Mr. J. W. Hame, the general manager and engineer of the tramways, show that there are four omnibuses, which were supplied by Edison Accumulators, Limited, three being in daily service, with the fourth in reserve. During the year the vehicles have covered a mileage of 65,470, the power consumption, after allowing for all losses, averaging 1·23 units per car-mile. Exclusive of interest and sinking fund, the total working costs per 'bus-mile worked out at 4½d. There has been very little outlay upon tires so far, but Mr. Hame estimates that, allowing for the full tire maintenance cost over a long period, the working costs will average 5½d. per omnibus-mile, exclusive of standing charges. There has been no trouble whatever with the batteries or electrical equipment, and the vehicles have proved entirely trustworthy. At one terminus a combined charging station and passenger shelter has been provided. A charging cable is drawn up from the roadway box and attached to the accumulator. The driver opens a small door under the observation window of the booster house and presses a button, which starts up the machine, and charging begins.

ELECTRIC VEHICLE COMMITTEE.

At a meeting of the Electric Vehicle Committee in London, Mr. R. A. Chattock presiding, it was announced that the Royal Automobile Club had nominated as their representative upon the Committee Mr. W. Worby Beaumont. Consideration was again given to insurance policies for electric vehicles.

Correspondence with the Car and General Insurance Corporation, Limited, was submitted, from which it appeared that they were willing to come into line with the suggestions previously made by the Committee that their standard electric vehicle policy should be altered so as to include the risk on the battery while the vehicle is in transit by road, rail or ship. Subject to this alteration, the Committee considered that the Car and General Insurance Company's policy met every reasonable requirement, and they decided to give their approval to it.

Arising out of correspondence with the Rugby Urban Council in the matter of providing charging facilities for electric vehicles, the secretary was directed to write and say that the Committee regretted the Council's decision not to provide such facilities at the present time. It should be noted that the British Thomson-Houston Company, Limited, and Messrs. Willans and Robinson, Limited, are prepared, when their own arrangements admit and at times convenient to themselves, to charge electric vehicles passing through Rugby.

The date of the next meeting was fixed for September 29, at 2.45 p.m.

THE IMPORT OF BATTERY VEHICLES.

We have received from the Electric Vehicle Committee a copy of the correspondence between that body and the Board of Trade in respect to the proclamation prohibiting the import of motor vehicles. In the first letter asking that electric battery chassis intended for commercial uses shall be most favourably treated under the licensing arrangements, Mr. F. Ayton, hon. secretary to the committee, advanced eight reasons in support of the request. Among them were the following:—(1) The usual cost of power for operating is approximately equal to petrol at 6d. per gallon; (2) the use of battery vehicles assists in conserving petrol supplies; (3) women or elderly men can very soon become proficient in driving battery vehicles, thus freeing men of military age for service; (4) simplicity and sturdy construction makes repairs a small item at a time when every mechanic is required for munition work; (5) the employment of power stations to produce electricity for charging battery vehicles is bound to improve the load factor as it has already done in Chicago and New York; (6) free importation will create such a demand that there will be some incentive after the war for British manufacturers to establish the building of such vehicles as a staple industry. A reply was received from the Department of Import Restrictions stating that if the Committee would send a statutory declaration that the chassis were to be used solely for commercial purposes the matter of their importation should have consideration.

MOTOR AND PETROL DIVIDENDS.

BRITON MOTOR COMPANY.—The report for the seven months to December 31, 1915, shows a trading profit of £5,162. After allowing for depreciation and other charges, there is a net profit of £3,142. It is proposed to pay a dividend at the rate of 10 per cent. per annum for the seven months, to write off £300 from preliminary expenses, placing £1,000 to reserve, and carrying forward the balance.

SHELL TRANSPORT AND TRADING.—The net profits of the Shell Transport and Trading Company for 1915, including £436,796 brought forward, were £2,164,696. Dividends amounting to 35 per cent. have been declared, leaving £420,302 to be carried forward. The directors recommend the transfer of £100,000 from the profit and loss account to reserve, which will then amount to £4,000,000. The net profits for the past five years and the dividends were as appended:—

	Net profits.	Dividends per annum.	Carried forward.
1915	£1,729,900	... 35 per cent.	... £420,302
1914	1,637,483	... 35 ,,	... 436,796
1913	1,535,066	... 35 ,,	... 326,564
1912	1,159,113	... 30 ,,	... 265,193
1911	626,314	... 20 ,,	... 294,985

PETROL SUBSTITUTES.

Under the direction of Mr. G. T. Harrap demonstrations are being given of a new petrol substitute known as Force motor fuel. It is a preparation of paraffin, lighter than crude oil, but it is not a spirit, and therefore is not subject to duty or to the regulations that prevent spirit being stored in the house or garage. The secret lies in the method by which it is given a fixed strengthening for use as a motor fuel. This fuel is said to have stood the test of practical use by the Motorists' Mutual Co-operative Society, a motor cab company, and various other firms.

Some months ago the Government were offered an invention by which a certain powder composition was to have water added in order to become motor spirit. The offer was declined, but Mr. J. Owen, the author of the motoring notes in the *Westminster Gazette*, understands that the invention has gone to France, and that the French Government has appointed a scientific commission to watch the demonstrations on its behalf. The inventor claims to have driven a car of 2,500 lb. weight, carrying six passengers, for an hour, covering 35 miles, and consuming one and a half gallons of the substitute fuel.

BETTER FUEL OUTLOOK AFTER THE WAR.

It may be some consolation for the present restricted supply of fuel to learn that after the war there will be a plentiful supply of benzol, which has hitherto been largely in use by the London General Omnibus Company. Owing to the demands of the Ministry of Munitions, the gas companies all over the country have laid down plant for extracting from the coal the products required for explosives, including benzole from by-product coke ovens. Last year 24,000,000 gallons of benzole was produced in that way, although the demand was not great for war purposes until July of that year. After the war it is expected that the supply can easily be brought up to 50,000,000 gallons annually.

L.G.O. COMPANY'S MINIATURE RIFLE RANGES.—The fifth miniature rifle range erected by the London General Omnibus Company, Limited, for the use of its employees was opened at the Training School, Milman's Street, Chelsea, on August 7. Colonel C. F. Colvile (director) presided, and Lieut.-General Sir A. E. Codrington fired the first shot and declared the range opened. He said that it was probably the finest miniature range he had seen, and would have gratified the heart of the leader of the movement, Lord Roberts. A vote of thanks to General Codrington was proposed by Mr. H. E. Blain, the operating manager, who said that, in addition to the five ranges now open on the company's premises, arrangements had been made at two other ranges for the employees to have facilities, so that range practice could now be obtained in practically every part of London. There were 1,800 members of the rifle club. The vote of thanks was seconded by Mr. G. J. Shave and suitably acknowledged.

Digitized by Google

MOTOR TRAFFIC.

MOTOR VEHICLES FOR MUNICIPALITIES.

Erith Urban Council has taken delivery of a 35-40 h.p. turbine motor fire engine from Messrs. Dennis Brothers, Limited.

Glasgow Electricity Committee has adopted a recommendation by the Sub-committee on Works to purchase two 5-ton battery wagons at a total cost of £2,990, orders for one vehicle each to be placed with Edison Accumulators, Limited, and the General Vehicle Company, Limited.

Blackpool Cleansing Department has received delivery of a second battery-propelled water sprinkler. This will enable all the horse-drawn water carts to be withdrawn. During the winter one of the electric sprinklers will be used for carting coke, a wagon body being substituted for the tank.

Hull Council has ordered cabs with wind screens to be fitted to the motor sweepers, the drivers having complained of exposure during rough weather. The War Office having been unable to release a Daimler chassis for use as a motor ambulance, the Health Committee of the Council has been empowered to secure a suitable chassis.

Bristol Corporation has had completely satisfactory experience of two 3-ton steam lorries that were obtained in October and November last from the Yorkshire Commercial Motor Company, at a cost of £1,090. The machines have been used for the cartage of bituminous and other materials required for road construction, and they are fitted with rubber tires, thus enabling them to take advantage of the extended speed limit of 12 miles an hour. In his annual report, Mr. L. S. McKenzie, the city engineer, also refers to another good investment that the Corporation made in August, 1915, by purchasing two petrol-driven Laffly road sweepers. Mr. McKenzie records a net saving of £181 by the two machines for the quarter ended March 31 last, exclusive of repairs and capital charges, and he considers that each sweeper will effect a saving of £160 per annum.

Dover Council has adopted a recommendation made by the deputy borough surveyor for carrying on the collection of house refuse at night when their sixth Edison van is delivered. Mr. Crummalk recommended that refuse collection should start at midnight, thus freeing two of the vehicles for other duties by 6 a.m. The remaining vans would be released by 10 o'clock. One or more of the vans could be adapted for street watering work, and as each vehicle had a capacity equal to that of two horsed watering vans, a saving would be effected of at least 10s. for every pair of horsed carts displaced. If one van were fitted with a machine broom, from four to six sweepers could be dispensed with. The cost of current with an electric vehicle employed in this manner was found slightly to exceed 3d. per street-mile. It was difficult to estimate the saving that could be effected by using the electric vehicles for emptying catchpits, but one electric would displace two or three horsed vehicles, which at present cost from 23s. to 35s. per day, according to the number that was hired by the department. He estimates a total saving by the rearranged scheme of work of between £500 and £700 per annum. With three Edison vans working over a period of about eight months the cost of refuse collection per ton worked out at 4s. 10·21d. as compared with 6s. 2d. with horsed refuse carts, the electrics dealing with 5,201 tons of refuse.

BUSINESS ITEMS.

Ferodo Fabrics.—A remarkable feature about Ferodo fabrics is their adaptability. Although designed originally for lining clutches and brakes, their high co-efficient of friction results in their being used in many ways. The latest instance comes from a firm who are extensively engaged on munitions. They are using Ferodo fibre in a circular vice for holding the shells whilst screwing in the noses, and they inform the makers that it gives good results, as it does not mark the work and has a remarkable gripping power. The manufacturers of Ferodo fabrics, the Herbert Frood Company, Limited, Chapel-en-le-Frith, are at all times ready to give advice in regard to the use of their fabrics, and welcome inquiries.

Messrs. W. T. Henley's Telegraph Works Company, Limited, the well-known manufacturers of Henley solid band tires, owing to the great increase in their solid tire business in Scotland, have recently opened a depot adjacent to their Glasgow branch office to deal with solid tire business only. A large stock of solid tires in all sizes is held here, and they have installed one of Hollings and Guest's latest type of hydraulic tire presses, enabling solid tires to be fitted without delay. The company have also published a booklet upon the abnormal wear of solid tires, and they will be pleased to send one to any user of solid tires. One of its features is a compendium of extracts from various technical publications giving disinterested advice as to how to obtain the best mileage from solid tires.

Spencer-Moulton Tires.—The popularity of the motor and other vehicle solid rubber tire produced by George Spencer Moulton and Company at Kingston Mills, Bradford-on-Avon, should be widely extended among municipal and other users as the result of the issue of the company's new catalogue, No. 101. To say that every owner and driver stands to gain by perusing the information given therein is no exaggeration. One of the novelties is a dozen cut-outs showing the exact sizes of a section of each tire (European sizes in millimetres and American in inches), so that the user can judge instantly and accurately what will suit his needs, according to whether his vehicle is British or American. Owners of steam and horsed vehicles shod with steel tires will be interested in a page that contains reasons why rubber tires should be substituted. The attention of employees who have charge of motor vehicles can be profitably directed to a page of hints for the treatment of rubber tires, which it is interesting to note were made by this firm for railway companies over forty-four years ago. Spencer-Moulton tires are the result of more than sixty years' experience in rubber manufacture. Under the management of Mr. Leo Swain at the head office, 239, Deansgate, Manchester, George Spencer Moulton and Company have met the demands of the commercial community by opening offices or agencies in the chief provincial centres, where hydraulic presses have been installed in order that replacements may be rapidly and efficiently handled.

DAIMLERS AT ST. HELENS.

While body design on the majority of double deck omnibuses has shown little or no improvement, the single deck body has become as attractive as a first-class railway saloon. One of the principal firms of body builders who have been responsible for this advance is Messrs. E. and H. Hora, of Peckham, London, whose work has contributed in no small measure to the popularity of public service motor vehicles. Especially is this so in the provinces, where patrons of motor traction enjoy a degree of comfort that is denied to the inhabitants of the metropolis. When a single-deck body is combined with a Daimler chassis the acme of luxurious travelling may be said to be reached, as a glance at the subjoined photograph will indicate. The vehicle there shown is operated by the St. Helens and District Motor Services of the County Carriers. The Daimler chassis is a 3-ton machine, and it has been supplied by permission of the War Department. This is the eighth Daimler chassis purchased by the County Carriers, who have furnished highly satisfactory reports of their performances. One chassis completed 52,000 miles before any attention was required by the engine. Another was looked over as a precautionary measure after it had covered 42,000 miles, and it then ran 8,000 miles before any attention was needed. To date, a third Daimler has totalled 32,000 miles, and the owners state that it "will apparently do many more before it is necessary to dismantle it." They add: "The Daimler is far and away the most economical vehicle in the service, and its extremely silent and smooth running make it the ideal for public service work."

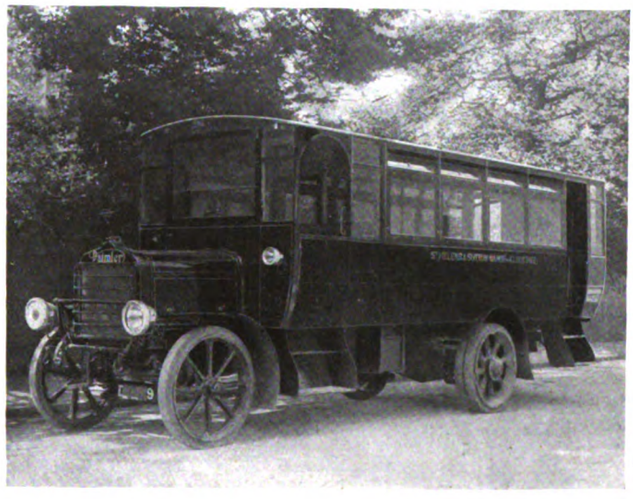

The Eighth Daimler in the Service of the County Carriers.

Digitized by Google

MOTOR TRAFFIC.

WARRINGTON CORPORATION OMNIBUS COSTS.

Mr. J. Telfer, general manager of Warrington Corporation Tramways, has issued the accounts of the motor omnibus department for the year ended March 31, 1916. From the appended comparative table it will be seen that the past year's results indicate an improvement. It would appear that the fare of 1d. is too low a figure for one of the routes.

	1915–16. Amount.	1915–16. Average per mile run.	1914–15. Amount.	1914–15. Average per mile run.
EXPENDITURE.	£ s. d.	d.	£	d.
To Traffic Expenses—				
Motormen and Conductors' wages	775 16 10	2·407	734	2·233
Cleaning and oiling	148 16 9	·462	127	·386
Lighting	55 9 2	·172	42	·127
Fuel, light, and water for garage	7 10 0	·023	7	·023
Ticket check	17 9 0	·054	6	·019
Uniforms and badges	—	—	7	·020
Licenses	13 9 0	·042	14	·042
Miscellaneous	0 3 11	—	—	—
	1,018 14 8	3·160	937	2·850
To General Expenses—				
Rents	20 0 0	·062	22	·066
Printing and stationery	8 1 2	·025	9	·028
Accident insurance and compensation	134 8 3	·417	143	·434
Fire and other insurances	25 4 4	·078	15	·046
Miscellaneous	10 13 10	·033	5	·016
	198 7 7	·615	194	·590
To General Repairs and Maintenance—				
Buildings and fixtures	19 5 3	·059	105	·321
Workshop tools and plant	5 3 8	·016	5	·014
Omnibuses—Chassis	495 12 5	1·537	342	1·040
,, Tires	324 7 10	1·006	354	1·078
,, Bodies and fittings	21 9 5	·063	20	·061
	865 18 7	2·686	826	2·514
To Power Expenses—				
Cost of petrol	777 16 0	2·413	824	2·506
	2,860 16 10	8·874	2,782	8·460
To allowances to employees serving in H.M. Forces	49 6 3	·153	44	·135
	2,910 3 1	9·027	2,826	8·595
Balance to net revenue	219 0 2	·679	56	·171
	3,129 3 3	9·706	2,882	8·766
INCOME.				
By traffic revenue	3,127 5 4	9·700	2,879	8·757
,, sundry revenue	1 17 11	·006	3	·009
	3,129 3 3	9·706	2,882	8·766

NET REVENUE ACCOUNT.

EXPENDITURE.	£ s. d.	d.	£	d.
To interest on loans	64 0 2	·199	86	·262
,, contribution to sinking fund	551 2 2	1·709	537	1·633
,, bank interest	0 3 4	—	—	—
	£615 5 10	1·908	£623	1·895
INCOME.				
By revenue account	219 0 2	·679	56	·171
,, bank interest	—	—	13	·038
,, balance, being net loss for the year	396 5 8	1·229	554	1·686
	£615 5 10	1·908	£623	1·895

APPROPRIATION ACCOUNT.

EXPENDITURE.	£ s. d.
Balance, April 1, 1915	217 19 6
Net revenue account, net loss for year	396 5 8
	£614 5 2
INCOME.	
Borough rate, for deficiency, 1914–15	217 19 6
Balance at debit, March 31, 1916	396 5 8
	£614 5 2

	1915-16.	1914-15
Total borrowing powers	£5,000	£5,000
Gross capital expenditure	£2,837	£2,837
Length of routes :—	miles.	miles.
Gorsey Lane	1·250	1·250
Bewsey Circular	2·375	2·375
Traffic revenue	£3,127	£2,879
Total revenue	£3,129	£2,895
Working expenses	£2,910	£2,826
War allowances to employees	£49	£44
Interest and sinking fund	£615	£623
Net balance (loss)	£396	£554
Omnibus miles	77371·5	78913·6
Passengers (contracts estimated)	846,883	771,510
Gallons of petrol consumed	14,632	15,523
Cost of petrol per omnibus mile	2·413d.	2·506d.
Average number of omnibuses in use	2	2
Percentage of working expenses to receipts	93·001	97·616
Avg. traffic revenue per mile	9·7d.	8·757d.
total revenue per mile	9·706d.	8·804d.
miles per day per omnibus	110·679	108·1
omnibus hours per day per omnibus	15·716	15·716
working expenses per mile, excluding petrol	6·614d.	6·089d.
working expenses per mile, including petrol	9·027d.	8·595d.
Fares—Adults 1d.; children ½d.		
Avg. fare per passenger	·886d.	·895d.
Avg. number of passengers per mile	10·946	9·7
Number of omnibuses	3	3

Type of omnibus—40 H.P. two-deck, petrol-electric.
Seating capacity per omnibus—34.

A HALLEY W.D. LORRY WINS A PRIZE.

The Halley W.D. lorry shown in the accompanying illustration recently took the first place in a competition somewhere in France. The points on which the award was based were (1) length of time

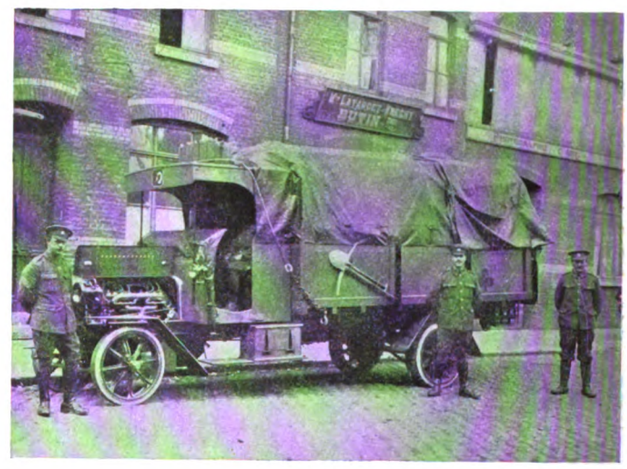

on active service; (2) behaviour; and (3) the amount of repairs done to the lorry during the period of service. A large number of lorries of various well-known makes were, we understand, among the competitors.

Digitized by Google

MOTOR TRAFFIC.

MUNICIPAL USE OF STEAM TRACTORS.

PORTSMOUTH'S GREAT SAVING OVER HORSE HAULAGE.

Following the discussion on steam tractors at the annual conference of the Institute of Cleansing Superintendents at Cardiff in July, Mr. H. Hopkinson, cleansing superintendent at Portsmouth, has submitted the appended comparison of steam and horse traction for cleansing work by the Corporation of Portsmouth :—

COST OF COLLECTION OF HOUSE AND BARRACK REFUSE BY STEAM MOTOR ("FODEN") WAGON AND TRAILER.

Carrying capacity of wagon attached to motor	...	11½ cub. yds.
,, ,, trailer ,, ,,	...	11 ,,
		22½ ,,
Weight per load of		
Wagon ... ... 3 cub. yards per ton	...	3 tons 13 cwts. 1 qr.
Trailer ... ... 3 ,, ,,	...	3 ,, 13 ,, 1 ,,
		7 ,, 6 ,, 2 ,,
2 loads per day of both wagon and trailer	...	14 tons 13 cwts.
Cost ,, ,, ,, ,,	...	Fuel, etc. 4s. 7½d.
		Wages 8s. 4d.
		Total 12s. 11½d.
14 tons 13 cwts., or 44 cub. yards, cost	... ...	12s. 11½d.
1 ton ,, 3 ,, ,,	... ...	10½d.
6 cwts. 2 qrs. ,, 1 ,, ,,	... ...	3½d.

COST OF HOUSE & BARRACK REFUSE COLLECTION BY HORSE & CART.

Carrying capacity of ash cart	4 cub. yards
Weight per load of ash cart (average)	1 ton 6 cwts.
Average No. of loads per horse—2½ per day =	3 tons 5 cwts.
Cost per day for one day's work	10s. 4d.

Therefore :

45 horses collect 112½ loads, or 450 cub. yards, average weight, 146 tons 5 cwts., costing ...	£23 5s. 0d.
1 horse will collect 2½ loads, or 10 cub. yards, average weight, 3 tons 5 cwts., costing	10s. 4d.
1 horse will collect 1 load, or 4 cub. yards, average weight, 1 ton 6 cwts., costing	4s. 1d.
1 horse will collect ¼ load, or 1 cub. yard, average weight, 6 cwts. 2 qrs., costing	1s. 0¼d.
3 cub. yards, average weight, 1 ton, costing ...	3s. 0¾d.

So it will be seen by the above that the cost of haulage by motor is 2s. 2¼d. less per ton (3 cub. yards), or 9½d. less per cub. yard (6 cwts. 2 qrs.).

HORSE.

	Loads.	Cub. yards.	Weighing. Tons	cwts.	Costing. £	s.	d.
In 1 day 1 horse collects	2½ or	10	3	5	0	10	4
In 1 week 1 ,, ,,	15 or	60	19	10	3	2	0
In 1 year 1 ,, ,,	780 or	3,120	1,014	0	161	4	0

MOTOR AND TRAILER.

	Loads.	Cub. yards.	Weighing. Tons	cwts.	Costing. £	s.	d.
In 1 day 1 motor and trailer collects ...	2 or	44	14	13	0	12	11½
In 1 week 1 motor and trailer collects ...	12 or	264	87	18	3	17	9
In 1 year 1 motor and trailer collects ...	624 or	13,728	4,570	16	202	3	0

GLASGOW TO LONDON BY MOTOR.

The Albion Motor Car Company, Limited, are under contract with the War Department to despatch each week to London by road a number of motor lorries. There is accommodation for two persons besides the driver on each vehicle, and to assist the respective war funds the Albion Company are agreeable to allow a limited number of men who may desire the experience of travelling to London by road to do so by their motor vehicles. The Albion Company will make no charge for the trip, but each person travelling will require to subscribe the sum of 10s. to one of the war funds, as named by the Albion Company. The journey usually takes four days (three nights in hotels), and all passengers will require to make their own arrangements for food and hotel accommodation *en route*. The fleets leave Glasgow approximately every Tuesday and Friday. Persons desirous of securing seats or obtaining further particulars should apply to the Albion Motor Car Company, Limited, 105, St. Vincent Street, Glasgow.

MOTOR TRAFFIC NOTES.

HULL MOTOR PARCELS SERVICE.—A motor parcels delivery service has been instituted in Hull and district by the Hull Motor Transport Company.

MOTOR TRANSPORT IN BENGAL.—The Eastern Transport Company have established motor services between a number of towns in Bengal, special attention being given to railway connections.

OMNIBUS PARCEL SERVICE BETWEEN ALDERSHOT AND READING.—The Tramways Committee at Reading have completed an agreement with the Aldershot and District Traction Company, Limited, for the reception and forwarding of parcels between those towns and intervening places.

OMNIBUS RESTRICTIONS AT OLDHAM.—With a view to arranging for the curtailment of the motor omnibus services of Oldham Corporation Tramways department, a census has been taken of the passengers. Petrol can be obtained only for services necessary to the carrying on of war work.

CONVEYANCE OF MUNITION WORKERS.—In order to conserve the petrol supply and so meet the increased demand for transport for munition workers, the Birmingham Tramways department has withdrawn a number of motor omnibuses from the Harbourne suburban route between 5 p.m. and 8 p.m.

2-Ton Halley Lorry at Work in Wrexham.

MOTOR VEHICLES' HARVEST DURING A TRAMWAY STRIKE.—On the occasion of the recent strike of tramway employees in New York, sight-seeing automobiles and hundreds of small motor cars were utilised along the tramway streets. The fare was 5d. per ride, which was twice the ordinary car charge.

A SURVEYOR'S PETROL LICENCE.—Only six gallons of petrol for 13 weeks' use of a motor cycle had been allowed by the Petrol Control Committee to the surveyor of the East Preston (Sussex) Rural Council. The Council had supported an application for an allowance of 18 gallons, in order that the officer may be able to properly supervise his men and their work.

OMNIBUS LICENSING AT READING.—In a report recently presented to the Watch Committee of Reading, the chief constable supported the granting of licenses for motor omnibuses linking up surrounding districts with the town. The vehicles, he added, were a great source of revenue to the trade of the town, and did not interfere with the working of the tramway service.

ALTERNATIVE USE FOR CHARS-A-BANCS.—The Askern Coal and Iron Company, Doncaster, have advertised for tenders from owners of motor chars-a-bancs for the conveyance of miners (munition workers) between the Angel and Royal Hotel, Doncaster, and the Askern main colliery, picking up miners *en route*. The double journey to take place three times per 24 hours, from Sunday night until Saturday mid-day. The company offers "to guarantee the cost of the same."

Digitized by Google

MOTOR TRAFFIC.

EDISON TOWER WAGON AT SOUTHAMPTON.—The Edison accumulator tower wagon which was purchased in September, 1915, by Southampton Corporation Tramways Committee at a cost of £715, enabled the department to dispense immediately with two horses. The cost of maintenance, as was anticipated, has so far been negligible, the only expense being the cost of energy. It has been found a great advantage to have the electric light available for night repairs, even though the current be off the trolley wire.

EFFECT OF THE PETROL SHORTAGE.—An indication of the great restriction of motor traffic effected by the petrol licence system is to be seen in London not only by the reduction of the number of omnibuses in service but by the disappearance of hundreds of private motor cars. The latter effect is particularly noticeable in the number travelling to and from the city. At certain hours in the morning and evening there was a constant procession of such vehicles along the Victoria Embankment, but it is now an easy matter for a pedestrian to cross the road even at the busiest period. It is remarked that at Bristol many business men have given up their cars and have returned to the railway, or are using the tramcars and omnibuses.

HURRICANE LAMPS ON MOTOR VEHICLES.—The Commercial Motor Users' Association recently appealed to the Home Office concerning the action of certain police authorities in construing Regulation A of the Defence of the Realm Regulations, affecting the use of movable lamps on highways. The Association is now officially notified, for the guidance of users of steam-propelled vehicles, more particularly that "whilst the Secretary of State has no authority to give a binding decision on a question of law, he believes the Regulation was not intended to prevent the use of such lamps on lorries or similar vehicles." It is understood that the Regulation was aimed at swivelling lamps, and that hurricane lamps using paraffin are not to be regarded as coming under it.

THE GIRL CONDUCTORS ON LONDON OMNIBUSES.—On the completion of six months' service by the girl conductors on the London omnibuses, a correspondent has been gathering their impressions of the work. The girls state that if they can stand the first few days, they become used to the swing and jolting and can adapt themselves to it without undue fatigue, finding it less tiring to move about than to sit down. One country girl who had been too timid to ride on top of an omnibus when she first came to London, spoke delightedly of her work, especially on country routes, and other girls said they enjoyed every minute of their days. As far as the greater part of the year was concerned, they said, omnibus conducting was emphatically work for women.

MOTOR VEHICLE CONTRACTS.

Clayton and Shuttleworth, Limited, of Lincoln, are supplying portable steam engines to the War Department.

The Motor Rail and Tramcar Company, Limited, have supplied a number of petrol tractors to the War Department.

D. Napier and Son, Limited, Acton, W., obtained a contract for the supply of motor lorries in recent monthly contracts called for by the War Office.

Ford Motor Company (England), Limited, Ansdell Street, Kensington, W., have a contract to supply a number of motor delivery vans to the War Office.

Straker and Squire (1913), Limited, Blackfriars, London, S.E., Twickenham, and Bristol, have a contract for supplying motor chassis and parts to the War Department.

The War Office have placed contracts with the Austin Motor Company (Birmingham), and with the Standard Motor Company, Limited (Coventry), for the supply of petrol engines.

THE INSTITUTION OF AUTOMOBILE ENGINEERS.

The first meeting of the session of the Institution of Automobile Engineers will be held on Wednesday, October 11, 1916, in the Hall of the Royal Society of Arts, John Street, Adelphi, W.C., at 8 p.m., when the president, Mr. L. A. Legros, M.Inst.C.E., will deliver his presidential address. The address will contain, among other things, a valuable collection of data in reference to torque curves of internal combustion engines. Cards of invitation to the meeting may be obtained on application to the secretary of the Institution, 28, Victoria Street, Westminster, S.W. It is hoped that this year it will be possible to arrange for the full number of meetings, but meantime the Institution is engaged on much important work in connection with research and standardisation, the results of which should be available for the members before the end of the session.

"ACTUAL EXPERIENCE."

In more ways than one a 16-page illustrated catalogue issued by the Daimler Company, Limited, Coventry, should effectively answer the purpose for which it has been issued. It bears the above title by virtue of containing letters received from more than a score of users of the Daimler vehicles. Their machines include omnibuses, chars-a-bancs, lorries, vans, brewers' drays, etc., and in every instance the fine work of the Daimler engine and chassis has led the drivers to voice their merits. Two features of the sleeve-valve engine are its silent operation and that it needs no attention beyond oiling for a minimum of 20,000 miles. Despite inferior road surfaces in many places, the Daimler proves as efficient in the provinces as it did in London when the licensing authorities imposed severe restrictions on the noisy omnibuses that raced through the streets in the days of the competing companies. One of the best testimonials is contained in the following extract from a letter received from the Cleveland Motor Service, Limited:—"Since June 1 last we have been driven, owing to War Office demands, to provide a three-omnibus service with a single omnibus. The route is over 15 miles each way, with four or five journeys per day—Sundays and week-days—120 to 150 miles per day. During the whole time we have only missed three journeys, these owing to carelessly tightened nuts in the leather couplings. Otherwise we should have performed the whole of the 26,000 miles without a break or hitch. The chassis and engine have been a revelation in mechanics—hence our further orders." Chars-a-banc owners refer to a 28-seat vehicle being as easy to drive as any small car, and as traversing for three months continuously weekly journeys averaging from 600 to 700 miles per week without the semblance of a breakdown. Blackpool, St. Annes, and Lytham Tramways Company write:—"We have a good lot of competition in this district with motor vehicles, but the Daimler, without a doubt, is the favourite with the people. The chars-a-banc proved very satisfactory for our long runs—tours to the Lakes being very popular—and not once have we had a breakdown." The owner of a lorry speaks of carrying 2½-ton loads on very rough roads, doing the work of six horses impressed by the military authorities. The Daimler among other machines has stood the test of the war, and local authorities and firms desiring to place orders for future execution will find the publication worthy of perusal.

NEW THORNYCROFT CATALOGUE.

John I. Thornycroft and Company, Limited, Caxton House, Westminster, Southampton, and Basingstoke, have issued a new and enlarged commercial vehicle catalogue. It comprises forty pages, and contains full particulars of the various types which the company will be building when they are permitted by the Government to recommence private work. At present they are required to supply their entire output of vehicles, consisting temporarily of 40 H.P. type "J" lorries, to the War Office for military purposes. Several new features have been introduced into the catalogue, including coloured illustrations of the vehicles just mentioned and of the 40 H.P. type "G" 5-ton lorry, and a set of useful coachbuilders' drawings. In other respects the catalogue has been enlarged and brought up to date, and a useful index has been added. A perusal of the publication shows that the company are listing models to carry useful loads of from 25 cwt. to 5 tons. The type "X" model, particulars of which are given on pages 24 and 25, is a new one for which they anticipate a large sale later on. With certain modifications to suit the special conditions under which the vehicles have to run, this model has been adopted by the Government of India on the recommendation of Lord Montagu of Beaulieu for military work in the East. Type "X" comprises 40 H.P. worm-driven chassis for 3 and 4 ton loads in an open lorry body, or 2½ and 3½ tons in a van body. As the catalogue has been in the printers' hands for some time, and as the cost of labour and material is constantly rising, the running cost tables contained on pages 10 and 11 now require some modification. Under present conditions it is impossible to print accurate running cost tables, but the company believe it will be found that their running cost tables approximate much more closely to actual running conditions than is the case with the figures published in some other quarters.

MOTOR LORRIES SUPPLEMENTING A RUSSIAN RAILWAY.—A message from Petrograd on August 27 stated that a complete service of motor cars has been started between Petrograd and Archangel to supplement the railway. The road, over 600 miles in length, has been newly constructed for the purpose. The cars, mostly heavy lorries, were supplied from the United States.

Digitized by Google

Registered Trade Mark

WORKS

675, Commercial Road London, E.

which is now their . . .

ONLY ADDRESS

THERMIT LTD.

Entirely British

Owned and Managed

THERMIT LIMITED
675, Commercial Road
LONDON, E.

Telegrams:—
"FULMEN STEP LONDON"

Telephone:—EAST 4157

Digitized by Google

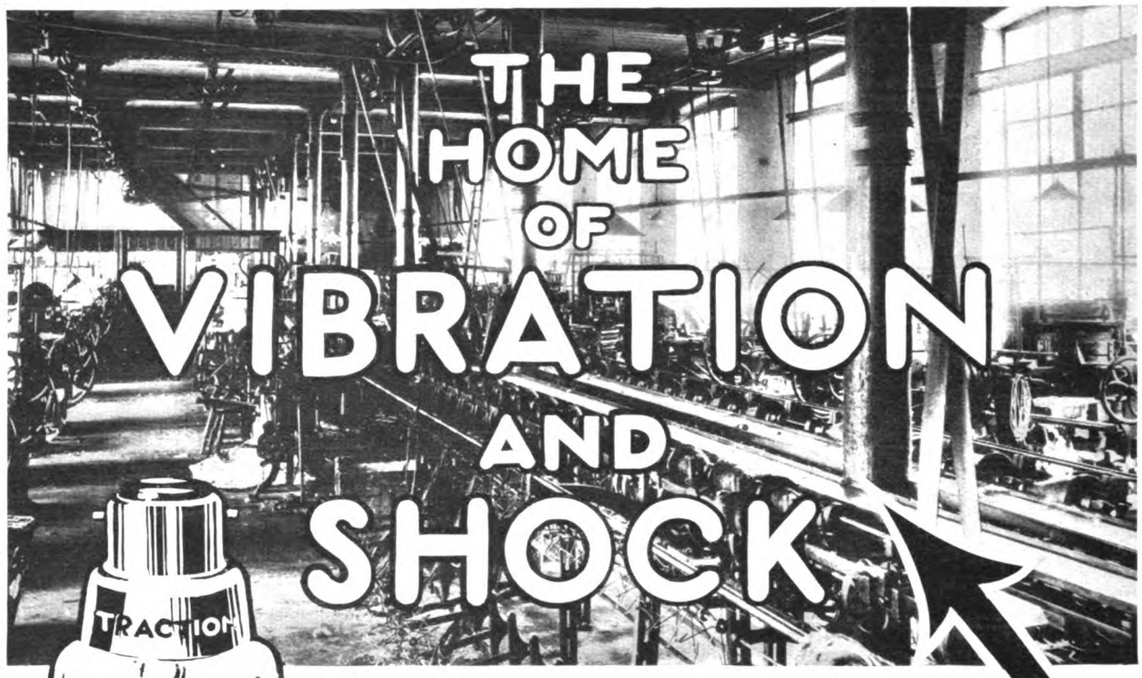

THE HOME OF VIBRATION AND SHOCK

IDEAL FOR INDUSTRIAL INSTALLATIONS

VIBRATION and accidental shocks are fatal to most ordinary types of Metal Filament Lamps, and renewal costs increase accordingly. This fact was chiefly responsible for the introduction of

SIEMENS WOTAN Drawn Wire TRACTION TYPE LAMPS

THESE Lamps have Tungsten Filaments and combine high efficiency with great mechanical strength. The filament is in one continuous length helical wound, and mounted in loop formation on a special support. This arrangement prevents "sagging," and the short-circuiting of adjacent lengths of filament. The distance between the top and bottom supports is in no case greater than $\frac{3}{4}$", and sharp bends are avoided. Maximum strength is thus obtained, and the lamps are therefore ideal for the local lighting of individual machines, work-benches, &c.

SIEMENS BROTHERS DYNAMO WORKS LIMITED. Lamp and Supplies Dept.: 38 & 39, Upper Thames St., E.C.

Digitized by Google

Telegrams:
"THOUGHTFUL, LONDON."

THE

Telephone
8186 LONDON WALL

LORAIN STEEL CO.

36-38, New Broad Street, London, E.C.

Highest Possible Recognition

Awarded at the Panama-Pacific International Exposition for the general excellence of Girder, Groove, Guard and High Tee Rails and Special Track Work products; the greatest merit being recognised in the following special products exhibited as representing the highest development of the Art:—

"Tadpole" Tongue Switch
Tongue-Holding Device
Electrically Welded Rail Joints

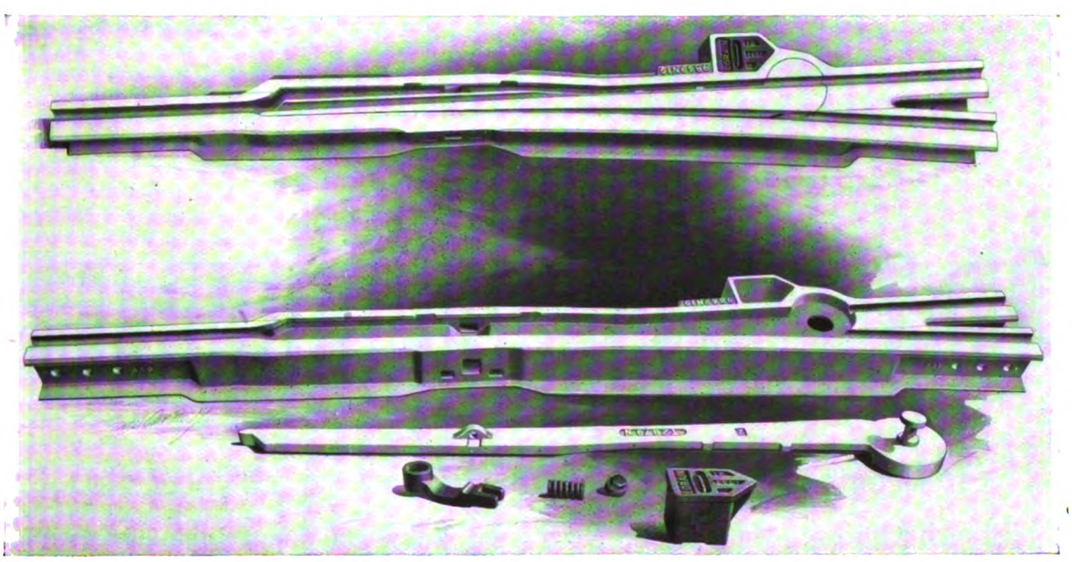

SOLID MANGANESE TADPOLE TONGUE SWITCH
Made with either grooved or plain Tongue

Digitized by Google

Tramway Equipments

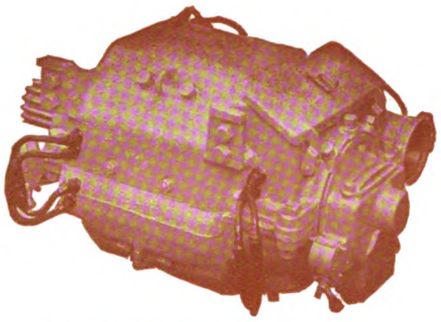

D.K. 20—Light Weight Tramway Motor.
View from commutator end.

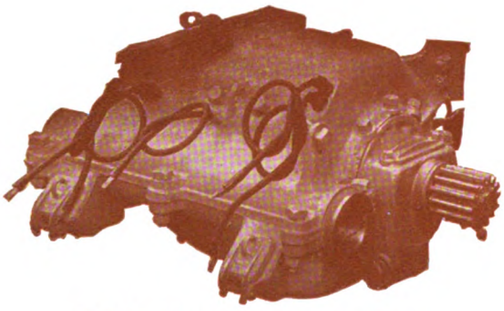

D.K. 20—Light Weight Tramway Motor.
View from pinion end.

LIGHT WEIGHT MOTOR

THE D.K. 20 Light Weight Interpole Traction Motor has been designed specially for Efficient and Economical Service

The reduction in weight of the motor in no case affects the soundness of construction, but many improvements have been added.

Use the D.K. 20 and reduce power consumption and wear and tear on cars and track.

DICK, KERR

& CO., LIMITED.

Head Office: ABCHURCH YARD, CANNON ST., LONDON, E.C.

Branch Offices: Manchester, Newcastle, Tokyo, Sydney, Johannesburg, Buenos Aires, Rio de Janeiro, and Milan.

Digitized by Google

Turbo-Alternators

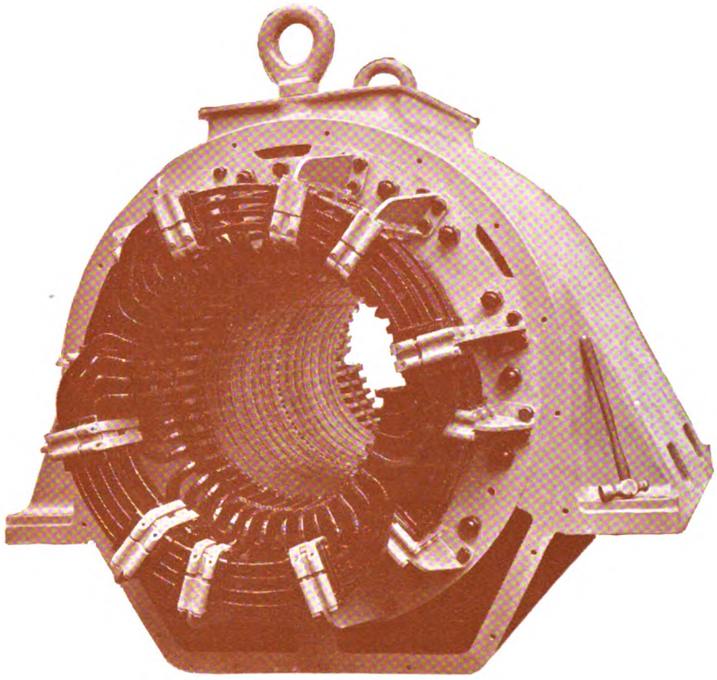

Soundness of Construction

THE world-wide reputation enjoyed by Dick, Kerr & Co., for the quality and reliability of their products, is due to soundness of construction, correct design, and skilled workmanship. Added to that—our very long and extensive experience in the design and manufacture of all classes of Electrical Plant, gives the purchaser confidence and assurance of successful operation.

DICK, KERR

& CO., LIMITED.

Head Office: ABCHURCH YARD, CANNON ST., LONDON, E.C.

Branch Offices: Manchester, Newcastle, Tokyo, Sydney, Johannesburg, Buenos Aires, Rio de Janeiro, and Milan.

Digitized by Google

For Successful Sub-Station Operation

it is essential that the converting plant should be of unquestionable reliability and possess high efficiency and large overload capacity.

B.T.H. Rotary Converters

possess the above qualities in an exceptional degree, and are extensively used in connection with important electric distribution schemes throughout the world, the machines installed in the United Kingdom alone having an aggregate capacity of over 200,000 kw.

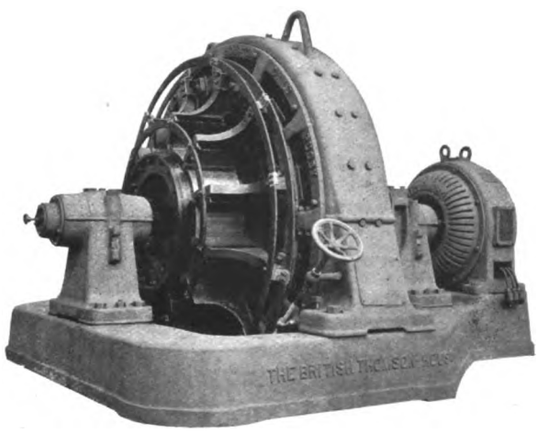

The British Thomson-Houston Co. Ltd.

ELECTRICAL ENGINEERS AND MANUFACTURERS

HEAD OFFICE AND WORKS : RUGBY, ENGLAND

R.E.T.

RAILLESS ELECTRIC TRACTION for passengers and freight.

Rubber Tyres. No Rails.

Also Battery Driven Vehicles and MOTOR LORRIES of all kinds.

The **R.E.T. CONSTRUCTION CO. LTD.**
Balm Road, Hunslet, LEEDS

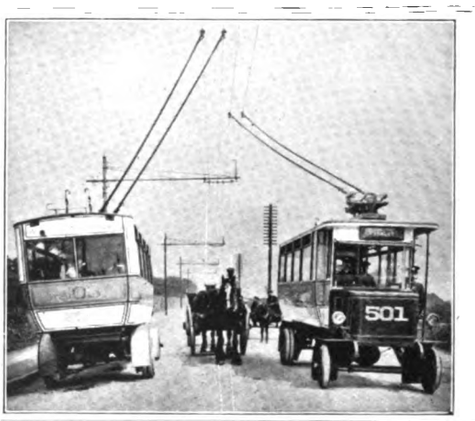

TRACTION SUPPLIES

SECTION INSULATORS
FROGS & CROSSINGS

IN STOCK
At Pre-War Prices.

GEO. W. GREEN & CO., (FELTHAM) LTD.

Q-FEL WORKS,
FELTHAM, MIDDLESEX.
Tel.: "CUFEL, FELTHAM."

Digitized by Google

EXPERIENCE!

backs up our reiterated statement that Standard Insulating Specialities are STILL THE BEST.

Proved *practical* utility is our claim for Standard Materials—*proved* in their regular use by the principal Tramways, Railways, Electrical Manufacturing Firms, Lighting and Power Stations, etc.

Be guided by *experience*, and instead of *experimenting* with **unknown** and **unproved** materials always use

STANDARD INSULATING VARNISHES & COMPOUNDS.

Catalogue and Expert Advice where necessary from

Pinchin, Johnson & Co., Ltd., 26 Bevis Marks, London E.C.

Digitized by Google

HADFIELDS Ltd

WORKS AREA 110 ACRES

Hecla & East Hecla Works, SHEFFIELD.

WORKMEN EMPLOYED OVER 6000

Specialists in Designing and Constructing

COMPLETE LAY-OUTS AND JUNCTIONS

OF EVERY DESCRIPTION

FOR ELECTRIC RAILWAYS & TRAMWAYS

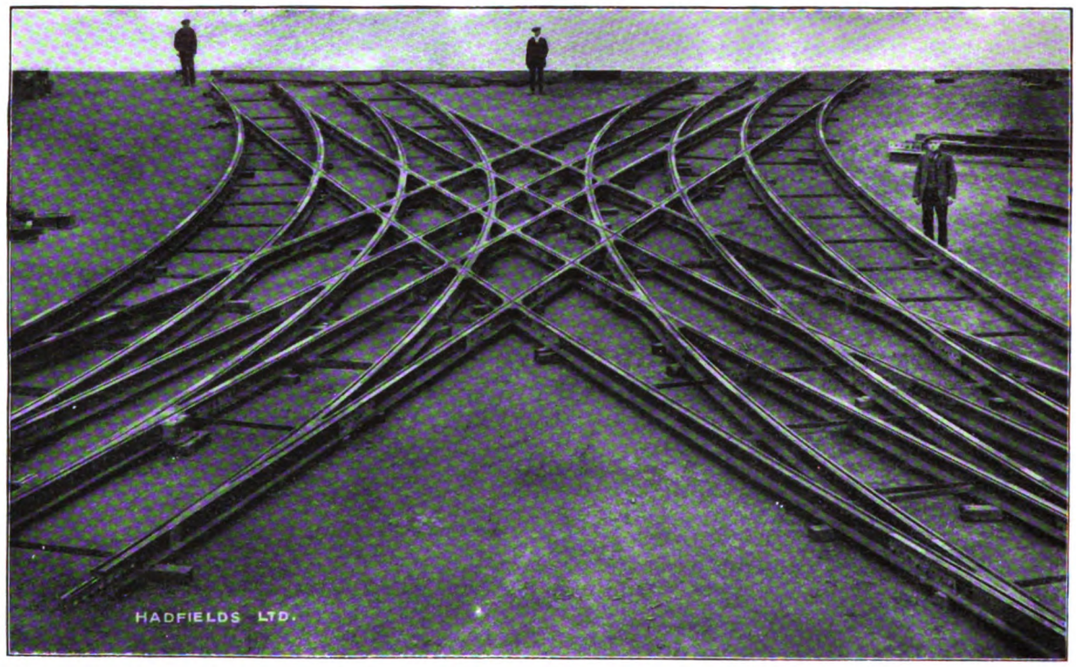

SPECIAL TRACK-WORK OF HADFIELD'S PATENT "ERA" MANGANESE STEEL CONSTRUCTED FOR NEWCASTLE-UPON-TYNE TRAMWAYS.

Hadfields have supplied Junctions and other special Track-work to the most important Railway and Tramway systems throughout the World.

WORLD RENOWNED

SOLE MAKERS OF 'ERA'

HADFIELD'S PATENT MANGANESE STEEL

THE SUPREME TRAMWAY POINTS, CROSSINGS MATERIAL FOR SPECIAL TRACK-WORK ETC.

Digitized by Google

CONTENTS

	Page
A Diesel-Electric Combination for Rail Motor Cars (Illus.)	245
Trailer Cars in London (Illus.)	247
The Woods-Gilbert Rail Planer and Grinder (Illus.)	249
Indian Railway Policy	250
Tramway Passengers and their Fares	251
London Tramway Finance	252
Causes of Rail Corrugation	253
Editorial Comments—Tramways and the War	254
Future Requirements	254
Goods Traffic	255
Air Raids and Lights on Vehicles	256
Trade after the War	257
"Safety First" Movement	258
Illuminated Car in Shanghai (Illus.)	258
Bradford Railless Cars	258
Municipal Tramways Association	259–286
Presidential Address by Mr. Peter Fisher	262
Some Notes on Passenger Transportation in Large Cities, by Mr. J. M. McElroy (Illus.)	263
Utilisation of Tramways for Goods Transport, by Messrs. G. W. Holford and W. Clough (Illus.)	271
Annual Business Meeting	279
Report of the Executive Council	283
Financial Reports and Meetings	286
Contracts and Orders	287
Personal	288
Tramway and Light Railway Notes	289
Patent List	290
MOTOR TRAFFIC SECTION	295
Voluntary Motor Transport	296
Patriotic Work at Bradford (Illus.)	296
Motor Traction in the Advance (Illus.)	297
Motor Vehicles for Municipalities	297
Motor Traction for Municipal Work	298
Restriction of Omnibus Routes	300
Alternatives to Tramways	300
Napier for a Business Firm (Illus.)	300
Balanced Windows (Illus.)	301
Commercial Vehicles of Great Britain	301
Motor Traffic Notes (Illus.)	302
Traffic Returns	291-292
Directories of Electric Tramways and Railways	xxiii-xxx
Municipal Tramways	xxiii-xxiv
Company Tramways	xxiv-xxvi
Particulars of Track and Equipment	xxvii-xxx
Buyer's Guide	xvi-xx
Index to Advertisements	xiii

WE ARE ADDING ALL THE TIME TO OUR LIST OF TRAMWAYS WHICH USE

TOOL STEEL GEARS and PINIONS

but most of our orders are now from systems which have used T. S. material for some time. Experience is better than statements, and to-day we offer records and not promises

SCHOLEY & CO. LIMITED
56, Victoria Street
WESTMINSTER
LONDON, S.W.

Digitized by Google

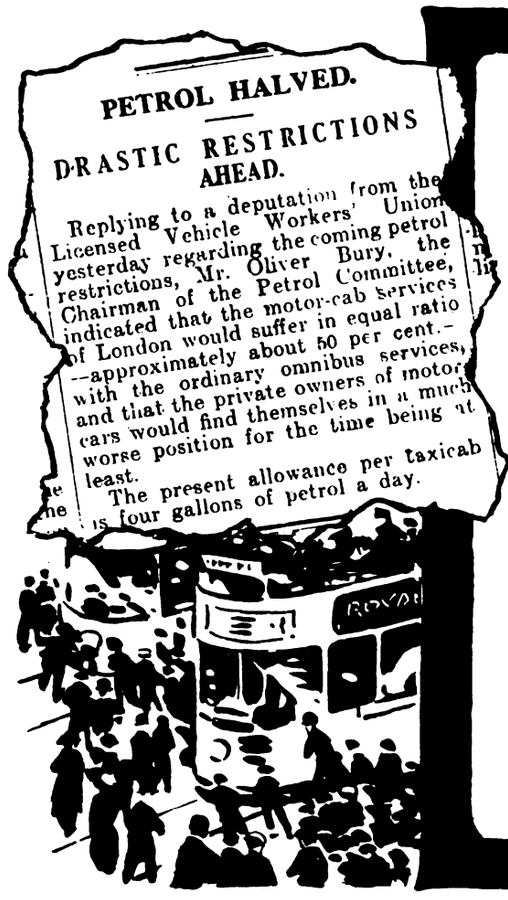

Coming—a rush!!

It is extremely likely that tramway services will be utilised to a greater extent as a result of the curtailment of 'bus services. The extra strain on tramway stock, however, can be met without fear of trouble by fitting each car with Skefko SKF ball bearings—the unique features of which enable them to remain unaffected by hard service. Upon hearing from you we will gladly send you further particulars.

SKEFKO.SKF

SELF-ALIGNING DOUBLE-ROW
BALL BEARINGS

The Skefko Ball Bearing Co. Ltd.
HEAD OFFICE AND WORKS LUTON, ENGLAND
London Office - - 28, Victoria Street, S.W.
Glasgow Office - - 45, Bothwell Street.

FLOWER BRAND.

TRADE MARK

TRADE MARK

MAGNOLIA METAL

THE D. H. STOLL COMPANY, INC.
MANUFACTURERS OF PRESSES, SHEARS, DIES AND SPECIAL SHEET METAL WORKING MACHINERY.

Buffalo, N.Y., April 7, 1914

Gentlemen :—We have used your metal for the past few years in all our Power Presses and Shears, both large and small, with the most satisfactory results.

This applies both to the equipment, which we have manufactured here for our own use, and the many carloads shipped to some of the largest manufacturers in both the United States, Canada and abroad, in which was the entire plant equipment for many large plants.

As above stated, we have used this metal in both large and small machines and some machines running as high as 60 to 70 tons for heavy sheet metal drawing work.

Yours very truly,
THE D. H. STOLL COMPANY.

MAGNOLIA ANTI-FRICTION METAL COMPANY OF GREAT BRITAIN, LTD.

Tel. No.: City 6596. *49, Queen Victoria Street, LONDON, E.C.* Teleg.: "Magnolier, London."
Tel. No.: 254-01. **LA MAGNOLIA,** *21, Rue de Petrograd, PARIS.* Teleg.: "Metamagne, Paris."

Digitized by Google

INDEX TO ADVERTISEMENTS.

	PAGE
Albion Motor Car Co. Ltd., Scotstoun, Glasgow ...	127
Allen, Edgar, & Co., Ltd., Sheffield	146
Auto-Ticket Printing Co., Ltd., Liverpool	—
Avon India Rubber Co., Ltd., Melksham	123
Baker, John, & Co. (Rotherham) Ltd., Rotherham	xxii
Beckett, Laycock & Watkinson, Ltd., Willesden ...	xx
Bell Punch & Printing Co., Ltd., London, E.C. ...	142
Brill Company, J. G., London, E.C.	xxxv
Britannia Lamp & Accessories Co., Ltd., London, E.C.	xxxiv
British Hele-Shaw Patent Clutch Co., Ltd., Oldham	xxxiv
British Insulated & Helsby Cables, Ltd., Prescot...	xxxi
British Thomson-Houston Co.. Ltd., Rugby ...	viii
British Westinghouse Electric & Manufacturing Co., Ltd., Manchester	xix
Brockhouse, J., & Co., Ltd., West Bromwich ...	147
Cantor, John & Son, London, E.	xiv
Clayton & Co. (Huddersfield), Ltd., Huddersfield...	127
Cleveland Metal Co., Stockton-on-Tees	—
Coan, R. W., 219, Goswell Road, London, E.C. ...	xviii
Commercial Cars, Ltd., Luton	136
Courtenay, J. W., Ltd., London, W.C.	143
Coventry Chain Co., Ltd., Coventry	131
Daimler Co., Ltd., Coventry	293
Dennis Bros., Guildford	122
Dick, Kerr & Co., Ltd., London, E.C. ... vi, vii,	148
Docker Brothers, Ltd., London, E.C.	142
Dunlop Rubber Co., Ltd.. Aston Cross, Birmingham	135
Edison Swan Electric Co., Ltd., Ponders End ...	xxi
Electro-Mechanical Brake Co. Ltd., West Bromwich	xxxviii
Equipment & Engineering Co., London ... xxxii.	xxxvi
Fodens, Ltd., Sandbach	138
General Electric Co., Ltd., London, E.C.	i
General Seating Co., Ltd.. London, E.C.	ii
General Vehicle Co., Ltd., London, W.C.	132
Glasgow Numerical Ticket Printing Co., Glasgow...	130
Glyco Metal Co., Ltd., South Parade, Manchester ...	xvi
Goodyear Tyre and Rubber Co., Ltd., London, W.C.	137
Green, Geo. W., & Co. (Feltham), Ltd., Feltham ...	viii
Grover & Co., Ltd., Carpenters Road, London, N....	130
Hadfields, Ltd., Sheffield	x
Halley's Industrial Motors, Ltd., Glasgow	124
Henley's Telegraph Works Co., Ltd., London	xix, 139
Herbert Frood Co. Ltd., Chapel-en-le-Frith ...	130
Hurst, Nelson & Co., Ltd., Motherwell	xxxvii
International Truck and Car Co., Ltd., London ...	xvi
Johnson & Phillips, Ltd., London, S.E. ...	xxxviii

	PAGE
Lacre Motor Car Co., 78, York Road, London ...	129
Leyland Motors (1914), Ltd., Leyland	125
"L'Industrie des Tramways et Chemins de Fer," Paris	142
London General Omnibus Co. Ltd., Broadway, Westminster, S.W.	131
Lorain Steel Co., London, E.C.	v
Magnolia Anti-Friction Metal Co., London, E.C. ...	xii
Maudslay Motor Co., Ltd., 4, Parkside, Coventry ...	124
Mirrlees Watson Co., Ltd., Glasgow	291
"Motor Traction," 20, Tudor Street, London, E.C.	xviii
Napier, D., and Son, London, W.	294
Oriental Tube Co., Ltd., West Bromwich	291
Pease & Partners, Ltd., Middlesbrough	xxii
Peckham Truck & Engineering Co., Ltd., London...	xv
Pinchin, Johnson & Co., Ltd., London, E.C. ...	ix
R.E.T. Construction Co., Ltd., London, E.C. ...	viii
Scholey & Co., Ltd., London, E.C.	xi
Scottish Commercial Cars Co., Ltd., Glasgow ...	141
Shepherd's Parging Block Co., Milkstone, Rochdale	xiii
Shrewsbury & Challiner Tyre Co., Ltd., Manchester	126
Siemens Bros. Dynamo Works, Ltd., London, S.W.	iv
Skefko Ball Bearing Co., Ltd., Luton	xii
Smith, Frederick, & Co., Ltd., Salford	—
Spencer-Moulton & Co. Ld., Deansgate, Manchester	128
Standard Underground Cable Co., London, E.C. ...	xviii
Stewarts & Lloyds, 41, Oswald Street, Glasgow ...	147
Straker & Squire, Ltd., London, S.E.	134
Thermit, Ltd., London, E.C.	iii
Thornycroft, John I. & Co., London, S.W.	133
Tilling-Stevens, Ltd., 26, Victoria Street, S.W. ...	121
Titan Trackwork Co., Ltd., Sheffield	xv
"Tramway and Railway World"	xiv, xxxiii
Tramway Supplies, Ltd., Leeds	147
Tudor Accumulator Co., Ltd., London, S.W. ...	131
Tyne Metal Co., Ltd., Newcastle-upon-Tyne ...	147
Underground Electric Railways Co., Ltd., London	—
United Electric Car Company, Preston, Lancs. ...	xxxiii
Walter Scott, Ltd., Leeds Steel Works, Leeds ...	145
Ward, Thos., Limited, Albion Works, Sheffield ...	144
Waygood-Otis, Ltd., London, S.E.	xviii
White Motors and Accessories, Ltd., London, S.W.	xvii
Williamson, Alfred, Ashton-under-Lyne	xxxiii
Wilson Rolling Shutter Co. (1914) Ltd., London, S.W.	xvi
Wood-Milne, Ltd., Preston	140
Vandervell, C. A. & Co. Ltd. London, W.	133
Zenith Carburetter Co., London, W.	130

fill it in with a Solid Block

REQUIREMENTS OF A RAIL FILLER—A satisfactory Filler must

1. Be handy and convenient to use.
2. It must not deteriorate in stock.
3. Must fix to present a solid upright vertical wall against which to pave.
4. Must not liquify and run with heat.
5. Must be unaffected by frost during the operation of laying and when fixed in position.
6. Must bear the pressure and vibration of heavy surface traffic.
7. Must be able to be used in rail after rail.
8. Must fix so that it absolutely prevents the adjoining paving from dipping below the rail to expose the rail edge and become dangerous to users of the road.

SHEPHERD'S PARGING BLOCK CO. LTD.
MILKSTONE, ROCHDALE. Telephone: 912 and 721 Rochdale
No. 11

BLOCK PARGING

Digitized by Google

CANTOR UNIFORMS

Photo: Owens, Southsea.

We have recently supplied the following Corporations with their Tramway uniforms:—Portsmouth, Southampton, Hull, Walthamstow, &c., &c. We are also Contractors to H.M. Secretary of State for War, The Lords Commissioners of the Admiralty, H.M. Postmaster General, The Crown Agents for the Colonies, &c., &c.

We manufacture every class of Uniform

Your enquiries will be esteemed and receive our prompt and careful attention

Designs and Estimates willingly submitted

Uniform Clothing :: Contractors :: | **Tramway Uniforms :: a speciality ::**

JOHN CANTOR & CO.

(Established 1881)

Crown Works, Old Nichol St.

LONDON, E.

Telephone No.: Avenue, 7733 (2 lines). Telegrams: "Tuniceers, Norton, London"

Photo: Owens, Southsea.

Some Countries and Colonies represented in THE PAID SUBSCRIPTION LIST OF THE TRAMWAY & RAILWAY WORLD

South Australia	China	Portugal	New Zealand
Bombay Presidency	Burma	Mexico	Peru
Argentine	Holland	Cuba	Russia
Cape Colony	Denmark	Mandalay	Malta
Norway	Belgium	Hong Kong	Greece
Sweden	United States	New South Wales	Brazil
Hawaii	Chili	Straits Settlements	France
Jamaica	Sierra Leone	Victoria	Japan
Italy	Natal	Queensland	Egypt
Rhodesia	Switzerland	Tasmania	Soudan
Canada	Transvaal	Bengal	Etc., etc., etc.

Thanks to the British Navy, communications continue to be unaffected, and **THE TRAMWAY AND RAILWAY WORLD** (Illustrated), in war as in peace, has an International circulation of the greatest value to those who desire to ensure the retention of their present trade connections abroad and their extension now and after the war.

In our Illustrated issues, as the "British Printer" has well said, "all announcements receive appropriate setting with clear and forcible effects."

Digitized by Google

ALL TYPES OF TRAMWAY POINTS

Made of
"TITAN"
MANGANESE STEEL

TITAN TRACKWORK CO.
Rutland Works, Rutland Road, SHEFFIELD LTD.

A GOOD THING IS SURELY WORTH A TEST!!

YOU CAN INCREASE THE SPEED OF YOUR CARS WITHOUT FEAR OF DERAILMENT

SEND FOR PARTICULARS, DRAWINGS ETC.

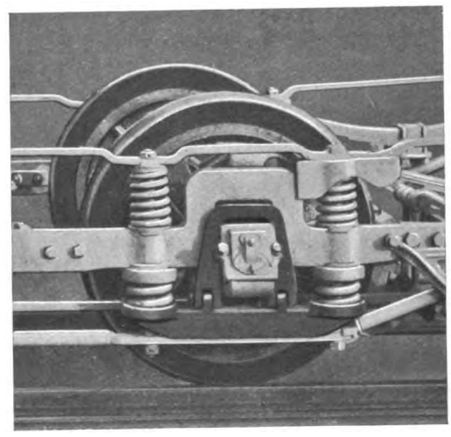

THIS GEAR RELIEVES THE CAR AND MOTORS FROM SIDE SHOCKS, ETC.

THE PECKHAM PENDULUM GEAR HAS STOOD THE SEVEREST TESTS ON OVER 35 TRAMWAYS IN THIS COUNTRY WITH ENTIRE SATISFACTION

CAN BE FITTED TO ANY EXISTING TRUCKS

THE PECKHAM TRUCK & ENGINEERING CO., LTD.

Telephone City 3,294
Telegrams "TRUXENPECK, CANNON, LONDON"

26, BUDGE ROW,
CANNON STREET,
LONDON, E.C.

3

Digitized by Google

THE
INTERNATIONAL
TRUCK & CAR
CO. LTD.

MANUFACTURERS OF

ROLLING STOCK FOR
ELECTRIC RAILWAYS
AND TRAMWAYS

PATENT RADIAL AXLE TRUCKS
FOR SHARP CURVES a Speciality

59-61, New Oxford Street, LONDON

WILSON
ROLLING SHUTTER CO. (1914) LTD.

SHUTTERS of every description in Steel, Bronze, Wood

66, VICTORIA ST., LONDON, S.W.

'PHONE 104 VICTORIA.

IF YOU WISH TO AVOID TROUBLE
USE NONE BUT

GLYCO

ANTI-FRICTION
WHITE METALS
OR
"GLYCO-BRONZES"

Absolutely guaranteed by the Sole Makers

GLYCO METAL CO. LTD.
South Parade
MANCHESTER

BUYER'S GUIDE

The Names of Advertisers whose announcements appear in consecutive issues of THE TRAMWAY AND RAILWAY WORLD are inserted free of charge, under such headings as may be desired.

ACCUMULATORS, ELECTRICAL.
Edison Accumulators, Ltd., London.
Tudor Accumulator Co., London, S.W.

ADVERTISING, TRAMWAY AND RAILWAY.
J. W. Courtenay, Ltd., London.

AIR BRAKES. (See Brakes.)

ALUMINIUM.
British Aluminium Co., Ltd., London, E.C.

AMMETERS. (See Volmeters.)

ANCHOR CHAIRS.
Blackwell & Co., London.

ANGLE IRON BUFFERS.
Brill Company, J. G., London, S.W.

ANTI-FRICTION METAL.
Magnolia Anti-Friction Metal Co., Ltd., E.C.

AUTOMATIC BRAKE ADJUSTERS. (See Brake Adjusters.)

AXLE BOXES.
Brill Company, J. G., London, E.C.
Peckham Truck and Eng. Co., London, S.W.

AXLES AND TYRES.
Anger Mfg. & Supply Co., Ltd., Preston, Lancs.
Baker, John, & Co., Rotherham.
Equipment & Engineering Co., London, W.C.

BALL BEARINGS.
Skefko Ball Bearing Co., Ltd., Luton.

BATTERIES, STORAGE. (See Accumulators.)

BEARINGS.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng, Co., London, S.W.
Skefko Ball Bearing Co., Ltd., Luton.
Watlington & Co., Ltd., London, E.C.

BELLS AND GONGS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Watlington & Co., Ltd., London, E.C.

BLINDS AND CURTAINS.
Beckett, Laycock & Watkinson, Ltd., London.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.

BOILERS.
Babcock & Wilcox, Ltd., London, E.C.

BOLTS.
Allen, Edgar & Co., Ltd., Sheffield.
Bayliss, Jones, & Bayliss, Wolverhampton.
Brockhouse, J., & Co., Ltd., West Bromwich.
Hadfields, Ltd., Sheffield.
Peckham Truck and Eng. Co., London, S.W.
"The Coventry" Repetition Co., Coventry.
Titan Trackwork Co., Ltd., Nottingham.

BOND PAINTS.
Ruberoid Co., Ltd., London, E.C.

BOXES, JOURNAL.
Anger Mfg. & Supply Co., Ltd., Preston, Lancs.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
Watlington & Co., Ltd., London, E.C.

BRACKETS AND CROSS ARMS. (See Poles.)

BRAKE ADJUSTERS.
Anger Mfg. & Supply Co., Ltd., Preston, Lancs.

BRAKES, CAR.
Brill Company, J. G., London, E.C.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Electric Co.
Dick, Kerr, & Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peacock Brake Co., London, E.C.
Peckham Truck and Eng. Co., London, S.W.

BRAKE HANDLES.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peacock Brake Co., London, E.C.
United Electric Car Co., Ltd., Preston.

BRAKE SHOES.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
Hadfields, Ltd., Sheffield.
Hurst, Nelson & Co., Ltd., Motherwell.
Peacock Brake Co., London, E.C.
Peckham Truck and Eng. Co., London, S.W.
Tyne Metal Co., Ltd., Newcastle-on-Tyne.
United Electric Car Co., Ltd., Preston.

BROOMS, TRACK.
Brush Elec. Engineering Co., Ltd.
Hurst, Nelson & Co., Ltd., Motherwell.
Watlington & Co., Ltd., London, E.C.

BRUSHES, DYNAMO AND MOTOR.
British Westinghouse Co., Ltd., London.
Electric Construction Co., Ltd., London.
Watlington & Co., Ltd., London, E.C.

CABLES, ELECTRIC TRAMWAY AND LIGHTING.
British Aluminium Co., Ltd., London, E.C.
British Westinghouse Co., Ltd., London.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.
Henley's Telegraph Works Co., Ltd., London
Macintosh & Co., Ltd., Chas., London, E.C.

CABLE PULLEYS.
Tyne Metal Co., Ltd., Newcastle-on-Tyne.

CABLE TRAMWAYS.
Dick, Kerr & Co., Ltd., London, E.C.

CARBON BRUSHES. (See Dynamo & Motor Brushes.)

CARBURETTORS.
Green, Geo. W., & Co., Ltd., Feltham.

CAR CURTAINS.
Beckett, Laycock & Watkinson, Ltd., London.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.

CAR JACKS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.
Watlington & Co., Ltd., London, E.C.

CAR ROOF COVERINGS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

CAR SEATS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
United Electric Car Co., Ltd., Preston, Lancs.

CAR STEPS. (See Movable Car Steps.)

CAR STOVES.
Brill Company, J. G., London, E.C.

CAR TRIMMINGS.
Brill Company, J. G., London, E.C.
General Seating Co., Ltd., London, E.C.

CARS, TRAMWAY.
Brill Company, J. G., London, E.C.
Dick, Kerr & Co., Ltd., London.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

CAR TRUCKS.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
United Electric Car Co., Preston.

CASTINGS.
Allen, Edgar & Co., Ltd., Sheffield.
Hadfields, Ltd., Sheffield.
Hurst, Nelson & Co., Ltd., Motherwell.
Stewarts & Lloyds, Glasgow.
Titan Trackwork Co., Ltd., Nottingham.

CHAINS.
Coventry Chain Co., Ltd., Coventry.

CHARS-A-BANCS.
Commercial Cars, Ltd., Luton.
Clayton & Co. Huddersfield, Ltd., Huddersfield.

CIRCUIT BREAKERS.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Electric Construction Co., Ltd., London.
Watlington & Co., Ltd., London, E.C.

COLOURS. (See Paint.)

COMMERCIAL MOTORS.
Clayton & Co. Huddersfield, Ltd., Huddersfield.

COMMERCIAL VEHICLES.
Commercial Cars, Ltd., Luton.

COMMUTATORS & COMMUTATOR SEGMENTS.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

Digitized by Google

JACKS FOR TRAMCARS & MOTOR VEHICLES

ALL MODELS DELIVERED FROM STOCK

"Barrett" Ball and Cone Bearing Screw Jacks
Capacity - 10 Tons £4 15 0 each

The provision of Jacks

At an inquest on a child who rolled off the tray of a lifeguard on a Blackpool tramcar and was fatally injured, the jury suggested that the Corporation should "provide some better means of securing jacks to raise cars in case of accident."

Vide—THE TRAMWAY AND RAILWAY WORLD, August 19, 1916.

"Barrett" Automatic Lowering Jack
Capacity - 5 Tons £2 5 0 each

SOLE BRITISH AGENTS

White Motors and Accessories, Limited,

Concanon Works, Concanon Road, Acre Lane, Brixton,
(Close to Lambeth Town Hall)
LONDON, S.W.

Telephones: 565 & 566 Brixton
Telegrams: Yenisean, London

Cables: Yenwalt, London

DIRECTORY OF MANUFACTURERS OF AND DEALERS IN SUPPLIES (*continued*).

CONDENSING PLANT.
Belliss & Morcom, Ltd., Birmingham.
Mirrlees Watson Co., Ltd., Glasgow.

CONDUITS.
Doulton & Co., London.

CONTROLLER FINGERS.
Anger Mfg. & SupplyCo., Ltd., Preston, Lancs.
Equipment & Engineering Co., London, W.C.

CONTROLLERS, ELECTRIC CAR.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Dick, Kerr, & Co., Ltd., London.

CONVERTIBLE CARS.
Brill Company, J. G., London, E.C
Hurst, Nelson & Co., Ltd., Motherwell.

CONVEYING AND ELEVATING MACHINERY.
Allen, Edgar, & Co., Ltd., Sheffield.
Hadfields, Ltd., Sheffield.

CROSSINGS. (See Points and Crossings).

CRUCIBLES.
Doulton & Co., Ltd., London

DESTINATION INDICATORS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.

DESTINATION SCREENS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.

DESTINATION SIGNS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.

DOG SPIKES.
Bayliss, Jones & Bayliss, Ltd., Wolverhampt'n

DROP FORGINGS.
Smethwick Stamping Co., Smethwick.

DYNAMOS.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Dick, Kerr & Co., Ltd., London.

ECONOMISERS.
Green, E., & Son, Ltd., Wakefield.

ELECTRIC BRAKES.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Electric Co., Ltd., Manchester.

ELECTRIC CABLES.
Henley's Telegraph Works Co., Ltd., London.
Macintosh & Co., Ltd., Chas., London, E.C.

ELECTRIC HEATERS.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.
Watlington & Co., Ltd., London, E.C.

ELECTRIC LAMPS.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.
Watlington & Co., Ltd., London, E.C.

ELECTRIC TRAMWAY SUPPLIES.
Allen, Edgar, & Co., Ltd., Sheffield.
Brill Company, J. G., London, E.C.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Co., Ltd., London.
Consolidated Accessories Co., London.
Dick, Kerr, & Co., Ltd., London.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.
Hadfields, Ltd., Sheffield.
Henley's Telegraph Works Co., Ltd., London.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S W.
Titan Trackwork Co., Ltd., Nottingham.
United Electric Car Co., Ltd., Preston. Lancs.
Watlington & Co., Ltd., London, E.C.

ELECTRIC TRAMWAYS.
Allen, Edgar, & Co., Ltd., Sheffield.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Dick, Kerr, & Co., Ltd., London.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

ELECTRICAL ACCESSORIES.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.

ENGINES.
Belliss & Morcom, Ltd., Birmingham.

FANS, ELECTRIC.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.

FARE REGISTERS.
Bell Punch & Printing Co., Ltd., London.
Brill Company, J. G., London, E.C.

FENCES AND GATES.
Bayliss, Jones, & Bayliss, London, E.C.

FENDERS, TRAMCAR.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

FISHBOLTS.
Allen, Edgar, & Co., Ltd., Sheffield.
Bayliss, Jones & Bayliss, Ltd., Wolverhampt'n

FISHBOLTS AND PLATES.
Anger Mfg. & SupplyCo., Ltd., Preston, Lancs.

FOLDING GATES.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.

FORGINGS.
Baker, John, & Co., Rotherham.
Brill Company, J. G., London, E.C.
Brockhouse, J., & Co., Ltd., West Bromwich.
Hurst, Nelson & Co., Ltd., Motherwell.
Smethwick Stamping Co., Smethwick.

FUEL ECONOMISERS.
Green, E., & Son, Ltd., Wakefield.

GEAR CASES.
British Thomson-Houston Co., Ltd., Rugby.
Equipment & Engineering Co., London, W C.
Peckham Truck and Eng. Co., London, S.W.
Watlington & Co., Ltd., London, E.C.

GEARS.
British Thomson-Houston Co., Ltd., Rugby.
Hadfields, Ltd., Sheffield.
Scholey and Co., Ltd., London, E.C.
Watlington & Co., Ltd., London, E.C.

GEARS AND PINIONS.
British Thomson-Houston Co., Ltd., Rugby.
Equipment & Engineering Co., London, W.C.
Peckham Truck and Eng. Co., London, S.W.
Watlington & Co., Ltd., London, E.C.

GEAR WHEELS.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

GENERATORS. (See Dynamos.)

GLASSWARE.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.

GRINDING MACHINES.
Equipment & Engineering Co., London, W C.

GRINDING MACHINES, CAR WHEEL.
Thermit, Ltd., London, E.C.
Watlington & Co., Ltd., London, E.C.

GUARD WIRE.
Equipment & Engineering Co., London, W C.
Watlington & Co., Ltd., London, E.C.

Digitized by Google

WIRE & RODS

COPPER
BRASS
COPPER CLAD
PHOSPHOR BRONZE
SILICON BRONZE
TROLLEY WIRE

Standard Underground Cable Co.
DOCK HOUSE, BILLITER ST., LONDON

Telegrams: KRANKASES, ISLING-LONDON. Telephones: {4879 CENTRAL. {3846 CITY.

ALUMINIUM CASTINGS

COAN CASTS CLEAN CRANK CASES

MADE AND REPAIRED.

FOR ALL TRADES.
LARGE AND SMALL.
PURE AND HARDENED

Inquiries invited.
Estimates given.

Contractor to Admiralty and War Office.

R. W. COAN, THE ALUMINIUM FOUNDRY,
219, Coswell Road, London, E.C.

ESTABLISHED 1833

WAYGOOD-OTIS, LTD.

Lift Makers — To H.M. The King.

By Appointment

WAYGOOD-OTIS LIFTS

of all kinds and for all purposes.

FALMOUTH ROAD, LONDON, S.E.

MOTOR TRACTION DEALING WITH MOTOR VEHICLES for BUSINESS PURPOSES

GIVES

Practical information and reliable data regarding all types of Motor Vehicles for the transport of passengers or goods, municipal purposes, etc.

Every Wednesday. *One Penny.*
Specimen Copy Post Free.
ILIFFE & SONS Ltd., 20, Tudor St., London, E.C.

DIRECTORY OF MANUFACTURERS OF AND DEALERS IN TRAMWAY AND RAILWAY SUPPLIES (*continued*).

GUARDS.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.

HEADLIGHTS.
Brill Company, J. G., London, E.C.
Watlington & Co., Ltd., London, E.C.

HEATERS, ELECTRIC.
Watlington & Co., Ltd., London, E.C.

HYDRAULIC PRESSES.
Hadfields, Ltd., Sheffield.

IGNITION LEADS (FOR MOTOR CARS).
Henley's Telegraph Works Co., Ltd., London.

INDICATORS.
Brill Company, J. G., London, E.C.
Consolidated Accessories Co., London.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

INSTRUMENTS.
Edison & Swan United Electric Light Co.

INSULATING MATERIAL.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

INSULATING VARNISHES.
Equipment & Engineering Co., London, W.C.

INSULATORS, TRAMWAY.
Blackwell, R. W., & Co., Ltd., London, E.C.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Co., Ltd., London.
Consolidated Accessories Co., London.
Doulton & Co., Ltd., London.
Equipment & Engineering Co., London, W.C.
Henley's Telegraph Works Co., Ltd., London.
Watlington & Co., Ltd., London, E.C.

IRONWORK FOR CAR BODIES.
Brockhouse, J., & Co., Ltd., West Bromwich.

JACKS.
Equipment & Engineering Co., London, W.C.
White Motors and Accessories, Ltd.

JAPANS.
Kearsley & Co., Ripon.

JOINT BOXES.
Henley's Telegraph Works Co., Ltd., London.

JOINT PLATES.
Allen, Edgar, & Co., Ltd., Sheffield.
Hadfields, Ltd., Sheffield.

JOINTS, RAIL.
Allen, Edgar, & Co., Ltd., Sheffield.
Thermit, Limited, London, E.C.

JOURNAL BOXES.
Brill Company, J. G., London, S.W.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
United Electric Car Co., Ltd., Preston, Lancs.

JOURNAL BOX PACKING.
Beckett, Laycock & Watkinson, Ltd., London.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.
Peckham Truck and Eng. Co., London, S.W.

LAMPS, ELECTRIC.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Electric Construction Co., Ltd., London.
Watlington & Co., Ltd., London, E.C.

LEATHERS (UPHOLSTERY).
General Seating Co., Ltd., London, E.C.

LIFE GUARDS.
Hurst, Nelson & Co., Ltd., Motherwell.

LIFTING JACKS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Glasgow.

LIGHTNING ARRESTERS.
Blackwell, R. W., & Co., Ltd., London, E.C.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

LINCRUSTA WALTON.
General Seating Co., Ltd., London, E.C.

LINE MATERIAL, ELECTRIC TRAMWAY
British Thomson-Houston Co., Ltd., Rugby.
Clough, Smith, & Co., Ltd., London, E.C.
Consolidated Accessories Co., London.
Dick, Kerr, & Co., Ltd., London.
Electro-Mechanical Brake Co., West Brom.
Equipment & Engineering Co., London, W.C.
Henley's Telegraph Works Co., Ltd., London.
Tramway Supplies, Ltd., Leeds.
Watlington & Co., Ltd., London, E.C.

LOCK WASHERS (Palnut Patent).
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

LOCOMOTIVES.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Co., Ltd., London.
Dick, Kerr, & Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.

LORRIES.
Clayton & Co. Huddersfield, Ltd., Huddersf'ld.
Commercial Cars, Ltd., Luton.

LUBRICANTS.
Wakefield, C. C., & Co., London, E.C.

METALS.
Magnolia Anti-Friction Metal Co. of Great Britain, Ltd., London, E.C.

MILLBOARDS—"PANELLIUM."
General Seating Co., Ltd., London, E.C.

MOTOR OMNIBUSES.
Clayton & Co. Huddersfield, Ltd., Huddersf'ld.
Commercial Cars, Ltd., Luton.

MOTOR TRUCKS (See Trucks).

MOTOR VANS.
Clayton & Co Huddersfield, Ltd., Huddersf'ld.
Commercial Cars, Ltd., Luton.

MOTOR VEHICLES.
Clayton & Co Huddersfield, Ltd., Huddersf'ld.
Commercial Cars, Ltd., Luton.

MOVABLE CAR STEPS.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.

MUNICIPAL VEHICLES.
Clayton & Co. Huddersfield, Ltd., Huddersf'ld.
Commercial Cars, Ltd., Luton.

OILS.
Wakefield, C. C., & Co., London, E.C.

OILSKINS.
Ailsa Oilskin and Rubber Co., Dalry.

OVERHEAD TROLLEY EQUIPMENT. (See Line Mat'l.

OVERHEAD LINE MATERIAL.
British Thomson-Houston Co., Ltd., Rugby.
Green, Geo. W., & Co., Ltd., Feltham.
Watlington & Co., Ltd., London, E.C.

OVERHEAD LINE TOOLS.
M. & G. Truck & Engineering Co., Ltd.
Watlington & Co., Ltd., London, E.C.

PAINT.
Kearsley, Robert, & Co., Ltd., Ripon, Yorks.

PAINTS, INSULATING.
Ruberoid Co., Ltd., London, E.C.

PANELS, ALUMINIUM.
British Aluminium Co., Ltd., London, E.C.

PANELS, MAHOGANY, etc.
Brill Company, J. G., London, S.W.

PANELS, 3-PLY, etc.
General Seating Co., Ltd., London, E.C.

PERMANENT WAY TOOLS.
Allen, Edgar, & Co., Ltd., Sheffield.

POINTS AND CROSSINGS.
Allen, Edgar, & Co., Ltd., Sheffield.
Dick, Kerr, & Co., Ltd., London.
Hadfields, Ltd., Sheffield.
Lorain Steel Company, London.
Titan Trackwork Co., Ltd., Sheffield.

POINT CONTROLLERS.
Clay & Atkinson, Bradford.
Equipment & Engineering Co., London, W.C.

POLES, METAL.
Clough, Smith, & Co., Ltd., London, E.C.
Dick, Kerr, & Co., Ltd., London.
Equipment & Engineering Co., London, W.C.
Peckham Truck and Eng. Co., London, S.W.
Stewarts & Lloyds, Ltd., Glasgow.
Watlington & Co., Ltd., London, E.C.

PORTABLE RAILWAYS.
Hurst, Nelson & Co., Ltd., Motherwell.

PRESSES, HYDRAULIC.
Youngs, Ryland St. Works, Birmingham.

PUBLIC SERVICE VEHICLES.
Clayton & Co Huddersfield, Ltd., Huddersf'ld.

PULLEY BLOCKS.
Youngs, Ryland St. Works, Birmingham.

PULLEYS, CABLE.
Dick, Kerr, & Co., Ltd., London.
Hadfields, Ltd., Sheffield.
Tyne Metal Co., Ltd., Newcastle-on-Tyne.

PULLEYS, SHAFTING, COUPLINGS, etc.
Allen, Edgar, & Co., Ltd., Sheffield.
Brown Bayley's Steel Works, Ltd., Sheffield.
Hadfields, Ltd., Sheffield.

PUNCHES, TICKET.
Auto-Ticket Printing Co., Ltd., Liverpool.
Bell Punch & Printing Co., Ltd., London.
Ticket Punch & Register Co., Ltd., London.
Williamson, Alfred, Ashton-under-Lyne.

RAIL BENDERS.
Equipment & Engineering Co., London, W.C.
Hadfields, Ltd., Sheffield.

(Continued on page xx.)

Digitized by Google

WESTINGHOUSE
Tramway Controllers

Strong and simple mechanism.
Liberal rating of current carrying parts.
Low maintenance.
All parts made to gauge and strictly interchangeable, therefore all wearing parts are quickly and cheaply renewable.
Maximum accessibility for inspection and repairs.
Constant finger tension irrespective of wear and finger springs specially designed to prevent stubbing.
Simple method of cutting out either motor when required.
Powerful magnetic controller blow-out.
Ample space for incoming cables.

Westinghouse Manchester

The British Westinghouse Electric and Manufacturing Company, Limited, Trafford Park, Manchester.

Henley's Solid Rubber Cables

Also known as "Cab Tyre Sheathed." ***Patent 3996/11.***

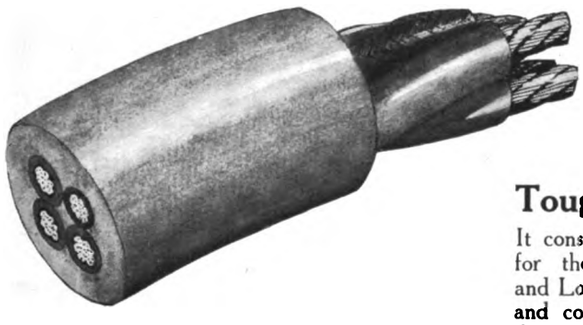

HENLEY'S tough, resilient, SOLID Rubber Cables will resist destructive action over periods covered by several replacements of cables having other forms of protection.

THE sheathing used on these Cables is that referred to in the Wiring Rules of the Institution of Electrical Engineers, Seventh Edition, March, 1916, page 14, Section 65, as

Tough Rubber Compound Protection

It consists of tough, resilient, *solid* rubber of the type used for the tyres of heavy motor vehicles, such as 'Buses and Lorries. We are manufacturers of Solid Band Tyres, and consequently know the type of Rubber Compound that will withstand the greatest amount of rough usage.

Therefore we can recommend our Solid Rubber Protection for Trailing Cables in Collieries, Wharves, Docks, Shipbuilding Yards, Manufactories, Railway Sheds and Tunnels, and all situations in which a wear-resisting sheathing is necessary; and for general wiring in Chemical Works, Breweries, Bleach and Dye Works, &c.

ASK FOR A SAMPLE.

W. T. HENLEY'S TELEGRAPH WORKS CO., LTD.,
Blomfield Street, London, E.C.

Digitized by Google

DIRECTORY OF MANUFACTURERS OF AND DEALERS IN SUPPLIES (*continued*).

RAIL BONDS.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

RAIL CLEANERS.
Brill Company, J. G., London, E.C.
Consolidated Accessories Co., London.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Watlington & Co., Ltd., London, E.C.

RAIL GRINDERS.
Consolidated Accessories Co., London, E.C.
Equipment & Engineering Co., London, W.C.
Thermit, Ltd., London, E.C.

RAIL JOINTS.
Bayliss, Jones & Bayliss, Ltd., Wolverhampton
Continuous Rail Joint Co., Ltd., London, E.C.
Hadfields, Ltd., Sheffield.
Thermit, Limited, London, E.C.

RAILLESS ELECTRIC SYSTEMS.
R.E.T. Construction Company, London, E.C.
Watlington & Co., Ltd., London, E.C.

RAIL LIFTERS
Equipment & Engineering Co., London, E.C.

RAIL PLANES.
Thermit, Ltd., London, E.C.

RAILS, TURNOUTS, CURVES, etc.
Allen, Edgar, & Co., Ltd., Sheffield.
Dick, Kerr, & Co., Ltd., London.
Hadfields, Ltd., Sheffield.
Lorain Steel Company, London.
M. & G. Truck & Engineering Co., Ltd.
Titan Trackwork Co., Ltd., Sheffield.
Walter Scott, Ltd., Leeds.

RAILWAY AND TRAMWAY MOTORS, ELECTRIC.
Brill Company, J. G., London, S.W.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Co., Ltd., London.
Dick, Kerr, & Co., Ltd., London.
Electric Construction Co., Ltd., London.

RAILWAY STORES.
General Seating Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.

RATTAN.
Brill Company, J. G., London, E.C.
General Seating Co., Ltd., London, E.C.

ROLLER BEARINGS.
Hurst, Nelson & Co., Ltd., Motherwell.

SANDING DEVICES.
Equipment & Engineering Co , London, W.C.
Taylor, John, Liverpool.

SAND BOXES.
Brill Company, J. G., London, S.W.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

SEATS AND SEATING MATERIALS.
Brill Company, J. G., London, E C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.

SIDE GUARDS.
Equipment & Engineering Co., London, W.C.

SIMPLEX TACKS.
Equipment & Engineering Co., London, W.C.

SLACK ADJUSTERS.
Peckham Truck and Eng. Co., London, S.W.

SLEEPING BERTHS.
Beckett, Laycock & Watkinson, Ltd., London.
General Seating Co., Ltd., London, E.C.

SNOW PLOWS.
Brill Company, J. G., London, S.W.
Hurst, Nelson & Co., Ltd., Motherwell.

SPRINGS.
Allen, Edgar, & Co., Ltd., Sheffield.
Brill Company, J. G., London, E.C.
Hadfields, Ltd., Sheffield.
Hurst, Nelson & Co., Ltd., Motherwell.
M. & G. Truck & Engineering Co., Ltd.
United Electric Car Co., Ltd., Preston, Lancs.

SPRINGS (LAMINATED AND SPIRAL.)
Brockhouse, J., & Co., Ltd., West Bromwich.

SPRINGS (UPHOLSTERY, etc.).
General Seating Co., Ltd., London, E.C.

SPRINKLING CARS.
Brill Company, J. G., London, S.W.
Hurst, Nelson & Co., Ltd., Motherwell,
M. & G. Truck & Engineering Co., Ltd.
United Electric Car Co., Ltd., Preston, Lancs.

STEAM TURBINES.
Belliss & Morcom, Ltd., Birmingham.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Dick, Kerr, & Co., Ltd., London.

STEEL.
Allen, Edgar, & Co., Ltd., Sheffield.
Baker, John, & Co., Rotherham.

STEEL FORGINGS.
Allen, Edgar, & Co., Ltd., Sheffield.
Baker, John, & Co., Rotherham.
Brill Company, J. G., London, E.C.
Brockhouse, J., & Co., Ltd., West Bromwich.
Hadfields, Ltd., Sheffield.

STEEL STRUCTURAL WORK.
Allen, Edgar, & Co., Ltd., Sheffield.

STEPS. (See Movable Car Steps.)

STONEBREAKERS.
Allen, Edgar, & Co., Ltd., Sheffield.
Hadfields, Ltd., Sheffield.

STRAIN WIRE
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd , London, E.C.

SWEEPERS.
Brill Company, J. G., London, S.W.
Hurst, Nelson & Co., Ltd., Motherwell.

SWITCHBOARDS AND GEAR.
British Thomson-Houston Co., Rugby.
British Westinghouse Co., London.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.
Tramway Supplies, Ltd., Leeds.

SWITCHES, ELECTRICAL.
British Thomson-Houston Co., Ltd., Rugby.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.
Watlington & Co., Ltd., London, E.C.

TANK AND GIRDER WORK.
Allen, Edgar, & Co., Ltd., Sheffield.

THIRD-RAIL INSULATORS.
Doulton & Co., Ltd., London.
Watlington & Co., Ltd., London, E.C.

THREE-PLY VENEER.
Equipment & Engineering Co., London, W.C.

TICKET PUNCHES. (See Punches).

TIME INDICATORS.
General Seating Co., Ltd., London, E.C.

TIRES.
Allen, Edgar, & Co., Ltd., Sheffield.
Baker, John, & Co., Rotherham.
British Griffin Co., Ltd., London, E.C.
Equipment & Engineering Co., London, W.C.
Hadfields, Ltd., Sheffield.
Macintosh & Co., Ltd., Chas., London, E.C.
Peckham Truck and Eng. Co., London, S.W.

TOP COVERS.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

TOWER WAGONS.
Clayton & Co. Huddersfield, Ltd., Huddersf'ld.
Commercial Cars, Ltd., Luton.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

TRACK BRAKES.
Brill Company, J. G., London, S.W.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.

TRACK SANDERS.
Brill Company, J. G., London, S.W.
Hurst, Nelson & Co., Ltd., Motherwell.

TRACK TOOLS AND APPLIANCES.
Allen, Edgar, & Co., Ltd., Sheffield.
Watlington & Co., Ltd., London, E.C.

TROLLEY CORD.
Anger Mfg. & Supply Co., Ltd., Preston, Lancs.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

TROLLEY HANGERS.
British Westinghouse Co., Ltd., London.
Consolidated Accessories Co., London.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

TROLLEY STANDARD EARTHING DEVICE.
Consolidated Accessories Co., London.

TROLLEY TENSION INDICATOR.
Consolidated Accessories Co., London.

TROLLEY WHEELS AND HEADS.
British Aluminium Co., Ltd., London, E.C.
British Thomson-Houston Co., Ltd., Rugby.
Tramway Supplies, Ltd., Leeds.
Watlington & Co., Ltd., London, E.C.

TROLLEY WIRE.
Equipment & Engineering Co., London, W.C.
Frederick Smith & Co., Salford, Manchester.
Watlington & Co., Ltd., London, E.C.

TRUCK BRAKES.
Brill Company, J. G., London, E.C.
Peckham Truck & Eng. Co., London, S.W.

TRUCKS, CAR.
Brill Company, J. G., London, S.W.
Dick, Kerr, & Co., Ltd., London.
Hurst, Nelson & Co., Ltd., Motherwell.
Lorain Steel Company, London.
Peckham Truck and Eng. Co., London, S.W.
United Electric Car Co., Preston.

VARNISHES.
Pinchin, Johnson, & Co., Ltd., London, E.C.

WELDED JOINTS.
Thermit, Limited, London, E.C.

WHEELS AND AXLES.
Allen, Edgar, & Co., Ltd., Sheffield.
Baker, John, & Co., Rotherham.
Brill Company, J. G., London, S.W.
British Griffin Co., Ltd., London.
Equipment & Engineering Co., London, W.C.
Hadfields, Ltd., Sheffield.
Hurst, Nelson & Co., Ltd., Motherwell.

WHEELS WITH WROT IRON CENTRES.
Baker, John, & Co., Rotherham.
Hurst, Nelson & Co., Ltd., Motherwell.

WHITE METAL FOR BEARINGS.
Magnolia Anti-Friction Metal Co., London.

WIRE, COPPER.
Henley's Telegraph Works Co., Ltd., London.
Smith, Frederick, & Co., Salford, Manchester.
Watlington & Co., Ltd., London, E.C.

WIRE ROPES.
Watlington & Co., Ltd., London, E.C.

BECLAWAT

(Reg. Trade Mark).

Balanced Frameless Window

The window illustrated is a plain polished plate running in our Silent Window Channel and operated by Window Balance.

Weatherproof.
. No Rattling .

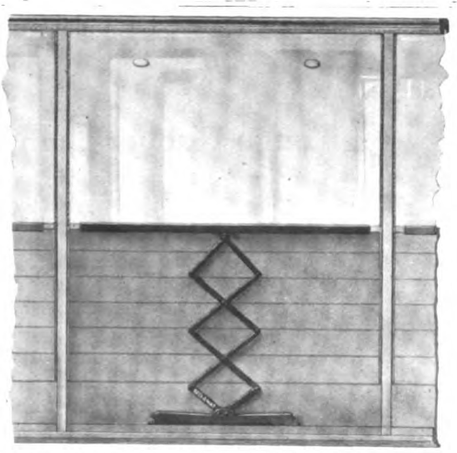

BECKETT, LAYCOCK & WATKINSON, Ltd.

Patentees and Manufacturers,

—AGENTS ALL— OVER THE WORLD.

Willesden, LONDON, N.W.

Tel. No. 1558 Willesden.

Tel. Add. "BECLAWAT"

Digitized by Google

STRONG & ECONOMICAL.

VIBRATION-RESISTING.

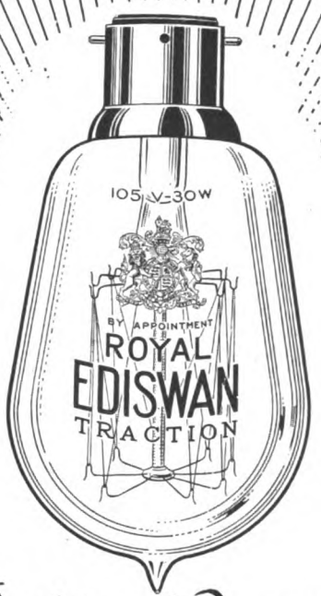

Designed & made to stand vibration

WHICH IS, OF COURSE, AS A TRACTION LAMP SHOULD BE. SPECIAL CARE IS TAKEN IN MANUFACTURE WITH THE GLASS STEMS TO ASSURE THAT THEY ARE PERFECT IN EVREY DETAIL

ROYAL

EDISWAN

DRAWN WIRE TRACTION LAMPS

HAVE SHORT RIGID FILAMENTS AND EVERY LAMP IS SEPARATELY AND RIGIDLY TESTED BEFORE BEING ALLOWED TO LEAVE THE WORKS

Will you favour us with your enquiries regarding "Traction" Lamps for any "Vibration Area?"

THE
EDISON SWAN ELECTRIC CO. LTD.
PONDERS END, MIDDLESEX
'Phone - 520 ENFIELD

FULLY LICENSED UNDER BRITISH PATENTS NOS:- 21513/06 - 27712/03 AND OTHERS.

Digitized by Google

JOHN BAKER & CO.

(ROTHERHAM), LTD.

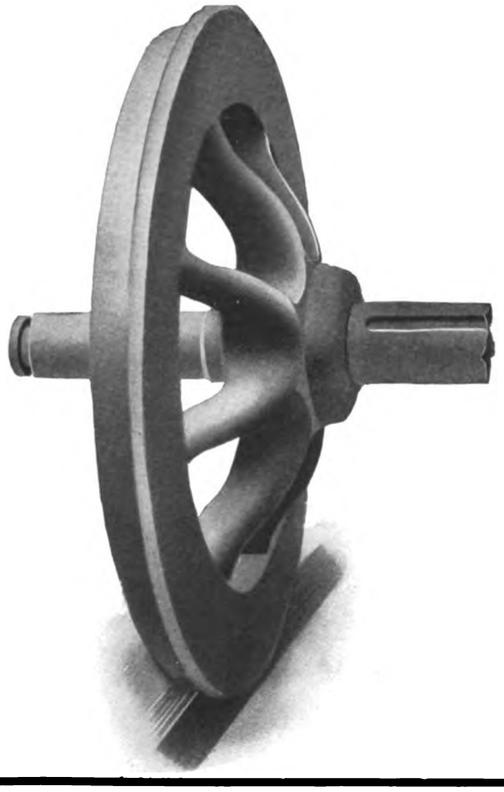

Brinsworth Iron & Wheel Works, ROTHERHAM
Kilnhurst Steel Works, near SHEFFIELD.

WHEELS WITH WROUGHT-IRON CENTRES.

AXLES TO BRITISH STANDARD SPECIFICATION FOR ORDINARY SERVICE.

Special (T) Brand Axles
— for Heavy Service. —

If you are troubled with Axle Breakages, try our Special Steel.

Tyres of Chrome Steel for High Mileage Results.

PEASE & PARTNERS, LTD.

WORKS:

TEES IRONWORKS, MIDDLESBRO'.

LICENSEES

OF THE

STEEL BACK

BRAKE BLOCK

FOR

RAILWAYS AND TRAMWAYS.

SOLE ENGLISH AGENTS:

ALFRED INGRAM & CO., Queen Annes Chambers, Westminster.

Digitized by Google

DIRECTORIES OF ELECTRIC TRAMWAYS

IN THE UNITED KINGDOM.

NAMES OF PRINCIPAL OFFICERS,

POSTAL ADDRESS, TELEGRAPHIC ADDRESS, AND TELEPHONE NUMBERS.

MUNICIPAL TRAMWAYS, pp. xxiii-xxiv. COMPANY TRAMWAYS, pp. xxiv-xxvi. PARTICULARS OF TRACK AND EQUIPMENT, pp. xxvii-xxx.

TRAMWAY ASSOCIATIONS, p. xxvi.

Aberdare Urban District Tramways, Gadlys Estate, Aberdare. [T.A., Tramways, Aberdare: T.N., 17.] *Gen. Manager and Elec. Engineer*, A. J. Abraham; *Traffic Supt.*, H. King; *Chairman Try. Com.*, Coun. E. Stonelake.

Aberdeen Corporation Tramways, Municipal Buildings, Union Street, Aberdeen. [T.A., Trams, Aberdeen: T.N. 826.] *Gen. Manager and Eng.*, R. S. Pilcher; *Per. Way Eng.*, J. Gordon (*Burgh Surveyor*); *Chairman Try. Com.*, Coun. Robertson.

Accrington Corporation Tramways, Market Hall, Accrington. [T.A., Trams, Accrington; T.N., 2212.] *Gen. Manager and Eng.*, H. Pilling; *Per. Way Eng.*, W. J. Newton; *Chairman Try. Com.*, Ald. T. E. Higham; *Vice-Chairman*, Coun. Morley.

Ashton-under-Lyne Corporation Tramways, Tramway Depot, Mossley Road, Ashton. [T.A., Tramways, Ashton; T.N., 325.] *Gen. Manager*, Ernest Holt; *Elec. Eng.*, N. Appelbee; *Chairman Try. Com.*, Ald. R. S. Oldham; *Vice-Chairman*, Ald. Waterhouse.

Ayr Corporation Tramways, Town Building, Ayr. [T.A., Trams. Ayr; T.N., 123.] *Gen. Manager and Eng.*, William Grant; *Burgh Elec. Eng.*, R. Marshall; *Per. Way Eng.*, John Young; *Rolling Stock Supt.*, Alf. Somerville; *Convener Try. Com.*, Coun. J. R. Learmont; *Vice-Chairman*, Bailie Murray.

Bacup Corporation Tramways.—Town Hall, Bacup, Lancs. [Lines leased to and worked by Rochdale Corporation.] *Town Clerk*, J. Entwistle; *Boro' Eng.*, W. H. Elce; *Chairman Try. Com.*, Ald. Sir H. Maden; *Vice-Chairman*, Coun. J. H. Lord (Mayor).

Barking Town Urban District Tramways, East Street, Barking. [T.N., 156 East Ham.] *Eng. and Manager*, W. Holmes; *Acting Engineer and Manager*, W. E. Kidner; *Chairman Try. Com.*, Coun. D. Gordon.

Barton-upon-Irwell District Council Light Railways, Barton-upon-Irwell.

[Line leased to and worked by the Lancashire United Tramways Co., *q.v.*]

Batley Corporation Tramways, Batley, Yorks. *Engineer*, S. D. Jones; *Chairman Try. Com.*, Coun. J. W. Turner; *Vice-Chairman*, Coun. F. W. H. Auty.

[Lines leased to and worked by the Yorkshire (Woollen District) Electric Tramways, Ltd., *q.v.*]

Belfast City Tramways, Tramways Office, Sandy Row, Belfast. [T.A., Nance, Tramway, Belfast; T.N., 2444.] *Gen. Manager*, J. S. D. Moffet; *Traffic Manager*, R. McMaster; *City Elec. Eng.*, T. W. Bloxam; *Per. Way Eng.*, E. S. Pinkerton; *Chief Eng.*, A. A. Blackburn; *Chairman Try. Com.*, Coun. J. McCaughey; *Vice-Chairman*, Coun. J. Warwick.

Bexley Urban District Council Tramways, Car Sheds, Bexleyheath, Kent. [T.A., Stokes, Tramways, Bexleyheath; T.N., 79.] *Gen. Manager and Elec. Eng.*, H. P. Stokes; *Rolling Stock Supt.*, A. Williams; *Chairman Try. Com.*, Coun. E. T. Coote; *Vice-Chairman*, Coun. E. F. Reid.

Birkenhead Corporation Tramways, Laird Street, Birkenhead. [T.A., Tramways Manager, Birkenhead; T.N., 1110.] *Gen. Manager*, C. Clarke; *Borough Sur. and Eng.*, C. Brownridge; *Rolling Stock Supt.*, R. Chadwick; *Chairman Try. Com.*, Coun. H. Halsall; *Vice-Chairman*, Coun. R. Frame.

Birmingham Corporation Tramways, The Council House, Congreve Street, Birmingham. [T.A., Trams, Birmingham; T.N., Central 7,000.] *Gen. Manager*, A. Baker; *City Elec. Eng.*, R. A. Chattock; *Traffic Supt.*, J. McDonnell; *Per. Way Eng.*, C. E. S. Bill; *Rolling Stock Supt.*, R. H. Dickinson; *Chairman Try. Com.*, Coun. H. Barrow, J.P.; *Vice-Chairman*, Coun. A. G. Ellaway.

Blackburn Corporation Tramways, Tramways Office, Blackburn. [T.A., Tramways, Blackburn; T.N., 547.] *General Manager*, J. H. Cowell; *Elec. Eng.*, P. P. Wheelwright; *Traffic Manager*, E. Greek; *Car Shed Supt.*, H. W. Seymour; *Chairman Try. Com.*, Ald. W. Thompson; *Vice-Chairman*, Coun. C. Higham.

Blackpool Corporation Tramways, West Caroline Street, Blackpool. [T.N., 67.] *Gen. Manager*, C. Furness; *Traffic Supt.*, C. J. Baker; *Resident Eng.*, F. Field; *Chairman Try. Com.*, Ald. J. Brodie, J.P.; *Vice-Chairman*, Ald. R. Holt (Mayor).

Bolton Corporation Tramways, Bradshawgate, Bolton. [T.A., Manager, Tramways, Bolton; T.N., 490.] *General Manager*, J. Barnard; *Elec. Eng.*, W. J. H. Wood; *Per. Way Eng.*, E. Ll. Morgan; *Rolling Stock Supt.*, C. Beech; *Chairman Try. Com.*, Ald. J. Miles; *Vice-Chairman*, Coun. P. Higson.

Bootle Corporation Tramways, Electricity Works, Pine Grove, Bootle. [T.N., 424.] *Elec. Eng.*, T. D. Clothier; *Chairman Try. Com.*, Ald. Booth; *Vice-Chairman*, Coun. Pennington.

[Lines worked by Liverpool Corporation Tramways.]

Bournemouth Corporation Tramways, Tramways Offices, Lansdowne Crescent, Bournemouth [T.A., Tramways, Bournemouth; T.N., 1701.] *General Manager*, I. Bulfin; *Chief Assistant & Elec. Eng.*, H. Vickers; *Traffic Supt.*, R. O. Baldwin; *Chairman Try. Com.*, Coun. Bell; *Vice-Chairman*, Coun. McCabe.

Bradford Corporation Tramways, Central Office, 7, Hall Ings, Bradford. [T.A., Tramways, Bradford; T.N., 2381 and 2382.] *Gen. Manager*, C. J. Spencer; *Asst. Elec. Eng.*, J. W. Dawson; *Traffic Supt.*, T. Stirk; *City Elec. Eng.*, T. Roles; *Chairman Try. Com.*, Coun. Enoch Priestley; *Vice-Chairman*, Coun. J. Lund.

Brighton Corporation Tramways, Lewes Road, Brighton. [T.A., Tramways, Brighton; T.N., 353 P.O.] *Eng. & Manager*, William Marsh; *Traffic Supt.*, W. N. Brooks; *Rolling Stock Supt.*, W. Orchard; *Per. Way Eng.*, F. N. Hudson; *Chairman Try. Com.*, Coun. Martin.

Burnley Corporation Tramways, Queen's Gate, Burnley. [T.N., 46.] *Gen. Manager*, Henry Mozley; *Boro. Elec. Eng.*, J. E. Starkie; *Boro. Surveyor*, G. H. Pickles; *Chairman Try. Com.*, Coun. E. Heap; *Vice-Chairman*, Coun. Irving.

Burton-on-Trent Corporation Tramways, Guild Street, Burton-on-Trent. [T.N., 202.] *Manager*, A. B. Slater; *Engineer*, T. Hall; *Chairman Try. Com.*, Ald. J. S. Rowland (Mayor); *Vice-Chairman*, Ald. T. E. Lowe.

Bury Corporation Tramways, Market Place, Bury. [T.N., 26.] *Gen. Manager*, William Clough; *Boro. Elec. Eng.*, S. J. Watson; *Chairman Try. Com.*, Ald. T. S. Collinge; *Vice-Chairman*, Coun. Hargreaves.

Cardiff Corporation Tramways, Central Offices, The Hayes, Cardiff. [T.A., Tramways, Cardiff; T.N., 1211, 1240. 1350, and 377.] *Gen. Manager and Elec. Eng.*, A. Ellis; *Deputy Manager*, C. G. M. New; *Traffic Manager*, H. David; *Per. Way Eng.*, W. Harpur; *Rolling Stock Supt.*, Jas. Preston; *Chairman Try. Com.*, Ald. Sir J. W. Courtis, J.P.; *Vice-Chairman*, Coun. A. J. A. Stone.

Chester Corporation Tramways, Station Road, Chester. [T.N., 166.] *Traffic Supt.*, W. H. Ellis; *Elec. Eng.*, S. E. Britton; *Per. Way Eng.*, W. M. Jones; *Chairman Try. Com.*, Ald. J. Jones; *Vice-Chairman*, Coun. A. S. Dutton.

Chesterfield Corporation Tramways, Chatsworth Road, Chesterfield. [T.A., Tramways, Chesterfield; T.N., 78.] *Gen. Manager and Elec. Eng.*, R. L. Acland; *Traffic Manager*, F. Root; *Per. Way Eng.*, C. E. Crossley; *Chairman Try. Com.*, Ald. E. Shentall (Mayor); *Vice-Chairman*, Coun. Woodhead.

Colchester Corporation Tramways, Magdalen Street, Colchester. [T.A., Tramways, Colchester; T.N., 92.] *Gen. Manager and Engineer*, R. C. Bullough; *Chairman Try. Com.*, Coun. A. M. Jarmin; *Vice-Chairman*, Coun. J. T. Bailey.

Colne Corporation Tramways, Colne, Lancashire. *General Manager and Engineer*, T. G. Richardson; *Chairman Try. Com.*, Coun. R. Knight (Mayor).

Coventry Corporation Tramways, Priestley's Bridge, Coventry. [T.A., Tramways, Coventry; T.N., 1014.] *Engineer and General Manager*, T. R. Whitehead; *Assistant Engineer*, W. M. Milnes; *Chairman* Coun. C. V. Pugh; *Vice-Chairman*, Coun. H. W. Wale.

Croydon Corporation Tramways, Tramways Office, Thornton Heath, Surrey. [T.A., Tramways, Croydon; T.N., 406, Croydon.] *Tramways Manager*, T. B. Goodyer; *Chairman Try. Com.*, Ald. G. J. Allen; *Vice-Chairman*, Coun. A. A. Thomson.

Darlington Corporation Tramways, Haughton Road, Darlington. [T.A., Tramways, Darlington; T.N., 2435.] *General Manager and Elec. Eng.*, J. R. P. Lunn; *Traffic Supt.*, J. Fraser; *Chairman Try. Com.*, Ald. C. W. Starmer.

Dartford Urban District Council Tramways, Dartford. *Chairman Try. Com.*, Coun. R. Bennett; *Vice-Chairman*, Coun. J. B. Walton.

[Leased. See Dartford Tramways in list of Tramway Companies.]

Darwen Corporation Tramways, Lorne Street, Darwen. [T.N., 104.] *Gen. Manager and Eng.*, F. J. S. Hosken; *Boro. Elec. Eng.*, C. H. Garnett; *Chairman Try. Com.*, Ald. Jas. Tomlinson.

Derby Corporation Tramways, 4, Victoria Street, Derby. [T.N., 410.] *Gen. Manager*, F. Harding; *Elec. Eng.*, T. P. Wilmshurst; *Per. Way Eng.*, J. Ward; *Chairman Try. Com.*, Coun. J. Dean.

Doncaster Corporation Tramways, Grey Friar's Road, Doncaster. [T.A., Rayner, Doncaster, T.N., 43.] *Manager & Elec. Eng.*, E. S. Rayner; *Chairman Try. Com.*, Coun. P. Stirling (Mayor); *Vice-Chairman*, Coun. Balmforth.

Dover Corporation Tramways, Town Hall, Dover. [T.A., Trams, Dover; T.N., 294.] *Gen. Manager*, E. Carden; *Per. Way Eng.*, W. C. Hawke (Boro. Surveyor); *Chairman Try. Com.*, Coun. Barwick; *Vice-Chairman*, Coun. Norman.

Dundee Corporation Tramways, Town House Buildings, Dundee. [T.N., 1340]; *Gen. Manager and Eng.*, Peter Fisher; *Elec. Eng.*, H. Richardson; *City Eng.*, J. Thomson; *Chairman Try. Com.*, Coun. G. A. Johnston.

East Ham (County Borough of) Corporation Tramways, Nelson Street, East Ham. [T.N., 611 and 100, East Ham.] *Gen. Manager and Elec. Eng.*, W. C. Ullmann; *Chairman Try. Com.*, Ald. M. Oakes.

Eccles Corporation Tramways, Eccles. *Elec. Eng.*, H. W. Angus; *Per. Way Eng.*, T. S. Picton; *Chairman Try. Com.*, Ald. W. J. Nuttall, J.P.; *Vice-Chairman*, Coun. Alexander.

[Lines worked by Salford Corporation.]

Erith Urban District Council Tramways, Tramway Depôt, Walnut Tree Road, Erith. [T.A., Tramways, Erith; T.N., 36.] *Gen. Manager and Elec. Engineer*, J. C. Williams; *Chairman Try. Com.*, Coun. G. C. Humphreys.

Exeter Corporation Tramways, Paris Street. Exeter. *Manager*, H. C. Bartlett; *Elec. Eng.* H. D. Munro; *Per. Way Eng.*, T. Moulding; *Chairman Try. Com.*, Ald. H. B. Varwell; *Vice-Chairman*, Coun. F. G. Towill.

Farnworth Urban District Council Tramways, Albert Road, Farnworth. *Chairman Try. Com.*, Coun. S. C. Steele; *Vice-Chairman*, Coun. Stanley.

[Lines leased to the South Lancashire Tramways Co.]

Glasgow Corporation Tramways, 46, Bath Street, Glasgow. [T.A., Trams, Glasgow; T.N., 1040, Douglas.] *Gen. Manager*, J. Dalrymple; *Traffic Supt.*, L. Mackinnon; *Chief Eng.*, J. Ferguson; *Elec. Eng.*, E. T. Goslin; *Sec.*, J. N. Wilson; *Chairman Try. Com.*, Coun. Montgomery; *Vice-Chairman*, Bailie Kelly.

Gloucester Corporation Light Railway, Bristol Road Depôt, Gloucester. [T.A., Tramways, Gloucester; T.N. 155.] *Gen. Manager and Elec. Eng.*, F. H. Corson; *Chairman Try. Com.*, Coun. J. O. Roberts; *Vice-Chairman*, Coun. C. J. Ramstedt.

Great Yarmouth Corporation Tramways, Caister Road, Great Yarmouth. [T.N. 265.] *Gen. Manager*, F. L. Turner; *Elec. Eng.*, Gordon Bryant *Per. Way. Eng.*, J. W. Cockrill (Borough Surveyor); *Chairman Try. Com.*, Coun. J. T. C. Salmon.

Halifax Corporation Tramways, Skircoat Road, Halifax. [T.N., 36 and 382.] *Traffic Manager*, Jas. D. Caird; *Try. Eng.*, J. W. Galloway; *Per. Way Eng.*, J. Lord (Boro. Eng.); *Chairman Try. Com.*, Ald. C. F. Spencer; *Vice-Chairman*, Ald. A. Fawcett.

Haslingden Corporation Tramways, John Street, Haslingden. *Gen. Manager and Elec. Eng.*, Barnes Kay; *Per. Way Eng.*, J. S. Green (Borough Surveyor); *Chairman Try. Com.*, Coun. Waddington; *Vice-Chairman*, Coun. Haworth.

Herne Bay Pier Tramway (owned and worked by Herne Bay U.D.C.), Herne Bay. [T.N., 22.] *Res. Eng. and Manager*, H. C. Dufton.

Heywood Corporation Tramways, Heywood, Lancs. [T.N., 47.] *Gen. Manager*, D. H. Davies; *Per. Way Eng.*, J. B. Nuttall; *Chairman Try. Com.*, Coun. J. Ashworth; *Vice-Chairman*, Ald. T. Popple, J.P.

Huddersfield Corporation Tramways, Northumberland Street, Huddersfield. [T.N., 698 and 898.] *Gen. Manager & Elec. Eng.*, R. H. Wilkinson; *Assist. Engineer*, A. P. Quilliam; *Traffic Supt.*, T. Hartley; *Borough Eng.*, K. F. Campbell; *Chairman Try. Com.*, Coun. E. H. Sellers; *Vice-Chairman*, Coun. T. Canby.

Hull Corporation Tramways, Alfred Gelder Street, Hull. [T.N., 444, Corporation.] *Manager*, Wm. J. McCombe; *Try. Elec. Eng.*, J. Wilkinson [T.N. 445, Corporation]; *Per. Way Eng.*, F. W. Bricknell (*City Engineer*) [T.N. 943, Corporation]; *Chairman Try. Com.*, Coun. W. Wheatley; *Vice-Chairman*, Coun. Hakes.

Ilford Urban District Council Tramways, Ley Street, Ilford. [T.N., 684.] *Manager and Engineer*, L. E. Harvey; *Chairman Try. Com.*, Coun. W. J. T. Cullis; *Vice-Chairman*, Coun. Owen Waters.

Ilkeston Corporation Tramways, Park Road Ilkeston. [T.A., Bellamy Ilkeston; T.N., 26.] *Manager and Elec. Eng.*, L. C. F. Bellamy; *Chairman Try. Com.*, Coun. J. E. Bestwick; *Vice-Chairman*, Coun. Kane.

Ipswich Corporation Tramways, Constantine Road, Ipswich. [T.A., Ayton, Tramways, Ipswich; T.N., 354.] *Gen. Manager and Elec. Eng.*, Frank Ayton; *Traffic Supt.*, A. Butler; *Rolling Stock Supt.*, W. A. Fairhead; *Chairman Try. Com.*, Coun. E. C. Ransome; *Vice-Chairman*, W. P. Burton.

Kearsley Urban District Council Tramways, Council Office. Kearsley, Farnworth, S.O. *Clerk U. D. C.*, H. Martin.

[Lines leased to and worked by the South Lancashire Tramways Co.]

Keighley Corporation Tramways, South Street, Keighley. [T.A., Tramways, Keighley; T.N., 17.] *Gen. Manager and Elec. Eng.*, H. Webber; *Chairman Try. Com.*, Coun. A. Smith.

Kilmarnock Corporation Tramways Electricity Works, Kilmarnock. [T.N., 95.] *Elec. Eng. and Manager*, W. C. Bexon; *Consulting Engineers*, Kennedy and Jenkin; *Convener Try. Com.*, Bailie Jones.

Digitized by Google

ELECTRIC TRAMWAYS IN THE UNITED KINGDOM.

Kirkcaldy Corporation Tramways, Electricity Works Victoria Road, Kirkcaldy. [T.A., Tramways, Kirkcaldy. T.N., 124, 174, and 175.] *Manager & Elec. Eng.*, O. F. Francis; *Traffic Manager*, Jas. Fisher; *Chairman Try. Com.*, Coun. G. Fergusson.

Lancaster Corporation Tramways, Electricity Works, Lancaster. [T.A., Milnes, Tramways, Lancaster; T.N., 1, L.] *Gen. Manager & Elec. Eng.*, G. C. Milnes; *Traffic Manager*, W. T. Charlton; *Chairman Try. Com.*, Coun. T. Wilkinson.

Leeds City Tramways, Swinegate, Leeds. [T.A., Tramways, Leeds; T.N., 1230; *General Manager*, J. B. Hamilton; *Traffic Supt.*, A. Daggett; *Elec. Eng.*, John Burbridge; *Highways and Per. Way Eng.*, R. B. Holt; *Car Works Supt.*, G. E. Watmough; *Chairman Try. Com.*, Ald. R. A. Smithson; *Vice-Chairman*, Ald. H. Brown.

Leicester Corporation Tramways, 20 and 22, Humberstone Gate, Leicester. [T.N., 2177.] *Manager & Sec.*, A. F. Lucas; *Boro. & Try. Eng.*, E. G. Mawbey; *Boro. Elec. Eng.*, T. R. Smith; *Cons. Engs.*, Kincaid, Waller & Manville; *Chairman Try. Com.*, Ald. S. Flint, J.P.; *Vice-Chairman*, Ald. G. Banton, J.P.

Leith Corporation Tramways, 165, Leith Walk, Leith. [T.N., 415.] *Gen. Manager*, F. A. Fitzpayne; *Per. Way Eng.*, J. R. Findlay (*Burgh Eng.*); *Chairman Try. Com.*, Judge Hall.

Leyton District Council Tramways, Car Depot, Lea Bridge Road, Leyton, E. [T.A., Tramways, Leyton; T.N., 17 Walthamstow.] *Manager*, F. Schofield; *Elec. Eng.*, F. Harman Lewis; *Per. Way Eng.*, E. H. Essex; *Chairman Try. Com.*, Coun. J. A. Hennah.

Lincoln Corporation Tramways, Brayford Side North, Lincoln. [T.A., Stanley Clegg, Lincoln; T.N., 109]. *General Manager and Elec. Eng.*, Stanley Clegg; *Chairman Try. Com.*, Ald. W. S. White; *Vice-Chairman*, Coun. M. A. Ashley.

Liverpool Corporation Tramways, 24, Hatton Garden, Liverpool. [T.A., Tramways, Liverpool; T.N., 6054 and 7701, Central.] *General Manager*, C. W. Mallins; *Per. Way Eng.*, J. A. Brodie (*City Engineer*); *City Electrical Engineer*, Harold Dickinson; *Rolling Stock Supt.*, T. Ridyard; *Chairman Try. Com.*, Coun. E. Russell Taylor; *Vice-Chairman*, Ald. F. Smith, J.P.

London County Council Tramways, 62, Finsbury Pavement, London, E.C. [T.A., Lotram Ave., London; T.N., 8321, 3322, and 8323 London Wall.] *Chief Officer*, A. L. C. Fell; *Deputy Chief Officer*, J. K. Bruce; *Traffic Assist.*, ——— ; *Rolling Stock Supt.*, W. E. Ireland; *Per. Way Eng.*, J. Welling; *Chairman Highways Com.*, G. H. Hume; *Vice-Chairman*, T. Prestige.

Lowestoft Corporation Tramways, Norwich Road, Lowestoft. [T.N., 87.] *Gen. Manager*, H. H. Saunders; *Elec. Eng.*, W. R. May; *Chairman Try. Com.*, Coun. F. Spashett.

Maidstone Corporation Tramways, Tramway Offices, Tonbridge Road, Maidstone. [T.A., Lambert, Tramways, Maidstone; T.N., 448] *Gen. Manager and Elec. Eng.*, A. T. Lambert; *Chairman Try. Com.*, Coun. D. T. J. Lyle; *Vice-Chairman*, Coun. Green.

Manchester Corporation Tramways, 55, Piccadilly, Manchester. [T.A., Tramways, Manchester; T.N., 7800 City.] *Gen. Manager*, J. M. McElroy; *Traffic Sup.*, J. T. Oakes; *Elec. Eng.*, J. J. McMahon; *Chief Civil Eng.*, H. Mattinson; *Rolling Stock Supt.*, G. R. Blackburn; *Chairman Try. Com.*, Ald. J. Bowes; *Vice-Chairman*, Ald. A. W. Chapman.

Middlesex County Council Light Railways, Middlesex Guildhall, Westminster, London, S.W. *County Eng.*, H. T. Wakelam, M.I.C.E.; *Chairman of Light Railways Com.*, County Ald. H. Burt; *Vice-Chairman*, County Coun. F. Goodyear.

Middleton Corporation Tramways, *Consulting Engs.*, Lacey, Sillar, and Leigh; *Chairman Try. Com.*, Ald. W. Wood, J.P. (Mayor); *Vice-Chairman*, Ald. Bentley, J.P.
[Worked by Manchester Corporation Tramways.]

Nelson Corporation Light Railways, Charles Street, Nelson. [T.N., 115.] *Manager and Elec. Eng.*, G. F. Nayler; *Per. Way Eng.*, W. Shackleton; *Chairman Try. Com.*, Coun. W. F. Cooke.

Newcastle-upon-Tyne Corporation Tramways, Manors, Newcastle. [T.A., Traction, Newcastle; T.N., 913 and 914 Central.] *Gen. Manager & Engineer*, Ernest Hatton; *Traffic Supt.*, T. Chalder; *Per. Way Eng.*, W. J. Steele; *Chairman Try. Com.*, Coun. R. Mayne; *Vice-Chairman*, Coun. A. M. Sutherland.

Newport (Mon.) Corporation Tramways, Town Hall, Newport, Mon. [T.A., Dynamo, Newport, Mon.; T.N., 990 L., Nat.] *Gen. Manager*, N. J. Young; *Boro. Elec. and Per. Way Eng.*, A. Nichols Moore; *Chairman Try. Com.*, Coun. J. Moxon; *Vice-Chairman*, Ald. F. Phillips.

Northampton Corporation Tramways, St. James', Northampton. [T.N., 279 & 280.] *Gen. Manager and Elec. Eng.*, J. F. Cameron; *Chairman Try. Com.*, Coun. T. D. Lewis; *Vice-Chairman*, Coun. W. Beale.

Nottingham Corporation Tramways, Beastmarket Hill, Nottingham. [Tramways, Nottingham; T.N., 225.] *General Manager & Elec. Eng.*, John Aldworth; *Traffic Supt.*, H. Morley; *Per. Way Eng.*, Arthur Brown (*City Eng.*); *Rolling Stock Supt.*, W. Boot; *Chairman Try. Com.*, Coun. R. H. Swain, J.P.; *Vice-Chairman*, Ald. F. R. Radford, J.P.

Oldham Corporation Tramways, Wallshaw Depot, Oldham. [T.A., Tramways, Oldham; T.N., 1495.] *Gen. Manager & Eng.*, P. Priestly; *Traffic Supt.*, J. Brierley; *Chairman Try. Com.*, Ald. F. G. Isherwood; *Vice-Chairman*, Coun. F. Elliot.

Perth Corporation Tramways, 128, High Street, Perth. [T.N., 226 & 101.] *Tramways Manager*, W. G. Snell; *Elec. & Tramways Eng.*, John Lambert; *Per. Way Eng.*, R. McKillop (*Burgh Surv.*); *Chairman Try. Com.*, Coun. Calderwood.

Plymouth Corporation Tramways, 15, Ebrington Street, Plymouth. [T.N. 518, Plymouth.] *General Manager*, C. R. Everson; *Elec. Eng.*, E. J. Okell; *Chairman Try. Com.*, Ald. S. H. Phillips, J.P.; *Vice-Chairman*, Coun. J. Moon.

Pontypridd Urban District Tramways, Generating Station, Treforest, Pontypridd. [T.N. 33.] *Gen. Manager and Elec. Eng.*, J. E. Teasdel; *Traffic Inspector*, W. May; *Per. Way Eng.*, W. E. Lowe (*Surveyor*); *Chairman Try. Com.*; Coun. M. L. Jones.

Portsmouth Corporation Tramways, Town Hall, Portsmouth. [T.N., 110 Corporation.] *Gen. Manager*, W. R. Spaven; *Elec. and Per. Way Eng., and Rolling Stock Supt.*, V. G. Lironi; *Traffic Supt.*, W. Munford; *Chairman Try. Com.*, Coun. J. Timpson; *Vice-Chairman*, Ald. R. Payne.

Preston Corporation Tramways, Holmrook Road, Preston. [T.A., Corporation Tramways, Preston; T.N., 273.] *Gen. Manager and Elec. Eng.*, J. F. Simpson; *Traffic Supt.*, C. H. Manning; *Chairman, Try. Com.*, Ald. J. Ormrod; *Vice-Chairman*, Coun. T. Parkinson.

Radcliffe Urban District Council Tramways, Council Offices, Radcliffe, Lancs. *Res. Eng.*, H. Wilkinson; *Per. Way Eng.*, W. L. Rothwell; *Clerk*, S. Mills; *Chairman Try. Com.*, Coun. Walker Allen, J.P.
[These tramways are worked as part of the Bury system.]

Rawtenstall Corporation Tramways, Bacup Road, Rawtenstall. [T.N., 81 and 85.] *Gen. Manager and Elec. Eng.*, C. L. E. Stewart; *Chairman Try. Com.*, Ald. H. Coupe, J.P.; *Vice-Chairman*, Coun. J. W. Stansfield.

Reading Corporation Tramways, Mill Lane, Reading. [T.A., Tramways Manager, Reading; T.N., 330.] *Gen. Manager & Elec. Eng.*, G. F. Craven; *Chairman Try. Com.*, Ald. C. G. Field, J.P. (Deputy Mayor).

Rochdale Corporation Tramways, Mellor Street, Rochdale. [T.A., Tramways, Rochdale; T.N., 48.] *Gen. Manager & Eng.*, G. Webster; *Traffic Manager*, R. Bentley; *Per. Way Eng.*, S. S. Platt; *Rolling Stock Supt.*, E. Sidgwick; *Chairman Try. Com.*, Ald. Taylor.

Rotherham Corporation Tramways, Rawmarsh Road, Rotherham. [T.A., Cross, Rotherham; T.N., 138, 152, and 241.] *General Manager & Elec. Eng.*, E. Cross; *Deputy Elec. Eng.*, J. R. Lilleker; *Traffic Superintendent*, H. Jagger; *Per. Way Eng.*, T. P. Collinge; *Rolling Stock Supt.*, C. A. Walker; *Chairman Try. Com.*, Ald. D. L. Winter; *Vice-Chairman*, Coun. T. Reeves.

St. Helens Corporation Tramways, Town Hall, St. Helens, Lancs. *Chairman Try. Com.*, Ald. Sir J. Beecham; *Vice-Chairman*, Coun. W. N. Pilkington.
[Lines worked by the New St. Helens and District Tramways Co.]

Salford Corporation Tramways, 32, Blackfriars Street, Salford. [T.A., Tramways, Salford; T.N., 5367 and 5368 Central.] *Gen. Manager*, Geo. W. Holford; *Elec. Eng.*, J. A. Robertson; *Traffic Supt.*, J. W. Blakemore; *Per. Way Supt.*, E. B. Martin; *Rolling Stock Supt.*, R. Chadwick; *Chairman Try. Com.*, Ald. H. Linsley, J.P.; *Vice-Chairman*, Coun. W. H. Barrett.

Sheffield Corporation Tramways, 8, Division Street, Sheffield. [T.A., Tramways, Sheffield; T.N., 4600.] *General Manager*, A. R. Fearnley; *Traffic Supt.*, A. Handford; *Per. Way Eng.*, W. J. Hadfield; *Rolling Stock Supt.*, J. Smith; *Chairman Try. Com.*, Ald. Sir W. Clegg, J.P.; *Vice-Chairman*, Coun. A. T. Bescoby, J.P.

Shipley Urban District Tramway, Dockfield, Shipley. [T.A., Electricity Works, Shipley; T.N., 190.] *Elec. Eng.*, Wm Redman; *Chairman Try. Com.*, H. Pitts.
[Lines leased to Bradford Corporation.]

Southampton Corporation Tramways, 161, Above Bar, Southampton. [T.A., Tramways, Southampton; T.N., 301.] *Gen. Manager*, W. T. Robson; *Boro. Elec. Engineer*, H. F. Street; *Traffic Manager*, C. G. Simpson; *Chairman Try. Com.*, Ald. F. A. Dunsford, J.P.

Southend-on-Sea Corporation Tramways, London Road, Southend-on-Sea. [T.N., 96.] *Gen. Manager and Elec. Eng.*, R. Birkett; *Traffic Manager*, J. Daniells; *Per. Way Eng.*, E. J. Elford (*Boro. Surveyor*); *Rolling Stock Supt.*, J. Dobson; *Chairman Try. Com.*, Ald. A. Martin.

Southend Pier Electric Railway, (owned and worked by Southend-on-Sea Corporation), [T.A., Piermaster, Sonthend; T.N., 91.] Southend-on-Sea. *Elec. Eng.*, C. R. Norton; *Piermaster*, Capt. N. E. Hucker; *Chairman*, Coun. H. Dowsett.

Southport Corporation Tramway, 44, Chapel Street, Southport. [T.N., 116.] *Gen. Manager*, T. J. Kendrew; *Boro' Elec. Eng.*, A. S. Black; *Chairman Try. Com.*, Ald. Griffiths, J.P.; *Vice-Chairman*, Coun. Clayton.

South Shields Corporation Tramways, Dean Road, South Shields. [T.A., Tramways, South Shields; T.N., 157.] *Gen. Manager & Elec. Eng.*, J. C. Whiteley; *Boro. Elec. Eng.*, H. S. Ellis; *Chairman Try. Com.*, Ald. W. G. Wylie; *Vice-Chairman*, Ald. J. W. Henderson.

Stalybridge Hyde, Mossley, and Dukinfield Tramways and Electricity Board, Waterloo Road, Stalybridge. [T.N., 311.] *Commercial Manager*, F. Schofield; *Chief Eng.*, R. Blackmore; *Chairman Try. Com.*, Ald. R. Wood; *Vice-Chairman*, Coun. S. C. Homer.

Stockport Corporation Tramways, Mersey Square, Stockport. [T.N., 232 and 237.] *Manager*, A. T. Eardley; *Elec. Eng.*, R. Lomax; *Chairman Try. Com.*, Ald. Chas. Sharples; *Vice-Chairman*, Ald. W. E. Hamnett.

Sunderland Corporation Tramways, Tramway Offices, Monkwearmouth, Sunderland. [T.A., Trys. Manager, Sunderland; T.N., 948.] *Gen. Manager and Elec. Eng.*, A. R. Dayson; *Chairman Try. Com.*, Coun. G. New, J.P.; *Vice-Chairman*, Coun. W. Walker, J.P.

Swindon Corporation Tramways, Electricity Works, Swindon. [T.A., Tramways, Swindon; T.N., 4.] *Manager*, T. Medcalf; *Elec. Eng.*, A. Dimmack; *Consulting Engs.*, Lacey, Sillar, & Leigh; *Chairman Try. Com.*, Coun. A. D. Richards; *Vice-Chairman*, Coun. A. Bull.

Wallasey Corporation Tramways, Seaview Road, Wallasey. [T.A., Tramways, Liscard; T.N., 1431, Liscard.] *General Manager*, R. R. Greene; *Elec. Eng.*, J. H Crowther; *Per. Way Eng.*, W. H. Travers; *Chairman Try. Com.*, Coun. F. E. Howse; *Vice-Chairman*, Coun. H. W. Griffin.

Walsall Corporation Tramway, St. Paul's Buildings, The Bridge, Walsall. [T.A., Tramways, Walsall; T.N., 238 & 559.] *Gen. Manager*, R. L. Horsfield; *Elec. Eng.*, H. A. Howie; *Per. Way Eng.*, J. Taylor (*Boro. Surveyor*); *Chairman, Try. Com.*, Ald. J. Cope; *Vice-Chairman*, Ald. J. Williams.

Walthamstow Urban District Council Tramways, Chingford Road, Walthamstow. [T.A., Tramways, Walthamstow; T.N., 20.] *Tramways Manager*, W. Murray; *Elec. Eng.*, G. R. Spurr (Priory Avenue, Walthamstow); *Per. Way Eng.*, G. W. Holmes; *Chairman Trys. Com.*, Coun. Clarke; *Vice-Chairman*, Coun. R. J. Bishop.

Warrington Corporation Tramways, Mersey Street, Warrington. [T.N., 196] *Gen. Manager*, J. Telfer; *Elec. Eng.*, F. V. L. Mathias; *Chairman Try. Com.*, Coun. Dr. G. W. Joseph; *Vice-Chairman*, Coun. J. Wilkinson.

West Bromwich Corporation Tramway, Electricity Works, West Bromwich. [T.N., 100.] *Boro. Eng.*, A. D. Greatorex; *Boro. Elec. Eng.*, W. A. Jackson; *Chairman Try. Com.*, Ald. A. G. Turley, J.P. (Mayor); *Vice-Chairman*, Coun. G. Garratt.
[These tramways are leased to the South Staffs. (Lessee) Co., Ltd.]

West Ham Corporation Tramways, Greengate Street, Plaistow, London, E. [T.A., Trameurs, Plais., London; T.N., 868 East.] *General Manager*, L. Slattery; *Boro' Elec. Eng.*, J. W. Beauchamp; *Chairman Try. Com.*, Coun. Kensett.

West Hartlepool Corporation Tramways, Cleveland Road, West Hartlepool. [T.N., 6073.] *Gen. Manager & Eng.*, Chas. Burgess; *Chairman Try. Com.*, Ald. Martin; *Vice-Chairman*, Coun. Charlton.

Wigan Corporation Tramways, Market Place, Wigan; [T.N., 226.] *Gen. Manager*, F. Buckley; *Per. Way Eng.*, A. T. Gooseman; *Chairman Try. Com.*, Ald. R. T. Fletcher; *Vice-Chairman*, Coun. J. Walkden.

Wolverhampton Corporation Tramways, Municipal Tramway Offices, Cleveland Road, Wolverhampton. [T.N., 324.] *Gen. Manager and Engineer*, C. O. Silvers; *Boro. Elec. Eng.*, S. T. Allen; *Per. Way Eng.*, George Green; *Chairman Try. Com.*, Ald. Sir C. T. Mander, Bart., J.P.; *Vice-Chairman*, Ald. S. Craddock, J.P.

York Corporation Tramways, 8, Clifford Street, York. [T.N., 302]. *Gen. Manager and Elec. Eng.*, J. W. Hame; *Traffic Supt.*, J. W. Horton; *Per. Way Eng.*, F. W. Spurr (City Surveyor); *Chairman Try. Com.*, Ald. S. W. Meyer; *Vice-Chairman*, Coun. W. H. Sessions.

COMPANY TRAMWAYS.

Aberdeen Suburban Tramways Company, 15, Golden Square, Aberdeen. [T.A., Judicial, Aberdeen; T.N., 447.] *Manager & Per. Way Eng.*, A. Wilkie; *Sec.*, G. Duncan; *Chairman*, James Mearns; *Directors*, W. Jackson, Dr. Christie, Jas. Sellar.

Airdrie and Coatbridge Tramways Company, Tramway Depôt, Main Street, Coatbridge [T.N., 105], and Electrical Federation Offices, Kingsway, London, W.C. *Gen. Manager*, A. Robertson; *Sec.*, P. N. Gray; *Chairman*, W. L. Madgen; *Directors*, H. S. Day, A. C. Miles, G. J. Somerville.

Barnsley and District Electric Traction Company, Ltd., Car Depot, Sheffield Road, Barnsley. [T.A., Tramways, Barnsley; T.N., 159.] *Acting Manager*, W. E. Nicoll; *Acting Sec.*, P. N. Gray; *Chairman*, E. Garcke; *Directors*, Col. Sir Thomas Pilkington, Bart., E. A. Paris.

Barrow-in-Furness Tramways, Salthouse Road Depot, Barrow, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Barrow; T.N., 125.] *Manager*, W. F. Bladon; *Sec.*, F. J. Cursons; *Acting Sec.*, J. S. Bowker; *Chairman*, H. S. Day; *Directors*, J. V. Kitchener, E. R. Soames.

Bath Electric Tramways Company, Ltd., Walcot Street, Bath, and 119-125, Finsbury Pavement, London, E.C. [T.A., Trams, Bath; T.N., 1214.] *Gen. Manager and Eng.*, W. E. Hardy; *Traffic Supt.*, E. Seckington; *Sec.*, H. J. Almond; *Chairman*, Hon. Sir J. Sivewright, K.C.M.G.; *Directors*, H. F. Clutterbuck, E. H. R. Trenow, A. A. C. Swinton, E. Callaird.

Bessbrook and Newry Tramway Company, Bessbrook, Co. Armagh. [T.A., Tramways, Bessbrook.] *Manager*, Robert Caven; *Elec. Eng.*, J. L. D. Meares; *Chairman*, J. N. Richardson; *Directors*, C. H. Richardson, R. T. Scott, T. W. Richardson, T. McGreggor Greer.

Birmingham District Power and Traction Company, Power Station, Downing Street, Smethwick, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Power Station, Smethwick; T.N., 65 Smethwick.] *Gen. Manager*, W. G. Bond; *Secretary*, B. Kingsford; *Chairman*, C. Shirreff Hilton; *Directors*, J. A. Lycett, W. L. Madgen, S. R. Blundstone, R. J. Howley.

Digitized by Google

ELECTRIC TRAMWAYS IN THE UNITED KINGDOM.

Blackpool and Fleetwood Tramroad Company, Ltd., Bispham, near Blackpool. [T.A., Cameron, Blackpool; T.N., 121.] *General Manager and Secretary*, J. Cameron; *Elec. Eng.*, A. Cameron; *Chairman*, John Greenwood; *Directors*, R. H. Prestwich, R. B. Barningham, R. S. Boddington, G. Richardson, G. Readman.

Blackpool and Fylde Light Railway Company, 5, Clifton Street, Blackpool. (No appointment of engineer or officials yet made.) *Secretary*, R. Bibby; *Chairman*, John Greenwood; *Directors*, T. Fisher, J.P., John Platt, J.P., W. Hardman, J.P., R. H. Mabbott.

Blackpool, St. Annes, and Lytham Tramways Company, Ltd., Squires Gate, and 30, Birley Street, Blackpool. [T.N., 327 and 22]. *Gen. Manager and Elec. Eng.*, H. W. Laing; *Traffic Manager*, G. W. Wood; *Rolling Stock Supt.*, J. Partington; *Secretary*, Chas. E. Riding; *Chairman*, G. Nicholson; *Directors*, T. M. Smith, T. Preston.

Bray and Enniskerry Railway Company, 52, Westland Row, Dublin. *Sec.*, M. F. Keogh; *Chairman*, A. Killingley; *Director*, F. M'Crea.

Brighton Beach Electric Railway, Madeira Road, Brighton. [T.A., Volk, Brighton; T.N., 14 P.O.] *Manager and Eng.*, Magnus Volk; *Traffic Superintendent*, H. Sheppard; *Per. Way Eng.*, J. Barker; *Secretary*, A. Volk; *Chairman*, Magnus Volk; *Directors*, M. H. Volk, B. W. Symonds, A. Volk.

Bristol Tramways and Carriage Company, Ltd., Clare Street House, Bristol. [T.A., Cab, Bristol; T.N., 74 & 3074 Nat.] *Manager*, Chas. Challenger; *Assist. Manager*, S. E. Smith; *Electrical Engineer*, W. H. Munton; *Permanent Way Engineer*, G. T. C. Edwards; *Secretary*, H. F. Cooper; *Chairman*, Sir G. White, Bart.; *Directors*, W. G. Verdon Smith (*Managing*), S. White, J.P., J. H. Howell, J.P., G. Stanley White.

British Electric Traction Company, Ltd., Electrical Federation Offices, Kingsway, London, W.C. E. Garcke (*chairman*); *Directors*, C. Shirreff B. Hilton, W. L. Madgen, Sir Charles Ollivant, A. Shepherd, G. T. Symons, C. G. Tegetmeier, P. D. Tuckett; *Joint Managers*, C. H. Dade and R. J. Howley; *Acting Secretary*, T. Bower; *Accountant*, C. Walmsley.

This company is interested in the following tramways, particulars of which are given under their respective names:

Airdrie & Coatbridge.
Barnsley & District.
Barrow-in-Furness.
Birmingham & District Power & Traction Co.:
Birmingham & Midland
Dudley, Stourbridge, & District.
South Staffordshire.
Wolverhampton Dist.
Devonport & District.
Gateshead & District.
General Elec. Tramways.
Gravesend & Northfleet.
Greenock & Port Glasgow.
Jarrow & District.
Kidderminster & District.
Merthyr.
Middleton.
Oldham, Ashton, & Hyde.
Peterborough.
Potteries.
Rothesay.
Sheerness & District.
South Metropolitan.
Southport.
Swansea.
Taunton.
Tynemouth & District.
Weston-super-Mare & District.
Worcester.
Wrexham & District.
Yorkshire (Woollen Dist.)

Burton and Ashby Light Railways, Power Station, Swadlincote, nr. Burton-on-Trent. [T.A., Toulmin, Swadlincote; T.N., 1.] *Manager and Eng.*, Jas. Toulmin; *Secretary*, A. L. Charles; *Chairman*, G. Murray Smith.

[The line is owned and worked by the Midland Railway Company.]

Camborne and Redruth Tramways, Elec. Works, Carn Brea, R.S.O., Cornwall. [T.N., 3, Camborne.] (Owned by Urban Elec. Supply Co.) *Manager and Eng.*, L. A. Hards; *Sec.*, C. H. Jones; *Chairman*, P. D. Tuckett; *Directors*, E. Charrington, H. B. Grotian, Douglas Owen.

Carlisle Tramways Company, Ltd., City of, Depot and Offices, London Road, Carlisle. [T.A., Tramways, Carlisle; T.N., 0180.] *Engineer and Manager*, R. L. McCulloch.

Chatham and District Light Railways Company, Luton Road, Chatham, and 88, Cannon Street, London, E.C. [T.A., Tramways, Chatham; T.N., 51.] *General Manager*, W. Jensen; *Assist. Manager*, A. J. Bousfield; *Traffic Manager*, ; *Secretary*, A. Clements; *Chairman*, A. R. Monks; *Directors*, H. C. Levis, J. F. Nauheim, W. B. H. Martindale.

Cheltenham and District Light Railway Company, Cheltenham. [T.N., 341.] *Directors*, A. H. Beatty (*Chairman*), W. Shearer, H. L. Williams, A. S. Guinness, H. J. McCormick; *Sec.*, Wm. C. Bryden, C. A., 66, Queen Street, London, E.C.; *Local Eng. and Manager*, Henry J. McCormick, St. George's Road, Cheltenham.

Clontarf and Hill of Howth Tramroad Company, 39, Dame Street, Dublin. [T.A., c/o Railways, Dublin; T.N., 917.] *Secretary*, J. P. Chapman; *Chairman*, W. L. Murphy; *Directors*, E. Anderson, J. J. Dudley.

Cork Electric Tramways and Lighting Company, Ltd., Albert Street, Cork. [T.A., Tramways, Cork; T.N., 78 and 535.] *Manager and Engineer*, H. H. Nalder; *Traffic Manager*, H. G. Whiting; *Per. Way Engineer*, H. Mack; *Secretary*, A. Clements; *Chairman*, A. R. Monks; *Directors*, E. Anderson, W. M. Murphy, Capt. W. Martindale, H. C. Levis.

Dartford Urban District Council Light Railways. Car Depot, Priory Road, Dartford. [T.N., 31 Dartford.] (Leased to and worked by Balfour, Beatty, & Co., Ltd., 66, Queen Street, London, E.C.) *Acting Manager*, F. A. Kincaid Fergusson.

Devonport and District Tramways Company, Electrical Federation Offices, London, W.C. [T.A., Head Office, Devonport c/o Tramway, London; T.N., Head Office, Holborn 2686. *Manager and Eng.*, George Cardwell; *Secretary*, S. M. Wright; *Acting Sec.*, P. N. Gray; *Chairman*, C. S. B. Hilton; *Directors*, J. S. Raworth, E. R. Soames, C. G. Tegetmeier, R. J. Sutcliffe.

[The Company's undertaking has been sold to Plymouth Corporation.]

Dewsbury, Batley, and Birstall Tramways Company, Ltd., Electrical Federation Offices, Kingsway, London, W.C.

[Lines worked by Yorkshire (Woollen District) Electric Tramways, Ltd., *q.v.*]

Dewsbury and Ossett Corporation and Soothill Nether Urban District Council Tramways. (Lessees: The National Elec. Construction Co., Ltd., 3, Laurence Pountney Hill, London, E.C.) [T.A., Overhauled, London; T.N., 5329 and 5330 Bank.] *Manager*, W. MacGibbon.

Douglas—Ramsey. (The Manx Elec. Rly. Company), 1, Strathallan Crescent, Douglas. (See Manx Electric Railway Company).

Douglas Southern Electric Tramways, Ltd., Marine Drive, Douglas, Isle of Man, and 24, Brazennose Street, Manchester. [T.A., Traffic, Douglas.] *Manager and Eng.*, R. Orton; *Sec.*, J. E. Sharples; *Chairman*, T. J. Hutchinson; *Directors*, I. E. Winslow, E. A. Hopkins.

Dublin and Lucan Electric Railway Company, 15, Conyngham Road, Dublin. [T.A., Lucan Tramway, Dublin; T.N. 2282 and 4006 Dublin, and 5 Lucan.] *Manager, Elec. Eng., and Sec.*, D. McDowall Grosart, J.P.; *Chairman*, J. W. Hill, J.P.; *Directors*, E. Anderson, A. B. Coyle, J.P., G. N. Murphy.

Dublin United Tramways Company (1896) Ltd., 9, Upper Sackville Street, Dublin. [T.A., Tramways, Dublin; T.N., 58 and 59.] *Gen. Manager*, G. Marshall Harriss; *Elec. Eng.*, R. Tanham; *Con. Eng.*, H. F. Parshall; *Per. Way Eng.*, P. F. O'Sullivan; *Secretary*, W. McHugh; *Chairman*, W. M. Murphy, J.P.; *Directors*, W. F. Cotton, J.P., J. Mooney, Rt. Hon. L. A. Waldron, P.C.

Dudley, Stourbridge and District Electric Traction Company, Ltd. (Section of The Birmingham and Midland Tramways Joint Committee), Power Station, Downing Street, Smethwick, Brierley Hill, Staffs., and Electrical Federation Offices, Kingsway, London, W.C. [T.N., 65 Smethwick.] *General Manager*, W. G. Bond; *Secretary*, E. H. Woodhall; *Chairman*, S. R. Blundstone; *Directors*, J. A. Lycett, R. J. Howley.

Dumbarton Burgh and County Tramways Company, Tramway Depot, Dumbarton, and 23, Rutland Street, Edinburgh. [T.A., Tramways, Dumbarton; T.N., 119.] *Gen. Manager and Elec. Eng.*, J. P. McMahon; *Secretary*, A. Dishart; *Chairman*, G. Balfour; *Directors*, K. Sanderson, K. A. Scott Moncrieff.

Dundee, Broughty Ferry & District Tramways Company, Milton, Monifieth, N.B. [T.N., 24 Monifieth.] *Gen. Manager & Engineer*, Daniel Fisher; *Secretary*, E. Cowan; *Chairman*, George Balfour; *Directors*, Edward Cowan, David Hynd.

Dunfermline and District Tramways Company, Tramway Depot, Cowdenbeath, Fife, and 8, New Row, Dunfermline. *Manager and Engineer*, J. H. Shepherd; *Secretary*, G. A. Nicolson; *Cons. Engs.*, Hawtayne & Zeden; *Directors*, Wm. Low, G. Balfour (*managing*), K. Sanderson, D. Hynd.

Falkirk & District Tramways Company, Larbert Road, Larbert, Stirlingshire. [T.A., Tramways Co., Falkirk; T.N., 154 Falkirk.] *Gen. Manager and Engineer*, D. Hays; *Chairman*, G. M. Brown; *Directors*, A. W. Tait, R. Hunter, G. Balfour, C. D. Geddes.

Felixstowe Pier Railway, Felixstowe. (The Coast Development Corporation, Ltd.) *Elec. Eng.*, E. A. Lambert.

Gateshead and District Tramways Company, Tramway Depôt, Sunderland Road, Gateshead, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramway Depôt, Gateshead; T.N., 125 & 408 Gateshead.] *General Manager*, William Morrison; *Secretary*, H. W. Davis; *Chairman*, H. S. Day; *Directors*, H. A. Stagg, C. R. Greene, Judge L. A. Atherley-Jones, K.C.

Giant's Causeway and Portrush Electric Tramway Company, Portrush. *Manager & Sec.*, W. McCurdy; *Elec. Eng.*, W. A. Traill; *Chairman*, F. J. S. Moore; *Directors*, C. M'D. Stuart, W. A. Traill.

Glossop Tramways, Electricity Works, Glossop (owned by the Urban Electric Supply Co.) [T.N., 31, Glossop.] *Manager and Res. Eng.*, C. E. Knowles; *Rolling Stock Supt.*, A. W. Bullough; *Secretary*, C. H. Jones; *Chairman*, P. D. Tuckett; *Directors*, E. Charrington, F. E. Gripper, H. B. Grotrian, D. Owen.

Gosport and Fareham Tramways, Tramways and Lighting Office, Gosport, Hants., and Moorgate Station Chambers, London, E.C. [T.A., Tramways, Gosport; T.N., 3, Post Office, Gosport.] *Eng. and Manager*, J. Fereday Glenn; *Sec.*, J. Barber Glenn; *Chairman*, A. Beattie, J.P., D.L.; *Directors*, J. Barber Glenn (*managing*), S. Hern.

Gravesend & Northfleet Electric Tramways, Ltd., Tramway Depot, Northfleet, Kent, and Electrical Federation Offices, Kingsway, London, W.C [T.N., 958, Gravesend.] *Manager*, J. R. Groves; *Sec.*, H. C. Walter; *Chairman*, W. L. Madgen; *Directors*, P. N. Gray, W. S. Wreathall.

Great Crosby Tramways, 31, James Street, Liverpool.

[This tramway is worked by the Liverpool Overhead Railway Company.]

Great Grimsby Street Tramway Co., Southampton House, Cleethorpes, and Moorgate Station Chambers, London, E.C. [T.A., Blanco, Cleethorpes; T.N., 16.] *Manager and Eng.*, H. L. White; *Elec. Eng.*, H. O. White; *Managing Director and Secretary*, J. B. Glenn; *Chairman*, A. Beattie, J.P., D.L.; *Director*, S. Hern.

Greenock and Port Glasgow Tramways Company, Ladyburn, Greenock, and Electrical Federation Offices, Kingsway, London, W.C. [T.A. Tramways, Greenock; T.N., 562]. *Manager*, A. Robertson; *Secretary*, P. N. Gray; *Chairman*, W. L. Madgen; *Directors*, G. J. Somerville, A. C. Miles, H. S. Day.

Guernsey Railway Company, Ltd., Hougue-a-la-Perre, Guernsey. *Manager and Elec. Eng.*, Arthur G. Bird; *Sec.*, J. de Mouilpied; *Chairman*, G. F. Peek; *Directors*, W. D. Murdoch, E. Valied, J. B. Collings, Q. Le Pelley.

Hampshire Light Railway (Electric) Company, Ltd., Moorgate Station Chambers, London, E.C. *Secretary*, J. B. Glenn; *Chairman*, A. Beattie, J.P.; *Directors*, J. Barber Glenn (*managing*), S. Hern.

[This company works the Portsdown and Horndean Light Railway.]

Hastings Tramways Company, Ltd., Beaufort Road, Silverhill, St. Leonards-on-Sea, and 1, Queen Victoria Street, London, E.C. [T.A., Tramways, Hastings, and Enshrine, London; T.N., 90 Hastings, and 3465, City]. *General Manager and Elec. Eng.*, W. Vincent Edwards; *Secretary*, W. R. Elston; *Cons. Engs.*, Kincaid, Waller, Manville, and Dawson; *Chairman*, G. Kitchen; *Directors*, E. C. Morgan, J. C. Williamson, Dr. Moody.

Imperial Tramways Company, Ltd., Clare Street House, Bristol. *Secretary*, W. G. Verdon Smith; *Manager*, F. Freshwater; *Chairman*, Sir George White, Bart.; *Directors*, H. C. Godfray, J. H. Howell, S. White.

Isle of Thanet Electric Tramways and Lighting Company, Ltd., St. Peter's, Kent, and Moorgate Station Chambers, London, E.C. [T.A., Tramways, St. Peters, Kent; T.N., 29 Broadstairs]. *Gen. Manager and Elec. Eng.*, J. A. Forde; *Traffic Supt.*, ——————; *Secretary*, J. Barber Glenn; *Chairman*, A. R. Monks; *Directors*, Lord Arthur Butler, W. M. Murphy, H. Brown.

Jarrow and District Electric Traction Company, Ltd., Electrical Federation Offices, Kingsway, London, W.C. [T.A., Jarrow, c/o Tramway, London; T.N., 2686 Holborn.] *Traffic Manager*, G. McClelland; *Secretary*, C. W. Francis; *Acting Sec.*, H. A. Stagg; *Chairman*, G. J. Somerville; *Directors*, W. Morrison (*managing*), H. S. Day.

Kidderminster & District Electric Lighting and Traction Co., Ltd., Kidderminster and Electrical Federation Offices, Kingsway, London, W.C. [T.N., 108]. *General Manager*, W. G. Bond, *Secretary*, B. Kingsford; *Chairman*, E. Garcke; *Directors*, J. A. Lycett, H. S. Day, W. L. Madgen.

Kinver Tramway, Kinver, and Electrical Federation Offices, Kingsway, London, W.C., *q.v.*, Dudley, Stourbridge, and District Elec. Traction Co., Ltd.

Lanarkshire Tramways Company, Edinburgh Road, Motherwell, N.B., and 88, Cannon Street, London, E.C. [T.A., Tramways, Motherwell; T.N., 64.] *Gen. Manager and Eng.*, G. F. Moller; *Elec. Eng.*, E. H. Glennie; *Per. Way Eng.*, R. Foster; *Traffic Supt.*, J. L. White; *Sec.*, A. Clements; *Chairman*, A. R. Monks; *Directors*, Sir B. Cunard, H. C. Levis, W. H. Whaite, G. Franklin, J. F. Nauheim.

Lancashire United Tramways Limited, Atherton, Lancs. [T.A., Tramways, Atherton; T.N., 36, Atherton.] *Gen. Manager and Engineer*, E. H. Edwardes; *Secretary*, H. P. Conibear; *Chairman*, Hon. A. Stanley M.P.; *Directors*, J. M. Henderson, M.P., Sir J. Beecham, J.P., R. Watson, J.P., A. Adam, J. S. Austen.

Liverpool and Prescot Light Railway.—This line, which with the St. Helens Tramways forms the connecting link between the City of Liverpool and South Lancashire Tramways, is owned and worked by the Lancashire United Tramways, Ltd.

Liverpool Overhead Railway Company, 31, James Street, Liverpool. [T.A., Motor, Liverpool; T.N., 5463 Central.] *Gen. Manager and Eng.*, E. J. Neachell; *Secretary*, W. H. Alexander; *Chairman*, H. C. Woodward; *Directors*, J. E. Anderson, G. D. Killey J. U. Hodgson, M. H. Maxwell.

Llandudno and Colwyn Bay Electric Railway, Limited, Tramway Depôt, Rhôs-on-Sea, Colwyn Bay, and Basildon House, Moorgate Street, London, E.C. *Gen. Manager*, Alex. G. Balfour; *Secretary*, A. W. R. Lovering; *Directors*, G. Balfour, A. W. Tait, T. Stoker.

Llanelly and District Electric Lighting and Traction Company, Ltd., Llanelly, and 66, Queen Street, London, E.C. *Engineer and Manager*, J. E. Stewart; *Secretary*, G. D. Prince; *Chairman*, A. R. Holland; *Directors*, A. V. Anderson, M. A. Edwards, A. H. Beatty.

London United Tramways Ltd., Electric Railway House, Broadway, Westminster, London, S.W. [T.N., 6800, Victoria.] *Managing Director*, J. Devonshire; *Secretary*, A. L. Barber; *Gen. Manager and Eng.*, A. H. Pott; *Chairman*, W. M. Acworth; *Directors*, Rt. Hon. Viscount Knutsford, Sir A. H. Stanley, F. V. Schuster.

Luton Corporation Tramways (leased to and worked by Balfour, Beatty & Co., Ltd., 22a, College Hill, London, E.C.), Tramway Offices, Park Street, Luton. [T.N., 230.] *Engineer and Manager*, A. E. Wray.

Mansfield & District Light Railway Co., Sutton Road, Mansfield. [T.A., Cars, Mansfield, T.N., 107.] *Gen. Manager and Sec.*, Stanley Dudman, *Chairman*, A. R. Holland; *Directors*, W. J. Chadburn, A. H. Beatty, G. Balfour.

Digitized by Google

ELECTRIC TRAMWAYS IN THE UNITED KINGDOM.

Manx Electric Railway Company, Ltd., 1, Strathallan Crescent, Douglas, Isle of Man, and 3, Finch Lane, London, E.C. [T.A., Electric, Douglas, Man.; T.N., 61.] *Gen. Manager & Eng.*, F. Edmondson; *Secretary*, C. A. Huni; *Chairman*, Col. Sir A. Griffith Boscawen; *Directors*, Sir W. H. Vandrey, B. E. Greenwell, E. Remnant.

Merthyr Electric Traction and Lighting Company, Ltd., 53, Pontmorlais Circus, Merthyr, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramway Company, Merthyr; T.N., 0180, Merthyr Tydfil.] *Managing Eng.*, L. W. Dixon; *Secretary*, S. J. Clements; *Chairman*, G. J. Somerville; *Directors*, C. G. Tegetmeier, W. L. Madgen, E. R. Soames.

Metropolitan Electric Tramways, Limited, Electric Railway House, Broadway, Westminster, London, S.W. [T.A., Metrolito, London; T.N., 6800, Victoria.] Manor House Offices, Seven Sisters Road, N. [T.A., Lentiscus, London; T.N., 77 Tottenham.] *Gen. Manager and Eng.*, A. H. Pott; *Traffic Manager*, W. E. Hammond; *Secretary*, A. L. Barber; *Chairman*, E. Garcke; *Directors*, Sir E. Spencer, W. L. Madgen, C. G. Tegetmeier, J. Devonshire (*Managing Director*).

Mexborough and Swinton Tramways Company, Electricity Works, Rawmarsh, Yorks. [T.N., 266], and 3, Laurence Pountney Hill, Cannon Street, London, E.C. *Manager and Eng.*, G. H. Browne; *Cons. Elec. Eng.*, F. E. Stanley; *Commercial Manager*, Wm. T. Mitchell; *Traffic Supt.*, M. McLeod; *Secretary*, L. D. H. Jacobs; *Chairman*, L. B. Schlesinger; *Director (Managing)*, W. B. Cownie, C.A.

Middlesbro, Stockton, and Thornaby Electric Tramway, Bridge Road, Stockton-on-Tees, and Clare Street House, Bristol. [T.A., Tramways, Stockton; T.N., 129.] *Manager*, F. Freshwater; *Secretary*, W. G. Verdon Smith; *Chairman*, Sir Geo. White, Bart.; *Directors*, H. C. Godfray, S. White, H. C. Doggett.

Middleton Electric Traction Company, Ltd., Hiltonfold Lane, Middleton, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramway Depot, Middleton; T.N., 37 Middleton.] *Gen. Manager*, W. F. Endean; *Secretary*, G. R. Oliphant; *Acting Secretary*, J. S. Bowker; *Chairman*, Lord Vaux of Harrowden; *Directors*, J. V. Kitchener, W. S. Wreathall.

Morecambe Tramways Company, Heysham Road, Morecambe, and 62, Market Street, Lancaster. [T.N. 1, Morecambe, and 71, Lancaster.] *Secretary and Manager*, G. H. Petty; *Chairman*, W. H. Pickles; *Directors*, J. Stott, S. Wright, O. Carr.

Musselburgh and District Electric Light and Traction Co., Ltd., High St., Musselburgh, N.B. [T.A., Tramways, Musselburgh; T.N., 115.] (Registered Office, 3, Laurence Pountney Hill, London, E.C. [T.N., 5329 and 5330, Bank.]) *Manager*, E. J. Walsh; *Resident Engineer*, E. J. Walsh; *Traffic Inspector*, W. Mittell; *Secretary*, L. D. H. Jacobs; *Chairman*, L. B. Schlesinger; *Directors*, B. Burnham, J. Anderson, W. B. Cownie, R. Watson.

New General Traction Company, Ltd., 8, Crosby Square, London, E.C. *Managing Director*, E. A. Hopkins; *Secretary*, J. G. Mills; *Chief Engineer*, I. E. Winslow; *Chairman*, Baron E. B. d'Erlanger. [This company controls the Norwich and the Douglas Southern Electric Tramways Companies.]

New St. Helens and District Tramways Company, Ltd., Atherton, Lancs. [T.A., Tramways, Atherton; T.N., 36 Atherton.] *Engineer and Manager*, C. D. Stanley; *Secretary*, H. P. Conibear; *Chairman*, Hon. Arthur Stanley, M.P.; *Directors*, J. Hunter, J.P., H. Martin, J.P., J. M. Henderson, M.P., J. S. Austen, and E. H. Edwardes (*Managing*).

North Shields Tramway Company owned and worked by Tynemouth and District Elec. Trac. Co. *q.v.*

Norwich Electric Tramway Company, 5, Orford Hill, Norwich, and 8, Crosby Square, London, E.C. [T.A., Tramways, Norwich; T.N., 475.] *Manager and Engineer*, F. W. Ketley; *Consulting Eng.*, I. E. Winslow; *Sec.*, J. G. Mills; *Directors*, E. A. Hopkins, Hon. A. G. Brand, F. FitzGerald, G. M. Chamberlin, and C. Pakeman.

Nottinghamshire and Derbyshire Tramways Company, Tramway Depot, Langley Mill, Derbyshire, and 66, Queen Street, London, E.C. [T.A., Tramways, Langley Mill; T.N., 53, Langley Mill.] *Manager*, C. R. Walker; *Secretary*, Wm. C. Bryden; *Directors*, A. R. Holland, A. H. Beatty, A. V. Anderson, and M. A. Edwards.

Oldham, Ashton and Hyde Electric Tramway, Ltd., Tramway Depot, Denton, Lancs., and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Denton; T.N., 265 Ashton.] *Supt.*, A. Anderson; *Secretary*, F. J. Cursons; *Acting Secretary*, J. S. Bowker; *Chairman*, E. Garcke; *Directors*, Judge L. A. Atherley Jones, K.C., W. S. Wreathall, J. V. Kitchener (*Managing Director.*)

Paisley District Tramways Company, Tramway Depôt, Paisley, and 83, Cannon Street, London, E.C. [T.N., 218 Paisley.] *Gen. Manager and Elec. Eng.*, Fred Coutts; *Traffic Supt.*, E. Jeffs; *Secretary*, A. Clements; *Con. Eng.*, H. F. Parshall; *Chairman*, O. H. Smith; *Directors*, Lord Arthur Butler, D. Johnston Smith, John Young.

Peterborough Electric Traction Company, Ltd., Lincoln Road, Peterborough, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Peterborough; T.N., 224.] *Gen. Manager*, T. G. Clabburn; *Secretary*, S. M. Wright; *Acting Sec.*, P. N. Gray; *Chairman*, Lord Vaux of Harrowden; *Directors*, E. A. Paris, R. J. Howley.

Plymouth, Stonehouse and Devonport Tramways Co., 16, Edgcumbe Street, Stonehouse, Devon, and Moorgate Station Chambers, London, E.C. [T.N. 53.] *Manager*, G. H. Moreton; *Elec. Eng.*, J. Graham Pearce; *Sec.*, J. Barber Glenn; *Chairman*, Andrew Beattie, J.P., D.L.; *Directors*, S. Hern, J. B. Glenn (*Managing*).

Portsdown and Horndean Light Railway, Cosham, Hants.; Tramways and Lighting Office, Gosport, Hants., and Moorgate Station Chambers, London, E.C. [T.A., Tramways, Gosport; T.N., 3, Post Office, Gosport.] *Engineer and Manager*, J. Fereday Glenn; *Secretary*, J. Barber Glenn; *Chairman*, A. Beattie, J.P., D.L.; *Directors*, J. Barber Glenn (*Managing*), S. Hern.

Potteries Electric Traction Company, Tramway Depôt, Stoke-on-Trent, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Stoke-on-Trent; T.N., 141.] *Gen. Manager and Eng.*, W. Thom; *Power and Rolling Stock Supt.*, F. J. Chapple; *Traffic Manager*, F. Hatch; *Secretary*, B. Kingsford; *Chairman*, R. J. Howley; *Directors*, F. W. Chanter, S. Mear, J. V. Kitchener.

Rhondda Tramways Company, Ltd., Tramway Depot, Porth, Rhondda, and Laurence Pountney Hill, Cannon Street, London, E.C. [T.A., Tramways, Porth; T.N., 118.] *Manager and Engineer*, H. Holliday; *Secretary*, L. D. H. Jacobs; *Chairman*, L. B. Schlesinger; *Directors*, J. C. Saunders, W. B. Cownie, J. T. Jervis, H. T. Barnett.

Rothesay Tramways Company, Ltd., Point House, Rothesay, and Electrical Federation Offices, Kingsway, London, W.C. *Manager*, A. Robertson; *Sec.*, P. N. Gray; *Chairman*, A. C. Miles; *Directors*, W. L. Madgen, H. S. Day.

Ryde Pier Company, Ryde, Isle of Wight. *Manager*, W. D. Stanney; *Elec. Eng.*, C. Harrison; *Chairman*, G. E. Mears.

Scarborough Tramways Company, Scalby Road, Scarborough. [T.A., Electric Tramways, Scarborough; T.N., 294.] *Gen. Manager and Elec. Eng.*, J. V. Moinet; *Chairman*, F. E. Gripper; *Directors*, V. Fowler, M. T. Whittaker, J. C. Wigham.

Sheerness and District Electric Power and Traction Company, Ltd., Electricity Works, Sheerness East, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Sheerness; T.N., 45.] *Manager & Eng.*, A. Charlton; *Sec.*, H. A. Stagg; *Chairman*, G. J. Somerville; *Directors*, R. J. Howley, E. R. Soames.

Snaefell Mountain Railway (See Manx Electric Railway Company).

South Metropolitan Electric Tramways and Lighting Company, Ltd., 114, Church Street, Croydon, 80, High Street, Sutton, and Electric Railway House, Broadway, Westminster, London, S.W. [T.N., 304 Croydon, 14 Sutton and 6800, Victoria.] *Gen. Manager and Engineer*, A. V. Mason; *Secretary*, W. M. Wright; *Chairman*, C. G. Tegetmeier; *Directors*, J. Devonshire (*managing*), E. Garcke, A. L. Barber.

Southport Pier Co., Ltd., Southport. [T.A., Pier, Southport; T.N., 174.] *Manager*, A. T. Faiers; *Chairman*, A. Skinner; *Directors*, J. R. Haworth, S. J. Fane, G. Duckworth, J. Duckworth.

Southport Tramways Company, Ltd., The Depôt, Churchtown, Southport, and Electrical Federation Offices, Kingsway, London, W.C. *Manager*, J. Lloyd; *Secretary*, H. A. Stagg; *Chairman*, C. S. Hilton; *Directors*, J. S. Raworth, Lord Vaux of Harrowden, J. V. Kitchener, G. R. Hulme.

South Staffordshire Tramways (Lessee) Company, Ltd., Electrical Federation Offices, Kingsway, London, W.C. [T.N., 65 Smethwick.] *General Manager*, W. G. Bond; *Secretary*, E. H. Woodhall; *Chairman*, W. S. Schuster; *Directors*, J. A. Lycett, S. R. Blundstone, R. J. Howley, B. Kingsford.

Sunderland District Electric Tramways, Ltd., Fence Houses, co. Durham. [T.A., Trams, Philadelphia, Shiney Row; T.N., 21, Houghton-le-Spring.] *Resident Manager and Engineer*, G. Stratton; *Traffic Manager*, E. A. Pearman; *Secretary*, H. J. Almond; *Directors*, H. R. Hogg, Hon. R. Parker, R. Tayler, A. Counter, C. Eves.

Sutton and Howth Electric Tramway Company (owned by the Great Northern Railway, Ireland), Sutton, county Dublin, and Amiens Street Station, Dublin. [T.A., Railroad, Dublin; T.N., 171, Dublin. and 16 Sutton.] *Gen. Manager*, John Bagwell; *Elec. Eng.*, A. W. Whieldon; *Chief Eng.* F. A. Campion; *Locomotive Eng.*, G. T. Glover; *Sec.*, T. Morrison; *Chairman*, F. Vernon; *Directors*, W. P. Cairnes (*Deputy Chairman*), W. B. Carson, H. S. Guinness, J. T. Reade, Capt. W. L. A. Goulding, Lt.-Col. J. C. W. Madden, R. A. Gradwell, J. Milne Barbour, T. F. Cooke, W. H. B. Moorhead, Lt.-Col. H. Plews, G. S. Clark.

Swansea Improvements and Tramways Company, 2, Rutland St., Swansea, and Electrical Federation Offices. Kingsway, London, W.C. [T.A., Tramway, Swansea; T.N., 268 Swansea.] *Gen. Manager*, D. James; *Elec. Eng.*, A. Johnston; *Secretary*, S. J. Clements; *Chairman*, C. G. Tegetmeier; *Directors*, G. J. Somerville, S. E. Garcke, E. R. Soames.

Taunton Electric Traction Company, Ltd., East Reach, Taunton, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Taunton, c/o "Tramways," London.] *Manager*, B. H. Griffith; *Acting Manager*, L. Marshall; *Secretary*, S. M. Wright; *Acting Sec.*, P. N. Gray; *Chairman*, G. J. Somerville; *Directors*, E. Garcke.

Torquay Tramways Co., Ltd., St. Marychurch Road, Torquay. [T.A., Carsheds, Torquay; T.N., 167 Torquay.] *Registered Office*, 3, Laurence Pountney Hill, Cannon Street, E.C. *Manager and Eng.*, H. J. Nisbett; *Secretary*, L. D. H. Jacobs; *Managing Director*, W. B. Cownie.

Trafford Park Company (Tramways), Trafford Park, Manchester. [T.A., Developing, Manchester; T.N., 61, Trafford Park.] *Secretary*, C. A. Grundy; *Chairman*, Marshall Stevens; *Directors*, Sir J. Lyons, H. McNiel, J. H. Balfour Browne, K.C.

[Lines worked by the Manchester and Salford Corporations.]

Tynemouth and District Electric Traction Company, Limited, John Street, Cullercoats, Northumberland, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tram Co., Cullercoats; T.N., 17 Whitley.] *Gen. Manager*, H. J. Smith *Sec.*, C. W. Francis; *Acting Sec.*, H. A. Stagg; *Chairman*, H. S. Day; *Directors*, J. H. Robinson, J. B. Williamson, R. J. Howley, Geo. J. Somerville.

Tyneside Tramways and Tramroad Company, Ltd., Neptune Bank, Wallsend. [T.A., Tramways, Wallsend; T.N., 84.] *Secretary & Res. Manager*, J. C. Little; *Elec. Eng.*, F. H. Briggs; *Cons. Eng.*, W. McLellan; *Chairman*, J. T. Merz; *Directors*, Lord Armstrong, J. H. Armstrong, G. E. Henderson, S. Hunter.

Wakefield and District Light Railway Company, Belle Isle, Wakefield.

[This company has been amalgamated with the Yorkshire (West Riding) Electric Tramways Co., Ltd.]

Walton-on-the-Naze Pier Tramway (Coast Development Corporation, Ltd.), The Pier, Walton-on-the-Naze. [T.A., Electricity Works, Walton-on-Naze.] *Eng.*, E. A. Lambert, A.M.I.E.E.

Wemyss and District Tramways Company, Ltd., Car Depot. Aberhill, Methill, N.B. [T.A., Tramways, Methill; T.N., 88 Leven.] *Gen. Manager*, W. T. Dawson; *Sec.*, J. O. Shepherd; *Chairman*, G. Balfour; *Directors*, W. Shepherd, G. Balfour, J. H. Guild.

Weston-super-Mare and District Electric Supply Co., Ltd., Locking Road, Weston-super-Mare, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Weston-s.-Mare; T.N., 79 & 181.] *Manager and Elec. Eng.*, G. Charlton; *Sec.*, H. A. Stagg; *Chairman*, G. J. Somerville; *Directors*, C. G. Tegetmeier, E. R. Soames.

Wolverhampton District Electric Tramways, Limited, Tramway Depot, Bilston, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Bilston; T.N., 56, Bilston.] *General Manager*, W. G. Bond; *Sec.*, E. H. Woodhall; *Chairman*, S. R. Blundstone; *Directors*, J. A. Lycett, R. J. Howley, B. Kingsford.

Worcester Electric Traction Company, Ltd., St. John's, Worcester, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Worcester; T.N., 81.] *Engineering Manager*, R. Simpson; *Secretary*, C. W. Francis; *Acting Sec.*, H. A. Stagg; *Chairman*, H. S. Day; *Directors*, J. A. Lycett, B. Kingsford, W. S. Wreathall.

Wrexham and District Transport Co., Ltd., 6, Lord Street, Wrexham, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Wrexham; T.N., 182, Wrexham.] *Manager*, A. A. Hawkins; *Sec.*, J. R. Oliphant; *Acting Sec.*, J. S. Bowker; *Chairman*, J. V. Kitchener; *Directors*, G. J Somerville, W. S. Wreathall.

Yorkshire (West Riding) Electric Tramways Co., Ltd., Belle Isle, Wakefield. [T.A., England, Belle Isle, Wakefield; T.N., 213.] *Gen. Manager and Sec.*, H. England; *Elec. Engs.*, C. J. Jewell and E. A. Wood; *Traffic Supt.*, W. J. McDonald; *Chairman*, Sir Herbert S. Leon, Bart.; *Directors*, B. Newgass, G. E. Leon, E. Remnant, W. Murray.

Yorkshire (Woollen District) Electric Tramways, Limited, Frost Hill, Liversedge, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Heckmondwike; T.N., 8 Heckmondwike.] *Secretary*, P. N. Gray; *Chairman*, E. Garcke; *Directors*, Sir Thos. Pilkington, E. A. Paris (*managing*).

TRAMWAY ASSOCIATIONS.

MUNICIPAL TRAMWAYS ASSOCIATION.

President:
PETER FISHER
(General Manager, Dundee Corporation Tramways).

Vice-President:
HENRY MOZLEY
(General Manager, Burnley Corporation Tramways).

Hon. Secretary and Treasurer:
C. J. SPENCER
(General Manager, Bradford Corporation Tramways), 7, Hall Ings, Bradford.

TRAMWAYS AND LIGHT RAILWAYS ASSOCIATION.

President:
The Rt. Hon. VISCOUNT CHILSTON.

Chairman:
The Hon. ARTHUR STANLEY, M.P.

Vice-Chairman:
HARRY ENGLAND.

Hon. Solicitor: W. MORRIS, Junr. *Hon. Auditor:* A. W. CHAMBERS, A.S.A.A.

Secretary:
A. DE TURCKHEIM.

Offices: Caxton House, Westminster, London, S.W
Telephone No. 2110 Victoria.

Digitized by Google

LIST OF ELECTRIC TRAMWAYS & RAILWAYS.

PARTICULARS OF TRACK AND EQUIPMENT.

TRAMWAYS, pp. xxvii-xxx. RAILWAYS, p. xxx.

Location of Line and Name of Operating Company.	Date of Opening of First Section.	Length of Route.	Total length of Track.	Gauge.	Weight and Type of Rail.	Maximum Gradient.	Sharpest Curve.	No of Motor Cars.	No of Dynamos	No. of Engines	Type of Engines	Total Capacity Traction, kw.	Principal Contractors for Electrical Equipment.
TRAMWAYS.				ft. in.	lbs.	1 in	ft. rad.						
Aberdare Urban District Trys. ..	Oct., 1913	2·9	3·3	3 6	96 G	13	45	14	2	2	V. Cp. C.	400	Lanc. Dynamo Co.
Aberdeen Corporation	Dec., 1899	14·4	27·75	4 8½	96 G	13	42·5	83	*14	14	V. Cp. C.	4,610	British T-H. Co. Macartney & Co.
Aberdeen Suburban Trys. Co. ..	June, 1905	5	5	4 8½	95 G	28	90	9	..	..	..	..	J. G. White & Co. Brush Co.
Accrington Corporation	Aug., 1907	7·53	10·53	4 0	95 G	14	..	32	*8	8	..	1,888	Brush Co.
Airdrie & Coatbridge Tramway Co.	Feb., 1904	3·63	4·94	4 8½	94 G	14	210	15	..	..	..	..	Brush Co.
Ashton-under-Lyne Corporation ..	Aug., 1902	7	8·15	4 7¾	96 G	10	40	25	5	5	..	400	Dick, Kerr, & Co. Siemens Bros.
Ayr Corporation	Sept., 1901	6	7·612	4 8½	90 G	21	45	24	*8	8	..	400	British T-H.
Bacup Corporation	1910	1·50	2	4 8½	103 G	9	40	..	..	..	..	..	
Barking Town Urban District ..	Dec., 1903	2·6	3·125	4 8½	100 G	25	44	9	4	3	V. Cp. C.	200	Blackwell & Co.
Barnsley & Dist. Elec. Traction Co.	Nov., 1902	3·06	4·25	4 8½	97 G	10	60	13	*	..	..	..	J. G. White & Co. Brush Co.
Barrow-in-Furness	Feb., 1904	6·9	10·32	4 0	90 G	13	50	24	*8	..	..	..	Brush Co. Dick, Kerr, & Co.
Bath Electric Tramways, Ltd. ..	Jan., 1904	14·7	19·3	4 8½	95 G	10·7	38	40	4	4	H.T. Cp.	675	Westinghouse
Batley Corporation	Aug., 1903	6·536	10·47	4 8½	104 G	9	40	15	6	4	H. Cp.	240	B. I. W. Co. British Elc. Cr. Co
Belfast City	Dec., 1905	49·65	98·54	4 8½	105 G	15	35	291	3	3	Tri. Exp.	3,000	J. G. White & Co. Westinghouse
Bessbrook—Newry (1) .. .. Bessbrook and Newry Try. Co.	Oct., 1885	3	3	3 0	41 V	80	55	2 M 2 T	2	1	Hyd. Turb.	..	Mather & Platt
Bexley Urban District	Oct., 1903	5·25	6·5	4 8½	90 G	14	40	21	3	3	V. Cp.	600	Dick, Kerr, & Co.
Birkenhead Corporation	Feb., 1901	13·8	24·09	4 8½	100 G	13½	40	65	6	6	V. Cp.	..	Blackwell & Co. British T-H.
Birmingham Corporation	Jan., 1904	65·56	114·55	3 6	105 G	13	40	586	..	..	..	1,475	Dick, Kerr, & Co.
Birmingham and Midland Trys. Co.	Nov, 1904	10·32	16·45	3 6	85 & 94 G	15	31	62	6	6	Cp.	..	Brush Co.
Blackburn Corporation	March, 1899	14·67	24·75	4 0	92 G	15	30	61	*4	4	V. Cp. C.	..	British T-H. Blackwell & Co.
Blackpool Corporation	Oct., 1885	14·75	21·38	4 8½	96 G	20	36	84	5	..	Turb.	3,250	Elwell-Parker British T-H.
Blackpool & Fleetwood Tramrd. Co.	July, 1898	7·9	15	4 8½	70 V 98 G	26	80	41	5	5	V. Cp.	600	Mather & Platt D.K. & Co.-B.T-H.
Blackpool and Fylde Light Ry. Co.	Under cons.	14	14·5	4 8½	..	..	..	..	..	..	..	..	
Blackpool—St. Anne's & Lytham ..	May, 1903	7·47	14·03	4 8½	92 G	22	35	40	..	..	..	..	British T-H.
Bolton Corporation	Nov., 1899	26	47·21	4 8½	90G	14	35	112	*12	12	V. Cp. C.	3,800	Dick, Kerr, & Co. Blackwell & Co.
Bootle Corporation	May, 1900	4·125	7·75	4 8½	95 G	20	40	55	*8	8	..	4,000	Blackwell & Co.
Bournemouth Corporation	July, 1902	21·66	31·75	3 6	100 G 66 slot	10	40	91	5	4	V. Cp.	1,200	J. G. White & Co.
Bradford Corporation	July, 1898	59	108·75	4 0	102 G	9·8	40	‡272	11	11	V. Cp. C.	..	Westinghouse Blackwell & Co.
Bray and Enniskerry Railway Co.	Under cons.	3·25	5	3 6	..	..	..	..	..	..	..	..	Macartney & Co.
Brighton Corporation	Nov., 1901	9·48	17·18	3 6	105 B.S. No. 4	9	40	53	5	5	Turb.	1,000	Westinghouse Blackwell & Co.
Brighton Beach (1)	Aug., 1883	1·75	2	2 8½	35 V	100	80	9	2	..	..	..	Siemens Bros.
Bristol—Bristol Trys. Co.	Oct., 1895	31	57·5	4 8½	92½ G	10	30	232	6	4	V. Cp. C.	..	British T-H. and Blackwell & Co.
Burnley Corporation	Dec., 1901	12·50	22·16	4 0	102 & 107 G	9·8	35	67	*8	6	H. Cp. C.	1,500	British T-H.
Burton and Ashby Light Railway..	July, 1906	10·2	12·3	3 6	90 G	11	51	20	2	2	Diesel	330	Dick, Kerr & Co. Brush Co.
Burton-on-Trent Corporation ..	Aug., 1903	6·67	9·75	3 6	90 & 100 G	11·7	40	20	3	3	V. Cp.	400	Dick, Kerr, & Co. Blackwell & Co.
Bury Corporation	June, 1903	22·5	34·42	4 8½	102¾ G	12	40	54	6	6	..	1,500	Westinghouse
Camborne and Redruth	Nov., 1902	3·75	4	3 6	83 G	15	40	8	7	7	Cp.	1,525	Dick, Kerr, & Co British T-H.
Cardiff Corporation	May, 1902	17·25	31·82	4 8½	100 G	23	35	130	9	9	V. Cp. C&T	2,200	British T-H. Dick, Kerr, & Co.
Carlisle, City of, Elec. Try. Co. ..	June, 1900	7·25	8·5	3 6	83 G	14	23	12	..	..	..	..	D.K. & Co.-B.T-H.
Cavehill & Whitewell Try. Co...	Feb., 1906	3·29	4·31	4 9	105 G	31	75	10	..	..	..	..	J. G. White & Co.
Chatham & District Light Rly. Co.	June, 1902	14·98	26	3 6	92½ & 105 G	9	35	50	5	4	H. Cp.	675	British T-H. Co. Brush Co.
Cheltenham and District ..	Aug., 1901	10·22	12·25	3 6	80 & 90 G	8·9	37	20	2	2	V. Cp.	..	Westinghouse
Chester Corporation..	April, 1903	3·59	6·4	3 6	94 & 100 G	23	40	18	*7	6 1	V. Cp. C. V. Tri. Ex C	240	Blackwell & Co. British T-H.
Chesterfield Corporation	Dec., 1904	3·6	5·1	4 8½	96 & 101 G	20	40	17	4	4	V. Cp. C.	800	Milnes & Co. Westinghouse Brush
Clontarf and Hill of Howth ..	July, 1900	5·5	6·5	5 3	90 & 60 G	13	34	12	..	..	..	..	W.M. Murphy & Co.
Colchester Corporation	July, 1904	6	7·94	3 6	95 G	12	43	18	8	8	V. Cp.	1,140	Dick, Kerr & Co. J. G. White & Co.
Colne Corporation Tramways ..	Nov., 1903	5·2	6·7	4 0	102 G	13	60	13	*	..	..	..	Blackwell & B.T-H. Glover & Co.
Cork Elec. Try. & Lighting Co. ..	Dec., 1898	10	15	2 11½	83 G	14	26	35	*9	9	H. Cp. C.	570	British T-H. Blackwell & Co.
Coventry Corporation Tramways..	Dec., 1895	12·88	15·81	3 6	65 G 81 G	16	35	51	5	3	H. & V. Cp.	1,500	Westinghouse Blackwell & Co.
Croydon Corporation	Sept., 1901	11·87	19·12	4 8½	96·5 G	16	40	75	*13	13	..	2,000	British T-H. Co.
Darlington Corporation	June, 1904	4·875	8·88	3 6	90 G	14	52·8	18	1	..	..	250	Westinghouse

* Current from combined lighting and traction station. (1) Third rail system. † Includes 1·25 miles railless trolley line. ‡ Includes 20 railless cars.
M—Motor Cars. T—Trail Cars.

Digitized by Google

ELECTRIC TRAMWAYS & RAILWAYS.—Particulars of Track and Equipment.

Location of Line and Name of Operating Company.	Date of Opening of First Section.	Length of Route.	Total Length of Track.	Gauge.	Weight and Type of Rail.	Maximum Gradient.	Sharpest Curve.	No. of Motor Cars	No. of Dynamos	No. of Engines	Type of Engines.	Total Capacity Traction, kw.	Principal Contractors for Electrical Equipment.
TRAMWAYS—*continued.*				ft. in.	lbs.	1 in	ft. rad.						
Dartford U. D. C.	Feb., 1906	6·5	8·5	4 8½	100 G	12	35	12	4	..	..	..	British I. W.
Darwen Corporation	Oct., 1900	4·36	7·16	4 0	95 G	9	35	19	*4	4	H. Cp.	..	British T-H.
Derby and Ashbourne	..	14·5	..	4 8½									J. G. White & Co.
Derby Corporation	July, 1904	13	22·06	4 0	95 G	14	46	50	3	3	Turb.	..	Brush & B.T-H.
Devonport Corporation	June, 1901	..	7	3 6	97 G	10	50	12	..	..	..	..	Blackwell & Co.
Doncaster Corporation	June, 1902	8·25	12·52	4 8½	94 G	16	45	32	8	8	..	1,000	Blackwell & Co.
Dover Corporation	Sept., 1897	4·75	7	3 6	87 & 90 G	10	44	24	*2	2	H.CC.	..	D. K. & B. T-H
Douglas—Port Soderick .. Douglas Southern Elec. Trys. Co.	Aug., 1896	3·25	3·75	4 8½	65 V	12	45	8 M 8 T	2	2	H. Cp.	200	Westinghouse British T-H.
Dublin & Lucan Elec. Railway Co.	March, 1900	6·5	7	3 6	50 V	20	27	9 M 5 T	2	2	H.Cp.C.	240	Dick, Kerr, & Co.
Dublin United Tramways Co.	May, 1896	49·8	95·26	5 3	105 G	12·3	22	365	8	8	Cp & Tur	5,500	Dick, Kerr, & Co. Blackwell & Co, British T-H.
Dudley and Stourbridge Trys. British Electric Traction Co.	July, 1899	22·88	30·97	3 6	90 G	11	50	59	4	4	H. Cp.	..	British T-H. Blackwell & Co.
Dumbarton	Feb., 1907	13	17	4 7¾	90 & 96	14	60	30	3	3	..	..	Dick, Kerr, & Co.
Dundalk	Under cons.	6	6·25	3 6	97 G	10	50	12					White & B.T-H.
Dundee, Broughty Ferry, and District	Dec., 1905	4·125	7·25	4 8½	90 G	16·5	30½	14	3	3	V.Cp.C.	..	J. G. White & Co. British T-H. Co.
Dundee Corporation	July, 1900	16·3	30·25	4 8½	90 & 100 G	10	35	76	5	5	..	..	Blackwell & Co.
Dunfermline (Fife Try. & Power Co.)	Nov., 1909	14·6	17·4	..	90 G	10	25	28	..	..	..	..	British T-H.
East Ham Corporation	June, 1901	7·58	14·20	4 8½	90 & 105 G	25	40	45	*5	5	H. Cp.	750	Dick, Kerr, & Co.
Eccles Corporation	May, 1902	5	7·75	4 8½	100 G	..	..	..	..	..	..	..	
Edinburgh and District	June, 1910	1·25	1·5	4 8½	100 G	21	54	4	..	..	..	..	Dick, Kerr, & Co.
Erith Urban District Council	Aug., 1905	4·7	8·4	4 8½	100 G	17	40	17	3	5	..	..	Brush Co. WestinghouseCo.
Exeter Corporation	April, 1905	4·875	7	3 6	90 G	11·5	35	24	*4	4	H. Cp.	..	Dick, Kerr, & Co.
Falkirk and District	Oct. 1905	7·81	10·5	4 0	90 G.	11·3	48	18	*	..	..	..	Bruce-Peebles British T-H.
Farnworth Urban District	Jan., 1902	4·33	7·16	4 8½	98 G	29	36	..	..	..	..	..	
Felixstowe Pier	Aug., 1905	0·5	0·5	3 6	36	..	..	3	..	..	..	..	
Gateshead and District	May, 1901	12·38	20·02	4 8½	90 G	8	35	55	*	..	..	..	Dick, Kerr, & Co. Blackwell & Co.
Giant's Causeway Elec. Try. Co.	Sept., 1883	8	9	3 0	42 V 75 G	24	30	5 M 21 T	2	2	Hyd.Turb.	..	Siemens Bros. British T-H.
Glasgow Corporation	Oct., 1898	99·26	198·13	4 7¾	110 G	11·93	30¾	857	8	8	V.Cp. & T	21,700	British T-H. Westinghouse
Glossop Urban District	Aug., 1903	4·56	5·6	4 8½	90 G	13	40	8	4	4	V. Cp.	200	British T-H.
Gloucester Corporation Light Rly.	May, 1904	9	15	3 6	90 G	25	40	30	*2	2	Cp.	750	Brush Co. Dick, Kerr, & Co.
Gosport & Fareham Trys. Co.	Jan., 1906	7·5	11·5	4 7¾	96 G	16	37½	22	3	3	V.Cp.C.	750	Dick, Kerr, & Co.
Gravesend and Northfleet	Aug., 1902	6·5	9	4 8½	87 G	11	45	18	*				Brush Co.
Great Crosby	June, 1900	2·5	2·5	4 8½	92½ G	..	40	14	*7	7	H. & V.Cp.	160	Dick, Kerr, & Co. Blackwell & Co.
Great Grimsby	Dec., 1901	6	11	4 8½	90 G	15	26	32 M 6 T	3	3	..	400	Dick, Kerr, & Co.
Greenock and Port Glasgow	Oct., 1901	7·425	14·05	4 7¾	90 G	11	60	42	*	..	..	..	
Guernsey Railway Co.	Nov., 1892	3	3	4 8½	74 V 84 G	60	60	9 M 8 T	2	1	H. & V. Cp.	160	Siemens Bros. British T-H.
Halifax Corporation	June, 1898	37·53	55·5	3 6	95½ G	9·5	38·6	101	*7	7	H. & V. Cp. & T.	3,000	Electric Cons. Co. British T-H.
Hampshire Light Railway (Elec.) Co.	March, 1903	6	9	4 8½	..	..	..	10	*	..	..	..	
Haslingden Corporation	July, 1908	3	3	4 0	100 G	10	30	..	..	..	..	45	Dick, Kerr, & Co.
Hastings and District	July, 1905	19·33	34	3 6	90 G	8	30	65	6	6	V. Cp.	2,100	Dick, Kerr, & Co.
Herne Bay Pier (1)	March, 1899	·75	·75	3 0	60	..	..	3	1	1	Gas	50	British T-H.
Heywood Corporation	Dec., 1905	4·25	4·25	4 8½	90 G	17	..	..	1	1	..	300	Blackwell & Co. B.I. & H.C. Co.
Houghton-le-Spring (See Sunderland Dist. Elec. Trys.)													
Huddersfield Corporation	Feb., 1901	34·50	56	4 7¾	98 G	11	35	106	4	4	V.Cp.C.	2,200	British T-H.
Hull Corporation	July, 1899	13·46	30·5	4 8½	94 G	20	30	180	7	7	V.Cp.C.	2,560	British T-H. Westinghouse
Ilford Urban District	Mar., 1903	7·42	12·62	4 8½	95 G	13	33·3	28	*7	7	..	1,600	British T-H. Dick, Kerr, & Co.
Ilkeston Corporation	May, 1903	3·8	4·3	3 6	90 G	12	28	13	..	..	..	..	Dick, Kerr, & Co.
Ipswich Corporation	Nov., 1903	10·8	14·87	3 6	90 G	11·5	40	36	*10	10	Enclos'd	1,175	Westinghouse
Isle of Man— Manx Elc. Rly. Co. Douglas to Ramsey	July, 1893	18	35·75	3 0	62½ V	24	90	34 M 29 T	8	9	H. Cp.	1,300	Mather & Platt
Manx Elc. Rly. Co. Snaefell Mountain	Aug., 1895	4·5	9·5	3 6	56 V	12	90	6	5	4	H. Cp.	390	
Isle of Thanet Trys. & Ltg. Co.	April, 1901	11	20·67	3 6	90 & 100 G	11	38	59	*6	6	3 V. Cp. 3 H. Cp.	800	British T-H. Blackwell & Co.
Jarrow and District	Nov., 1906	2·54	3·42	4 8½	95 G	12·5	50	10	..	..	..	..	Brush Co. B.I. & H.C. Co.
Kearsley Urban District	Jan., 1902	1·75	1·75	4 8½	95 G	20	..	..	..	..	..	..	Westinghouse
Keighley Corporation	Oct., 1904	3·5	6·11	4 0	95 G	25	60	12	*4	4	V.	200	Blackwell & Co. Brush & B.T-H.
Kidderminster—Stourport British Electric Traction Co.	May, 1898	4·6	4·87	3 6	75 G	14	45	13	*5	5	Stm Turb.	..	Brush Elc.Eg.Co
Kilmarnock Corporation	Dec., 1904	4·18	5·5	4 8½	90 G	24	45	14	*3	3	..	250	Blackwell & Co.
King's Norton & Northfield U. D.	May, 1904	5·25	8·25	3 6	105 G	15&21	100&145	..	..	..	..	..	Blackwell & Co.
Kinver	April, 1901	4·25	6	3 6	63 & 90 G	..	..	6					
Kirkcaldy Corporation	Feb., 1903	6·11	8·56	3 6	100 G	11	40	26	*10	6	Cp.H.T.	2,290	British T-H. Co
Lanarkshire Tramway Co.	July, 1903	28·431	43·120	4 7¾	96 & 101 G	9·4	37	76	4	4	3 H. Cp. 1 V. Cp.	825	British T-H. Co
Lancashire United Tramways Co.	Oct., 1902	39	54	4 8½	90 G	15	50	82	*8	8	V.Cp.C&T	7,000	B. I. W. Co.
Lancaster Corporation	Jan., 1903	4	4·81	4 8½	90 G	8	30	12	4	4	V. Cp.	200	Greenwood & Batley, Ltd.
Leamington & Warwick Elec. T. Co.	July, 1905	3·04	6·1	3 6	65 G	12	47	12	3	3	Cp.	..	Brush Co.
Leeds City	Aug., 1897	69·02	114·62	4 8½	105 & 111 G	8·4	32	345	5 3	5 3	H. Cp C. Stm. Tur	6,150	Elec. Con. Co. Greenwood & Batley, British T-H. Blackwell & Co

* Current from combined lighting and traction station. (1) Third Rail system. M—Motor Cars. T—Trail Cars.

Digitized by Google

ELECTRIC TRAMWAYS & RAILWAYS.—Particulars of Track and Equipment.

Location of Line and Name of Operating Company.	Date of Opening of First Section.	Length of Route.	Total length of Track.	Gauge.	Weight and Type of Rail.	Maximum Gradient.	Sharpest Curve.	No. of Motor Cars.	No. of Dynamos	No. of Engines	Type of Engines.	Total Capacity Traction, kw.	Principal Contractors for Electrical Equipment
TRAMWAYS—*continued.*				ft. in.	lbs.	1 in	ft. rad.						
Leicester Corporation	May, 1904	20·25	38	4 8½	100 G	16	35	160	7	7	V.Cp.C&T	9,250	Dick, Kerr, & Co. / Blackwell & Co.
Leith Corporation	Aug., 1905	9·08	17·9	4 8½	106·7 G	19	54	37	*11	11	..	1,600	Brush & B.T-H.
Leyton Urban District	Dec., 1906	8·95	17·694	4 8½	105 & 111 G	24	45	60	*4	4	Cp.T.E&T	2,040	..
Lincoln Corporation (1)	Nov., 1905	1·75	2·96	4 8½	100 G	..	36	8	*9	9	..	120	Blackwell & Co.
Liverpool Corporation	Nov., 1898	70	127	4 8½	95, 123 & 134 G	13	30	599	*42	42	Trip.Ex.	44,600	British T-H. / Dick, Kerr, & Co. / Westinghouse
Liverpool Overh'd Ry. (Trol.Ln.Ex.)	June, 1900	2·5	2·5	4 8½	92½ G	Nil	40	14	7	7	H.&V.Cp.	160	Dick, Kerr, & Co.
Llandudno and Colwyn Bay ..	Oct., 1907	8·37	13·60	3 6	90 G	11·5	45	18	*	..	..	..	Bruce-Peebles.
Llanelly and District	July, 1911	6·25	6·75	4 8½	90 G	11·2	60	12	*2	2	Trip.Ex.	..	British T-H.
London County Council (2) ..	May, 1903	148·56	287·35	4 8½	105 G	10·6	45	1725M / 150T	8	8	V. Cp. C. Turbine	43,000	Dick, Kerr, & Co. / Westinghouse
London United Tramways Co. ..	April, 1901	55·25	102·45	4 8½	92½ & 100 G	18	28	339	7	5	V. Cp.	3,500	British T-H. / Westinghouse. / Blackwell & Co.
Lowestoft Corporation	July, 1903	4·75	5·07	3 6	100 G	27	36	19	*5	5	Cp.	..	Blackwell & Co.
Luton Corporation Tramways (Leased to J. G. White & Co., Ltd.) ..	Feb., 1908	5·25	6·25	4 8½	95 G	11	35	12	*1	1	..	..	J. G. White & Co. / British T-H.
Maidstone Corporation	July, 1904	5·5	7·04	3 6½	96 G	9	35	19	3	3	..	750	Dick, Kerr & Co.
Manchester Corporation	June, 1901	120·05	244	4 8½	105 G	14·9	35	685	*22	22	Turb'nes	45,300	British T-H. / Dick, Kerr, & Co.
Mansfield and District Co. ..	July, 1905	10	12·25	4 8½	90 G	17	50	24	*3	3	..	..	
Merthyr	April, 1901	3·69	4·81	3 6	96 G	11	66	16	*4	4	H.S.V.	..	D. K. & B. T-H
Metropolitan Electric Trys., Ltd.	July, 1904	56·25	112·5	4 8½	100 G	12	40	312	5	5	1 Stm. Tur	..	British T-H. / Brush Co.
Mexborough & Swinton Trys. Co.	Feb., 1907	7·75	10·75	4 8½	90 G	8·5	55	20	4	4	Turb.	700	Brush & B.T-H.
Middlesbro', Stockton, & Thornaby Electric Tramways Co.	July, 1898	10·5	15·825	3 6	92½ G	17	35	60	3	4	H.&V.Cp.	900	British T-H. / Blackwell & Co.
Middlesex County Council	Aug., 1904	25·5	51	4 8½	..	..	..	..	..	..	..	..	
Middleton Corporation	March, 1902	2·5	5	4 8½	..	..	..	..	..	..	..	..	
Middleton Electric Traction Co. ..	March, 1902	8·5	10·53	4 8½	90 G	15	49½	28	3	3	..	500	Glover & Co.
Morecambe	Jan , 1912	1·20	..	4 8½	96 G	18	..	4	..	..	..	..	
Musselburgh and District ..	Dec., 1904	6·5	8·125	4 8½	90 G	34	45	16	4	3	..	400	B. T-H. Co., Nat. Elec. Cons. Co
Nelson Corporation	Feb., 1903	2·74	3·86	4 0	106 G	11	41	11	*4	4	..	400	Blackwell & Co. / British T-H. Co. / Brush Co.
New St. Helens & District Trys. Co.	July, 1899	18	20	4 8½	95 G	13	35	36	*4	4	V. Cp. C.	..	Westinghouse / British T-H.
Newcastle Corporation	Dec., 1901	32·75	62·875	4 8½	101 G	11	37	220M / 2 T	6	6	V.Cp.Trip. Ex.&Turb.	11,000	Westinghouse / British T-H.
Newport (Mon.) Corporation ..	April, 1903	7·5	14·35	4 8½	98 G	10·5	40	44	5	5	V. Cp.	1,750	Westinghouse
Northampton Corporation	July, 1904	6·5	11·16	3 6	90 & 96 G	18	50	33	4	4	V.C.C.&T	1,020	Dick, Kerr, & Co. / Brush Co.
North Shields Tramways Co. ..	March, 1901	..	7·75	3 6	90 G	10	36	22					
North Staff. Trys. (*vide* Potteries)													
Norwich Electric Tramways Co. ..	July, 1900	14·5	19·25	3 6	65½ & 90 G	12·6	38	42	6	5	H.TCp&T	1,000	Westinghouse / Blackwell & Co.
Nottingham Corporation	Jan., 1901	21·5	41·5	4 8½	107 G	11·5	40	155	*3	3	..	..	British T-H. / Dick, Kerr, & Co.
Nottinghamshire & Derbyshire Tramways Co.	Aug., 1913	12·8	16·10	4 8½	G	..	..	24	*	..	..	..	British T-H.
Oldham, Ashton & Hyde Trys. Co.	June, 1899	9·12	11·75	4 8½	97 G	11	28	46	*3	3	V.Cp.C.	..	British T-H.
Oldham Corporation	Dec., 1900	24	37	4 8½	100 & 105 G	10·5	40	109	*4	4	..	2,220	Dick, Kerr, & Co.
Paisley & District Tramways Co.	June, 1904	18·25	32·50	4 7½	90 G	10	34	60	..	..	..	..	British T-H.
Perth Corporation	Oct., 1905	4·846	6·75	3 6	90 G	16	25	12	5	5	Cp.	500	Blackwell & Co.
Peterborough Elec. Traction Co. ..	Jan., 1903	5·33	6·71	3 6	94 G	31	35	14	..	..	..	..	Blackwell & Co. / Dick, Kerr, & Co
Plymouth Corporation	Sept., 1899	7·75	15	3 6	92 G	9	35	42	3	3	V. Cp.	..	Elec. Cons. Co. / Westinghouse
Plymouth, Stonehouse, and Devonport	Nov., 1901	1·5	3·62	3 6	84 G	11	34	15	..	..	..	..	Blackwell & Co. / Dick, Kerr, & Co
Pontypridd Urban District ..	March, 1905	5·5	8·6	3 6	96 & 100 G	10	27·6	26	4	5	V.C.Cp.	450	B.I.W. & B.T-H. / Blackwell & Co.
Portmadoc & South Snowdon Rly.	Under cons.	13·25	15	1 11½	41	28	200	6	..	..	..	..	
Portsdown & Horndean Tramway	March, 1903	6	7·5	4 7½	96 G	16	40	16	2	2	Oil	200	Dick, Kerr, & Co. / Brush Co.
Portsmouth Corporation	Sept., 1901	17·65	34·63	4 7½	96 & 100 G	17	35	100	5	4	V.& H.Cp.	2,075	Macartney & Co. / Dick, Kerr, & Co.
Potteries Electric Traction Co. ..	May, 1899	31·67	41·48	4 0	87, 90, 100, & 110 G	11	45	110	8	8	H.Cp. / V.Cp.	2,275	Dick, Kerr, & Co. / Blackwell & B.T-H.
Preston Corporation	June, 1904	10·54	17·2	4 8½	B.S.S. No. 2	16	28	39	2	2	H. Cp.	600	Dick, Kerr, & Co.
Radcliffe Urban District ..	April, 1905	5	6·5	4 8½	100 G	15	40	..	*4	4	V. Cp.	600	Mather & Platt
Rawtenstall Corporation	May, 1909	12	15·9	4 0	100 G	15	38	24	*3	3	..	850	Westinghouse
Reading Corporation	July, 1903	7·44	13·175	4 0	96 G	16	35	36	4	4	V. Cp.	400	Blackwell & Co. / Dick, Kerr, & Co / Westinghouse
Rhondda Tramways Co.	July, 1908	21	28·75	3 6	95 G	9	38½	54	7	4	Trip.Ex.	1,230	British T-H. / Brush
Rochdale Corporation	May, 1902	19·58 (A)	22·74 (A)	4 8½	103½ G	11·7	30	69	*	..	..	..	British T-H. / Dick, Kerr, & Co / Brush Co.
Rotherham Corporation	Jan., 1903	10	12	4 8½	100 G	9·5	45	36	*6	6	H.S.Cp.	1,485	Dick, Kerr, & Co.
Rothesay	June, 1902	4·81	9·68	3 6	94 G / 77 G	24	34	20	3	3	V. & Oil	350	Dick, Kerr, & Co / Westinghouse
Ryde Pier, Isle of Wight Ryde Pier Co. (3) ..	March, 1886	·5	1	4 8½	30 & 34 V	..	..	4	2	2	Gas	..	Siemens Bros.
Salford Corporation	Oct., 1901	41·90	75·79	4 8½	103 G	20	42·5	220	*7	7	C. & Turb.	3,000	Westinghouse / Mather & Platt
Scarborough Tramways Co. ..	May 1904	5	7·75	3 6	90 G	10·5	35	22	2	2	Stm.Turb.	..	Brush & B.T-H.
Sheerness and District	April, 1903	2·5	2·704	3 6	94 G	43	40	8	6	5	V.Cp.C.	100	Siemens & Halske / Brush Co.
Sheffield Corporation	Sept., 1899	40	77·84	4 8½	110 & 120	9·5	35	339	..	..	..	..	British T-H.

* Current from combined lighting and traction station. (1) G.B. surface contact system. (2) Mainly Conduit system, but there are now several Trolley lines. Besides the electric lines the London County Council has also 4·45 route miles of horse tramways. (3) Third rail system. (A) Not including 17·1 miles track leased.
M—Motor Cars. T—Trail Cars.

Digitized by Google

ELECTRIC TRAMWAYS (contd.).	Date of Opening of First Section.	Length of Route.	Total Length of Track.	Gauge.	Weight and Type of Rail	Maximum Gradient.	Sharpest Curve.	No. of Motor Cars.	No. of Dynamos	No. of Engines.	Type of Engines.	Total Capacity Traction, kw.	Principal Contractors for Electrical Equipment.
				ft. in.	lbs.	1 in	ft. rad.						
Shipley Urban District	May, 1902	6	10	4 0	98 G	15	..	..	6	6	Turbine	1,800	British T-H.
Soothill Nether U.D.C. & Dewsbury & Ossett Corporations	Nov., 1908	3·125	4·45	4 8½	90 G	13	50	8	*	..	..	..	Nat. Elec. Cons. Co.
Southampton Corporation	Jan., 1899	10·25	18·75	4 8½	{96 G & 105 B.S. No. 4}	13	40	73	6	6	H. Cp. C.	1,000	Westinghouse
Southend Corporation	July, 1901	7·01	13·52	3 6	90 G	18	48	42	*6	7	V. Cp.	2,075	British T-H.
Southend Pier (1) Southend Corp.	Aug., 1890	1·25	1·25	3 6	60 G	Lev.	..	28	..	..	..	..	British T-H.
South Metropolitan Elec. Try. Co.	Feb., 1906	13·09	26	4 8½	95 G	16	42	51	*8	6	Stm Tbs	1,650	Dick, Kerr & Co. / Brush Co.
Southport Corporation (5)	July, 1900	13·5	10·75	4 8½	87 & 90 G	25	45	30	*3	3	H. Cp.	600	Dick, Kerr, & Co.
Southport Electric Tramway Co.	July, 1901	8·17	12·52	4 8½	87 G	Nil	40	21	*				
Southport Pier	1905	..	·75	4 0	..	..	..	1 M 2 T	..	..	..	..	Westinghouse
South Shields Corporation	March, 1906	5·7	10·25	4 8½	95 G	15	35	40	2	2	V. Cp. C.	1,100	Dick, Kerr & Co.
South Staffordshire	Jan., 1893	16·90	26·87	3 6	97 & 90 G	17	46	46	3	3	C. H. Cp.	..	Blackwell & Co. / E. C. C.
Stalybridge, Hyde, Mossley, and Dukinfield	May, 1904	21·186	27·75	4 8½	99 G	9	27½	59	8	..	Turb.	1,000	Dick, Kerr, & Co.
Stockport Corporation	Aug., 1901	16	27·62	4 8½	96 G	10·8	35	50	*5	5	Cp.	1,000	Dick, Kerr, & Co.
Sunderland Corporation	Aug., 1900	10·92	20·35	4 8½	96 G	12	36	70	*	..	..	936	Dick, Kerr, & Co.
Sunderland District Electric Trys.	June, 1905	14·27	15·97	4 8½	90 G	11	40	33	*	..	..	..	British T-H.
Sutton & Howth (G.N.R., Ireland)	June, 1901	5·3	6	5 3	72 B	16·7	300	11	3	3	V. Cp.	500	British T-H. / Westinghouse
Swansea Tramways Company	June, 1900	13·02	20·38	4 8½	84 & 86 G	14	45	75	3	3	H. Cp. C.	620	British T-H.
Swindon Corporation	Sept., 1904	3·7	4·4	3 6	105 G	14	37	12	5	4	..	600	Dick, Kerr & Co.
Taunton Electric Traction Co.	Aug., 1901	1·66	2	3 6	90 G	25	35	6	*	..	..	..	Blackwell & Co.
Torquay Tramways	April, 1907	9·76	17·04	3 6	90 G	10	31	33	*	..	..	..	British T-H.
Trafford Park Estates, Ltd. (Trys.)	July, 1903	2·5	2·75	4 8½	100 G	Nil	35	..	..	..	..	..	
Tynemouth and District	March, 1901	4·21	7·83	3 6	90 G	10	30	21	*3	3	..	..	Blackwell & B.T-H.
Tyneside Tramways & Tramroads Co.	Sept., 1902	10·97	16·23	4 8½	95 G	10	40	24	*				
Wallasey Corporation	March, 1902	12	20	4 8½	98 G	11	40	67	*1	1	Turbine	1,000	Blackwell & Co.
Walsall Corporation	Jan., 1904	13·5	19·5	3 6	90 & 92 G	18·5	32	39	*7	7	V. & Tur.	2,490	British T-H.
Walthamstow U.D.C. Light Rly.	June, 1905	9·14	12·53	4 8½	100 G	18	40	38	*15	12	{Gas & Turb's}	1,560	Westinghouse
Walton-on-Naze Pier	Aug., 1898	·5	·5	3 6	36 V	..	..	3	3	2	..	100	Blackwell & Co.
Warrington Corporation	April, 1902	6·5	9·6	4 8½	90 G	27	50	21	*6	6	V.C.	500	British T-H.
Wemyss and District	Aug., 1906	7·5	13	3 6	{95 & 97 G}	18	85	17	3	3	2 V. Cp.	..	Bruce Peebles & Co
West Bromwich Corporation	Dec., 1902	7	12·5	3 6	98 G	20	49	29	8	8	Turb'nes	750	Dick, Kerr, & Co.
West Ham Corporation	Feb., 1904	16·8	30·0	4 8½	100 G	18	40	118	*3	3	V.C.Cp.	1,500	B. I. W. Co.
West Hartlepool Corporation	May, 1896	6·72	8.3	3 6	87 & 90 G	15	35	25	*	..	..	..	Brush & B.T-H.
Weston-super-Mare	May, 1902	2·92	3·53	4 8½	90 G	25	40	12	5	4	Cp. & T.	..	Elec. Cons. Co. / Dick Kerr & Co.
Wigan Corporation	Jan., 1901	30·9	45·42	{3 6 / 4 8½}	105 G	12	45	73	*8	8	..	740	Blackwell & Co. / British T-H. / Brush Co.
Wolverhampton Corporation (3)	April, 1902	13·5	22	3 6	91 G	15	37·5	52	*10	10	{H. & V.C. & Turb's}	2,900	Blackwell & Co.
Wolverhampton District	Oct., 1900	15·51	22·72	3 6	90 G	20	40	30	*4	..	..	..	British T-H. / Electric Cons. Co.
Worcester Electric Traction Co.	Feb., 1904	5·86	8·58	3 6	94 G	13	45	15	*3	3	..	..	B.I.W. & B.T-H. / Westinghouse
Wrexham and District	April, 1903	4·44	6·16	3 6	96 G	9·11	50	10	*6	..	..	..	Brush Co. / Dick, Kerr, & Co.
Yarmouth Corporation	June, 1902	10	14·4	3 6	90 & 95 G	27	48	35	3	3	Comp.	..	British T-H.
York Corporation	Jan., 1910	6	9·9	3 6	100	18	40	3 M. 4 T.	*8	8	V.C.	..	Brush Co. / B.I.W. Co.
Yorkshire (West Riding)	Aug., 1904	24·69	40·382	4 8½	96 G	15·5	40	69	9	6	..	1,800	Dick, Kerr, & Co. / Brush & B.T-H.
Yorkshire Woollen District	Feb., 1903	22·25	36	4 8½	{94 & 100 G}	8	30	69	*	..	..	..	Dick Kerr & Co.
RAILWAYS.													Brush Co. / Dick, Kerr, & Co.
LONDON AND VICINITY:													
Central London Rly. Co. (1)	July, 1900	6·5	13	4 8½	100 V	30	..	68 M. 172 T.	6	6	H. Cp. C.	..	British T-H
City & South London Rly. Co. (1	Dec., 1890	7·25	14·75	4 8½	{60 V / 80 V}	30	120	52 L. 142 T.	(a)	..	..	..	Mather & Platt. / Elec. Cons. Co
East London Railway (2)	April, 1913	5·75	11·5	4 8½	90 B	..	..	(c)	..	..	..	..	British T-H.
Gt. Northern & City Rly. Co. (2)	Feb., 1904	3·5	7·75	4 8½	85 V	52	660	35 M 45 T	6	..	..	..	British T-H.
Great Western Railway (Hammersmith and City line.)	Nov., 1906	4·9	10·5	4 8½	97½ B	60	400	46 M. 80 T	10	10	V. Cp.	..	British T-H. / Elec. Con. Co.
London & North Western Rly. (Euston-Watford line in progress) (2)	May, 1914	41·5	80	4 8½	..	..	..	..	..	..	Turbine	..	Siemens Works / Westinghouse
London & South Western Rly.	Nov., 1915	47	150	4 8½	..	..	168	84	..	..	Turbine	..	Dick, Kerr & Co. / British T-H. / Westinghouse
London, Brighton, and South Coast Railway (4) (Extensions in progress)	Dec., 1909	22	70	4 8½	..	..	..	16 M. 8 T.	*(d)	..	..	..	British T-H. / Blackwell & Co.
London Electric Railway Co.: Baker St. & Waterloo Ry. (2)	March, 1906	7	14·0	4 8½	90 B	60	330	36 M. 72 T.	(a)	..	..	..	Westinghouse / British T-H.
Charing Cross—Hampstead Railway (2)	June, 1907	8	16·5	4 8½	90 B	33	330	60 M. 90 T.	(a)	..	..	..	Westinghouse / British T-H.
Great Northern, Piccadilly & Brompton Rly. (2)	Dec., 1906	9·25	18·5	4 8½	90 B	33	330	72 M. 144 T.	(a)	..	..	..	Westinghouse / British T-H.
Metropolitan Railway (2)	Jan., 1905	26	59	4 8½	86 B	44	363	86 M. 172 T.	4	4	Turbine	..	Westinghouse / British T-H.
Metropolitan District Railway (and running powers) (2)	July, 1905	41	80·46	4 8½	86 B	40	330	234 M. 336 T.	(a)	..	Turbine	..	British T-H. / Westinghouse
Waterloo and City Rly. (1)	Aug., 1898	1·5	3	4 8½	87 B	30	321	17 M. 12 T.	6	6	V. C.	..	Siemens Bros. / Dick, Kerr & Co.
PROVINCES:													
Lancashire and Yorkshire (2) (Extensions in progress)	March, 1904	43	85	4 8½	86 B	85	840	38 M. 52 T.	6	5	{1 V.C. / 4 H.C.}	..	Dick, Kerr, & Co.
Liverpool Overhead Rly. Co. (1)	March, 1893	6·5	13·05	4 8½	60 V	40	429	46 M 7 T	7	7	{H. Cp. / V. Cp.}	..	Electric Cons. Co. / Dick, Kerr, & Co.
Mersey Railway (1)	April, 1903	4·5	9	4 8½	86 B	27	528	24 M. 87 T.	5	5	V. Cp.	..	Westinghouse
Midland Rly.—Morecambe and Heysham Branch (4)	June, 1908	9·75	19·5	4 8½	..	..	..	2 M. 6 T.	4	4	Gas.	..	Westinghouse / Siemens Bros.
North Eastern Railway (1)	March, 1904	..	..	4 8½	90 B	..	..	..	(b)	..	..	..	British T-H. Co.

*Power from combined lighting and power station. (1) Third rail system. (2) Third and fourth rails system. (3) Lorain surface contact system. (4) Single phase. (5) Not including 9 miles owned but leased. (a) Power supplied by Chelsea Power Station (80,000 H.P.) (b) Power purchased from the Newcastle-upon-Tyne Electric Supply Company, Limited. (c) Rolling stock supplied by Metropolitan Railway. (d) Power supplied by London Electric Supply Corporation.
M—Motor Cars. T—Trail Cars.

Digitized by Google

PRESCOT INSULATORS

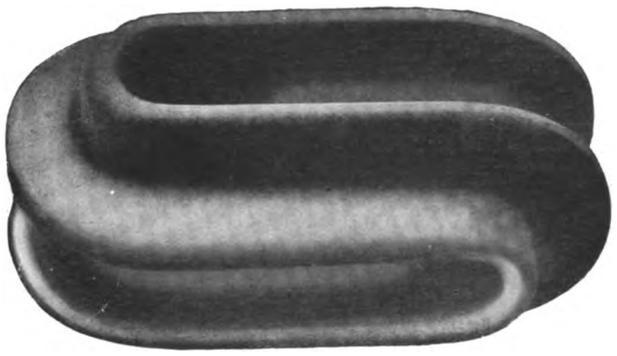

Regd. No. 639667/14.

These Insulators are insulators all through and do not depend on the attractive green glaze for their insulating qualities.

They are designed to maintain their alignment when erected, and their mechanical and electrical factors of safety are high.

The following are particulars of the sizes stocked:

	D 4411	D 4412
Working Load	500 lbs.	2,500 lbs.
Breaking Load	2,000 lbs.	10,000 lbs.
Flash over Voltage (dry)	20,000 A.C.	30,000 A.C.
Flash over Voltage (wet)	2,000 A.C.	10,000 A.C.

BRITISH INSULATED & HELSBY CABLES

LIMITED

CABLEMAKERS & ELECTRICAL ENGINEERS

PRESCOT, LANCASHIRE, and HELSBY, nr. WARRINGTON

Home Branches in : London, Manchester, Glasgow, Birmingham, Newcastle, Cardiff, Dublin, Belfast, and Leeds.

Overseas Branches in : Melbourne, Johannesburg, and Calcutta.

Agencies in : Amsterdam, Bombay, Buenos Ayres, Christiania, Hong Kong, Rangoon, Shanghai, Singapore, and Lisbon.

Digitized by Google

PHONO-ELECTRIC

TROLLEY WIRE

TOUGHNESS

is an essential feature in Trolley Wire, and it is secured in **Phono-Electric** without making the wire brittle. :: It is therefore suitable for the heaviest traffic, where its long-wearing qualities will be amply demonstrated.

The toughness in many Trolley Wires is only skin-deep, hence when this is removed, the rest wears out quickly. :: In Phono-Electric, the toughness exists throughout the entire section.

PHONO-ELECTRIC FOR HEAVY DUTY

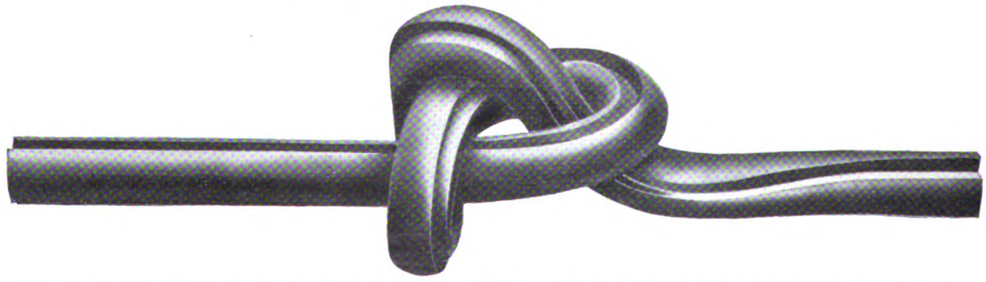

Booklet giving full particulars of tests and other data

THE EQUIPMENT & ENGINEERING CO.

2 & 3, Norfolk Street, Strand

LONDON, W.C.

Telephone City 1088 (2 lines)

Telegrams Kharparts, Estrand, London

Digitized by Google

The United Electric Car Co. Ltd.

Telegrams "Prescar, Preston." **WORKS: PRESTON, ENGLAND** Telephone No. — 219. —

MANUFACTURERS of Carbodies and Trucks for Steam and Electric Railways, Street Tramways and Light Railways; also of bodies for Motor Buses, Petrol Rail Motor Cars and Railless Electric Traction Cars.

SPECIALITIES: Preston Flexible Axle Truck, Preston Patent Destination Indicator, "Triumph" Reversible Seat, "Leatheroid," "Duroid," and Cotton Duck Blinds.

SPARE PARTS for both Carbodies and Trucks supplied.

THE AUTOBUS

IN THE TRAMWAY WORLD.

Motor Traffic Section.

When "The Tramway and Railway World" was founded in 1892, motor traction was, of course, scarcely dreamt of, but the avowed object of the paper was to encourage all new methods that gave promise of usefulness.

In pursuance of that policy the progress of motor traction received early attention. Commenting on the historic motor parade to Brighton in 1896, "The Tramway and Railway World" predicted that

"It would give a prodigious impulse to transport both by road and rail."

Within a decade this prophecy was abundantly fulfilled and so much space had been devoted to the new industry that in 1906 a special

MOTOR TRAFFIC SECTION

was added. Every illustrated issue thus contains a section devoted especially to motor cars for Public Service, and includes articles on current topics, illustrated descriptions of new types of vehicles and accessories, and the latest news.

Public Service Motor Cars.

The importance of this section will be gathered from the fact that an increasing number of the leading municipal authorities, railway and transport companies, now own and operate large fleets of motor vehicles, including omnibuses, chars-a-bancs, motor lorries for the transport of goods, parcel delivery vans, tower wagons, motor street sweepers, and a variety of other types.

ALFRED WILLIAMSON

TRAMWAY & RAILWAY TICKET PRINTER,

ASHTON-UNDER-LYNE.

THE 'WILLIAMSON' REGISTERING TICKET BELL PUNCH

TICKETS & **PUNCHES**

Supplied on the **Very Best Terms.**

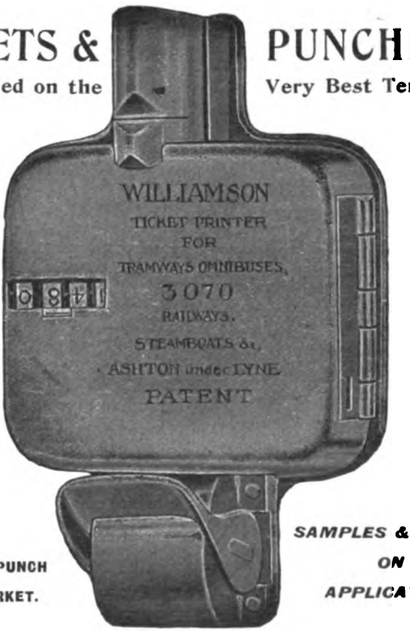

ESTABLISHED 1835.

Telephone: 320 Ashton under-Lyne.

THE STRONGEST PUNCH ON THE MARKET.

SAMPLES & PRICES ON APPLICATION.

PUNCHES ON SALE OR HIRE.

Digitized by Google

The BRITANNIA LAMP & ACCESSORIES CO. Ltd.

Telegrams: "Aetnaco, Barb., London" Telephone: City 1257 (2 lines)

"Britannia House"
48, Milton Street
LONDON, E.C.

Supply all Material for the
— complete equipment of —

Electric Railway, Tramway, and Transmission Lines



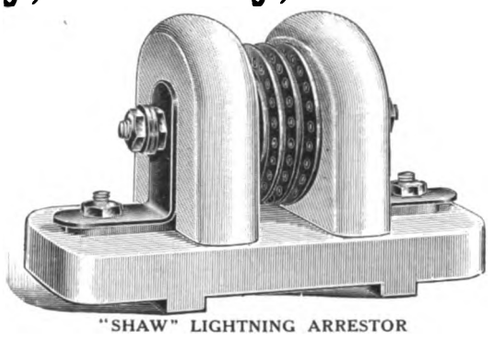

"SHAW" LIGHTNING ARRESTOR



SPECIFY "AETNA" INSULATION

Large Stock of Line Material, Porcelain Insulators, "Shaw" Lightning Arrestors,
Fuses, Tools, and Accessories for Traction and Transmission Lines

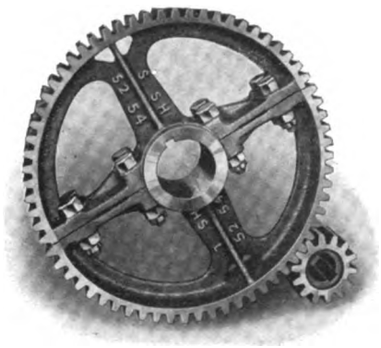

"HELE-SHAW."

BEST QUALITY MATERIAL.

ACCURATE WORKMANSHIP.

TEETH MACHINE-CUT FROM SOLID.

TURNED BOLTS FOR SPLIT WHEELS.

We manufacture the finest

GEAR WHEELS AND PINIONS FOR

ELECTRIC TRAMWAYS, RAILWAYS, etc.

ALL TYPES STOCKED SUCH AS

B.T.H., DICK-KERR, WESTINGHOUSE, BRUSH, etc.

CONTRACTS EXECUTED FOR L.C.C., MANCHESTER, LEEDS, SALFORD, SHEFFIELD, etc.

These Gears are made on specially designed Machines of our own manufacture, and our PRICES are unbeatable when QUALITY is taken into consideration. Send for further particulars to the Manufacturers:

B
H-S
The Mark of Excellence

The British Hele-Shaw Patent Clutch Co. Ltd.

Telephone: 1133
Telegrams: "Prehension, Oldham."

Suthers Street, OLDHAM, England

Digitized by Google

THE Tramway & Railway World
WITH MOTOR TRAFFIC SECTION

Founded 1892. LONDON, OCTOBER 12, 1916. VOL. XL.

A DIESEL-ELECTRIC COMBINATION FOR RAIL MOTOR CARS.

Favourable results have already been obtained with the petrol-electric system applied to railway service. Cars equipped on this system have been at work for some time on railways in this country, France, Egypt, and elsewhere. A new and important step has lately been taken by Continental manufacturers in the design and construction of Diesel-electric rail motor cars, that is, of cars whose axles are provided with electric motors that are worked by current from an electric generator driven by a direct-coupled heavy-oil internal combustion motor.

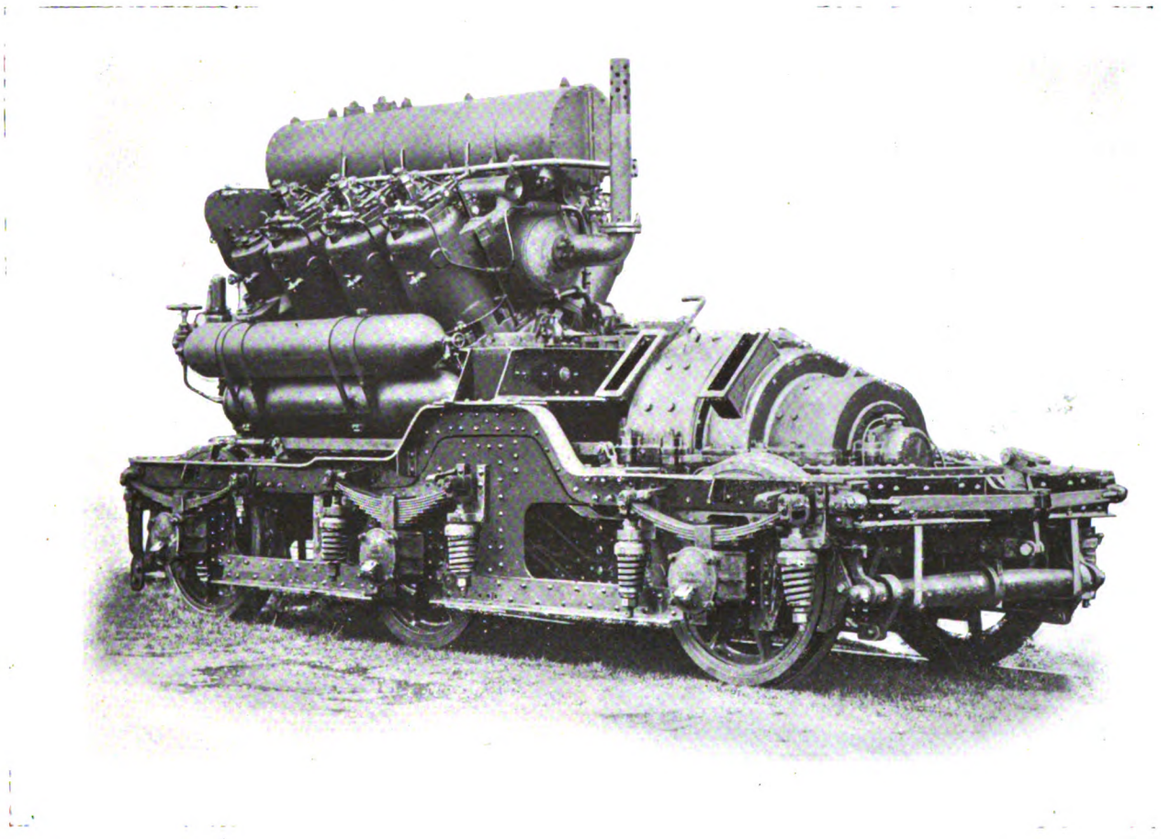

Truck with Diesel Motor, Electric Generator.

Two rail motor cars of this type were ordered before the war from the Brown Boveri Company by the management of the Saxon Railways, and the electrical part of the work on these was carried out by them, the mechanical apparatus (including the Diesel engines) being entrusted to the firm of Sulzer Brothers, of Winterthur.

On completion the cars were tested at first over the section of line between Rastatt and Gernsbach, and were afterwards put into regular work between Leipsic and Dresden, a distance of 80 miles. The final tests which were carried out on June 8, 1915, were continued from 8.30 a.m. until 4 p.m. with intermediate stops; the speeds obtained ranged up to 44 miles per hour on long stretches; and the tests generally gave such good results that the cars were at once put into regular service on the Leipsic-Dresden section. The fuel consumption per kilometre at a speed of 70-75 kilometres per hour is said to be 0·6 kilogram, so that as the oil tank carries about 400 kilograms of fuel, the car is able to travel for 650 kilometres or 400 miles without requiring fresh supplies of fuel.

Judging from these results, it seemed reasonable to anticipate for this method of traction a useful future, and in view of the special importance that it has for lines that must be equipped and worked with the minimum of cost, the constructive details of these cars merit the attention of railway managers and engineers, particularly in view of the pressing need for economy that will be felt after the war.

Digitized by Google

Each rail motor car has two trucks—the leading one with three axles, the rear truck with two. On the former is mounted a Diesel engine of special design direct-coupled to a continuous-current generator with exciter mounted on the same axle. The current from this generator at voltages varying between 200 and 380 volts is led to the traction motors mounted on the axles of the rear truck, in a manner already well known and used in the case of petrol motors, but with the great advantage of much lower cost of fuel, as well as increased safety in working, by reason of the use of Diesel oil with a much lower flash point.

The weight of each of these cars, which are of standard gauge, is approximately 65 tons, and as already stated, they can work up to a speed of 44 miles per hour. The passenger compartments are all third class and can carry up to 100 persons, 80 seated and 20 standing. The overall length is approximately 72 ft. The Sulzer-Diesel engine, complete with flywheel, fuel, oil, and compressed air tanks, &c., weighs about 9 tons only.

On the trailing truck are mounted the two continuous-current traction motors which are provided with a single magnet frame with two armatures. They are rigidly mounted on the truck, powerful leaf springs being fitted between the axles and truck framing. Connection from the motor axles to those of the truck is made by an intermediate geared axle and side rods to the truck wheels. The two motors can develop a joint output of 360 H.P. for a short period of overload, and 160 H.P. in continual service.

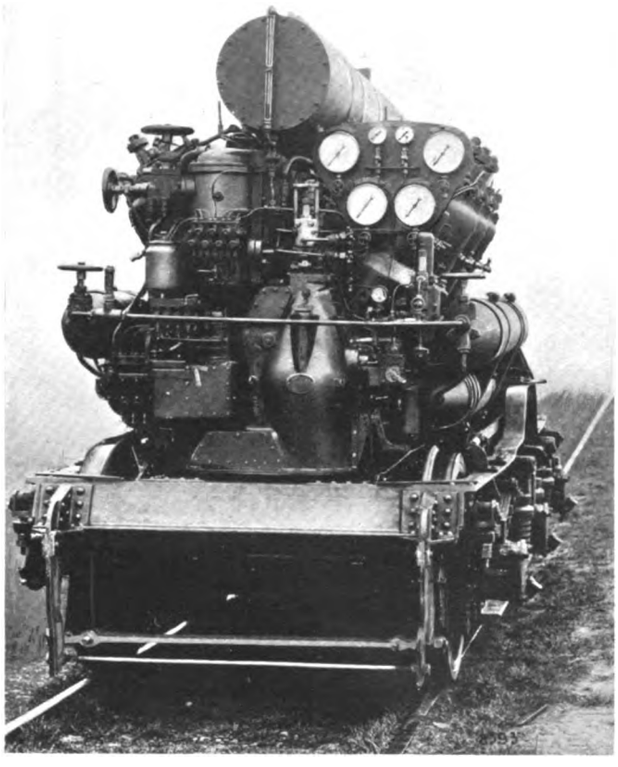

View of Truck showing Diesel Motor.

Protection is given to the Sulzer-Diesel engine and electric generator, carried on the forward truck on three axles (as in the case of ordinary motor cars), by means of a hinged sheet metal cover, which allows, however, of easy and rapid inspection. The engine is of the four-cycle Sulzer type with six cylinders, each 260 mm. diameter with stroke of 300 mm., set diagonally at an angle of 30 deg. with the perpendicular in order to reduce to a minimum the space occupied. Its output is 200 H.P. effective at 450 revolutions, but it can for a short period cope with an overload of 250 H.P. The crank axle is set parallel with the axis of the car

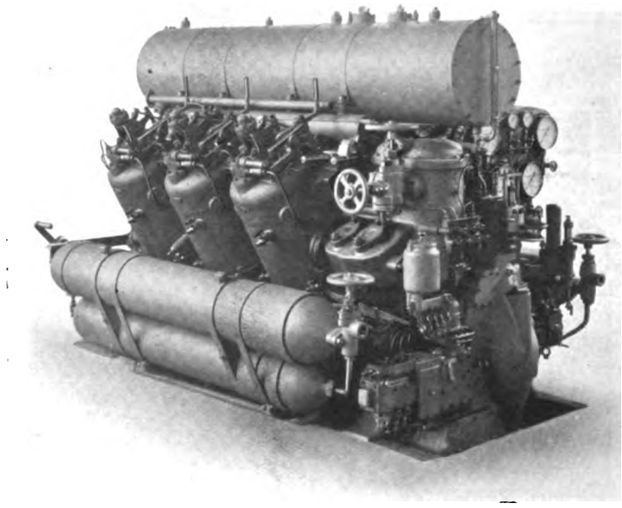

Diesel Motor Ready for Mounting on Truck.

and to the right and left under the cylinders are fixed reservoirs for compressed air. These furnish the supply for starting the engine and feeding in the fuel, and are kept filled by a compressor driven directly from the engine crank axle. The air used for starting is compressed to between 50 and 75 atmospheres.

The cylinders are cooled by water, which circulates through an air cooler after passing round the cylinder heads. On lines where car heating is desired, the cooling water can be led through radiators under the car seats, thus serving a double purpose.

The crank axle is coupled directly to the electric generator axle by means of a special elastic coupling designed by Messrs. Brown Boveri and Company with a view to eliminating the difficulty of vibration due to the irregular running of the engine. The same object is also aimed at by a special pneumatic regulation (applied from the driver's platform at either end of the car) of the fuel oil valves. This device—designed by Messrs. Sulzer—allows the engine revolutions to be reduced to 200 per minute when the car is at rest, thus giving considerable economy. The electric generator is designed for an output in steady working of 140 KW., but will run up to 190 KW. for one hour without excessive rise in temperature. The machine is entirely closed with the exception of two ventilation openings, through which cold air is drawn in through the windings and thereafter expelled.

The traction motors are started and regulated as to speed in a very economical fashion by a modification of the Leonard system. By varying resistances in the exciter armature circuit, the voltage of the generator is controlled and thereby the traction motors also.

A driver's cab is provided at each end of the rail car vehicle itself, so that it may be driven in either direction without requiring to be reversed. The cabs are, of course, fitted with all necessary apparatus for control and manœuvre, as well as electric measuring instruments for the generator and circuits generally. The exciter is coupled direct to the generator shaft, and has an output of 7·5 KW. at an E.M.F. of 70 volts. It serves not only to excite the generator field coils,

Digitized by Google

but also to drive the fan that cools the water for the engine cylinder jackets. Moreover, when the Diesel engine is running light, it can by means of the exciter be made to charge a battery of accumulators mounted under the body of the car. This battery has a capacity of 90 ampere-hours on a three-hour discharge, and serves both for lighting the vehicle and for operating train whistles or other signals. It is furthermore connected up to the field coils of the exciter, and therefore on starting up the engine the generator field can be at once fully excited.

Also worthy of note is a safety arrangement comprising an auxiliary block circuit which opens or closes the exciter main switch to generator fields, according as the said circuit itself is open or closed. This circuit is opened or shut by means of a contact connected with the controller handle, and the same action also takes place if the safety brake comes into play through a heavy overload on the two motors. Interruption of the auxiliary circuit also interrupts the exciter current, and therefore stops further supply to the traction motors. Besides this, the auxiliary circuit brings into action the compressed air brake in a few seconds after the current is interrupted.

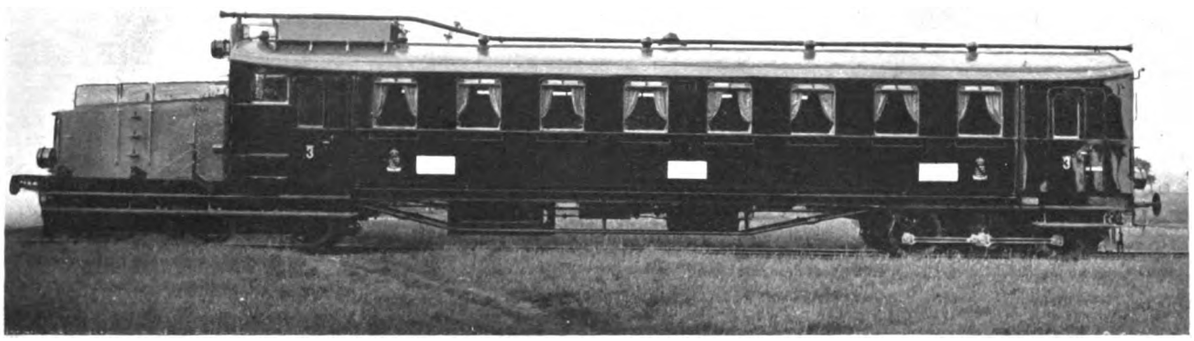

Diesel Electric Rail Motor Car.

The results obtained with this rail motor car both from tests and from actual working service have been so favourable that the makers have at present under construction three more rail motor cars and one locomotive, all employing the same type of arrangement, and they are also working out designs for locomotives and for rail motor cars both larger and smaller than those now described, to standard and to narrow gauge also. The rail motor cars are designed generally for powers of from 100 to 300 H.P.; beyond this capacity, it is preferred to employ locomotives carrying one or more Diesel engines which may develop up to as much as 2,000 H.P. This fact serves to show the great interest being taken in this new arrangement, which certainly would seem destined to have a very considerable development.

Gas Fuel for Generating Stations.—The Electricity Committee of Brighton have reported an offer by the British Coalite Company, Limited, to supply gas as fuel for the boilers. Some expenditure would be necessary in order to adapt the boilers, etc., but the committee estimate that half of the present cost of fuel would be saved. The company propose to erect a retort and plant for carbonising coal on land adjoining the generating station at Southwick Basin, whither coal is brought by sea. Similar plant is now being installed at Barugh, near Barnsley, and the Yorkshire Electric Power Company have agreed to take and use residual gas as fuel.

TRAILER CARS IN LONDON.

OVER ONE HUNDRED IN USE.

Perhaps the best indication of the value of trailer cars to London is to be found in the fact that in October last the Board of Trade agreed to their being run during the period of the war at all times of the day on the authorised routes. Previously the trailers were only used at periods of rush traffic. It is safe to predict that after the experience now being gained there will be no return to the restrictions, which were no doubt a concession to the senseless obstruction that the police all along unsuccessfully offered before Parliamentary Committees. More than a hundred and thirty trailers are now in service on four routes south of the Thames, these districts having the heaviest traffic in the metropolis. In the course of a few weeks the full number of 150 trailers that were ordered from the builders will be in operation. We understand that special facilities were granted for the rapid delivery of the vehicles that has been witnessed during the past ten months, for the authorities were quick to discern the value of the trailers, both for the speedy and safe conveyance of passengers and for enabling motor men and conductors to be liberated for service in the war.

The Board of Trade have also granted authority to the Metropolitan Electric Tramways Company to use trailers in the districts served by their lines outside the northern boundary of the county of London. To these outer suburbs there is a heavy traffic, notably from such places as Cricklewood and Finsbury Park. When the war is over an extension of trailer traffic in the form of through running is likely to be seen from the Victoria Embankment *via* Tooting to Hampton Court and other places in the Thames valley. With the support of the County Council the London United Tramways Company obtained powers for that purpose before the war broke out. On the County Council's lines there has not been a suggestion that the trailers offer any obstruction to other traffic. Three of the services—Tooting, Norbury, and New Cross—pass through the busy junction known as the Elephant and Castle, and it is impossible to stand there and watch the traffic without observing that a motor car and trailer pass over it in less time than would be taken up by two motor cars. An observer will also note that the staircases of the trailers are so placed that if the necessity arises the cars can be operated on the front exit system.

Digitized by Google

A brief reference to the shunting of the trailers will be of interest. Two methods are adopted. When the terminus is level the trailer is left at the entrance to a crossing, over which a motor car will come from the adjoining line and pull the trailer back with it. coupled to a later car in readiness for going through the same movement. The only matter for regret is that the cars cannot run through to Croydon owing to the disinclination of the Corporation to render their track capable of taking the extra traffic.

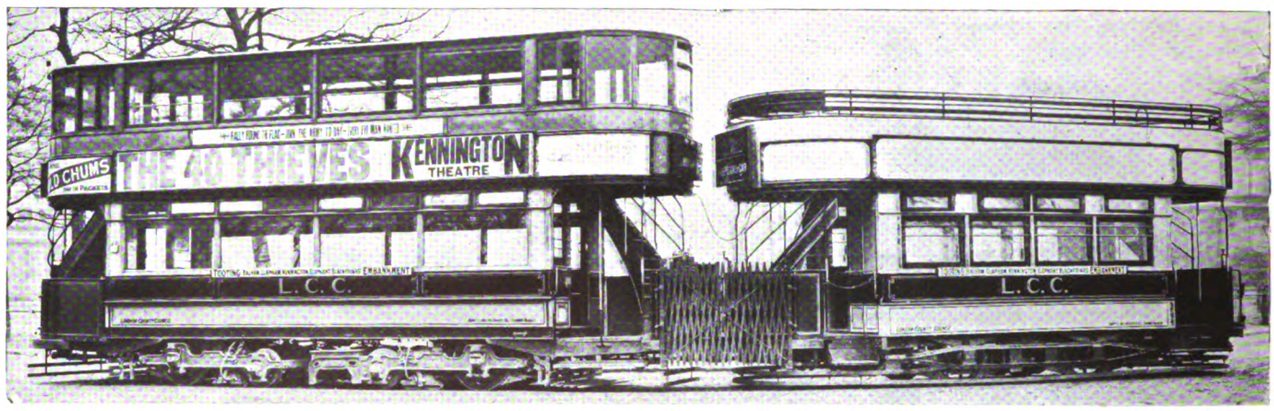

London County Council Motor Car and Trailer on Curve.

At the London and Croydon termini the metals of the former are on a slight gradient until a few yards before the Croydon boundary is reached. The system adopted here is for an incoming car to drop its own trailer and to couple up with one standing in front, pushing it

Delegates to the conference of the Municipal Tramways Association had the opportunity to gain first-hand knowledge of trailer working. Local considerations must guide provincial tramway authorities in the matter of adopting trailers, but there is every

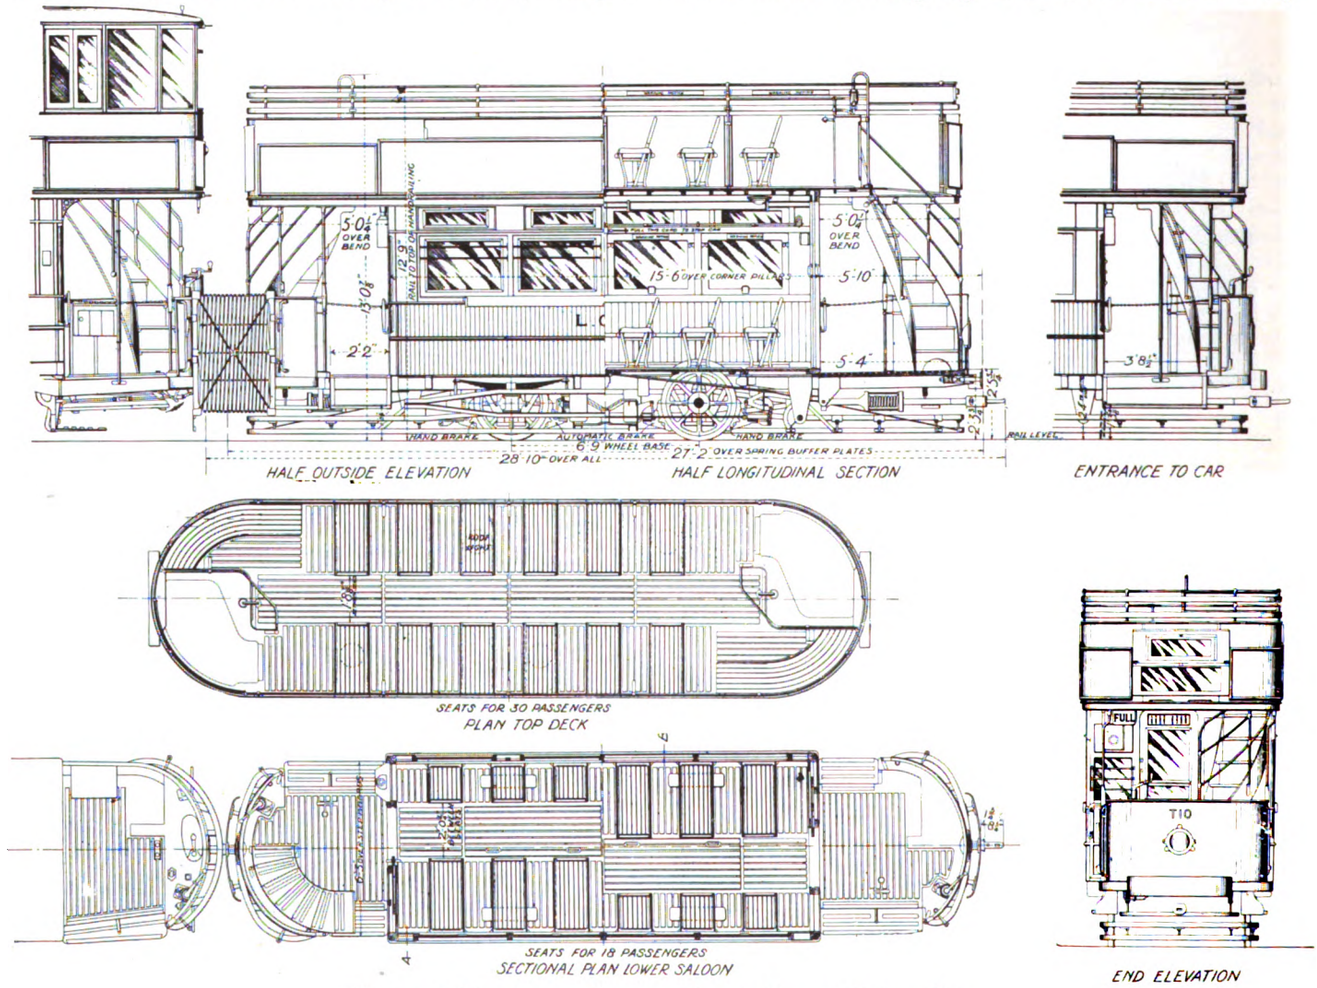

Plans and Elevations of London County Council Trailer Car.

over the crossing to the end of the line, the woman conductor on the trailer holding off the automatic brake by applying a lever on the platform. When loaded up the two vehicles proceed together. Meanwhile the trailer dropped by this motor car has been

prospect that when the war terminates trailer traffic on electric tramways in this country will be given a great impetus by the courageous stand made in its behalf by Mr. A. L. C. Fell, of the London County Council Tramways, and its successful operation by his staff.

Digitized by Google

THE WOODS-GILBERT RAIL PLANER AND GRINDER.

At the conclusion of the recent conference of the Municipal Tramways Association, a number of the members and delegates paid a visit to Bexley Heath and inspected the Woods-Gilbert rail planing and grinding machine, which is there at work grinding corrugations out of the tramway rails. A few days later a number of metropolitan tramway managers also paid a visit of inspection. In their earlier years the Bexley tramways were free from corrugation, but more recently the trouble has been very extensive, scarcely a length of rail being free from crrugation. The work of the machine at Bexley has so far been confined to the grinding out of corrugations, but it will be used later to remodel stretches of worn-out rails which have been in use ever since the tramways were opened in 1903.

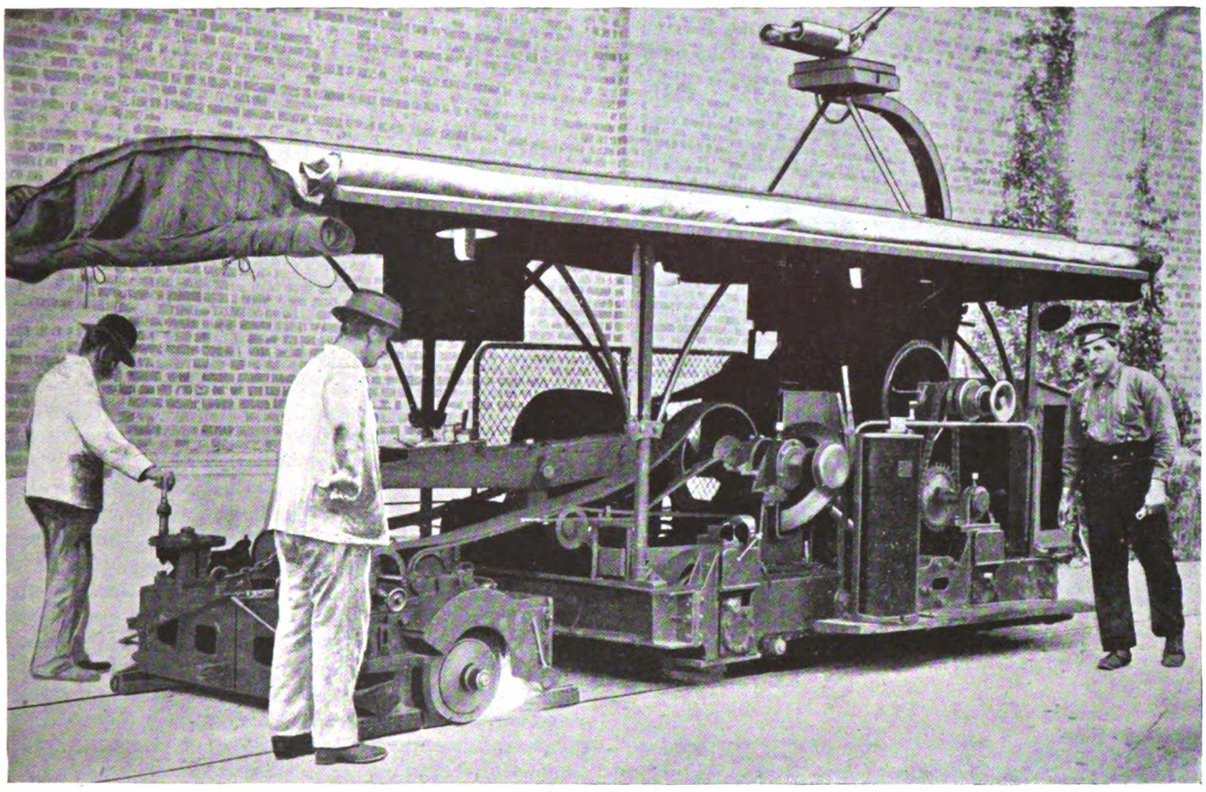

Woods-Gilbert Machine Grinding Tread of Rail.

In our issue of Oct. 16, 1913, there appeared a general description of this ingenious and then novel machine, but some details about it are now available. The invention, which is in the hands of the Woods-Gilbert Rail Planer Company, Limited, originated in Australia, and the machine was used in Melbourne and other Australian towns before it appeared in this country. The company enter into contracts with tramway authorities for remodelling worn rails, so that the rail life may be increased by as much as 50 per cent. The remodelling comprises the deepening of the groove, the cutting down of the guard lip, and the removal of the dish at joints and of corrugations.



Remodelled Rail Section.

The main machine or tractor is a powerfully-built vehicle which carries all the operating gear and a powerful electric motor. As will be seen from the illustration, an overhead canopy carries a trolley pole and wheel for collecting current from the overhead wire. To the tractor is coupled either a grinding or a milling attachment, according to the kind of work to be done. The grinding attachment is shown in the foreground of the illustration. The grinder for removing corrugations and dishing at joints has two 24 in. abrasive wheels, so that both rails are worked upon simultaneously. This attachment runs on four sets of rollers. Each grinding wheel has a separate vertical feed. For deepening the groove of rails and cutting down the lip the milling attachment is used. The work is done by 12 in. rotary high-speed cutters. The machines are accurately balanced so as to ensure a fine adjustment to the work. As to the grinding, it is claimed that to get satisfactory results a powerful machine, such as the Woods-Gilbert, with ample weight and rigidity, is necessary. The latest type of the machine weighs from 9 to 10 tons. Regarding capacity, the machine when grinding treats approximately 12,000 ft. of single track per month, and when milling it disposes of 9,000 ft. of single track in the same period. The machine has been designed with suitable under-gearing to enable it to be run along the tracks at speeds up to 20 miles an hour, when not engaged in milling or grinding. In this way it can be rapidly run to the nearest cross-over and be sent over to the other track to allow a night car to pass on tramways where night cars are run. If the line is single track, or if there is no convenient cross-over, then by the use of transverse gearing the machine can be quickly removed from the track to allow the car to pass. The work on the rails

Digitized by Google

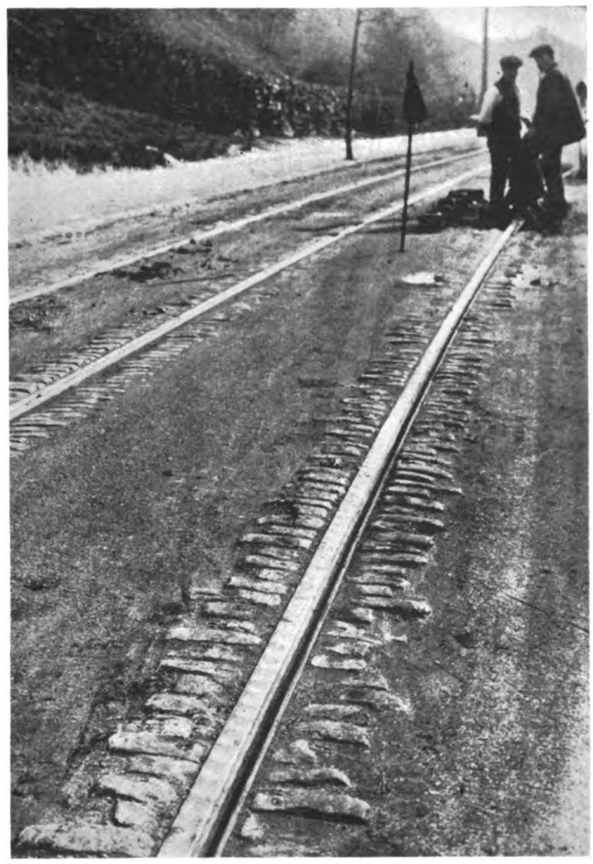

Rail Before Treatment.

Rail After Treatment by Woods-Gilbert Machine.

is, of course, carried out by night. The operating staff consists of a mechanical engineer in charge and two assistants.

Several tramway systems in this country have had their worn rails remodelled with most satisfactory results. The last place was Wigan, where four miles of track have been dealt with so satisfactorily that a further contract has been entered into. Before the work was done the rails were so badly worn that the wheel flanges were in contact with the bottom of the groove. The latter has been deepened to three-quarters of an inch, and the cost has not exceeded £530 per mile.

INDIAN RAILWAY POLICY.

The inquiry into Indian railway management as conducted by the State and by the companies respectively is of general interest throughout the Empire. It is of particular interest to the managers and contractors of railway and tramway undertakings, because all stores and materials of every description have to be ordered by and supplied through a Government department in State-owned undertakings, while private companies are not hidebound by rules, regulations, and codes.

From the paper read recently in his eighty-eighth year by Sir Guilford Moleworth, with the above title, much instruction was anticipated; as a matter of fact it will greatly rejoice all so-called "congress-wallahs" (including Mrs. Annie Besant) and those whose objects are to discredit the present rule in India, and to promote Parliamentary government by Indians. This would mean, in fact, Home Rule; but India is the last quarter of the globe where such a principle is applicable, or can possibly lead for many years to come to anything but dire disaster. The lecturer's opinion will unfortunately carry great weight with all the disaffected, as he has been a Government official for a great number of years, having been attached to headquarters as consulting engineer to the Government of Ceylon and of India. In this position he has been responsible, in a great measure, for the Government policy in regard to railways, and yet he now repeats antiquated opinions enunciated by him thirty years ago. He affirms that "the enormous profit of the railway companies is a national misfortune; for not only does such profit quit the country, but every rupee thus gained militates against our (the Indian) export trade." One answer to this is, of course, that the capital raised in this country and spent on the railways in India is more than recouped every twelve months by the material gains of the country as a whole. As regards the "enormous profits" of the railway companies, these can only be shown by misreading the statistical returns. This having been done to a remarkable extent, no doubt quite unconsciously, by Sir Guilford, the bottom drops out of his assertions as to all the other misdeeds of the companies and of the "speculators" whose enterprise enabled the railways to be started. The profits of the year 1912-13 to the Indian railway companies are stated to have amounted to £15,617,000, "an enormous and ever-increasing amount." As a matter of fact, after paying all charges on loans, on annuities, on sinking fund, and after paying *less* than half a million sterling to the companies as their share, the profit to the State was no less than £4,789,533, all of which went into the general revenues of India. The lecturer guarded himself by thus prefacing his conclusions: he said, "If I am correct in this inference." Unfortunately he was incorrect, and his erroneous conclusions have got such a start that we fear they will never be overtaken by the truth.

Digitized by Google

TRAMWAY PASSENGERS AND THEIR FARES.

By a Barrister-at-Law.

Judging from the reports of tramway managers and others, tramway authorities at the present juncture are suffering from some loss of revenue by passengers omitting to pay their fares before alighting from the cars. When a passenger is detected, he relies upon the fact that his fare has not been demanded of him. The shortage of male employees and the darkened nights have led to an increase of this class of offence by diminishing opportunities for detection. Under these circumstances it is desirable to review the law on the subject, to see what powers tramway authorities have and to suggest what remedies might be employed.

All tramway authorities are bound by the terms of the Tramways Act of 1870, subject in every case to the provisions of their special Acts. Section 46 of the Tramway Act empowers the local authority of a district in which a tramway is laid down to make regulations and by-laws for enforcing regulations. It also authorises the promoters of any tramway and their lessees to make regulations for regulating the travelling in or upon any carriage belonging to them, and by-laws to enforce the regulations. It also imposes a penalty for a breach of any by-law, providing that the maximum penalty that can be inflicted shall not exceed forty shillings and ten shillings for any continuing offence. Section 51 specifically states that "*if any person travelling or having travelled in any carriage on any tramway avoids or attempts to avoid payment of his fare*, or if any person having paid his fare for a certain distance knowingly and wilfully proceeds in any such carriage beyond such distance and does not pay the additional fare for the additional distance, or attempts to avoid payment thereof, or if any person knowingly or wilfully refuses or neglects on arriving at the point to which he has paid his fare to quit such carriage, every such person for every such offence shall be liable to a penalty not exceeding forty shillings."

In addition to their statutory powers, tramway authorities possess their common law rights. "They have a right of property in their cars and have the right to protect them from trespass by a person remaining therein or thereon without paying or intending to pay his fare, and in order to protect their property they may eject such a person from their car. A person by merely mounting a tramcar does not escape the common law liability to be treated as a trespasser if in fact he is one. It is true that there are other remedies given by the Tramways Act, 1870, and their by-laws, but those are not exclusive remedies, and therefore, I think," said Mr. Justice Lawrence, in the case of Whittaker *v.* London County Council (1915), 2 K.B., pp. 680, 681, "that the question left open by Kennedy, L.J. in Hutchins *v.* London County Council, must be answered by saying that a trespasser, such as I have referred to, can be lawfully ejected from a tramcar."

The regulations and by-laws made by a tramway authority or company may or may not, according as they are framed, deprive the authority or company of the advantage which is conferred upon them by Section 51; for instance, a regulation with a by-law enforcing it, which required a passenger to pay his fare on demand might make the demand a condition precedent to the enforcement of any penalty against a person who after travelling left the car without paying his fare. An examination of the language used in Section 51 suggests that an offence is committed apart from any by-law by a person who "travelling or having travelled avoids or attempts to avoid payment of his fare." The words "knowingly or wilfully" are omitted, and this is somewhat remarkable if either proof of the knowledge or wilfulness of the passenger is an element in the offence required to be proved against him, because later on these words are introduced in the parts of Section 51 which deal with "travelling beyond the distance paid for without paying for an additional ticket, or journeying beyond the destination." It may reasonably be supposed that the legislature considered that a passenger who had travelled by a car must be aware of the fact whether he had paid his fare or not by purposely omitting the words "knowingly or wilfully" in the one case and using them in the other. A passenger, moreover, may be unwittingly carried beyond the destination for which he has paid his fare, but having paid one fare, the presumption would be that in travelling beyond his destination he had no intention to defraud, but had done so in ignorance or unconsciously. The burden of proof would then properly rest upon the tramway authority to show that he had travelled beyond his destination either "wilfully or knowingly." If he had either "wilfully or knowingly" travelled beyond his destination his *bona-fides* would not avail him.

In Tuffley *v.* Tate, decided in 1907 (96 L.T., 24), a case under the Light Railway Act, a passenger, accompanied by his nephew, took two tickets, requesting the conductor to stop at the Queen's Hotel, a place where the cars stopped on request. The conductor forgot to stop and the passenger was carried two hundred or two hundred and fifty yards beyond his destination. The passenger refused to leave the car, and stated that he intended remaining in it to lodge a complaint. He refused to pay additional fares or to give his name and address. He was summoned under a by-law which provided that each passenger shall upon demand pay to the conductor or other duly authorised officer of the company the fare legally demandable for the journey. It was decided that the by-law was good, and the passenger could be convicted although there was no intention to defraud.

In Hunt *v.* Green, 1907 (96 L.T., 23), a by-law was held good which provided that "each passenger shall show a ticket if and when required to do so to the conductor or any duly authorised servant of the company, and shall also when required to do so either deliver up his ticket or pay the fare legally demandable for the distance travelled by such passenger." A passenger paid his fare and received a ticket. In the course of his journey he lost it. On being asked to produce his ticket by an inspector he was unable to do so, although the conductor admitted that he had paid for and received one. The passenger was requested to produce his ticket, pay his fare, or leave the car. He declined to comply with any of these requests. He was held liable for an infringement of the by-law, which was held to be a reasonable one.

With reference to this case, it may be said that by framing a by-law in the way that it had been framed, the company had deprived itself of the power that it would have undoubtedly possessed of taking proceedings under Section 51 of the Act.

One practical difficulty in obtaining payment is the existence of short-distance fares. When a car is fairly full both inside and out, it not infrequently happens that a passenger enters and wishes to alight whilst the conductor is busily engaged collecting fares on the top of the car. What is the passenger then to do? To leave the fare with another passenger inside, or deposit it somewhere on the car, or wait until the conductor descends the stairs? The adoption of the last alternative may mean that the passenger is carried half a mile beyond his destination. No wonder that a good many persons alight without paying their

Digitized by Google

fares at all. Is a practical solution of this difficulty impossible? This is a question for tramway managers. The law on the subject, apart from special by-laws, is clear enough, although many of the travelling public seem to be completely ignorant of it. A notice prominently displayed both inside and on the top of the car, calling attention to the words of Section 51, would probably assist the companies by enlightening passengers as to their responsibilities and their inability to escape them by reason of the conductor's failure to demand their fares.

LONDON TRAMWAY FINANCE.

By A. J. Lawson.

It has now become usual to expect adverse results from the working of the London County Council tramways, and to see the deficits made up annually from the general reserve. That reserve may possibly tide the undertaking over another year before a tramway deficiency rate will have to be levied upon the ratepayers generally in consequence of the inability of the Council to get paying results from the working of what should be one of the finest tramway undertakings in the world.

It is amusing, however, to learn that in the opinion of the leader of the Progressive party "It pays to carry people cheaply. The figures both of London and of Glasgow prove the financial soundness of the halfpenny fare." The answer to that absurd statement is to be found in the figures given in the accounts of both cities which were published in The Tramway and Railway World of July 22, and I propose analysing these for the purpose of making the facts understandable by those who might be misled by Sir John Benn's sophistries. He boasts of carrying 62,000,000 workmen passengers a year in the early morning hours, before motor omnibuses leave their garages, but conceals the fact that this service is rendered at an annual loss to the undertaking of £80,000. I am aware that he and some other members of the Council claim that these passengers at very reduced fares pay for the actual operating expenses of the service, but do not contribute anything to capital charges. The argument is fallacious. It might as well be claimed that a jobmaster, for instance, was making a profit who sent out a man with a pair of horses and a four-wheeled vehicle to carry, say, a dozen people eight miles to their work every morning, six days in each week, if their fares were sufficient to pay the driver's wages for the period of his absence and covered the cost of the horses' feed the previous evening, though nothing were earned on the return journey.

With the present number of passengers carried at workmen's fares an increase of 2d. per person per week would wipe out the deficit on this service, and 3d. per passenger per week, or ½d. per day, would give a slight profit on these early morning services.

The perpetuation and extension of halfpenny fares was, however, the Council's greatest blunder, having regard to the huge capital expenditure on the London tramways. To plead the example of Glasgow as a justification for halfpenny fares in London is to ignore facts. Glasgow's tramways pass through nearly every business street, and the traffic in the central parts in both directions is almost as dense at mid-day hours as at morn or night. London's traffic, on the contrary, overcrowds main cars and trailers in one direction only twice a day, while during mid-day hours the traffic is very light and the trailers are taken off, as well as many of the electric cars, and even the reduced number remaining in service throughout the day carry but few passengers. The difference is clearly shown by the number of passengers per car-mile. Glasgow's smaller cars, without trailers, carry 14·5 passengers per car-mile; London's huge cars, with a large and ever-increasing number of trailers in use, carry only 11.4 passengers per car-mile run. What the result would be in point of revenue if the London cars could obtain the same number of passengers as the Glasgow ones, even on the present car-mileage, is shown further on.

Dealing now only with the abolition of halfpenny fares and making the minimum fare 1d., as has been done in West Ham, Leyton, and Walthamstow, in which places an improvement, though slight at first, is already discernible in the weekly returns, it may at once be conceded that a considerable number of people who at present ride very short distances on a halfpenny fare would walk sooner than pay 1d. *on a fine day*. Assuming that even half of them did so there would be no loss in receipts, the amount received from the remaining half, being at twice the rate, would balance the loss from the abstention of the other half, of whom more and more would return to riding in all weathers. Even allowing a permanent loss in numbers of $33\frac{1}{3}$ per cent.—an excessive allowance—the gross revenue from the higher fare would increase from £337,500 as at present to £450,000—a net gain of £112,500. It is, however, probable that the total number of passengers would not eventually fall below the present figures, in which case the addition to the present revenue from passenger traffic would be equal to the whole amount now received from halfpenny fares, or in other words, £337,500 a year. Adding to this the £80,000 a year now lost on workmen's fares which, as already stated, would be made up by 2d. more per week from each of the 200,000 people who daily patronise these early cars, we should have in that case the very substantial addition of £417,500 annually to the present inadequate revenue. That sum would be thus raised to a gross total of £2,756,770, from which would have to be first deducted the working expenses of £1,683,660 (taking last year's figures) and leave a balance of £1,073,110. Out of this balance the interest and sinking fund charges require £752,385, leaving only £320,725 for depreciation and permanent way renewals. If we take Glasgow as the model to be followed (and it is a good one), £255,375 of this amount would be placed in the depreciation fund, leaving only £65,350 for permanent way renewals, while Glasgow's example of making sufficient provision for this very necessary work requires in London a contribution to that fund of not less than £166,000. Therefore we would still be about £100,000 short of the amount necessary to make the same proportionate provision for depreciation and renewals as Glasgow now does (to say nothing of the £43,458 she places to the common good) even after revising fares, and obtaining additional passengers to replace those who will walk sooner than pay 1d. for the privilege of riding. If the London tramways could obtain as many passengers per car-mile as Glasgow does, the needed revenue would be more than made up, for the number of people to be carried would be, 694,255,000 on the same car-mileage of 47,879,675 as at present and consequently at not much greater cost in working. With such a total and an average fare of 1d. the finances of the London County Council tramways would be placed on nearly as sound a footing as those of Glasgow, but not quite. Unfortunately it is quite impossible for the London County Council tramways as at present laid or run to carry any such number of people, or to hope for any such financial return. The improvements at termini and extensions of lines already suggested in the columns of The Tramway and Railway World would have to be undertaken before such favourable results became possible.

Digitized by Google

In the meantime the revision of fares above suggested is vital and urgent if in future Parliament is to be asked to grant fresh powers for new lines or other improvements, since it is not likely such powers would be granted to a Council whose management of an undertaking under existing powers has not only failed to make the enterprise pay its way but may have involved the inhabitants generally in making good its losses out of the rates. And it is useless waiting, or delaying the matter till after the war. The conditions then will be more difficult than now, more especially if the various funds be in the meantime wholly depleted, and track and cars be not properly maintained, to say nothing of the growing obsolescence of the generating plant in the power house at Greenwich, and the distributing plant in the various sub-stations.

To bolster up the contention that all is well with the London County Council tramways we are asked to compare the results with those of Glasgow. For the sake of facilitating the comparison as much as possible I append in parallel columns the principal figures from the accounts for last year, and a short analytical summary of percentages in each case. Here they are :—

	London.	Glasgow.
Route miles worked	144½	99
Track miles worked	289	198
Capital expenditure	£13,516,577	£3,835,156
Capital repaid	£3,935,586	£1,475,337
Capital outstanding	£9,580,991	£2,359,819
Capital per mile of route	£93,540	£38,740
Capital per mile of track	£46,770	£19,370
Receipts from passengers	£2,278,659	£1,149,264
Gross revenue	£2,339,291	£1,157,337
Working expenses	£1,683,660	£693,005
Balance remaining	£655,631	£464,332
Interest and sinking fund	£752,385	£200,088
Depreciation fund	*Nil*	£105,725
Permanent way renewal fund	*Nil*	£68,681
Income-tax	£40,000	£39,854
War allowances	£95,365	£80,438
Profit after paying all charges	*Nil*	£43,458
	£73,795 deficit	
Car-miles run	47,879,675	24,963,309
Passengers carried	545,423,397	362,371,464
Traffic receipts per route mile	£15,690	£11,571
Traffic receipts per car-mile	11·36d.	11·05d.
Passengers per car-mile	11·39	14·51
Average fare per passenger	1·003d.	·761d.
Operating costs per car-mile exclusive of war allowances	7·961d.	6·658d.
Operating costs per car-mile including war allowances	8·439d.	7·467d.

To the above working expenses there is required for interest and sinking fund payments only (exclusive of any provision for depreciation or permanent way renewals) a further amount per car-mile in London of 3·771d. but of only 1·924d. in Glasgow, thus further accentuating the essential differences between the two places, as for every £100 of capital expended on the London tramway system Glasgow spent only £29 15s. There is the difference in length of lines, however, to be taken into account. Including this consideration the relative capital outlays are :—London £100, Glasgow £41 8s., or as percentages, London 100 per cent., Glasgow 41·4 per cent. The other ratios are :—

	London. per cent.	Glasgow. per cent.
Capital repaid	29	38·5
Capital outstanding	71	61·5
Ratio of expenses to revenue, including war allowances	72	60
Ditto, excluding war allowances	68	53
Gross revenue to total capital	17·4	30·2
Net revenue to total capital	4·85	12·1
Interest and sinking fund charges to total capital	*5·57	5·2
Contribution to depreciation	*Nil*	2·76
Contribution to permanent way renewals	*Nil*	1·79
Contribution to "public good"	*Nil*	1·13

* Exceeding net revenue, hence draft on general reserve of £73,795.

With such results staring from the balance sheets of the two undertakings it requires a good deal of courage to state, as some County Councillors do, that all is well with London tramway finance and that were it not for road maintenance and rates (which, by the way, every tramway in the kingdom has to pay) there would be a handsome profit. A handsome profit on working at a loss !

Let anyone work out for himself from the data here given the problem : What should be the average fare on London tramcars, with a total of only 50 per cent. more passengers than in Glasgow, to obtain the same return upon capital ? The answer will surprise him, and convince him it cannot be done with the present halfpenny fares.

That it could be done if the present halfpenny fare stages were greatly reduced in length is a suggestion that has been made by some of those who contend that the halfpenny fare, properly apportioned, would be a valuable source of revenue. Experiment in this direction might very well be undertaken by the Council. After all, the London transport problem is *sui generis*, and only the most painstaking and constant experimental study of it will enable the best solution to be found. Its importance justifies all the investigation that can be given to it.

CAUSES OF RAIL CORRUGATION.

Mr. Mason D. Pratt, chief engineer of the United Railways and Electric Company, of Baltimore, has contributed to the *Engineering Record* the appended statement of the causes of tramway rail corrugation, based on twenty-five years' experience in the manufacture of rails and the construction and maintenance of track :—

(1) Self-propelled Cars.—Practically all corrugation occurs on electric tramways where all or a large majority of the cars are self-propelled.

(2) Girder or other rails having considerable vertical stiffness.

(3) Soft Steel for Rails.—The extent and depth of corrugation is in inverse ratio to the content of carbon and other hardening elements.

(4) One Type of Car in Operation, particularly double-truck, four-motor equipment.—On tracks over which there is regularly operated a service of mixed types of cars, corrugation may appear from time to time, but unless some other feature (as, for instance, No. 3) is the cause, the corrugation will usually "iron out."

(5) Contour of Rail Head.—Flat-headed rails, or those on which the wheels have only a narrow or partial bearing, will develop corrugations earlier than those on which the wheels have a full bearing (as on convex-head rails).

(6) Heavy mill scale on the rails. On rails that have been rolled under conditions producing heavy mill scale that is allowed to go through the finishing pass, the surface of the rails has been so heavily marked as to start corrugation immediately after the rails have been put in service.

Other causes are (7) rapid acceleration and deceleration ; (8) unequal diameter of wheels on same axle ; (9) long radius curves ; (10) intensity of wheel loads ; (11) track foundation ; (12) segregation of steel ; (13) track sanding ; (14) grades.

Mr. Pratt has inserted the following clauses in his specifications for rails for the last two years, and this is reported to have had a beneficial effect :—

"In the rolling process such precaution shall be taken as may be necessary to entirely remove mill scale just prior to rails entering last two finishing passes, and otherwise to produce a finished bar having smooth, regular, and true surface on head and in finishing contact areas.

"Any rails showing by the closest possible inspection the slightest indication of corrugation will be rejected."

Mr. Pratt submitted the foregoing statement to the chief engineers of the larger tramway systems in the United States, and he states that while their individual experience varied somewhat the conclusions were substantially agreed to.

Digitized by Google

THE
Tramway and Railway World

FOUNDED IN 1892 AND PUBLISHED BY
THE TRAMWAY AND RAILWAY WORLD PUBLISHING COMPANY, LIMITED,
AMBERLEY HOUSE, NORFOLK STREET, LONDON, W.C.

SUBSCRIPTION:

THE TRAMWAY AND RAILWAY WORLD can be obtained, post free, at the following rates:

FOR THE UNITED KINGDOM—Twenty-five Shillings per annum.

THE ANNUAL SUBSCRIPTION INCLUDES 64 ISSUES, OF WHICH 12 ARE ILLUSTRATED NUMBERS.

FOR ALL PLACES ABROAD—Thirty Shillings per annum.

Single Copies—One Shilling (Postage, 2 pence—Abroad, 5 pence).

THE EDITORIAL AND PUBLISHING OFFICES OF
THE TRAMWAY AND RAILWAY WORLD
ARE AT AMBERLEY HOUSE, NORFOLK STREET,
LONDON, W.C.

Telephone No.: GERRARD 2048.
Telegraphic Address: "TRAMIGRO, ESTRAND, LONDON."

LONDON, OCTOBER 12, 1916.

Tramways and the War. The presidential address of Mr. Peter Fisher at the conference of the Municipal Tramways Association afforded a most interesting and comprehensive summarised review of what has been done by tramway organisations in relation to the war. The address, if read by one who had not closely followed events in the tramway field during the past year, would come as a revelation. The annual report of the Executive Council, on its part, shows how numerous have been the matters arising out of war conditions which have been successfully dealt with. In the broader aspect, as Mr. Fisher pointed out, the main service of the tramways has been in the way of aiding the supply of munitions and keeping industry alive. In these directions no more essential service can be imagined than the providing of facilities for taking munition workers to and from their labours. In spite of depleted staffs, the tramways have responded and are responding magnificently. Hence the appropriateness of the Government having recognised the provision of tramway facilities as munitions work. The patriotism and bravery of tramway employees are well emphasised by the statistics which Mr. Fisher submitted in regard to the men who have joined the Forces and the women who have come in to take their places. The President's remarks on the subject of increasing tramway fares in order to meet higher costs are worthy of close attention. That more revenue is needed, especially for repairs and renewals after the war, is indisputable. A great deal of necessary expenditure is being postponed till then, and the longer it is postponed the heavier will be the demand. As to the problems arising after the war, the President was confident that they will be satisfactorily settled. One of the most important things to be dealt with, both for the tramways and the industries of the country, is the development of the carriage of goods on the tramways. That was also treated in a separate paper submitted to the conference, and it will receive continued attention until such traffic has been developed on a proper system.

Future Requirements. One of the most valuable aspects of the work of the Municipal Tramways Association is that while providing efficient machinery for dealing with emergencies, such as have occurred during the past two years of war, the annual conference serves to direct attention to problems of the future. In addition, the delegates are able to create through the municipal governing authorities a body of opinion that can make its influence felt among the members of the Legislature. Food for reflection along each of those lines of thought is provided by Mr. McElroy's notes on passenger transportation in large cities, and by the remarks of every speaker in the exceedingly fruitful discussion. There are moderate-sized as well as great towns that will benefit from paying immediate attention to the warning voiced by Mr. McElroy. From his active study of traffic conditions in Europe and America, in order to devise means of relieving the saturation of the main arteries in Manchester, Mr. McElroy has good grounds for warning other towns that they may be involved in similar difficulties sooner than their rulers think may be the case. Confirmation of this was strikingly afforded by the observations of Mr. J. B. Hamilton. No public transport authority can afford to neglect the moral conveyed in the Leeds manager's assertion that nobody would have looked for such a development of tramway traffic as has

Digitized by Google

occurred during the past decade. Equally important is it that heed should be paid to two further principles laid down by these two managers. Mr. McElroy urged abstention from voting tramway earnings to the relief of the rates, and that the money should be put aside in order to provide means to relieve congestion arising from increased traffic. Further, he advised profiting from the fact that the world's experience has shown the necessity of every city being provided with a permanent authority directing the initiation and carrying out of all schemes for new transit facilities, in order to secure continuity of policy and to provide for the needs of a wide surrounding area, as well as the city immediately concerned. From the remarks of the deputy chairman of Coventry Tramways Committee, it is evident that the need for such an authority is felt there. Other places could also be named as examples to bear out our contention that in provincial centres, as well as in London, there is need for the formation of a Traffic Board. It may be that the beginnings of such an authority are now being hammered out in the joint committee, representative of several departments of the Corporation, who are engaged in considering the needs of Manchester. That Mr. Hamilton's views tend in the same direction is evident from his suggestion that in order to prevent the depletion of tramways committees' coffers by other departments a joint committee should be formed of all the bodies interested in street traffic. Birmingham, which has its central traffic problem as a legacy of past inaction, is awake to the importance of joint action in the town planning of its outer districts. Sooner or later many towns will have to follow suit if they are not to suffer for neglect of the old adage that a stitch in time saves nine. One encouraging outcome of Mr. McElroy's paper was the revelation that London has one unofficial citizen who has rendered himself a capable student of traffic problems by means of travel and study. Mr. H. H. Gordon's remarks showed that in the great questions remaining for settlement in the metropolis he can rise above partisanship. Like the author of the paper, he advocates unified control for all the instruments of traffic.

Goods Traffic.

Considering the searching manner in which the paper of Messrs. Holford and Clough dealt with the question of utilising tramways for goods carriage, it was surprising that so effective and instructive a discussion followed. The authors and speakers were all managers who have had experience of carrying goods and mineral traffic, if only in one or two cases for the requirements of their own undertakings, and no speaker ventured to question the possibility of goods transit where sidings can be constructed into warehouses and works. Therefore the subject is one that calls for extended investigation on the lines so well marked out by the authors of the paper, and no time should be lost in appointing for that purpose a joint committee of the two tramway and light railway associations. Mr. McElroy's remarks failed to take count of the main reason that has led to the revival of the discussion, a cause that is contributing to the tramway congestion problem with which he is faced in Manchester. For a long time prior to the war, manufacturers in Manchester and the intervening towns complained of the difficulty of obtaining raw material, etc., from Liverpool docks, and of sending out their goods. That trouble has been accentuated by the war. Thus there would appear to be fair scope for instituting a new means of service by and in connection with tramways. That possibility has long been in the minds of the tramway managers whose systems are linked up in the district, and, as Messrs. Holford and Clough observed, the tramways of Yorkshire could be arranged to afford similar facilities. There is no reason why this aspect of the question, and also that of local working, pure and simple, where feasible, should not be forwarded by the managers concerned, independent of deliberations on the broad general question. The policy of the body charged with the latter work might include consideration of legislative matters, and the giving of a lead to the Board of Trade to facilitate the granting of further powers that may be deemed necessary, especially in the light of the economic competition that must follow the war. The old policy of Government departments simply holding the scales fair for rival interests must be terminated. If this country is not to be handicapped, the guidance

Digitized by Google

must come from the men who at every hour of the day are in touch with the wants of the community. The way to assist in enforcing a new order of things is for every tramway manager to consider whether the examples of Leeds, Huddersfield, and Burnley can be followed in their towns. Mr. Hamilton is not resting content with what he has already accomplished, for his annual report indicates that he is giving attention to the possibility of providing goods and mineral facilities for districts far removed from railway termini. Besides greatly enhancing the usefulness of the tramways, a scheme of that character will rid the streets of many slow-going units that not only create congestion, but add to the cost of track and road maintenance.

Air Raids and Lights on Vehicles.

Recent events have served to revive that rather vexed question as to whether traffic should continue to run during air raids. There are some extremists who advocate total stoppage on the approach of aircraft being definitely known, and certain incidents that occurred on the morning of Sunday, September 24, might, at first thought, tend to support this view. Much has been made of damage either on or near certain main roads, and flashes from tramways or electric railways have come in for a good deal of comment. The cold truth of the matter is that these flashes, whilst very vivid as seen from the ground, or near, are too spasmodic and brief to afford any reliable guidance from above, and the real source of danger is believed to be, not these brilliant flashes, but the continuity of relatively dim lights carried by vehicles such as any busy highway will provide. There being, therefore, no reason for discontinuing tramway or electric railway traffic *as such*, it only remains to consider the question of whether traffic should, on these occasions, be stopped or not as a whole. It is difficult to see what can be gained by such a measure. So far as the safety of the vehicles and their drivers or passengers are concerned, they are no better off in standing still than in motion, and in other respects time is being lost and delay incurred. Stoppage of traffic, moreover, in the absence of general warning signals, which the authorities have largely abandoned, can only be effected by holding up at centres, which means a concentration of vehicles and people at comparatively few points. This is obviously undesirable, and on reflection there seems to be no difficulty in arriving at the conclusion that, so far as the safety of the traffic and those concerned in its movement is involved, the best plan is to keep it in motion and as widely distributed as possible. From the standpoint of the safety of the community in general, it has already been observed that anything like continuous lines, even of very dim lights, is more likely to help the enemy than "arcing," inasmuch as it is relatively constant, and lends itself far more easily, therefore, to observation and reckoning. To that extent, then, life and property about a busy highway is in rather more peril than is the case elsewhere. Taking into consideration, however, the hours at which raids commonly occur, and the inconsiderable density of traffic in all but a few special areas at that time, the extra degree of danger is exceedingly small. It certainly is not anything like so great as to call for a total stoppage of all traffic. Nevertheless, some precaution is demanded, and the most obvious and the most simple is that of total extinction of all vehicle front lights, screening of rear lights so as to be visible only directly ahead, with drastic reduction of speed on signals, which could easily be given by exhibiting, for instance, coloured lamps at traffic centres. Such signals would cause no general alarm, and pedestrians happening to be abroad at the time would be apprised in two ways of the advisability of getting home or looking out for shelter. They would either observe the signals at important points, or, failing that, the running of traffic with lights out would be sufficient intimation. A scheme of this kind has, in fact, been adopted in part, and on the whole it seems to be a common-sense way of meeting the present emergencies. To run traffic without lights at night is not a desirable expedient, but its dangers are so obvious as to a large extent to neutralise themselves. The need for extremity of caution in such conditions would assert itself so forcibly as to compel both drivers and pedestrians to play for safety. There would be little, if any, addition to the perils of the streets, but the scheme would reduce to a minimum the dangers from the skies.

Digitized by Google

TRADE AFTER THE WAR.

At a meeting recently held at the Mansion House to discuss "after the war" problems in connection with the engineering industry, a considerable number of proposals were made for safeguarding the future of what the Lord Mayor very rightly described as the main bulwark of European freedom. It must be generally recognised that it is essential that British engineering should have a prosperous future, and that the industry should become the employer of more and more skilled men. It must also be recognised that we shall presently have to face a very difficult and possibly dangerous position altogether apart from the war itself, though following upon it as a natural consequence.

The problem of employment will be very difficult to solve, and cannot be solved at all without a fair degree of co-operation between employer and employed. While recognising the handicap under which British engineering must necessarily labour until restriction of output becomes a thing of the past, we cannot in common fairness fail to realise the point of view of men, who fear that by increasing individual output they will also increase unemployment. This would, of course, happen unless markets were widened in proportion to the rise of output, and many proposals have already been put forward as to how this desirable result could be brought about.

At the meeting in question many of these proposals were only touched upon lightly. These included schemes of protective tariff and the constitution of a ministry specially charged with the duty of watching over our industry. A policy thoroughly concrete in character and very interesting to all officials of municipal enterprises was outlined by the Lord Mayor of Manchester.

The Manchester Corporation has adopted a standing order applicable to all its departments. It is to the effect that no contract may be entered into by the departments of the Corporation with any person of Austrian or German nationality, or with any company of which a substantial proportion of the share capital is held by subjects of countries at present at war with us. The Manchester Corporation have circularised other similar bodies, suggesting the general adoption of the same policy. Meanwhile, one may reasonably anticipate that sections of the British engineering industry, including particularly the manufacturers of rail and road vehicles, have already urged or will urge upon the Government the enforced adoption by all public bodies of what might be described as a national policy. Hitherto firms of foreign origin have almost invariably been free to tender for the supply of railway or tramway plant, or of road motor vehicles for municipal service. British manufacturers would naturally advocate a restriction which would keep the whole of such business inside this country.

There are plenty of parallel instances to act as precedents. Thus, for example, in France practically all, if not quite all, the public service motors owned by municipalities, or running under agreement with municipalities, must necessarily be wholly constructed in France by French labour. In this way a very valuable nucleus of a fleet of military motors was built up under conditions not nearly so favourable as those obtaining here. The outstanding instance is that of the General Omnibus Company of Paris. In this case, as readers are aware, the company has the monopoly of running public service motors, and pays a substantial sum annually for the privilege. The frequency of the service is regulated, as are also the conditions of employment. Restrictions are imposed as to the main features of design of the vehicles, and even the bodies were, to all intents and purposes, designed by the military authorities with an eye to their own possible requirements.

In Great Britain a policy of this kind is not so absolutely necessary because the distribution of our population is very much more favourable to the extensive use of public service motors. There is also a much bigger field for the tramway as distinct from the light railway of the type familiar to all visitors to Belgium before the war. In a lesser degree perhaps, but certainly in a degree not negligible, it would be desirable that municipal fleets of motor omnibuses in this country should be such as to be of real help for national defence in times of emergency.

This points to the desirability of restricting purchase to British-built machines, and going further than Manchester itself has gone, along the lines that Manchester has suggested. The danger in connection with any such restrictions lies, of course, in the possibility of manufacturers getting together in a sort of ring for pushing up prices. It is conceivable that, short of an arrangement completely restricting municipal purchase to British machines, some scheme might be framed which would have the effect of giving a preference to home manufacturers on some agreed scale of percentage. Thus, attempts to rig prices would at least be strictly limited in scope. Beyond this it would be necessary to rely to some extent on the good sense of manufacturers who would, it is to be hoped, realise that permanently increased output is not compatible with organised attempts to obtain extortionate profits. The whole idea, whether carried to its logical conclusion or only taken as far as Manchester has taken it, is one that is well worth the careful consideration of all municipalities. Short of legal compulsion by some Parliamentary Act or Departmental Order, municipalities could, if they so desired, set an example in the right direction with a view to helping in the great problem of employment. Similarly, the officials of such municipalities have at any rate advisory powers which would enable them to do good work along the same lines.

The Producers' Organisation.

The British Empire Producers' Organisation is now vigorously at work, and the preliminaries being over, useful results should follow. It has been arranged to issue monthly reports to the various associations affiliated. We have received a copy of the first of these reports, which covers the period from the founding of the Organisation in the end of last year till the present time. The Right Hon. W. M. Hughes, Prime Minister of Australia, is patron of the organisation, and there is a highly influential list of vice-presidents and Council, the chairman of the latter being Mr. C. T. Parker. The two principal objects are to make the Empire self-supporting and to remove from our industry and commerce all German influence and control. A beginning, it may be recalled, was made with organising the sugar industry of the Empire. Important representative meetings were held in London, Glasgow, and Liverpool. In July a British Agricultural Section was organised, and in August the Council passed a resolution declaring that labour is entitled to its full share of any benefit which may be obtained through preference being given to any industry. Steps are being taken for the formation of a number of sections, including one for iron and steel. The Organisation promises to do much good work, and its general secretary, Sir George Macgill, is showing great energy.

A British Trade Bank.

One of the most interesting, and, as it is likely to prove, important events of September in the movement

Digitized by Google

for fostering British trade was the issue of a report by Lord Faringdon's Committee recommending the formation of a British Trade Bank with a capital of £10,000,000. The Committee was composed of eminent bankers and financiers, and its proposals and discussion of the subject are of great interest. Moreover, they ought to command the assent of the Government. The object in view is to provide means for meeting the needs of British firms after the war as regards financial facilities for trade, particularly with reference to the financing of large oversea contracts. By financial facilities the Committee mean those involving a longer currency than those afforded by ordinary banks. The Committee point out various ways in which the proposed bank can help traders and develop industry, and among its functions would be the working of an information department and the examination of industrial projects. This great scheme, apart from some criticisms on points of detail, has been received with much favour in financial and industrial circles. If carried out it should prove of immense value.

RUSSO-BRITISH TRADE.

In view of the substantial financial interests which this country has in Russian undertakings, including tramways among other things, satisfaction must be expressed at the formation last month of a Russo-British Chamber of Commerce in London. Under most influential auspices it will promote trade and commerce between the two empires.

MINERALS AND METALS.

It is sincerely to be hoped that the representations which have been made to the Advisory Council for Scientific and Industrial Research by the Iron and Steel Institute, the Institution of Mining Engineers, the Institute of Metals, and the Institution of Mining and Metallurgy will have some effect. In place of the multitude of Government Departments and Committees dealing with industries of the kinds represented, the institutions advocate the formation of a central Department of Minerals and Metals, so that overlapping and confusion may be prevented and efficiency promoted.

"SAFETY FIRST" MOVEMENT.

LONDON GENERAL OMNIBUS CINEMA FOR SCHOOLS.

A representative of the London General Omnibus Company informed the coroner at Tottenham that the company had engaged a special staff to point out to children the dangers of the streets, and intended shortly to send lecturers to the schools to illustrate with cinematograph films how these risks could be avoided. This statement was made at an inquiry into the death of a child who was killed in a street accident. The announcement will not come as a surprise to the many members of the Tramways and Light Railways Association and the Municipal Tramways Association, who visited the L.G.O. Company's training school on the occasion of their annual meetings in London this year. Mr. H. E. Blain, the operating manager of the company, then explained the work that had been carried out in connection with the "Safety First" campaign, and gave statistics showing that since 1910 it had reduced the number of accidents by 68 per cent. That figure has been a constantly-improving one each year, and there are now only 2·15 accidents per 10,000 miles run for the whole fleet of omnibuses. By means of an exhibition of films of reconstructed accidents and of correct and incorrect methods of employees' work, Mr. Blain enabled his auditors to appreciate what a great part the moving picture film has played towards bringing about a reduction in the accident rate. Another contributory cause was the distribution of "Safety First" literature in the elementary schools. The latest films reproduce representations of every type of accident that has occurred on omnibus routes during the past two years, and it is these that are going to be exhibited in the schools. Free use of the films is also offered to the proprietors of picture theatres in London. Among the older pictures are several showing unsafe methods of working omnibuses on tramway routes of the London traffic group.

ILLUMINATED CAR IN SHANGHAI.

An illuminated car of an attractive and original design was run on the Shanghai tramways on the occasion of the King's birthday this year. As the photograph shows, the car (for which Mr. Donald McColl, general manager of the Shanghai tramways, was responsible) was an exceptionally fine piece of work. A painting of the King was mounted high up at each end of the vehicle, and it was illuminated from behind by electric lamps and flanked by a Union

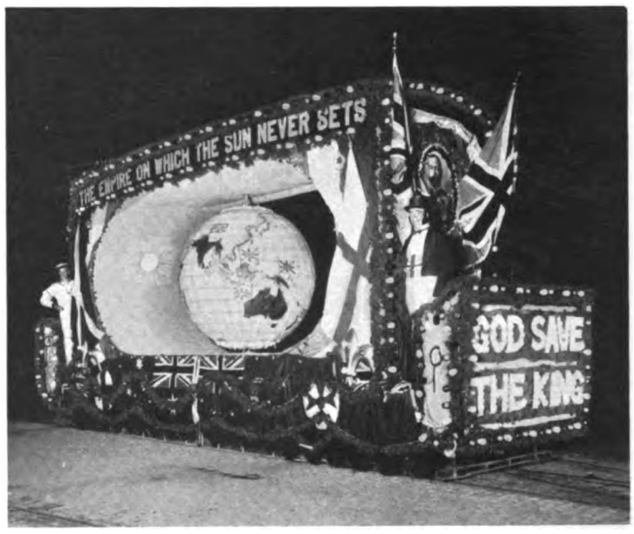

Jack. Underneath each portrait, in large letters formed of white electric bulbs, appeared the words "God Save the King." Between the floor and the canopy of the car was mounted a huge globe which was slowly revolved, one half always being illuminated by the sun. The globe was painted in different colours so that the sea and the continents were clearly shown, the most vivid of all being the portions of the British Empire, which were in red with Union Jacks over them.

BRADFORD RAILLESS CARS.

In his annual report, Mr. C. J. Spencer, general manager of Bradford Corporation Tramways, states that the total cost of operation for the railless trolley cars was 7·9d. per car mile. This sum includes interest and sinking fund charges, and he considers that it will compare favourably with petrol omnibus figures published this year. The report adds that 2,089,484 passengers were carried at fares approximately half the rates charged on most motor omnibus undertakings. There are 20 railless traction cars in use, and the total length of the five routes was 9 miles 790 yards. The longest route is 2 miles 1,232 yards, from Foster Square to Frizinghall, including a loop round Gaisby Lane, etc. June 24, 1911, was the date when the system was opened for traffic. The appended statement shows the expenditure and receipts for the past two years:—

	1914–15. Average per mile.	1914–15. Expenditure.	1915–16. Average per mile.	1915–16. Expenditure.
	d.	£	d.	£
Traffic expenses	3·162	2,340	3·078	4,134
General expenses	·616	456	·566	759
Repairs and maintenance ...	1·955	1,446	1·748	2,348
Power expenses	·824	610	·843	1,132
Total	6·557	4,853	6·235	8,375
Balance	—	—	·301	404
INCOME.				
Traffic revenue	5·830	4,315	6·536	8,779

The mileage was 322,390, as compared with 177,653 in 1914–15.

Digitized by Google

THE MUNICIPAL TRAMWAYS ASSOCIATION

(INCORPORATED)

Fifteenth Annual Conference, held in London, September 21st and 22nd, 1916.

For the second time in succession owing to the great European war the Municipal Tramways Association held its annual conference in London. In normal times it would have visited Dundee, the home of its president for the past year, but under present conditions it was more convenient for the members to meet in London; and to minimise the demands on their time as much as possible the programme was confined to two days. The fifteenth annual conference, of which a full report is given in the following pages, was opened on Thursday morning, September 21, in the Hall of the Surveyors' Institute, Westminster, S.W., where the members met a year ago. President Fisher took the chair at 10.30, when the hall was well filled by members and delegates. In welcoming the vice-chairman of the London County Council, Mr. Fisher alluded to the illness of Mr. A. L. C. Fell, chief officer of the London County Council tramways and a former president of the Association. Mr. W. J. Squires, in reply, said that Mr. Fell had been ordered away for a six months' sea voyage. He was sure that everyone connected with the tramway industry wished him a speedy recovery and a return to his work. On the motion of Mr. J. B. Hamilton, the secretary was directed to forward an expression of the sympathy of the members to Mrs. Fell.

The President then began the delivery of his address, but owing to severe throat trouble from which he had been suffering for a few days he relinquished the task, and the reading was completed by the hon. secretary. In the course of his address Mr. Fisher touched upon the work of the year, and alluded to the important problems arising out of the war. He mentioned the success of the Council in effecting the extension of the term "munition work" to cover tramway facilities, and said that no fewer than forty-four municipal tramways were certified under the Munitions of War (Amendment) Act, 1916. It was not always realised how important a part tramways were taking in the national crisis in carrying munition workers, while over 38 per cent. of tramway workers were in H.M. Forces. As to the problems which would arise in the future, no one could do more than conjecture. One thing was certain; victory in the field would not put an end to strenuous life and industrial enterprise. The history of municipal tramway enterprise had been a history of progress and improvement, and he had no doubt that tramway authorities would be able to do much to assist British brains and ingenuity through the important channel they represented. A sympathetic allusion to those who had fallen in the war closed an interesting address, which was marked by a strong but reasonable spirit of optimism as regards the future.

Mr. J. M. McElroy then read a paper which he had entitled "Some Notes on Passenger Transportation in Large Cities." A number of diagrams were included, which afforded a useful comparison of transit statistics. The paper had evidently required much research, and it was listened to with close attention. The principal difficulties met with in planning and extending traffic systems were noted. In all large cities congestion would take place sooner or later; when the arterial roadways had been utilised to the utmost, saturation point would be reached. Then new arteries must be opened out, and subways or tube or elevated railways would become necessary. Each city presented its own problems; it was dangerous to rely on plans adopted elsewhere. Tramway feeders would always be required, and they must be so placed as to maintain a supply of passengers at important junction points with other means of transit. Motor omnibuses would be of assistance in certain circumstances. The difficulties of rush-hour traffic were discussed, and the importance of tramways in dealing with it was insisted upon. A plea was made for new legislation in order to relieve municipal tramway undertakings from unfair burdens now placed upon them. Particularly was it desirable that there should be a permanent authority to direct negotiations for the carrying out of new schemes for transit facilities.

Mr. H. H. Gordon, of the London County Council, opened the discussion in an interesting and informing speech, and he was followed by Messrs. Harrison Barrow, Montgomery, Smith, Wale, and Hamilton.

In the afternoon Mr. G. W. Holford read a paper on "The Utilisation of Tramways for Goods Traffic," which had been prepared jointly by himself and Mr. W. Clough. The authors surveyed the subject in the light of what had been written and done up to the present time, and they presented a strong case for a forward movement. Figures were given to show how moderate loads could be handled cheaply on existing systems. Special reference was made to work at Leeds, Huddersfield, and Burnley, and to the railless trolley vehicle introduced by Mr. Spencer at Bradford with marked success. The paper is given in full in the following pages, and it merits careful study.

The discussion was opened by Mr. C. J. Spencer. Other speakers were Messrs. Montgomery, Mozley, Hamilton, Wilkinson, and Clough who replied to the discussion.

At the business meeting on Friday the report of the Executive Council, which is appended to our report, was, after some discussion, unanimously adopted. It is a very satisfactory record of a busy year, in which the Council has well served the Association.

The election of officers was carried out in the usual business-like manner with a minimum loss of time. Mr. Henry Mozley, general manager of Burnley Corporation, who was unanimously elected president for the ensuing year, has long been a member of the Executive Council. His tramway career began in the days of steam traction, and he has witnessed, and been instrumental in carrying out, some useful changes in tramway equipment and methods. Several innovations at Burnley have been adopted elsewhere, for Mr. Mozley has never been reluctant to communicate his ideas to his colleagues. His election to the presidency of the Association is an indication of the esteem in which he is held by the members. The election of Alderman J. Miles, J.P., chairman of Bolton Corporation Tramways, as vice-president, was unanimous, and was a testimony to the appreciation of the members of the valuable aid which he has rendered as a member of the Executive Council. The vacancies on the Council were filled by the election of the following:—Sir John

Digitized by Google

Courtis, Messrs. William Clough, W. J. McCombe, Jas. Dalrymple, and T. B. Goodyer.

Mr. C. J. Spencer consented, at the earnest request of the members, to retain the position of honorary secretary, and he was accorded a cordial vote of thanks for his services during the past year.

A vote of thanks was also awarded to the president for his able conduct of the affairs of the Association during his year of office.

A RETROSPECT.

Now that the association has held its fifteenth annual conference, a glance at its history may be of interest, especially to those of its members whose connection with it is comparatively recent. Fifteen years is not a great span in the life of an institution, but in this period the association has attained an even greater importance than its founders anticipated. Its rapid growth in membership and influence is due in a large measure to a step wisely taken soon after its formation, which enlarged its scope and identified it completely with the interests of all municipal tramways. Its beginning was, however, on a modest scale. On March 21, 1902, the Association of Municipal Tramway Managers of Great Britain was formally inaugurated at a meeting of twenty managers held in Manchester. The movement was due mainly to Mr. John Young, then general manager of Glasgow Corporation Tramways, though Manchester was the birthplace. It turned out that the meeting which gave birth to the infant—now grown to such size and influence—was the outcome of a small informal gathering which had been held, also in Manchester, on the first day of the same month. As a matter of historic interest, it is worth recording the names of those who attended that preliminary meeting—pioneers in a great developing field, one or two no longer with us, others transferred to new spheres of industry, others again still in the same towns that they then represented. They were J. Aldworth, Nottingham; A. Baker, London; C. R. Bellamy, Liverpool; A. L. C. Fell, Sheffield; E. Hatton, Salford; J. M. McElroy, Manchester; W. Wharam, Leeds; and J. Young, Glasgow.

The result of that preliminary meeting was that a circular letter, signed by Mr. Young, was sent to all the municipal tramway managers in Great Britain. They were not so large a band as they are to-day. This letter suggested that an association should be formed for the acquisition of experimental, statistical, and scientific knowledge relating to the construction, equipment, and operation of tramways, and for the diffusion among its members of information on all subjects affecting tramways. The meeting of March 21 adopted a constitution and by-laws, and it was provided that the membership should be confined to municipal tramway managers and such of their principal assistants as they might recommend. Twenty-one managers were elected members of the association, with Mr. Young as president, Mr. Bellamy as vice-president, and Mr. McElroy as secretary for the year.

A little more than three months later, namely, on July 3 and 4, 1902, the first annual conference of the association took place at the Agricultural Hall, Islington, London, where the second tramway and light railway exhibition promoted by the TRAMWAY AND RAILWAY WORLD was at that time being held. Appropriately enough, a conference of the Permanent International Tramway Union—the only one which that body has ever held in this country—was taking place about the same time and at the same venue. The meeting of the Tramway Managers' Association was attended by 31 members.

A very important step was taken in 1903. At a meeting of the association held in Leeds on March 27, it was agreed to widen the scope of the association. Its title was altered to that of the Municipal Tramways Association of Great Britain, and it was provided that ordinary members should include municipal corporations or other local authorities owning and working tramways, each local authority to be represented by the chairman or deputy chairman of its tramway committee. Thus the possible membership was much enlarged, and at the same time a more popular element was added to the purely technical, official, and administrative atmosphere. Experience has proved that the change was a wise one. The towns thus federated can recognise that the association is theirs, and not merely a society of experts in their employment. At the same time the practical and professional nature of the association has not been impaired, and politics has been rigidly excluded. The papers and discussions have been enriched by the contributions of tramway committee chairmen, while the professional element has kept the association strictly tuned up to its fundamental purpose. The latter feature was aided by the formation at the same meeting of a managers' section.

After this the membership grew rapidly, and before long nearly every local authority working tramways was a member of the association. The annual conferences were marked by the reading and discussion of a wide variety of papers relating to tramways, both on the engineering and the traffic sides. Each year the conference was held in a different town, and the manager of the tramways in that town was the president for the year. Tramway traffic grew enormously and tramway problems developed correspondingly. In dealing with these matters the executive of the association had plenty of work, and the results of their labours were brought before the annual conferences. Special committees considered and reported on specific matters of importance referred to them, including, of course, all tramway subjects involved in legislation or Government action.

So things went on till the outbreak of the European War in 1914. It had been arranged that the conference of that year should be held in Salford. By a recent innovation municipal as distinguished from professional representatives had become eligible for the presidency, and the president for that year was Alderman H. Linsley, chairman of Salford Tramways Committee. In view of the upheaval caused by the outbreak of the war the holding of the conference was cancelled, but the annual business meeting was held in Salford on November 13, when all the officers were re-elected for another year. In 1915 it was found practicable to resume the conferences, though on a limited scale. The peripatetic scheme of places of meeting was for the time abandoned, and a short conference was held in London last year.

As an addendum to this retrospect we give the dates of all the conferences, the names of the towns in which they were held, and the names of the presidents:—

Date.	*Place.*	*President.*
July 3–4, 1902	... London	... Mr. J. Young.
July 8–10, 1903	... Glasgow	... Mr. J. Young.
Sept. 27–29, 1904	... Liverpool	... Mr. C. R. Bellamy.
July 4–6, 1905	... London	... Mr. A. Baker.
Sept. 19–21, 1906	... Leeds ...	... Mr. J. B. Hamilton.
Sept. 25–27, 1907	... Manchester	... Mr. J. M. McElroy.
Sept. 23–25, 1908	... Nottingham	... Mr. J. Aldworth.
Sept. 22–24, 1909	... London	... Mr. A. L. C. Fell.
Sept. 21–23, 1910	... Bradford	... Mr. C. J. Spencer.
Sept. 27–29, 1911	... Glasgow	... Mr. J. Dalrymple.
Sept 25–27, 1912	... West Ham	... Mr. H. E. Blain.
Sept. 23–26, 1913	... Sheffield	... Mr. A. R. Fearnley.
Business meeting 1914	Salford ...	... Ald. H. Linsley.
Sept. 23–24, 1915	... London	... Ald. H. Linsley.
Sept. 21–22, 1916	... London	... Mr. P. Fisher.

Digitized by Google

THE MUNCIPAL TRAMWAYS ASSOCIATION.

THE CONFERENCE.

The 15th annual conference of the Municipal Tramways Association (Incorporated) was held at the Surveyors' Institution, Great George Street, London, S.W., on Thursday, September 21, and Friday, September 22, 1916. The President of the Association, Mr. Peter Fisher, general manager of the Dundee Corporation Tramways, presided. Those present included the following :—

LIST OF DELEGATES.

Aberdare	A. J. Abraham, general manager.
Ashton-under-Lyne	Ald. R. S. Oldham, chairman. Ernest Holt, general manager.
Bexley	H. P. Stokes, engineer and manager.
Birkenhead	Coun. H. Halsall, chairman. Cyril Clarke, general manager.
Birmingham	Coun. H. Barrow, chairman. A. Baker, general manager.
Blackburn	Coun. Higham, vice-chairman. J. H. Cowell, general manager.
Bolton	Ald. John Miles, J.P., chairman. Coun. J. R. Horrocks, member of committee. J. Barnard, general manager.
Bradford	Coun. E. Priestley, J.P., chairman. Coun. J. Lund, vice-chairman. C. J. Spencer, general manager. J. W. Falkingham, assistant secretary M.T.A.
Burnley	Henry Mozley, general manager.
Burton-on-Trent	A. B. Slater, general manager.
Bury	Ald. T. S. Collinge, chairman. Coun. H. Hargreaves, vice-chairman. William Clough, general manager.
Cardiff	Ald. Sir J. W. Courtis, J.P., chairman. Arthur Ellis, engineer and manager.
Chester	W. H. Ellis, traffic manager.
Chesterfield	R. L. Acland, general manager and engineer.
Colne	T. G. Richardson, general manager.
Coventry	Coun. C. V. Pugh, J.P., chairman. Coun. H. W. Wale, vice-chairman. T. R. Whitehead, general manager.
Croydon	Ald. G. J. Allen, J.P., chairman. T. B. Goodyer, manager.
Derby	J. Dean, chairman.
Dundee	Coun. G. A. Johnston, chairman. Peter Fisher, general manager.
East Ham	Ald. M. Oakes, J.P., chairman. W. C. Ullman, engineer and manager.
Exeter	Ald. H. B. Varwell, chairman. H. C. Bartlett, general manager
Glasgow	Coun. Montgomery, chairman. Bailie Thos. Kelly, vice-chairman. Jas. Dalrymple, general manager.
Halifax	Ald. C. F. Spencer, chairman. Ald. A. Fawcett, vice-chairman. J. D. Caird, traffic manager. J. W. Galloway, tramways engineer.
Huddersfield	R. H. Wilkinson, general manager.
Hull	William J. McCombe, manager.
Ilford	L. E. Harvey, manager and engineer.
Ilkeston	S. F. James, town clerk, hon. solicitor, M.T.A.
Keighley	Coun. A. Smith, chairman. Harry Webber, general manager.
Leeds	Ald. H. Brown, vice-chairman. Coun. C. G. Gibson, member of committee. J. B. Hamilton, general manager.
Leicester	Ald. S. Flint, chairman. Ald. G. Banton, vice-chairman. A. F. Lucas, manager. T. R. Smith, engineer.
Leyton	F. Schofield, manager.
Liverpool	Coun. E. Russell-Taylor, J.P., C.C., chairman. Ald. F. Smith, J.P., vice-chairman. C. W. Mallins, general manager.
London County Council	H. Gordon, dep. chairman of the Council. W. J. Squires, J.P. J. K. Bruce, dep. chief officer of tramways. L. Slattery, traffic superintendent.
Maidstone	A. T. Lambert, general manager.
Manchester	Ald. A.W. Chapman, M.D., vice-chairman. J. M. McElroy, general manager.
Newcastle	Coun. R. Mayne, chairman.
Newport	N. J. Young, general manager.
Northampton	Coun. T. D. Lewis, chairman. John F. Cameron, general manager.
Nottingham	J. Aldworth, general manager.
Plymouth	Coun. J. Moon, vice-chairman. C. R. Everson, general manager.
Portsmouth	Coun. J. Timpson, chairman. Ald. R. Payne, vice-chairman. W. R. Spaven, general manager.
Preston	Coun. T. Parkinson, vice-chairman. J. F. Simpson, engineer and manager.
Reading	Ald. C. G. Field, J.P., chairman. G. F. Craven, gen. manager and engineer.
Rochdale	Ald. James Taylor, chairman. George Webster, general manager.
Salford	Ald. Linsley, J.P., chairman. G. W. Holford, general manager.
Sheffield	Ald. Jas. Knowles, chairman of engineering sub-committee. A. R. Fearnley, general manager.
Southampton	Ald. Dunsford, J.P., chairman. W. T. Robson, general manager.
South Shields	J. C. Whiteley, manager.
Stalybridge	Ald. R. Wood, chairman. R. Blackmore, engineer-in-chief.
Wallasey	Coun. H. W. Griffin, vice-chairman. R. R. Greene, general manager.
Walsall	R. L. Horsfield, general manager.
Walthamstow	Coun. R. J. Bishop, vice-chairman. Wm. Murray, manager.
West Ham	H. W. Littler, ex-chairman, and member of the Executive Council. J. S. D. Moffet, general manager.
Wigan	F. Buckley, general manager.
Wolverhampton	C. Owen Silvers, general manager and engineer.
York	J. W. Hame, engineer and manager.

The PRESIDENT, in opening the proceedings, said :—Our hon. secretary has some announcements to make, but just before he makes them will you allow me to say how gratifying it is to see so many municipalities represented here this morning. You may take it that that is an expression of the interest they have in our Association, and the work that is carried on by that Association in relation to tramways. We have also one or two strangers with us, and we all offer them a very hearty welcome. Amongst the assembly this morning we have the deputy-chairman and the vice-chairman of the London County Council. I am sure we all feel honoured by them seeing their way to grace our proceedings with their presence. Since I came into the hall I have heard that our friend Mr. Fell has had a relapse. I know nothing of its nature, but perhaps his vice-chairman, who is present with us, will tell the Conference what this means.

Mr. W. J. SQUIRES (London County Council) :—Mr. President and gentlemen, it was with very great regret that I had to report to your secretary this morning that Mr. Fell had a rather serious relapse last week. I know the testimony which you have paid to Mr. Fell on former occasions, and I am sure this morning that everybody will agree with me that we are very sorry indeed to hear of this. He has now been ordered away for a six months' tour, and you, sir, and I trust every member of this Conference, nay, everyone connected with tramway undertakings, will express only this wish, namely, that Mr. Fell may return to those duties in which he has a great responsibility, and I am sure when he does that the London County Council will again welcome him to his work. (Hear, hear.)

Mr. J. B. HAMILTON (general manager, Leeds City Tramways).—May I take this opportunity, which I do most readily, to ask this meeting, through its secretary, to forward to Mrs. Fell their expression of sympathy and their hope that Mr. Fell will return with renewed vigour.

The PRESIDENT.—Will some gentleman second that ?

Mr. H. E. BLAIN.—If I may be allowed, in response to your call, to second that, I shall do so with very great cordiality. I feel sure that all have felt very deeply indeed the severe illness which Mr. Fell has undergone, and that we all desire to show him by this cordial expression of sincere sympathy the esteem in which we hold him.

The PRESIDENT.—I am sure we all join with the mover and seconder in expressing our regret at Mr. Fell's illness, and we trust that the voyage he is undertaking will be the means of a speedy and complete recovery.

The motion was then carried unanimously.

The SECRETARY (Mr. C. J. Spencer) then announced an invitation from Mr. Blain, of the London General Omnibus Company, to the members of the Conference to visit the training school at Chelsea, of which several delegates availed themselves in the afternoon. A letter also had been received from Mr. Stokes, manager and engineer of the Bexley Tramways, inviting the delegates to view the working of Wood's-Gilbert rail grinder and planing machine on

Digitized by Google

the Bexley tramways. It was also announced that an invitation had been extended by the London County Council to the delegates to inspect the Council's trailer car system, the generating station and the central car repair depot.

The PRESIDENT, who was greeted with applause upon rising, said :—Gentlemen, unfortunately I have a bad throat this morning, and have had for two days. It is better at present or else I would not make even an attempt to read this address to you ; but seeing that you have a print in your hands I will try to read it myself.

PRESIDENTIAL ADDRESS.

BY MR. PETER FISHER
(General Manager, Dundee City Tramways).

The great European war is still being waged with as great, if not greater, intensity as when we last met in conference, and in consequence of its overshadowing influence our Conference meets here to-day instead of, according to the usual procedure, in Dundee. We can only regret the necessity for the continuance of this great conflict, but in the interests of humanity and civilisation and fidelity to the written or verbal obligation the Allied Powers must be organised solely for the purposes of the war until their efforts are crowned with victory, and an honourable and lasting peace obtained on terms laid down by the Allies.

As you will see from the annual report of the Executive Council, a large proportion of the work of that body during the past year has been in relation to problems arising out of the war, i.e., supply of tramway tickets, tramway tire supplies, retention of tramway employees, Munitions of War (Amendment) Act, 1916, classification of tramway material, women as tramcar conductors, Lights (Vehicles) Order, 1915, British trade after the war, and disabled soldiers and sailors. Several of these matters deserve more than passing notice. In connection with the Munitions of War (Amendment) Act, 1916, your Council, with valuable outside assistance, were successful in getting the term "munitions work" extended to cover "tramway facilities." No fewer than 44 municipal tramway undertakings are up to this date certified under the Act, and many others are authorised to issue Class "B" Priority Certificates to facilitate the delivery of supplies for maintenance.

We, as tramway authorities, recognise that in this crisis our point of view must be primarily to give our services to the nation, both in the way of supplying munitions and in keeping industry alive. It is not always realised by the average man that tramways are to-day playing a very important part in the national crisis in carrying workpeople from their homes to the factories and *vice versa*. Workpeople are to-day in all probability working harder and more strenuously than at any other period in history, and if the journey from their homes to the factory and back had in all cases to be undertaken on foot, the nation would feel a serious reaction in reduced output. It is therefore very gratifying that the Government have realised the great importance of tramway undertakings and have given them such facilities as enable them to keep going.

The Lights (Vehicles) Order, 1915, was in its original form such that the tramway authorities in order to comply with it would have been put to the necessity of making considerable expenditure, and that at a time when the staffs in their workshops are depleted. There is also the additional difficulty of obtaining materials for the work.

Other matters affecting tramway interests and the interests of this Association, as you will see from the report in your hands, have been dealt with by the Executive Council.

The past year has not been fruitful in developments and extensions so far as tramways and other passenger-carrying facilities are concerned. The most outstanding features of the year are the readjustment of tramway fares and stages, the employment of females on a large scale, and the introduction of volunteer labour for driving, the latter innovation having been introduced in Birmingham, Newcastle, and Bradford, where 320 auxiliaries are employed with quite satisfactory results.

During the year proposals for increasing the fares, shortening the stages, or abandoning halfpenny fares have been considered by various tramway authorities. In several cases changes have been made whereby the average fare per passenger has been materially increased, and in all these cases additional revenue has been the result.

Strange as it may seem, some authorities have actually been considering the decreasing of fares and the cheapening of tramway facilities. It is remarkable that, in the main, tramway fares have not increased very seriously. Tramway travelling, indeed, is about the only commodity that has not been generally increased. Having regard to the increased working costs consequent on higher wages and bonuses to employees, war allowances to dependants of men who have joined the colours, and the largely increased cost of tramway supplies, it is not surprising that the question of increasing tramway revenue should demand the attention of those operating many tramway systems.

Present conditions provide ample justification for suggesting that the existing low fares should be adjusted so that the increased costs should be fully met. While the accounts of most municipal tramway undertakings look fairly satisfactory, still it must be admitted that much necessary expenditure is only suspended till the end of the war.

There are now 8,609 females employed on tramways, as follows :—8,433 as conductors and 176 as drivers. The splendid manner in which women have taken up this work, and the facility with which they have adapted themselves to this new employment, has earned for them the approbation of the tramway authorities and the tramway patrons.

Some idea as to the part tramways are taking in the great conflict may be obtained from the following figures :—

Number of men who have joined H.M. Forces	20,905
Percentage to total	38
Number of men who have joined munition factories ...	1,893
Percentage to total	3½
Amount paid to dependants of employees	£854,649
Average allowance per man per week	10s. 7½d.
Collected on cars for national and other objects ...	£43,800
Collected and contributed by employees to relief funds	£36,070

In addition to the above, tramways are doing much to assist the national cause which cannot be expressed in figures. The services

Mr. Peter Fisher,
President of the Municipal Tramways Association.

rendered in making provision for the carrying of munition workers and others engaged in important national work is a case in point.

What of the future? Changes will come. The war certainly will not only be an interruption of what formerly existed. What will be the precise nature of the problems which, when they emerge, must be boldly faced, no one can forecast. It is a matter still in the region of conjecture.

It may be hazarded that no two men's views of the future will harmonise, and this need not surprise us, for, although Britain and her Allies have now wrested the initiative from the Central Powers, never, let us hope, to lose it, the nature of the settlement can hardly yet be gauged. One thing certain is that victory in the field will not put an end to the strenuous life in industrial enterprise.

Germany, faithful to her motto of "thorough," will make a determined effort to regain in the market-place what she has lost on the battlefield. Competition will be as keen as in bygone days, and although in the strict sense of the word we, as tramway operators, are neither manufacturers nor merchants, I have no hesitation in predicting that we will be able to do much to assist

Digitized by Google

British brains and ingenuity through the important channel of public service which we represent.

The history of municipal tramways is a history of progress and improvement. Sometimes we were tempted to think that everything had been done which could be done, and yet in tramway enterprise, as in all other departments of human affairs, there is no such thing as finality. For two years the war has dominated everything, but when peace returns pressing problems will present themselves to us in their true perspective, and these will probably involve adjustments such as we scarcely dreamt of in pre-war days.

Simultaneously with the cessation of hostilities various problems relating to our employees will present themselves. For example, the question of war wages and bonuses, and the position to be taken up regarding our men who may be in receipt of pensions but still able to perform certain duties. As I have before remarked, other and more important problems will emerge later on which no one can possibly forecast.

I have not a shadow of doubt that municipalities will sympathetically consider the above questions, and it is to be hoped that friendly conferences between all interested will from time to time take place, and, with a spirit of reasonableness of "give and take," will act as lubricants to all those negotiations which will undoubtedly have to be faced.

It is extremely appropriate that one of the papers to be submitted to the Conference to-day deals with the important question of goods transportation on tramways. The services which can be rendered to the country by using the tramways to their fullest extent in this connection can only be appreciated when the subject is considered on lines such as were outlined by the late Mr. Bellamy in his presidential address at the Conference in Liverpool in 1904.

The development of tramways from a passenger-carrying point of view has occupied our attention almost entirely in the past. Now the other point of view, viz., transit, such as tramways can offer for goods, should have our fullest consideration. On the face of it it appears reasonable to say that if a tramway is of value for picking up passengers from railway stations and other points, and depositing them at their destinations, it should be equally true in the case of goods. In fact, one might suggest that in the tramway undertakings in the country the railway companies have a suitable instrument for detail distribution which could be used to mutual advantage and to great public convenience. In the days to come, when economic competition between nations will in all probability be even fiercer than in the past, transit will undoubtedly play an important part.

The writers of a book on the "Coming Trade War" contend that cheap and efficient production is attained by the influences of five sciences, one of which is "transportation." We are essentially transport men, and upon our ability to assist will depend to a considerable extent the success of the nation in the economic fight of the future. Relaxation of restrictions and regulations may be necessary to enable tramways to play the important part they are destined to do, but when national interests are involved there should be no difficulty in this respect.

It seems a little doubtful whether the Government have yet realised the very great assistance which tramways throughout the country can render, even at the present time, as a transit instrument for goods as well as passengers. Railways are crowded with traffic of all kinds, and considerable complaint is heard all over the country regarding the delays that are taking place. It is therefore just a little surprising that the Government have not seriously considered the usefulness of the various tramway undertakings for the carriage of munitions and general merchandise.

No doubt the paper to be submitted to the Conference later in the day by Messrs. Holford and Clough will be keenly debated in this assembly, and it is to be hoped that it will appeal to even a larger audience than that contained in this room.

As Britishers it is gratifying to us to note the schemes now adumbrated for the protection of the maimed and incapacitated through taking part in the war, but for those who return fit for work suitable employment must be provided. In addition to those who left our service for the army it will be up to us to do all in our power to assist others who have endured such hardships and suffering in the cause which prompted Britain to enter the war.

I feel that I cannot close without making reference to those of our men who have fallen in the conflict. We offer our condolences to their relatives and friends who have been bereaved, and who have also been denied the sacred privilege of paying their last respects to their loved ones, many of whom did not even get the kindly sod in "God's acre"—no wreaths, no tears, no priest, and no mourning congregation. Our brave are scattered over the whole war area. Someone has said, "Our battles have been won by the men who fell." They are gone; we will cherish their memory. They lived "the one crowded hour of glorious life" which "is worth an age without a name."

I would also like to take the opportunity of recording my appreciation of the honour conferred upon me in appointing me as president of this important Association, and to express my gratitude to the Executive Council and to our Hon. Secretary for their many kindnesses and whole-hearted support throughout my year of office.

Alderman S. FLINT (chairman Leicester Corporation Tramways), after expressing the sympathy of the members with the president in the disability under which he was labouring through having taken a rather bad cold, said:—The address to which we have just listened is not open to us to criticise, but one may say this, that we are under a very great debt to our president for bringing it before us. It is full of points of interest, and I think opportunities will probably be given during the Conference when some of these points may be enlarged upon to the general advantage of the conference. With the last clause but one in the address we all at once deeply sympathise. It expresses our feelings in most beautiful terms. I suppose, perhaps, there are scarcely any of us here but who enter into them very deeply. I myself have four sons in the army, and a daughter serving abroad. Three of them have been wounded, and I appreciate most sincerely the touching remarks made in this paragraph of the president's address. As I say, we owe a debt to our president, and I have great pleasure in moving, in this brief way, that we give him our hearty thanks for the address he has read to us this morning.

Mr. J. DALRYMPLE (general manager, Glasgow Corporation Tramways).—I have very great pleasure in seconding the vote proposed by Mr. Alderman Flint, and I wish to add my expression of thanks to the president for his able *résumé* of the position at present as it has presented itself to him, and for the very thoughtful and sympathetic reference which he has made to the points that are likely to take up our attention in the near, I hope the very near, future. I beg to second the motion.

Mr. H. MOZLEY (vice-president).—I have very great pleasure in putting this motion to the conference. I am sure you will agree to it unanimously.

The vote of thanks to the president for his address was then put to the conference, carried by acclamation, and conveyed to the chair.

The PRESIDENT.—I beg to thank you for the kind way in which you have received my effort this morning. Mr. Alderman Flint has specially referred to the last paragraph but one in the address. May I say that I felt that we, as tramway chairmen, as delegates, and as managers, could not meet this morning without making some reference to the brave fellows who left everything and gave up their lives for their country and those dear to us. I am very glad you have appreciated that point, and I am sure we do earnestly give our condolences to the friends of those who have fallen. (Applause.)

The President then called upon Mr. J. M. McElroy to read the paper which he had prepared and had entitled:

SOME NOTES ON PASSENGER TRANSPORTATION IN LARGE CITIES.

BY MR. J. M. MCELROY
(General Manager, Manchester Corporation Tramways).

Systematic studies of the passenger transportation requirements of the large cities in this country—studies directed towards making proper provision for meeting the constantly-increasing traffic demands which follow the cities' development—have not in the past been undertaken with that thoroughness which has been characteristic of many cities abroad, particularly in America. Looking ahead is not one of our strong points, and certainly preparation for future developments has not been a distinguishing feature in some phases of our local government. True it is that in recent years we have heard much of town planning, but it is doubtful even now whether it is being conceived and directed, except perhaps in a few instances, with that breadth of view which its importance demands.

Town planning schemes and the making of provision for future passenger transportation requirements are really part and parcel of the same problem, and should be considered together. They cannot be divorced if the best results are to follow; and the planning of transit facilities should only be undertaken after detailed studies have been made of each city's traffic characteristics. That our ancestors gave little or no attention to town-planning the older parts of most of our cities only too plainly indicate. The lay-out of the streets followed no plan—they "just happened." In consequence of this the difficulties in the way of providing adequate transit facilities sooner or later becomes one of the most complex questions we have to face.

As cities grow, due to the gradual increase in population, and as the riding habits of the people develop, it becomes more and more difficult to make the channels of passenger transport equal to the ever-growing demands. In every city the main factors affecting this problem are much the same. There is a constant migration of the population from the inner to the outer zones, and this is greatly accelerated by every extension and improvement in the means of transit. Suburban districts rapidly become urban, and new suburban districts in the outlying areas are always in process of formation. Smaller towns and districts on the outskirts are drawn into closer touch with the cities, and a greater community of interests is being established over a gradually-widening area.

Digitized by Google

Every extension of the means of transit into the outer zones adds to the difficulties of handling the traffic in the central zone, and in time the congestion becomes so acute that the city authorities realise that they are face to face with the inevitable traffic problem. This condition of things arises sooner or later in all large cities, but some cities have been confronted with the problem at an earlier date than others owing to the narrowness and bad lay-out of the streets in the older parts of the city, to the absence of suitable arterial roads, and to the presence in the central zones of a large amount of ordinary vehicular traffic which, if it is slow-moving, tends greatly to retard the general flow of traffic.

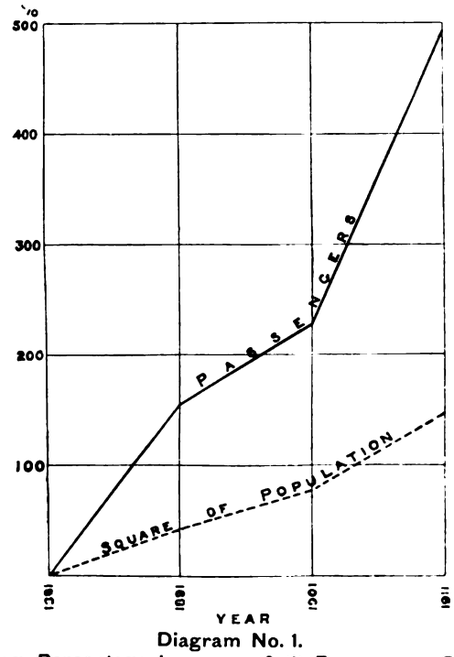

Diagram No. 1.
Showing Percentage Increase of (1) Passengers Carried, (2) Square of Population in Manchester and District.

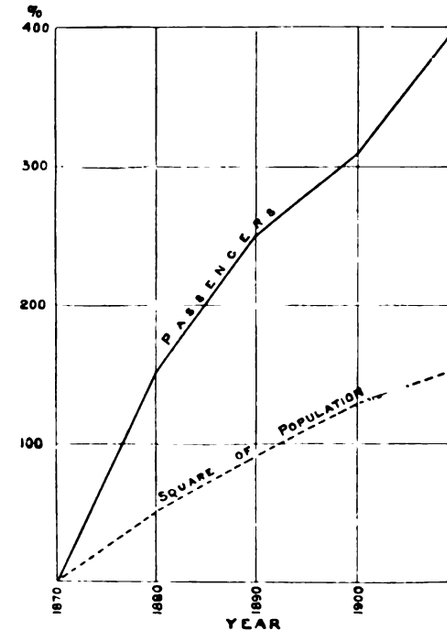

Diagram No. 2.
Showing Percentage Increase of (1) Passengers Carried, (2) Square of Population in Greater London.

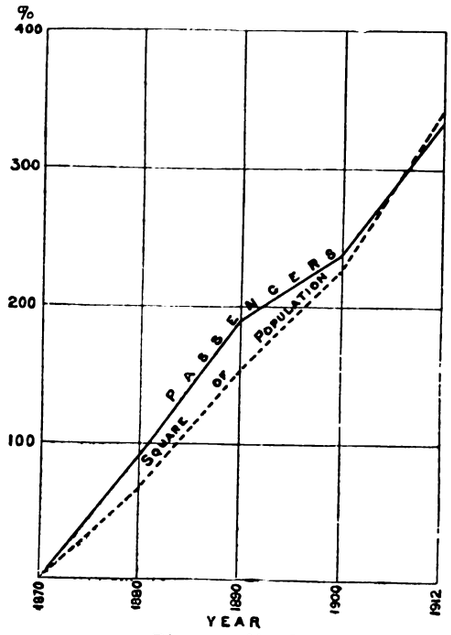

Diagram No. 3.
Showing Percentage Increase of (1) Passengers Carried, (2) Square of Population in Greater New York.

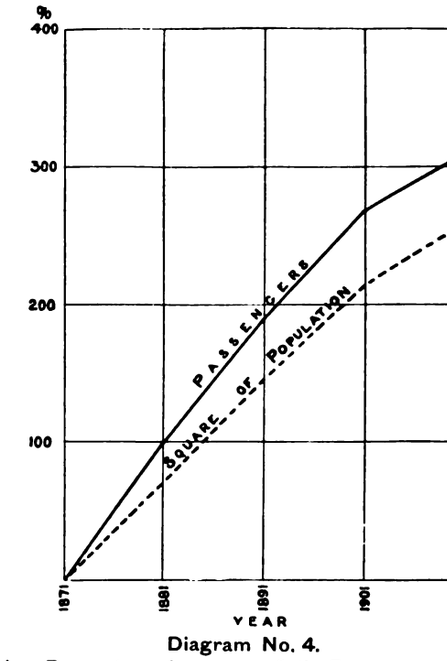

Diagram No. 4.
Showing Percentage Increase of (1) Passengers Carried, (2) Square of Population in Boston.

It is well known that the passenger traffic in cities grows at a much greater rate than the increase in the population. Some years ago a student of traffic questions, having analysed the statistics of a number of European cities, found that on the average the number of passengers carried increases in the same ratio as the square of the population. This rule is approximately true as regards American cities, but it does not appear to be true as regards British cities. In some of our cities the number of passengers carried is increasing at a much greater rate than the square of the population.

The accompanying diagram, No. 1, shows the percentage increase of (1) the passengers carried, and (2) the square of the population in Manchester and the surrounding districts during the past three decades. Diagram No. 2 shows similar information as regards Greater London. In both of these instances it will be seen that the number of passengers carried is increasing at a much greater rate than the square of the population. Diagrams Nos. 3 and 4 show the facts as regards Greater New York and Boston, from which it will be observed that the line indicating the passengers carried very closely follows the line indicating the square of the population.

In considering the traffic statistics of various cities, it may be very misleading to draw general inferences unless the local circumstances in each case are fully recognised and clearly kept in mind. Many factors tend to accelerate the normal growth in a particular city, and unless we are acquainted with these we may be drawing wrong conclusions from the data. Quite apart from the question of the increased facilities and the introduction of general improvements in the means of transit—which are always followed by a rapid rise in the number of passengers carried—the factor as to the fares charged, and the changes made therein from time to time, has a most important bearing on the subject. We have therefore in the case of each city not only to look at the total transit facilities

Digitized by Google

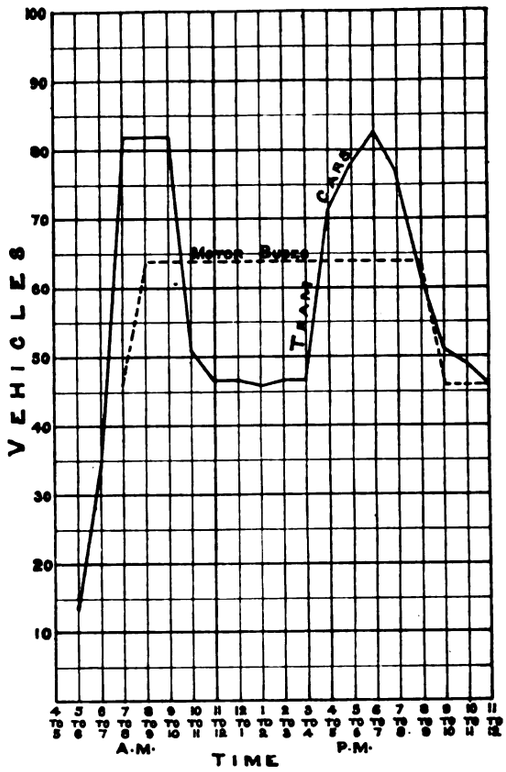

Diagram No. 5.
Showing Number of Tramcars and Motor Omnibuses passing in one direction along Walworth Road, London, July, 1914.

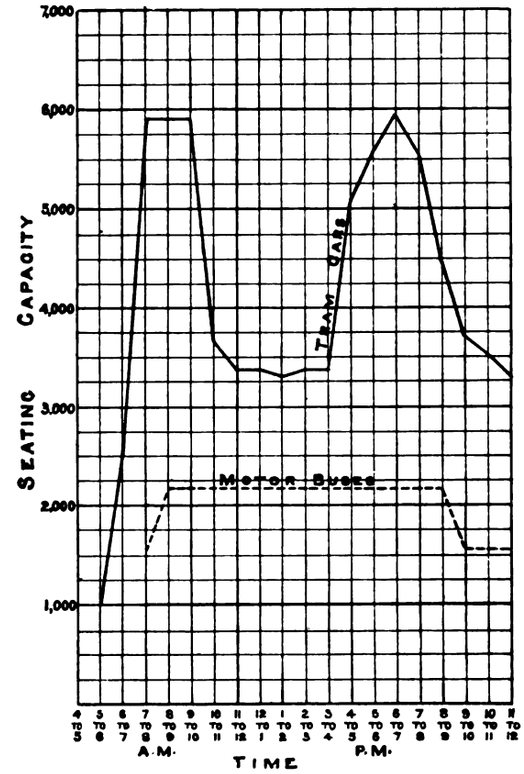

Diagram No. 6.
Showing Seating Capacity on Tramcars and Motor Omnibuses passing in one direction along Walworth Road, London, July, 1914.

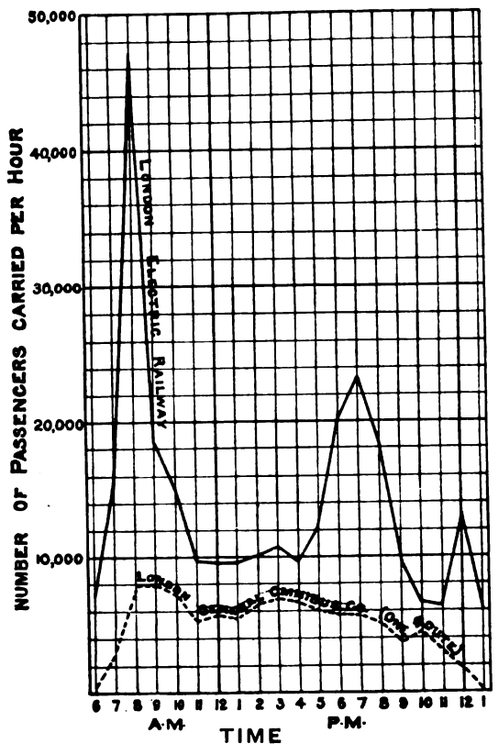

Diagram No. 7.
Showing Hourly Number of Passengers carried on the London Electric Railway and one route of the London General Omnibus Company.

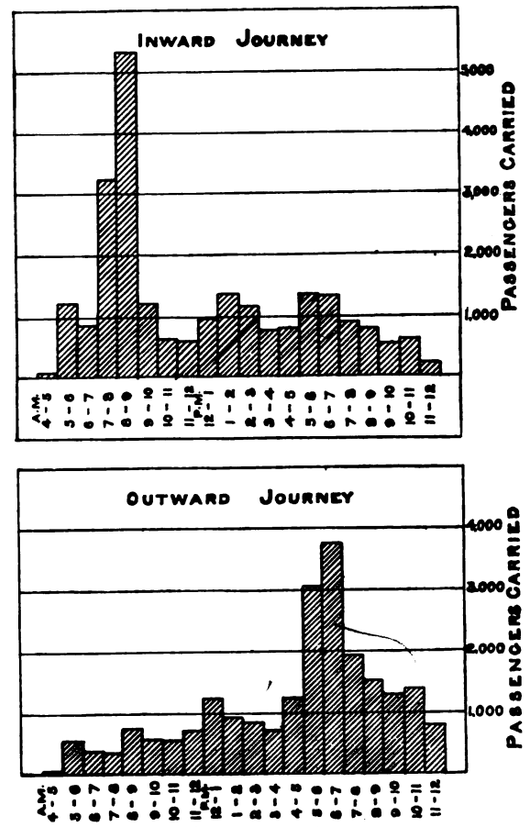

Diagram No. 8.
Showing the Number of Passengers carried each Hour of a Typical Day, Rochdale Road Route, Manchester.

Digitized by Google

provided, and gauge their excellence or otherwise, but we have to look at the fares charged, and see the effect of these. We should ascertain the extent to which long-distance and short-distance passengers are respectively catered for. In short, comparative statements as to the number of passengers carried tend to be misleading because they do not indicate the average distance travelled by each passenger.

The ultimate volume of passenger traffic which can be dealt with by facilities which use the street surface is limited by the capacity of the arterial routes near the central parts of the city. When the traffic on these routes approaches the saturation point, then additional arteries must be opened out or other transit facilities provided.

The new facilities which may be provided are :—

(1) Railways—(*a*) in shallow subways; (*b*) in deep level "tubes"; (*c*) on elevated structures.

(2) Shallow subways in the congested areas into which the surface cars can be run.

Many cities have not waited until the saturation point of the surface facilities has been reached before underground or overhead railways have been constructed, because the demand for the railways has arisen through the constant desire for quicker movement. In other words, *time saving* has been the main factor which has led to the construction of many city railways, and the patronage they receive from the public depends largely upon the time-saving capabilities of the lines.

Experience shows that the provision of shallow subways into which surface cars can be run so as to relieve the traffic congestion in the central parts of cities cannot be justified owing to the great cost of construction and the comparatively small amount of traffic which can be passed through them. Underground lines of any description can only be justified by a dense traffic demanding the operation of high-speed trains run at very close intervals.

In planning new transit facilities a wide outlook is all-important. Any schemes carried out on narrow or confined lines, or which do not form part of the transportation requirements of the city viewed as a whole, ultimately result in serious losses to the community from every point of view.

Underground lines should be so laid out that they can be worked in conjunction with the surface lines by providing suitable transfer points from surface to underground and *vice versa*. The surface lines should gather the local traffic and feed the underground lines, which, in order that they may pay their way, must be provided with an immense volume of traffic. It is not at all likely, having regard to the general experience, that private enterprise will be willing in future to shoulder the great outlay involved in the provision of underground facilities.

be £68,000,000. This capital is being provided roughly half and half by the city and by the operating companies. The companies are to get out of the revenue all their operating expenses and 6 per cent. upon their investments, and out of the balance the city is to get the interest on its investment plus 1 per cent. for sinking fund, and if there is any profit after these payments have been made it is to be divided equally between the city and the companies. It is, however, doubtful whether there will be the available net revenue to meet the interest and sinking fund payments of the city, and the possibility of any ultimate profits to the city is remote. But the city authorities are not looking for profits. They are determined to provide adequate travelling facilities—and so important a duty on the part of the municipality do they consider this that they have made up their minds to do it properly, even if it entails a charge upon the rates of the city.

In London—where all the capital for the underground railways has been found by private enterprise—it is pointed out by Sir Albert Stanley that in 1913 the amount available for dividends on the ordinary capital was only sufficient to pay just over 2 per cent.—not a very encouraging result for a city which has the largest population in the world.

In studying the problem which we are now faced with in Manchester—where several of our arterial routes approaching the centre of the city have practically reached the saturation point—I came to the conclusion, after careful consideration, that the proper course for the Corporation to pursue to meet the constantly-growing requirements was—before attempting to provide underground facilities, the cost of which is so enormous—to improve and make more efficient the existing surface lines by opening out parallel routes, by forming new streets and widening others at considerable cost, and also by adopting tramway terminals near the heart of the city, the latter being necessary on account of the narrowness and bad lay-out of the central streets.

Since my report was written I observe that Mr. M. C. Brush, the vice-president of the Boston Elevated Railway Company—a company which operates the whole of the transportation facilities in Boston, i.e., the surface tramways, tramways in subways, underground and elevated railways—made the following observations in a paper read before the American Electric Railway Association in 1916 :—

> "When tracks in a certain street have reached the saturation point . . . . and additional transportation facilities must be provided, every conceivable effort should be made to use parallel streets for additional surface tracks, or even build an elevated structure. It is absolute economic waste to recklessly spend enormous sums of money for subway construction merely

STATEMENT SHOWING CAPITAL INVESTED IN UNDERGROUND AND ELEVATED CITY RAILWAYS.

	Greater New York.	Chicago.	Philadelphia	Boston.	London.
Total Amount at present Invested :—	£	£	£	£	£
(A) By the Company :—					
Elevated lines ...	33,541,667	20,416,667	...	...	...
Underground lines	23,958,333	...	...	...	53,962,628
	57,500,000	20,416,667	3,541,667	7,291,667	53,962,628
(B) By the City :—					
Elevated lines ...	2,083,333	...	...	...	...
Underground lines	9,375,000	...	...	...	...
	11,458,333	...	...	1,875,000	...
Total amount at present invested ...	68,958,333	20,416,667	3,541,667	9,166,667	53,962,628
Proposed Future Expenditure :—					
(A) By the Company :—					
Elevated lines ...	13,958,333	...	3,333,333	1,250,000	...
Underground lines	20,833,334	7,291,667	1,458,334	416,667	...
	34,791,667	7,291,667	4,791,667	1,666,667	...
(B) By the City :—					
Elevated lines ...	4,375,000	...	833,333	...	...
Underground lines	29,583,333	20,000,000	6,458,334	1,458,333	...
	33,958,333	20,000,000	7,291,667	1,458,333	...
Total Proposed Future Expenditure ...	68,750,000	27,291,667	12,083,334	3,125,000	...
Average cost per route mile of existing lines ...	564,313	372,563	485,167	684,063	(*) 664,230

(*) This figure is the average of four companies, viz. :—Central London, City and South London, Great Northern and City, and London Electric.
A large part of the works in New York included under the head of "Future Expenditure" has been carried out since this table was compiled in February, 1914.

The accompanying statement shows the immense sums invested in urban railway lines in a number of cities, and the proposed further expenditure which some of such cities are proposing to incur. In New York the total outlay on the underground and elevated lines—when the extensions are fully completed—will be £137,000,000. The expenditure on the extensions, undertaken in recent years, will

because a particular highway has operating upon it all the surface cars consistent with either good transportation or economy, and subway construction should only be decided upon after other and less expensive means of furnishing additional transportation have been sufficiently studied to justify their expediency.

Digitized by Google

> "The enormous amount of traffic absolutely necessary to support expensive subway construction makes it incumbent on those responsible for such expenditure to thoroughly satisfy themselves that the traffic offered, and the conditions prevailing, compel subway construction rather than the use of other arteries on the highway or even private right of way construction on the surface."

The necessity of utilising the streets to the fullest advantage for meeting the demands for passenger transportation involves the consideration, from time to time, of the question as to the most suitable means of surface transit, having regard to the traffic requirements.

Much has been written about the relative merits of tramcars and motor omnibuses—unfortunately not without bias on the part of the advocates of each class of vehicle. An abstract discussion as to the relative merits of tramcars and motor 'buses, without reference to the particular purpose for which they are intended to be used, is likely to be very misleading. Each type of vehicle has its peculiar advantages, and in the future each will be utilised for handling that class of traffic for which it is best suited. The tramcar, on account of its greater seating capacity and its ability to cope with traffic of a widely fluctuating character, will be utilised where heavy peak loads have to be catered for. On the other hand, where the volume of traffic is not great, or where there is a steady traffic flow throughout the day, motor 'buses will probably prove to be the more suitable vehicles. In some instances it may be found to be advantageous to run the two types of vehicle along the same routes. The aim should be to use the highways as channels for passenger transport to the best possible advantage, and the most efficient means of doing this can only be decided upon in any particular case by a study of the traffic characteristics.

Attempts have been made to show the relative efficiency of the two types of vehicles—tramcars and motor 'buses—by comparing the *average* loading. It has been pointed out that "the average load of a tramcar with 74 seats is 10½ passengers, and of the motor 'bus with 34 seats is 8 passengers, and therefore the relative efficiency of the motor 'bus is almost twice as great as that of the tramcar." This is a distortion of the meaning of the word "efficiency." In practice we have not to deal with hypothetical averages, but with actual traffic conditions—conditions often varying greatly at different times of the day. The relative efficiency of the two types of vehicle cannot otherwise be gauged than by their ability to cope with the volume and flow of traffic in particular cases.

Diagram No. 9 shows the loading of a typical tramcar during a full day's continuous running on the Palatine Road route, Manchester. The car has a seating capacity for 75 passengers. The intermittent nature of the loading, and the effectiveness of the tramcar in handling it, are clearly indicated. The diagram also shows by a broken line the seating capacity of a motor 'bus. The tramcars on this route have the upper saloons covered, and therefore the whole of the seating accommodation is available in all conditions of weather. In bad weather the outer seats of motor 'buses are nearly always empty, hence their effective seating capacity under these conditions may be said to be reduced by about one-half. The *average* number of passengers carried per car-mile on the tramcar shown on the diagram was 14. The fallacy of using this figure as a measure of the car's efficiency is too obvious to need comment.

Diagrams Nos. 5 and 6 (kindly prepared for me by Mr. A. L. C. Fell) show what the tramcars and motor 'buses are doing respectively to meet the traffic demands on a typical route in London. Diagram No. 5 shows that the number of tramcars passing in one direction at the hours of peak load is 82. At the slack hours nearly half the cars are withdrawn. On the other hand, the motor 'buses make no attempt to deal with the peak between 7 and 8 a.m., but obviously cater for a steady all-day traffic. Diagram No. 6 shows the relative seating capacity of the tramcars and motor 'buses referred to in Diagram No. 5, and illustrates the effectiveness of the former. The trams are dealing with the peak loads and the 'buses are catering for the steady pick-up traffic throughout the day.

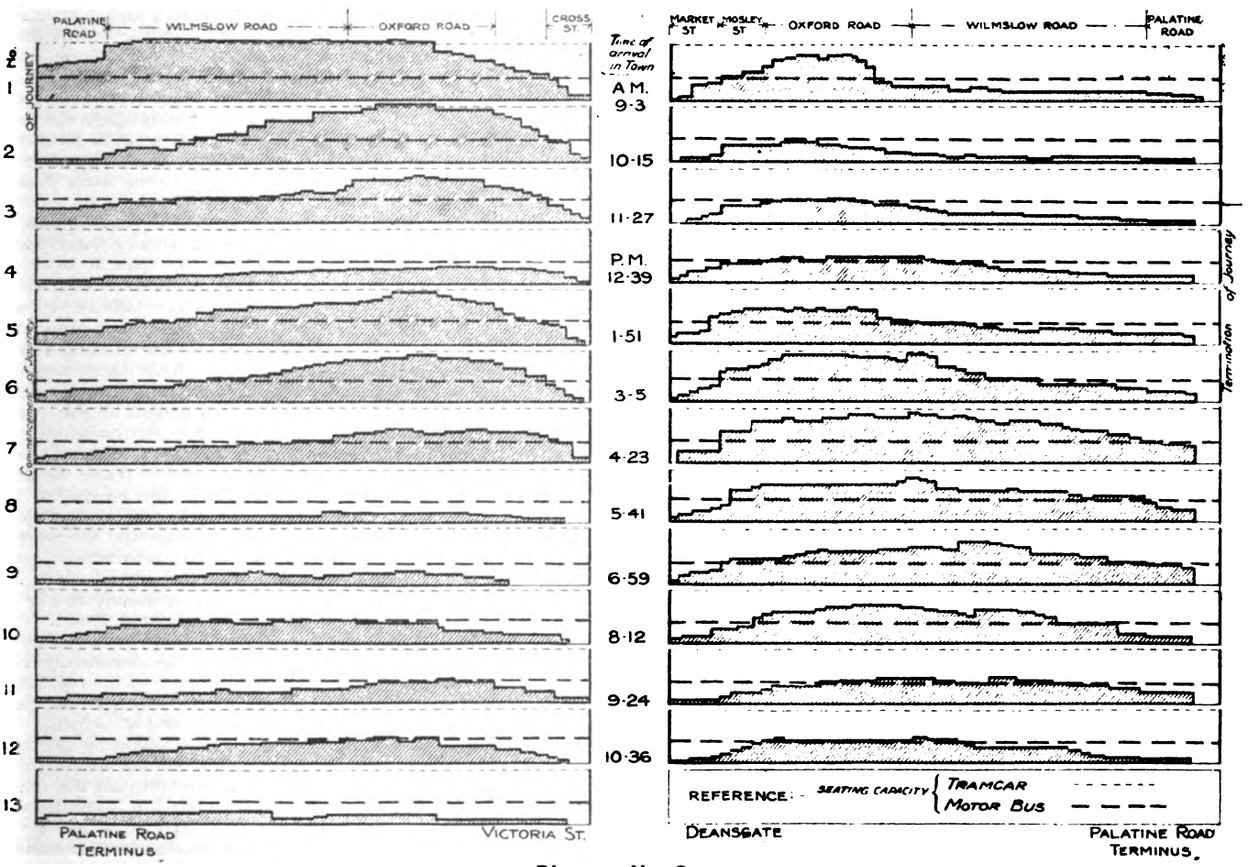

Diagram No. 9.

Showing Loading of a Typical Car during a Full Day's Continuous Running on Palatine Road Route, Manchester

Diagram No. 7 (taken by permission of Sir Albert Stanley from his paper on "London Traffic") shows the fluctuating character of the loading on the London Electric Railway and on one route of the London General Omnibus Company. Here is an illustration of the ability of the railways to handle heavy peak loads and the lack of capacity in the case of the motor 'buses.

Sir Albert Stanley in his paper points out that—

> "*The motor 'bus, when operating in conjunction with other means of transit, has not a peak load.* One reason is the absence of workmen's return fare, which cuts it off from a fair share in the traffic before 8 o'clock in the morning. Another reason is the smallness of the units required to be filled with traffic, which allows of a closer adjustment to demands. A third reason is the special feature of motor 'bus traffic casually picked up all day long, so long as there is traffic in the street. The motor 'buses are always reasonably full throughout the day. *At the time of peak load they are quite full.*"

Digitized by Google

The opening sentence and the last sentence of this quotation put the facts very frankly—at the rush hours the motor 'buses are quite full, but the other transit facilities are looking after the peak loads.

Diagram No. 8 shows the number of passengers carried each hour of a typical day on the Rochdale Road route, Manchester. The heavy peak loads are carried mainly by large tramcars with a seating capacity of about 75, which are taken out of service immediately the rush hour is past. The difficulties that would be encountered if we had to handle these loads by means of small traffic units are too obvious to need detailing.

The making of proper provision for handling the rush-hour traffic will always be the difficult part of the passenger transportation problem. It involves, and will continue increasingly to involve, a large expenditure of capital and comparatively high operating costs. It is on account of this that competition by separate companies for the steady all-day traffic by means of vehicles which can be run on the public streets at a relatively small capital cost, and which escape many of the obligations placed upon those who cater for the peak loads, is unfair, and should not be permitted.

The right to operate public service vehicles, acquired by merely obtaining an annual license, is archaic, and new legislation dealing with this matter is urgently needed. Concessions to use the public streets, if granted, should carry with them obligations in the public interest, with corresponding security and protection for the operators.

It is becoming more and more clearly recognised, by all those who are qualified to judge, that the public interests are best served by making the facilities for city passenger transportation a monopoly —a monopoly subject to the control of the city authorities, who should possess full powers either to provide and operate the facilities themselves, or, if they think fit, to grant franchises to private companies to do so, subject to control and regulation in the public interest.

The world's experience has shown that every city should have a permanent authority directing the initiation and carrying out of all schemes for new transit facilities, in order that there may be continuity of policy, and that the future needs of the city and the surrounding districts over a wide area may be properly looked after.

THE DISCUSSION.

Mr. H. H. Gordon (deputy chairman, London County Council).—Mr. President and gentlemen. It was my good fortune about two and a half years ago, just before the war, to be following Mr. McElroy's footsteps—I am not at all sure whether in some instances he was not following mine—in visiting the larger cities on the Continent with a view to investigating the traffic conditions which prevailed there, and with a view to picking up, perhaps, a useful hint which might help us in our work as people interested in the traffic organisations of large cities. I found there many things which gave me good cause for satisfaction when I compared home and foreign conditions. (Hear, hear.) I also found many things where apparently we did not show to such advantage. You, Mr. President, have alluded to the fact that the policy of Germany has always been one of "Thorough," and I regretted to find that among all the large cities which I visited—I visited something over a dozen —I found that Berlin was supreme in the number of journeys per head of population. The number of journeys per head of population in Berlin in 1913 was 312; and in London it was 238. London only came seventh in the point of enumeration of the travelling habit of the citizens of great cities. Manchester had in that year 201 journeys per head of population. The main difference between the travelling habits of large cities I have found to be attributable to the fact that in none of the cities, or in very few of the cities of Great Britain, did we have so extensive a tramway development as is characteristic of the great cities on the Continent. In the city of Milan, for example, there were 267 journeys per head of population by tramways alone. In Berlin there were 190. In London there were 113. In Milan there were 20 miles of tramway for every 100,000 of population. In London there were four miles of tramway for every 100,000 of population. The result of that is seen in the fact that the travelling habit on the whole in the cities of Great Britain is not so well developed as is the travelling habit on the Continent.

Now, Sir, I know that attempts have been made at various times to associate the number of journeys made per head of population in any city with the population of that city. I think that is an entire fallacy. (Hear, hear.) I have tried to plot out on diagrams and to find equations to show some relationship between population and journeys in the cases of twelve of the large cities of our country. I can find no casual connection between them when I considered the mere number of population, or even when I considered the square, or any higher factor, of population. In fact, that the number of journeys and the population of a city are not directly connected is clearly proved by some interesting investigations which were made in America by one of those distinguished traffic experts to whom Mr. McElroy has referred—Mr. Bryan J. Arnold. He pointed out that in Chicago at a certain period there was an increasing population; there were increasing facilities for traffic; but a decreased number of journeys on the part of the population, due to an adverse trade condition. In trying to estimate the number of journeys for which we must cater it is no good relying merely on population. You have to take account of facilities; you have to take account of the nature of the trade carried on there; and you have to take account of the social conditions of the people; and any attempt to establish such casual relationship based on one factor only will, in my opinion, be bound to lead to inconclusive results.

I have been very much interested in the suggestions Mr. McElroy has put forward as to how we are to deal with the intense traffic problem in the centres of all our great cities; and I notice it has been suggested that we may hope to alleviate the congestion in the centres of our great cities to some extent, at all events, by the construction of underground or overhead railways, or shallow subways. I have been led to the conclusion, as the result of such investigation as I have been able to make, that we cannot hope to relieve the congestion in the centres of our cities by any means of railways—underground, overhead, shallow subways, or any other way; and the experience of the whole of the Continent and the experience of the whole of America, confirms that idea. Members of this association probably know the famous Rue de Rivoli in Paris. It was always the great shopping centre. The traffic was immense. It was proposed to construct a branch of the Metropolitaine—the underground electric railway of Paris—immediately underneath this street. Shopkeepers went horrified to the Minister of Public Works and said, "We shall be ruined; everybody will go underground; the famous arcades will be deserted; and our trade and businesses will be lost." The Minister of Public Works did not listen to them. The lines were constructed. But there were not fewer pedestrians on the surface. Then motor omnibuses were installed to carry the passengers through the streets in the place of the horse omnibuses. Again, there was no diminution in the number of pedestrians in the street. Then the Metropolitan railway had another line put underneath it; but still the Rue de Rivoli is more crowded and there are more foot-passengers in the street than ever in its previous history.

The same is the case in London. Take the Central London Railway. There are more motor omnibuses, with greater carrying capacity, running through Oxford Street now than at any time in its previous history. And I was very much interested when in Buda-Pesth to see that the first shallow electric railway in Europe, which ran under the Andrassy Út, along the most crowded and fashionable thoroughfare in Buda-Pesth, had not succeeded in 1913 in banishing the gaudy-coloured box-like vehicle which they called an omnibus. And experience in America has proved that you cannot banish the congestion in the central streets by the construction of underground electric railways. Nor, on the whole, ought we to be too alarmed at the congestion which prevails in the central streets because to a large extent the amount of traffic which goes through the centre of towns is an index of the prosperity of the town, and the more crowded our streets are, I hope they will become yet more and more crowded and that the trade and the prosperity of the cities in which we live may become greater and greater. That is true. But there is a well-regulated crowd, and an ill-regulated crowd; and what takes place now mainly in our cities is not a well-regulated crowd but an ill-regulated crowd. And I agree with Mr. McElroy in thinking that we who are interested in tramways should devote ourselves more to the consideration—and a better consideration—of the laws which apply to the regulation of traffic in streets; not merely the regulation of our tramway passenger traffic, but to the regulation of all traffic and all vehicles.

I have made some calculations—I am investigating the subject on my own account—and I find that with all our crowded streets we are not usefully occupying more than one-third of the available carriage-way if traffic were properly regulated in accordance with proper traffic rules. And that brings me directly to another consideration in connection with the relative merits of motor omnibuses and of tramways. Granted that the streets in the centre of our great cities are of such great value that it is of primary importance that we should make the utmost use of them; we ought to see that we employ such instruments of traffic as enable us to make the most efficient use of the streets. (Hear, hear.) I put that down as almost a truism. Regarded merely as a vehicle, everybody in this room knows that per passenger carried a tramway occupies less street space than does a passenger carried by a motor omnibus. That is not all We are told that on account of the inflexibility of tramcars, tramcars become a hindrance to transit and thereby restrict the even flow of traffic; whereas the flexibility of the motor omnibus enables them to utilise every portion of the street space and thereby makes greater use of the carriage-way. No greater fallacy was ever uttered. It is an absurdity to imagine that the proper regulation of traffic is for the traffic to go in and out, this way and that way, all over the road; sometimes two or three vehicles abreast and sometimes one impeding the other—that is not the way traffic ought to run; that is not the way in which traffic should be regulated. In the case of the most efficient transit we have—I mean the railways—the proper flow of traffic is on straight lines and at regulated speed; and if you consider the proper regulation of street traffic from that point of view, you will abolish the flexibility of the motor omnibus and you will come more and more to that rigid system of even flow of traffic on straight lines, with uniform intervals between, more in accordance with the lines our

Digitized by Google

tramways follow, and not in accordance with the lines the motor omnibuses follow. Therefore I say it is particularly important that we who are interested in tramway matters should devote ourselves to the consideration of the laws of traffic as applied not merely to our own vehicles but also as applied to all other instruments of traffic which use the road. And we who are interested in tramways have also to see that such an abomination as widening streets at enormous cost and then allowing any individual to occupy it for standing vehicles while loading goods should be abolished together with other traffic abominations. I must say that here again in Berlin I found that the traffic regulations from that point of view were very much better than they are in any town in this country, and they would not allow any big individual premises to be built abutting on a main thoroughfare unless a wharf were established whereby the goods could be received by the firm.

One other point and I am done. I say I am a tramway man, and that does not say that I have any bias against motor omnibuses or railways; on the contrary we have to recognise that we are all interested in the solution of the transit problem; that all these extensions of transit to which I have referred are equally essential to the solution of the problem. I was rather astonished to find that Mr. McElroy said that where a load is constant throughout the day that there the motor omnibus was an efficient instrument of transit. I should have imagined that with a constant load no tramway manager would have desired anything better than the opportunity of running tramways along such streets.

Now the determining factor is this, as Mr. McElroy has rightly pointed out:—the variation in the amount of traffic and the question of peak loads. We tramway men complain that we have to do a very large share of the peak load whereas the motor omnibus is entirely devoid of any such work. We have every reason to be grateful when we compare the diversity of traffic on tramways with the diversity of traffic on, say, the Great Eastern Railway in London. In the busiest hour in the morning the Great Eastern Railway brings in 16 times as many passengers as it brings in in the least busy hour of traffic. In the London County Council Tramways we have only to deal with a diversity of eight to one. The Great Eastern have to deal with a diversity of sixteen to one; and that at once shows that it would be impossible to hope to carry the Great Eastern Railway traffic by means of tramcars.

As Mr. McElroy rightly pointed out, the limiting factor in traffic organisation is the capacity of your internal area. Just fancy, if in addition to the numerous tramcars which already run, say, from Bow to Aldgate, we had to carry the enormous Great Eastern Railway traffic, which railway runs parallel to that route, and which carries three or four times as many passengers as we do. The streets could not accommodate the traffic. For times of intense peak loads there is no instrument of transit so efficient, in my opinion, as a railway, whether it be a tube railway, or a high-level railway, but, of course, there must be an enormously high peak load. You cannot hope economically to carry these high peak loads unless you have some such organisation as a railway. On the other hand, for moderate peak loads—eight to one—I think there is no instrument of traffic so efficient as a tramcar; and for places where the traffic is intermittent and not heavy at all, where it varies from day to day—pleasant Sunday afternoon excursions (laughter)—there is no instrument of transit so efficient as a motor omnibus. It is all a question of the degree of the intensity, and the regularity of the traffic with which you have to deal, as to which instrument of transit you employ. I think tramway men would be only too glad to have the opportunity of handling the varying traffic which the London General Omnibus Company enjoys, say, down a street like Oxford Street—

A DELEGATE.—Or Bayswater Road.

Mr. GORDON.—Yes; or Bayswater Road. Now let us recognise, as Mr. McElroy recognised it, that to deal with high peak loads means an enormous expense. To deal with a high peak load by railways and giving them no other traffic during the rest of the day is a proposition which cannot be commended on financial lines. The dividends of the London tube railways show what the result is. The railway serving the richest traffic area in central London pays a beggarly 2½ per cent.; no wonder there is no desire to extend tube railways in London. But here we come to the crux of the whole situation. London has given a valuable lesson as to the direction in which we are to develop. Mr. Blain's company, the London Traffic Combine, has shown it. Mr. Blain's interest at the present time is motor omnibus operation. Motor omnibus profits are paying the dividends of the London United Electric Railways. In London you have combined two of the main instruments of transit. You have combined the tube railways, with their tremendously high capital cost and low cost of operation, with the omnibus company which has a low capital cost and a very large number of passengers; and it is the combination of the two which enables both to pay dividends. Now we want to extend that. We want to extend the combine of the tube railways and the omnibuses to the absorption of the London County Council Tramways in order that we may have what is essential in every city, as Mr. McElroy has pointed out, a unified control of all the instruments of transit, utilising each to the best advantage—(Mr. McElroy.—Hear, hear.)—and utilising the instruments of transit in the way they should be employed.

The last point is that to my mind traffic is so important; the whole of our civilisation, the whole of our social amenities, depend upon it, that I think that the authority controlling the forms of transit in all large cities should be a public authority whose object shall be not to cater for dividends but the conserving of the best interests of the community. (Applause.)

Mr. H. BARROW (chairman, Birmingham Tramways Committee).—Most of the delegates here will remember a paper read by Mr. Baker some years ago in reference to town planning and tramways. He stated at that time that we were hoping in Birmingham to get some wide roads made with tramways put upon separate tracks; but I am sorry to say that up to the present we have not got those roads made. Liverpool has been ahead of us and has succeeded in getting some made. But I rise to-day to emphasise the importance of the point made by Mr. McElroy of the tramway department working in with the town planning department. Although we have no roads actually constructed in Birmingham, as I have just said, we have two schemes for town planning, therefore we have been one of the earliest authorities to get complete schemes agreed to by Parliament. In connection with those two schemes we have wide roads laid down for tramway purposes, in two cases 100 ft. in width, which will admit of a separate track for the tramway. We are preparing three other schemes of town planning at the present time, and in connection with those schemes we are preparing for roads 120 ft. in width for the purpose of tramways. There is no necessity, of course, on these roads which are laid down to spend any money at the present moment; all that is required is to see that you have the space left in the roads for future purposes. That is an important thing to remember. There is an idea abroad that enormous sums of money are going to be spent on these streets at once. That is not so. All you want is your road planned; the part constructed may be only 20 ft. wide at the present time; but you have looked ahead and you have realised that this will be one of the main arteries out of the town in the future, and, therefore, you are securing your space of 100 to 120 ft. in width.

Mr. McElroy also emphasised the necessity of the tramway department and the town planning department working together. That is what we are striving to do in Birmingham; and the two departments always consult together—the tramway department consults with the town planning department before it considers the putting down of a tramway; and the town planning department always comes to us with its schemes for the future and says, "Will you be likely to run tramways down this or that particular road?" I want to emphasise this because I am certain it is essential that those two departments should run and work harmoniously together and look to the future. We are always saying it is too late to have town planning now; but we forget that every year in ordinary times thousands of houses are put up, and many miles of streets are made; and that in a few years our suburbs which are now absolutely country will be filled up with houses. We heard from Mr. Long yesterday that there is a suggestion of spending £20,000,000 in building houses. There you get a glimpse of what is going to happen after the war is over.

I have been very much interested in that part of Mr. McElroy's paper dealing with the central parts of the big cities. I think that Birmingham, perhaps, is peculiarly unfortunate in the manner in which it has been laid out—or, has not been laid out—and we have had the greatest difficulty in dealing with traffic in the centre of Birmingham. The town planning department has appointed a committee to deal with the problem, and it is working with the tramway department. It has been suggested that we might construct subways, but the facts and figures that have been given point to the fact that that is not going to be the solution of the difficulty. I think we are much indebted to Mr. McElroy for the information he has given us on this subject. (Hear, hear.)

Alderman H. B. VARWELL (chairman, Exeter Corporation Tramways).—I do not know whether there are any gentlemen here who have to do with old cities with narrow thoroughfares, who can tell me whether there are any regulations as to motor cars stopping at shops for a length of time to enable people to do their shopping—if they are allowed to stay at all, or not.

Alderman F. SMITH (vice-chairman, Liverpool Corporation Tramways).—The very excellent speech that has been delivered by Mr. Gordon supporting the paper on which Mr. McElroy has spent so much time with such excellent results, prompts me in response to your kind invitation to say a few words. However much we admire German thoroughness—and I, in 1897 looking at their systems admired some portions very much—it became perfectly clear to me by the development of Liverpool, that we could very considerably improve on several points. (Hear, hear.) In the year of which I am speaking there was strong competition between Sir Arthur Forwood and some of us with regard to the view we took of American and German organisation and working of tramways. I had not the good fortune in 1897 to see America; but in 1898 I saw both America and Canada. The working of the German one-deck car system seemed to me at first to be the most admirable of systems; but in the early development in Liverpool it was found that the one-deck car with trailer was not suitable to our streets and to our working; and that we could shift a greater number of passengers with less risk and greater speed by a double deck car than by either

Digitized by Google

the American or the German type of car, as we tried both types of car, the trial of these types being arrived at on a division only decided by a majority of one—Sir Charles Petrie on that division giving the one deciding vote.

I was very much struck by some of the observations made by Mr. Gordon, and I cannot but think that the bounden duty of every gentleman who has read Mr. McElroy's excellent paper is to offer some observations upon it, though I have said over and over again at these useful meetings—and I say it again this morning—it is an astounding thing that a body of intelligence such as we have at this conference should permit a call upon Mr. McElroy to actually read a paper that has been in our hands for ten days, which every man managing tramways ought to have read carefully, so as not to be called upon here on the spur of the moment—which is a very bad spur to speak upon—to offer observations on it. We are entitled to expect from every tramway manager present the considered expression of thought on the contents of a paper of such great importance. Mr. McElroy has given us diagrams which I think are of real value. I can assure this conference that consideration will be given to them in Liverpool. A very great deal can be done and must be done to meet the changing conditions, bearing in mind the enormous increase in our traffic. We must make new arrangements; and I am driven by my observations to agree with what I think is the idea of Mr. McElroy that the future of the development of tramways lies upon the street, by parallel, or broader, roads. Our friend from Birmingham says that we must work hand in hand with the Town Planning Department. Directly he starts to do this he will find that the city engineer will—like the city engineer of Liverpool, who is a very wide-awake gentleman—dip his hand in the tramway pocket for some portion of the cost of widening the roads needed by town planning. (Laughter.) Within limits I do not see very much objection to that. Thought and care must be given to the user of your tramway profits, and if those tramway profits are not secured and wisely dealt with while you can do so, the development will not be attained that you really want in the great interests of moving the travelling public. We must move them quickly; we must move them safely; and to do that we must have wide roads.

Many of the points in the very able speech of Mr. Gordon have made an appeal to me, such as his proposal of one traffic authority, and that traffic authority to take special heed of the more or less uneducated, I am bound to say that in spite of the Education Act which has been working for 40 to 50 years—we still have samples in Liverpool of the uneducated carter who, smiling at the tramcar, runs carefully in front of it, jeering at the driver who seeks to get on with the job he has in hand. I am very much indebted to Mr. McElroy for many points contained in his paper, and I feel especially indebted to Mr. Gordon, who has given us such an illuminating address upon it. (Hear, hear.)

Mr. H. W. Wale (vice-chairman, Coventry Tramways Committee).—I feel particularly interested in the paper that has been given by Mr. McElroy because I happen to come from a town whose population has increased by 50 per cent. in a decade. Now, in the concluding part of his paper Mr. McElroy says this: "The world's experience has shown that every city should have a permanent authority directing the initiation and carrying out of all schemes for new transit facilities, in order that there may be continuity of policy . . ." I want to know what that means, because we had an unfortunate experience in Coventry when we were inaugurating a motor omnibus system. In instituting that we had to get the consent of Parliament, and what happened was that while we were very desirous of being the permanent authority every other authority affected in that particular neighbourhood looked upon us as aggressors and promptly appealed to Parliament to scotch the scheme we put forward. I say this most unhesitatingly that unless Parliament expressly confers, not on a city but on a district, a transport authority for that district, we shall not get on very much. Otherwise what would happen would be that the railway authorities touching the city and district would feel that their interests were affected; the particular motor omnibus companies operating in that area would also feel that their interests were affected; and instead of getting a policy or continuity of policy as a paramount consideration, or getting something which would be of value to the community, you would have a proposition not worthy of serious consideration. I would ask Mr. McElroy to deal with that point because it is of particular interest to communities such as that from which I come.

Mr. J. B. Hamilton (Leeds).—If I rise to say a word at this moment it is mainly in order to express my admiration for the paper which Mr. McElroy has given us. I think he can take this to heart, that it is about the only paper I have heard read at a meeting of this kind which has not been followed by a great number of speakers. The reason for this is that Mr. McElroy has practically finished the task, or, at any rate, what he did not say has been very ably said by Mr. Gordon. The matter of transportation in cities is one which I had the pleasure of bringing before this association two or three years ago, and I am glad to find many of the deductions I drew from my experience of tramway work have also been reached by Mr. McElroy and Mr. Gordon. There is no doubt whatever, I think, and our experience at all times proves it, that there ought to be a central controlling body. How that is to be constituted—as has been asked by the last speaker—must be decided according to the different conditions prevailing in different towns. To my mind, however, there must be, in addition to town planning committees, co-ordination with the central bodies which deal with street improvements. In Leeds we have, of course, the two authorities. We have a Town Planning Committee and a City Improvements Committee; and unquestionably whilst wide roads, with proper entrances and exits, into and from our great cities must be provided, we are gradually reaching in central parts by the increase in traffic of all kinds the condition of what Mr. McElroy has termed "saturation." In comparing Great Britain with America and the Continent, Mr. McElroy rather suggested a want of foresight on the part of local authorities. May I say that I think that is scarcely justified by the position of affairs. I take it that no tramway man of even ten years ago could have estimated such enormous developments of tramway transit during that period. I am of opinion that in many of our provincial towns, as well as in London, where there is now some congestion, if the width and space of the streets were more carefully utilised by better regulation of slow moving traffic, there would yet be sufficient room. The lowering of fares, with the spread of and the greater increase in the population of our cities, all have tended to an enormous development of traffic, which I think will continue. Go back ten years and look at the number of passengers carried then and look at what it was for the last year. You will then find a reasonable excuse is permissible for what Mr. McElroy has described as want of forethought on the part of the municipalities. I say that in order to put the picture as I see it fairly before you. I think, however, it is absolutely necessary now, when we realise the possibilities of cheap and frequent means of traffic, that the central authorities should wake up, and that there should be co-ordination between the different committees controlling the improvements of streets; the provision of large arterial entrances and exits, such as are the dream of town planners and tramway undertakings, so that the best results can be obtained. That leads on to this, that undoubtedly the local authority, to avoid superfluous and overlapping services, &c., should control all means of public transport in the city; and that is a conclusion to which everyone must come who has read Mr. McElroy's paper. I am very specially indebted to Alderman Smith for the hint he has given with regard to the class of gentlemen who dip their hands into the pockets of the tramway undertaking in Liverpool. I happen to be engaged at the present time with a colleague on a report dealing with city tramway facilities, and I shall keep that point in mind. (Laughter.) I do think that perhaps in the past many tramway undertakings have been considered as the milch cow of the various Corporations, and that all sorts of schemes initiated outside the Tramways Departments have been brought forward without consideration and on the assumption that their cost could be met by the Tramways Department. I think that should be avoided entirely, and the best way to do it is to form a joint committee of all the bodies interested in street traffic, so that whatever schemes may be adopted, the tramways shall be called to bear a proportion of any expenditure that is made, and have opportunities of seeing that their interests are conserved in the laying out of such streets.

Mr. J. M. McElroy, in reply to the discussion, said.—May I thank the various speakers for the kind words they have uttered about my paper? I do not know that there is much criticism to reply to. I am very pleased to have had the support of so able a gentleman as Mr. Gordon, who has looked deeply into this matter. He has followed my arguments so clearly, and has put them before you even better than I did in the paper itself. I think many tramway managers here may say, "Well, our city is a long way from wanting any of the facilities foreshadowed in the paper." Do not be too sure about that. We know that in every city the number of journeys taken per head of population is growing steadily; and sooner or later, probably in some cities much sooner than they think, the arterial roads nearing the city centre will have reached the saturation point, and they will be up against this very problem. (Hear, hear.) The lesson to be drawn from the paper is this. In many cities it is the custom to give large sums in relief of the rates—after having paid interest and sinking fund, and after having made some provision, more or less adequate, in the shape of renewals and depreciation fund, it is customary to transfer large sums in aid of the rates But remember what is coming along in the future. Each year we are gradually filling up our main arterial roads and in a few years' time new arteries, either parallel or underground, will be required. The lesson to be drawn from the paper this morning is that we should put sufficient by in the times when we are prosperous, so as to make adequate provision for those trying times which are ahead of nearly all the large cities in this country; and instead of giving such large sums in relief of the rates the policy should be to create a very large reserve fund to meet the development as and when it takes place. I do not know that I can say anything further. Mr. Wale raised a point, but all I said in the conclusion of the paper was that every city should have a permanent authority directing the traffic facilities over a wide area, not merely the city itself, and that could be done by Parliament, how and in what form would have to be considered on the merits of each particular case.

A hearty vote of thanks having been passed to Mr. McElroy for his paper, the conference adjourned for luncheon.

Digitized by Google

AFTERNOON SESSION.

The President again took the chair at 2 o'clock.

Mr. G. W. HOLFORD (general manager, Salford Corporation Tramways), read the following joint paper :—

UTILISATION OF TRAMWAYS FOR GOODS TRAFFIC.

BY Messrs. G. W. HOLFORD
(General Manager, Salford Corporation Tramways),
AND W. CLOUGH
(General Manager, Bury Corporation Tramways).

When the preparation of this paper was first undertaken, it was intended to be submitted to the Salford Conference of 1914. The subject was considered a peculiarly suitable one by reason of the conference being held in Lancashire, it being then suggested the paper might deal principally with the conveyance of goods by tramways between the Manchester docks and the surrounding industrial districts. (The authors, we understand, were selected because one was the manager of the tramway system which offers access to the Manchester Ship Canal Docks, and the other the manager of a tramway system in one of the adjacent manufacturing towns). Owing to the outbreak of war the reading of the paper was postponed, but we were, however, recently invited by the Executive Committee of the Association (who thought the time now opportune) to submit a paper to this conference on the general question, and we were pleased to comply with their request. Whilst we may not present a solution of the problem, we nevertheless hope the information we are able to place before the meeting will be of material assistance and guidance, and that at any rate we may reduce the issue to what is practicable as regards the utilisation of tramways for the conveyance of goods.

We wish to pay our tribute to others who have on prior occasions dealt with this subject, and for this reason, and in order to deal with the matter in as complete a form as possible, we may perhaps be allowed to give a *résumé* of the views which have been expressed heretofore.

The first of our members to introduce to the Association the subject of the utilisation of tramways in this country for the conveyance of goods, as being one worthy of consideration, was our esteemed friend, the late Mr. C. R. Bellamy, of Liverpool, who in 1904, at the conference held in that city, in his presidential address, spoke at length on the matter, and stated :—

> "The Tramways Act of 1870 provided for a general merchandise traffic ; and while this class of business under company control has been practically ignored, it is probable that with inter-urban connections and joint municipal control it would become a very useful source of additional revenue, as well as a great boon to important sections of the trade of the country.
>
> "The only attempted solution of this problem was the effort to promote the construction of light railways, which by reason of their cheaper construction would, it was hoped, provide a network of mechanical carriage of great flexibility, capable of dealing with a traffic that the railways do not, and cannot, cater for.
>
> "An American has said, in describing a tramway goods system, that it was as flexible as an elephant's trunk and quite as capable of picking up small things, and that it could flourish on the crumbs that a steam railway would despise.
>
> "It is this power to pick up small things over large areas expeditiously, cheaply, and frequently, which the railway companies lack, and for which they should welcome us as allies.
>
> "The ever-increasing network of municipal tramways, with their connecting links, might quickly provide the whole country with a system cheaper in operation than was contemplated under the Light Railways Act, which would do much under proper recognition of its capacity to largely increase the trade and revenue of the country.
>
> "I believe there is a great scope for such a development of tramways in this country.
>
> "Traders and manufacturers could obtain or send light consignments of goods at any time under short notice to the connected towns, railways, or docks."

Mr. Bellamy's remarks may be said to have been chiefly directed to the usage of tramways on country roads for the conveyance of agricultural products, etc., but he also touched upon the question generally, and although an interesting discussion followed, it does not appear that any steps were taken to adopt his suggestion or that any tramway undertaking ventured to experiment in this direction.

In July, 1905, a meeting of Lancashire tramway managers was convened in Manchester to discuss this subject, and again, although everybody was convinced of the benefits to be derived both by the trading community and tramway owners, it was found there were many difficulties, especially with regard to loading and unloading, which appeared to block the progress of any scheme.

At a meeting of the Lancashire and Cheshire Tramway Managers' Association, held in Oldham in April, 1912, a paper was read on the subject, bearing more particularly on the utilisation of the tramways for the conveyance of raw cotton from the Manchester Ship Canal Docks to the various mills in Oldham and the vicinity. The same difficulties as to loading and unloading were again pointed out, and no solution could be suggested.

In the early part of 1913 the Manchester Press contained many references to this subject. It was stated that the delay in the conveyance and delivery of goods between Manchester and the mills and workshops of Lancashire was so great as to be causing serious concern amongst traders. The chairman of one of the largest workshops in Lancashire stated :—" It would almost seem as if the carrying powers of the country had not been able to keep pace with the productive powers of the nation."

Reports appeared in the Press of interviews with the heads of large commercial undertakings and eminent members of municipalities, all emphasising the great assistance which tramways could render to the commerce of Lancashire if a practical scheme could be devised whereby the tramways might be utilised for the conveyance of goods.

It was said " that tramway undertakings were losing a great source of revenue by not utilising the generating stations and tramway tracks during the night time." Amongst other benefits it was pointed out that the adoption of such a scheme " would relieve the congestion of the streets in the daytime, would reduce the present heavy motor traffic, and the cost of paving the streets would consequently not be so heavy." Any apparent difficulties were passed over by saying these could be very easily overcome.

At the conference of the Tramways and Light Railways Association held in Blackpool in 1913, Mr. E. H. Edwardes, the general manager of the South Lancashire Tramways Company, submitted an interesting paper, part of which referred to this subject, but again without any practical results.

More recently we find Mr. C. W. Mallins, general manager of the Liverpool Corporation Tramways, dealing with the question of the conveyance of goods from the docks over the tramway system, but so far the Dock Board has not favourably received the scheme.

Although this subject should interest all owners of tramways, it is one which peculiarly concerns the Lancashire systems, for, as will be seen from the map on page 272, no other county has such a network of tramways as those which connect the industrial towns of the County Palatine, or could derive more benefit from the utilisation of tramways for conveyance of goods, if this were practicable.

This continuous network of tramways covers the following street mileage, viz. :—

	Route Miles.
Ashton-under-Lyne Corporation	5½
Bolton Corporation	28¾
Bury Corporation	23¾
Lancashire United	33⅞
Liverpool Corporation	72¾
Manchester Corporation	96¾
Oldham Corporation	20½
Oldham, Ashton and Hyde Company ...	9¼
Rochdale Corporation	16¾
Salford Corporation	30¼
Stalybridge, Mossley, etc., Joint Board ...	23¾
Stockport Corporation	20
Wigan Corporation	21½
	403

In a similar manner are the large industrial areas of Yorkshire linked together by tramway lines, and it does appear somewhat strange to outsiders that advantage has not heretofore been taken of this fact for the transport of other than passenger traffic.

Of course it is apparent to all interested in transport work—not only in the case of merchandise but in the case of passengers also—that the lesser number of hands such traffic has to pass through the better opportunities there are for organisation, and greater are the facilities to be afforded. Just for a moment let us glance at the position of a large city handling a busy passenger street traffic. Under municipal administration traffic can be dealt with on well organised lines with fares and services fixed on an equated basis, but if half a dozen or more private individuals were catering for the passenger traffic then disorganisation would follow and constant dissatisfaction ensue.

If the transport of merchandise over certain areas could be dealt with under one board or organisation there is no doubt that many of the grievances that at present exist would be removed, and many facilities and benefits would follow, but whether such a system could be introduced is a matter for the consideration of the whole of the interested parties in the several areas.

There have been several instances in this country where the use of tramways has not been solely confined to passenger traffic, and in order that there may be no misconception of the extent to which

Digitized by Google

this has been done it is perhaps advisable that a brief description should be given of each case. Taken in alphabetical order they are as follow :—

BURNLEY.

In September, 1912, the Corporation of Burnley commenced to run a goods waggon for the conveyance of heavy parcels, i.e., parcels between 56 lb. and 5 cwts. The charges were based on 3d. per cwt. per package, with a minimum charge of 3d. The goods were placed in an open wagon of the railway type, and if necessary covered with a sheet. This wagon was placed *in front* of a service car and propelled along the tramways. The fact that the wagon was placed in front of the car is worthy of notice, together with the opinion of Mr. Henry Mozley, the general manager of the Burnley Corporation Tramways. He states :—" It will be found much safer and more convenient to propel the wagon in front of a car than behind as a trailer. The driver is much more able to look after the safety of the wagon in the streets than the conductor on the rear platform of the car, as he is frequently away from his post, and passengers are in no danger whatever as they would be if the wagon was used as a trailer." It was found possible, without any inconvenience, to place this wagon in front of passenger cars working on a ten minutes' service. The wagon was run at specified times, and was allowed to stand at the terminus for ten minutes, and the sender or receiver of the goods had to meet the wagon on its arrival. The financial results were not satisfactory, and the daily running of the wagon has been abandoned, but it is now run on receipt of an order and a guaranteed load which will produce not less than 4s.

is 340 yards from the main line of tramways, and the Corporation incurred the expense of £1,243 for the requisite tramway connection. At the other end, each mill owner constructed his own tramway connection. Two self-propelled wagons were built, but only one of these is in daily use. From the illustration appended it will be seen that the wagons are similar to railway wagons, but are mounted on an ordinary tramway truck, and have a platform at each end and a trolley standard mounted on a framework in the centre. The bodies are 16 ft. long, 6 ft. 2 in. wide, and 3 ft. 9 in. deep, inside measurements. They are equipped with two Westinghouse No. 20 motors of 45 H.P. each. The tare weight is 9 tons 12 cwts., and the carrying capacity 10 tons, making a gross weight of 19 tons 12 cwts. The coal is discharged either at each side of the wagon, or from the bottom of the wagon through hoppers. During the year ending March 31, 1916, 12,121 tons of coal were conveyed.

LEEDS.

During the summer of 1910, the Corporation completed negotiations with certain contractors for the sand required in connection with the new filter beds of the Waterworks Department at Headingley. The quantity required was approximately 30,000 tons, and the distance about 3½ miles from the Sovereign Street Depot of the tramways department, which has a wharf on the river and canal bank.

To enable the work to be carried out suitable wagons with hoppers, and a 2-ton electric crane were purchased and installed. The conveyance began in September, and at March 31 following about 28,000 tons had been safely delivered, the revenue from this amounting to £1,660. After providing for all necessary charges, including

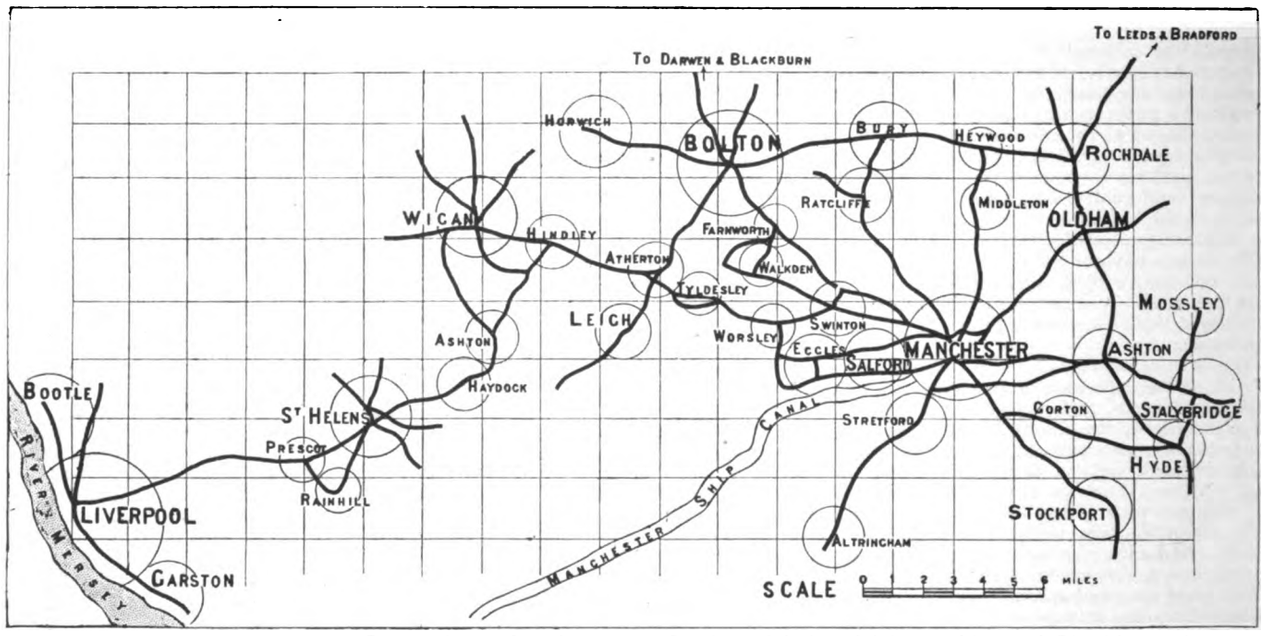

Map showing the Tramway Connections of an Important Section of Industrial Lancashire and Cheshire and the Accessibility to the Liverpool and Manchester Docks.

GLASGOW.

By the Vale of Clyde Tramways Act, 1871, the Glasgow Corporation have to allow the use of the tramways for the conveyance of goods and mineral traffic, with wagons and other vehicles in ordinary use on railways, upon payment to the Corporation of tolls, not exceeding six-tenths of a penny per ton-mile, on the weight of traffic so conveyed, exclusive of the weight of the vehicle, empty vehicles passing free of toll ; provided always that the Corporation shall be entitled to charge for traffic conveyed for three miles, or any shorter distance, any sum not exceeding twopence per ton.

This arrangement is at present in operation for the conveyance of materials from a railway station to one of the shipbuilding yards, a distance of nearly half a mile, for which the Corporation charge 2d. per ton. This was originally done by horse traction, but in 1905 it was considered advisable to use electricity, and the shipbuilding company provided an electric locomotive to haul wagons. In addition to the 2d. per ton for the use of the track, the Corporation now receive 1d. per ton for the supply of electricity. The weight dealt with in this way has been as much as 160,000 tons per annum.

HUDDERSFIELD.

Since September, 1904, the Corporation of Huddersfield has been utilising the tramways for the conveyance of coal from a railway siding to three different mills, two of which are a distance of three miles away, and the other five miles. The difference in level between the railway siding and the street is such as to allow the railway wagons to run over and discharge the coal into shoots, which empty into carts or tramway vehicles. This makes it possible to deal with coal delivered at the sidings from any colliery. The railway siding

full track maintenance, a very satisfactory net profit resulted to the undertaking. The cars conveying the material were all fitted with standard equipments, and were easily able to maintain the same effective speed as the ordinary service car, and therefore, although the whole of the work was carried on during the working day, it is stated that not the slightest inconvenience was caused to the travelling public. In the following year the balance of the 30,000 tons was conveyed, and the revenue received amounted to £248.

In a recent communication, Mr. J. B. Hamilton, the general manager of the Leeds City Tramways undertaking, states :—" Since that date the wagons have been found to be of very great use in conveying material for the use of the tramway and other municipal departments, but no further contracts were entered into until 1915, when further developments took place."

The developments referred to are as follow :—An agreement was entered into with the Leeds Fireclay Company, whereby fireclay and coal was conveyed over the tramway lines from the company's mines in Harehills to the works at Wortley and Elland Road, a distance of fully five miles. The operations commenced on October 4, 1915, but owing to war conditions the amount to be carried was much less than was anticipated.

For this purpose it was necessary to construct connections (at the company's expense) at the above-named termini, the hopper wagons owned by the department being utilised for the conveyance of the minerals. Mr. Hamilton in his annual report states :—

> " This commencement in the carriage of goods traffic for the general public marks an important era in the developments of the business of the tramway undertaking.

Digitized by Google

"In each of the Bills authorising the construction and operation of tramways in Leeds and district which have been passed by Parliament the very fullest powers for conveyance of goods, minerals, etc., upon the tramway lines have been carefully provided for, and no doubt this will in the future be found to be most valuable in serving the citizens.

"Owing to the contour of the district, all the railways and canals are placed in the southern half of the city, leaving considerable districts, principally residential, which are long distances from the railway and goods termini.

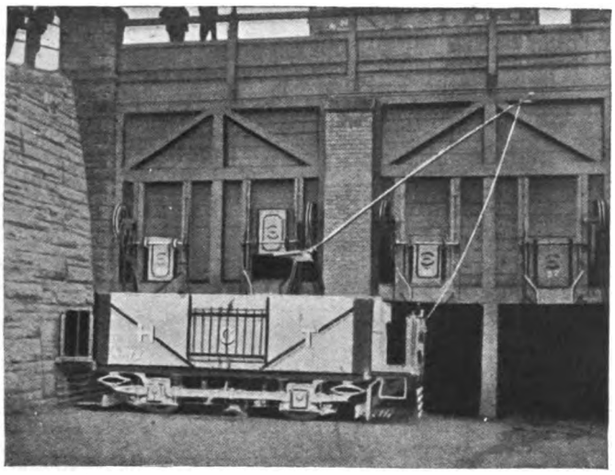

Huddersfield Tramway Wagon being Loaded with Coal.

"A properly devised scheme, by utilising the powers of the tramway undertaking to convey minerals and goods over its routes, would undoubtedly lower the cost of conveyance of materials to and from such districts, and very much reduce the wear and tear on the public highways."

We understand Mr. Hamilton is now engaged in preparing a scheme for submission to the tramways committee which will bring into effect the views expressed in his report, and that the experience gained by the conveyance of fireclay at the present time has been most satisfactory and encouraging.

There have also been other instances where the use of tramways cannot be said to have been confined exclusively to passenger traffic. A number of tramway systems convey their own permanent way materials on the tramways, and there are several systems on which important parcel departments have been instituted and special vans provided. In this connection we may mention the case of the Manchester tramways undertaking and Sutton and Company. The judgment which was obtained in this case has a most important bearing on the powers of a Corporation, and although of a somewhat lengthy character, we consider should not be omitted from a paper of this description.

This was an application in the High Court of Justice (Chancery Division) in February, 1906, by Messrs. Sutton and Company, for an injunction to restrain the Corporation of Manchester from acting as carriers or delivery agents except on their tramways, and from expending any of the corporate monies for that purpose.

The intention of the Corporation was to put into operation a large and comprehensive scheme. They proposed—

(*a*) To accept "cash on delivery parcels, i.e,, parcels where the value thereof is to be collected by them on delivery and subsequently handed to the senders.

(*b*) "Express delivery," i.e., parcels to be delivered by special messengers at special rates and to insure parcels.

(*c*) To act as agents for all railway companies for the receipt of parcels, and to pay to the companies monthly all monies due to them for the carriage of parcels, in consideration of a payment to the Company of a penny per parcel for collection.

(*d*) To collect and deliver parcels outside the radius of their tramway lines altogether, between places having no connection with their tramways, and of goods which have never travelled and are not intended to travel by their tramways at all.

Mr. Justice Farwell stated :—

This Act, in my opinion, enables the Corporation to run carriages and take tolls on all the network of tramways mentioned therein, and use such tramways for the purpose of carrying passengers, and of conveying and delivering animals, goods, minerals, and parcels. Mr. Upjohn pressed upon me that there is no power to carry or deliver, but merely a power to use the tramways for the purpose of carrying and delivering, but this appears to me too narrow a ground to found a decision. I refer to the Railway Clauses Consolidation Act, 1845, section 86, and I find that there is no power to carry generally thereby conferred, but a power to "carry and convey upon the railways all such passengers, goods, etc." I am unable to see any real distinction between this and the power given to the Corporation by sections 8 and 22 of the Act, 1899. But a railway company acting "as all railway companies now elect to act, and as the defendants act," as carriers, and not as either toll takers or conveyers (see Mr. Justice Wills' judgment in "Hall *v.* L.B.S. Railway Company," 15 Q.B.D., page 557), have undertaken the ordinary duties of a carrier, as Mr. Justice Byles put it in "Taylor *v.* G.N.R.," L.R.I.C.P. 385, "the first duty of a common carrier is to carry the goods safely, the second is to deliver them." This duty to deliver would exist without the express use of the word in section 22, and I cannot read that section as restricting the Corporation to deliver upon the tramways in the absence of custom or of special contract.

I apprehend that a railway company is not bound to deliver at the house or shop of the consignee, but if they do not they are bound to keep the goods safely for a reasonable time, and to deliver to the consignee or his agents when he calls for them. But there is nothing *ultra vires* in their delivering by cart or otherwise, at the consignee's house or to any other place authorised by him, including the station of a railway company, such goods as they have brought on their tramway lines ; such delivery is fairly incidental to their authorised business. As Lord Salisbury puts it in "Sowerby *v.* G.N.R.,"

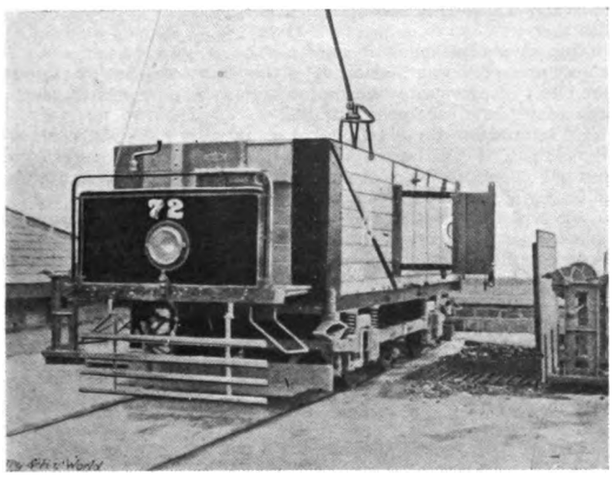

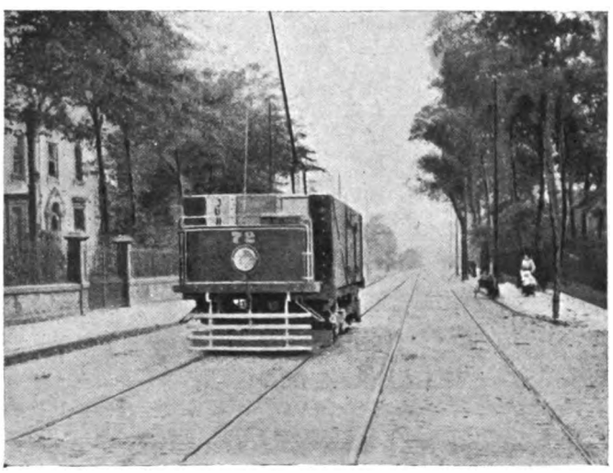

Wagons Used for the Conveyance of Coal—Huddersfield Corporation Tramways.

7 R and C Cases, at page 170, "They (that is, the Great Northern Railway) are permitted by law to carry on the business, not only along their lines, but also in connection with and as part of the same general undertaking by which they make profit—the business of distributing the goods which they so bring from distant points to the places where the different consignees intend they shall be delivered. For that purpose they have to build stations both for the receipt and dispatch of goods which are so entrusted to them." It would be difficult in the present case to put any practical limits to the place of delivery ; it cannot be at the terminus only—this is

Digitized by Google

the American or the German type of car, as we tried both types of car, the trial of these types being arrived at on a division only decided by a majority of one—Sir Charles Petrie on that division giving the one deciding vote.

I was very much struck by some of the observations made by Mr. Gordon, and I cannot but think that the bounden duty of every gentleman who has read Mr. McElroy's excellent paper is to offer some observations upon it, though I have said over and over again at these useful meetings—and I say it again this morning—it is an astounding thing that a body of intelligence such as we have at this conference should permit a call upon Mr. McElroy to actually read a paper that has been in our hands for ten days, which every man managing tramways ought to have read carefully, so as not to be called upon here on the spur of the moment—which is a very bad spur to speak upon—to offer observations on it. We are entitled to expect from every tramway manager present the considered expression of thought on the contents of a paper of such great importance. Mr. McElroy has given us diagrams which I think are of real value. I can assure this conference that consideration will be given to them in Liverpool. A very great deal can be done and must be done to meet the changing conditions, bearing in mind the enormous increase in our traffic. We must make new arrangements; and I am driven by my observations to agree with what I think is the idea of Mr. McElroy that the future of the development of tramways lies upon the street, by parallel, or broader, roads. Our friend from Birmingham says that we must work hand in hand with the Town Planning Department. Directly he starts to do this he will find that the city engineer will—like the city engineer of Liverpool, who is a very wide-awake gentleman—dip his hand in the tramway pocket for some portion of the cost of widening the roads needed by town planning. (Laughter.) Within limits I do not see very much objection to that. Thought and care must be given to the user of your tramway profits, and if those tramway profits are not secured and wisely dealt with while you can do so, the development will not be attained that you really want in the great interests of moving the travelling public. We must move them quickly; we must move them safely; and to do that we must have wide roads.

Many of the points in the very able speech of Mr. Gordon have made an appeal to me, such as his proposal of one traffic authority, and that traffic authority to take special heed of the more or less uneducated, I am bound to say that in spite of the Education Act which has been working for 40 to 50 years—we still have samples in Liverpool of the uneducated carter who, smiling at the tramcar, runs carefully in front of it, jeering at the driver who seeks to get on with the job he has in hand. I am very much indebted to Mr. McElroy for many points contained in his paper, and I feel especially indebted to Mr. Gordon, who has given us such an illuminating address upon it. (Hear, hear.)

Mr. H. W. Wale (vice-chairman, Coventry Tramways Committee).—I feel particularly interested in the paper that has been given by Mr. McElroy because I happen to come from a town whose population has increased by 50 per cent. in a decade. Now, in the concluding part of his paper Mr. McElroy says this: "The world's experience has shown that every city should have a permanent authority directing the initiation and carrying out of all schemes for new transit facilities, in order that there may be continuity of policy . . ." I want to know what that means, because we had an unfortunate experience in Coventry when we were inaugurating a motor omnibus system. In instituting that we had to get the consent of Parliament, and what happened was that while we were very desirous of being the permanent authority every other authority affected in that particular neighbourhood looked upon us as aggressors and promptly appealed to Parliament to scotch the scheme we put forward. I say this most unhesitatingly that unless Parliament expressly confers, not on a city but on a district, a transport authority for that district, we shall not get on very much. Otherwise what would happen would be that the railway authorities touching the city and district would feel that their interests were affected; the particular motor omnibus companies operating in that area would also feel that their interests were affected; and instead of getting a policy or continuity of policy as a paramount consideration, or getting something which would be of value to the community, you would have a proposition not worthy of serious consideration. I would ask Mr. McElroy to deal with that point because it is of particular interest to communities such as that from which I come.

Mr. J. B. Hamilton (Leeds).—If I rise to say a word at this moment it is mainly in order to express my admiration for the paper which Mr. McElroy has given us. I think he can take this to heart, that it is about the only paper I have heard read at a meeting of this kind which has not been followed by a great number of speakers. The reason for this is that Mr. McElroy has practically finished the task, or, at any rate, what he did not say has been very ably said by Mr. Gordon. The matter of transportation in cities is one which I had the pleasure of bringing before this association two or three years ago, and I am glad to find many of the deductions I drew from my experience of tramway work have also been reached by Mr. McElroy and Mr. Gordon. There is no doubt whatever, I think, and our experience at all times proves it, that there ought to be a central controlling body. How that is to be constituted—as has been asked by the last speaker—must be decided according to the different conditions prevailing in different towns. To my mind, however, there must be, in addition to town planning committees, co-ordination with the central bodies which deal with street improvements. In Leeds we have, of course, the two authorities. We have a Town Planning Committee and a City Improvements Committee; and unquestionably whilst wide roads, with proper entrances and exits, into and from our great cities must be provided, we are gradually reaching in central parts by the increase in traffic of all kinds the condition of what Mr. McElroy has termed "saturation." In comparing Great Britain with America and the Continent, Mr. McElroy rather suggested a want of foresight on the part of local authorities. May I say that I think that is scarcely justified by the position of affairs. I take it that no tramway man of even ten years ago could have estimated such enormous developments of tramway transit during that period. I am of opinion that in many of our provincial towns, as well as in London, where there is now some congestion, if the width and space of the streets were more carefully utilised by better regulation of slow moving traffic, there would yet be sufficient room. The lowering of fares, with the spread of and the greater increase in the population of our cities, all have tended to an enormous development of traffic, which I think will continue. Go back ten years and look at the number of passengers carried then and look at what it was for the last year. You will then find a reasonable excuse is permissible for what Mr. McElroy has described as want of forethought on the part of the municipalities. I say that in order to put the picture as I see it fairly before you. I think, however, it is absolutely necessary now, when we realise the possibilities of cheap and frequent means of traffic, that the central authorities should wake up, and that there should be co-ordination between the different committees controlling the improvements of streets; the provision of large arterial entrances and exits, such as are the dream of town planners and tramway undertakings, so that the best results can be obtained. That leads on to this, that undoubtedly the local authority, to avoid superfluous and overlapping services, &c., should control all means of public transport in the city; and that is a conclusion to which everyone must come who has read Mr. McElroy's paper. I am very specially indebted to Alderman Smith for the hint he has given with regard to the class of gentlemen who dip their hands into the pockets of the tramway undertaking in Liverpool. I happen to be engaged at the present time with a colleague on a report dealing with city tramway facilities, and I shall keep that point in mind. (Laughter.) I do think that perhaps in the past many tramway undertakings have been considered as the milch cow of the various Corporations, and that all sorts of schemes initiated outside the Tramways Departments have been brought forward without consideration and on the assumption that their cost could be met by the Tramways Department. I think that should be avoided entirely, and the best way to do it is to form a joint committee of all the bodies interested in street traffic, so that whatever schemes may be adopted, the tramways shall be called to bear a proportion of any expenditure that is made, and have opportunities of seeing that their interests are conserved in the laying out of such streets.

Mr. J. M. McElroy, in reply to the discussion, said.—May I thank the various speakers for the kind words they have uttered about my paper? I do not know that there is much criticism to reply to. I am very pleased to have had the support of so able a gentleman as Mr. Gordon, who has looked deeply into this matter. He has followed my arguments so clearly, and has put them before you even better than I did in the paper itself. I think many tramway managers here may say, "Well, our city is a long way from wanting any of the facilities foreshadowed in the paper." Do not be too sure about that. We know that in every city the number of journeys taken per head of population is growing steadily; and sooner or later, probably in some cities much sooner than they think, the arterial roads nearing the city centre will have reached the saturation point, and they will be up against this very problem. (Hear, hear.) The lesson to be drawn from the paper is this. In many cities it is the custom to give large sums in relief of the rates—after having paid interest and sinking fund, and after having made some provision, more or less adequate, in the shape of renewals and depreciation fund, it is customary to transfer large sums in aid of the rates. But remember what is coming along in the future. Each year we are gradually filling up our main arterial roads and in a few years' time new arteries, either parallel or underground, will be required. The lesson to be drawn from the paper this morning is that we should put sufficient by in the times when we are prosperous, so as to make adequate provision for those trying times which are ahead of nearly all the large cities in this country; and instead of giving such large sums in relief of the rates the policy should be to create a very large reserve fund to meet the development as and when it takes place. I do not know that I can say anything further. Mr. Wale raised a point, but all I said in the conclusion of the paper was that every city should have a permanent authority directing the traffic facilities over a wide area, not merely the city itself, and that could be done by Parliament, how and in what form would have to be considered on the merits of each particular case.

A hearty vote of thanks having been passed to Mr. McElroy for his paper, the conference adjourned for luncheon.

Digitized by Google

AFTERNOON SESSION.

The President again took the chair at 2 o'clock.

Mr. G. W. HOLFORD (general manager, Salford Corporation Tramways), read the following joint paper :—

UTILISATION OF TRAMWAYS FOR GOODS TRAFFIC.

BY Messrs. G. W. HOLFORD
(General Manager, Salford Corporation Tramways),
AND W. CLOUGH
(General Manager, Bury Corporation Tramways).

When the preparation of this paper was first undertaken, it was intended to be submitted to the Salford Conference of 1914. The subject was considered a peculiarly suitable one by reason of the conference being held in Lancashire, it being then suggested the paper might deal principally with the conveyance of goods by tramways between the Manchester docks and the surrounding industrial districts. (The authors, we understand, were selected because one was the manager of the tramway system which offers access to the Manchester Ship Canal Docks, and the other the manager of a tramway system in one of the adjacent manufacturing towns). Owing to the outbreak of war the reading of the paper was postponed, but we were, however, recently invited by the Executive Committee of the Association (who thought the time now opportune) to submit a paper to this conference on the general question, and we were pleased to comply with their request. Whilst we may not present a solution of the problem, we nevertheless hope the information we are able to place before the meeting will be of material assistance and guidance, and that at any rate we may reduce the issue to what is practicable as regards the utilisation of tramways for the conveyance of goods.

We wish to pay our tribute to others who have on prior occasions dealt with this subject, and for this reason, and in order to deal with the matter in as complete a form as possible, we may perhaps be allowed to give a *résumé* of the views which have been expressed heretofore.

The first of our members to introduce to the Association the subject of the utilisation of tramways in this country for the conveyance of goods, as being one worthy of consideration, was our esteemed friend, the late Mr. C. R. Bellamy, of Liverpool, who in 1904, at the conference held in that city, in his presidential address, spoke at length on the matter, and stated :—

> "The Tramways Act of 1870 provided for a general merchandise traffic ; and while this class of business under company control has been practically ignored, it is probable that with inter-urban connections and joint municipal control it would become a very useful source of additional revenue, as well as a great boon to important sections of the trade of the country.
>
> "The only attempted solution of this problem was the effort to promote the construction of light railways, which by reason of their cheaper construction would, it was hoped, provide a network of mechanical carriage of great flexibility, capable of dealing with a traffic that the railways do not, and cannot, cater for.
>
> "An American has said, in describing a tramway goods system, that it was as flexible as an elephant's trunk and quite as capable of picking up small things, and that it could flourish on the crumbs that a steam railway would despise.
>
> "It is this power to pick up small things over large areas expeditiously, cheaply, and frequently, which the railway companies lack, and for which they should welcome us as allies.
>
> "The ever-increasing network of municipal tramways, with their connecting links, might quickly provide the whole country with a system cheaper in operation than was contemplated under the Light Railways Act, which would do much under proper recognition of its capacity to largely increase the trade and revenue of the country.
>
> "I believe there is a great scope for such a development of tramways in this country.
>
> "Traders and manufacturers could obtain or send light consignments of goods at any time under short notice to the connected towns, railways, or docks."

Mr. Bellamy's remarks may be said to have been chiefly directed to the usage of tramways on country roads for the conveyance of agricultural products, etc., but he also touched upon the question generally, and although an interesting discussion followed, it does not appear that any steps were taken to adopt his suggestion or that any tramway undertaking ventured to experiment in this direction.

In July, 1905, a meeting of Lancashire tramway managers was convened in Manchester to discuss this subject, and again, although everybody was convinced of the benefits to be derived both by the trading community and tramway owners, it was found there were many difficulties, especially with regard to loading and unloading, which appeared to block the progress of any scheme.

At a meeting of the Lancashire and Cheshire Tramway Managers' Association, held in Oldham in April, 1912, a paper was read on the subject, bearing more particularly on the utilisation of the tramways for the conveyance of raw cotton from the Manchester Ship Canal Docks to the various mills in Oldham and the vicinity. The same difficulties as to loading and unloading were again pointed out, and no solution could be suggested.

In the early part of 1913 the Manchester Press contained many references to this subject. It was stated that the delay in the conveyance and delivery of goods between Manchester and the mills and workshops of Lancashire was so great as to be causing serious concern amongst traders. The chairman of one of the largest workshops in Lancashire stated :—" It would almost seem as if the carrying powers of the country had not been able to keep pace with the productive powers of the nation."

Reports appeared in the Press of interviews with the heads of large commercial undertakings and eminent members of municipalities, all emphasising the great assistance which tramways could render to the commerce of Lancashire if a practical scheme could be devised whereby the tramways might be utilised for the conveyance of goods.

It was said " that tramway undertakings were losing a great source of revenue by not utilising the generating stations and tramway tracks during the night time." Amongst other benefits it was pointed out that the adoption of such a scheme " would relieve the congestion of the streets in the daytime, would reduce the present heavy motor traffic, and the cost of paving the streets would consequently not be so heavy." Any apparent difficulties were passed over by saying these could be very easily overcome.

At the conference of the Tramways and Light Railways Association held in Blackpool in 1913, Mr. E. H. Edwardes, the general manager of the South Lancashire Tramways Company, submitted an interesting paper, part of which referred to this subject, but again without any practical results.

More recently we find Mr. C. W. Mallins, general manager of the Liverpool Corporation Tramways, dealing with the question of the conveyance of goods from the docks over the tramway system, but so far the Dock Board has not favourably received the scheme.

Although this subject should interest all owners of tramways, it is one which peculiarly concerns the Lancashire systems, for, as will be seen from the map on page 272, no other county has such a network of tramways as those which connect the industrial towns of the County Palatine, or could derive more benefit from the utilisation of tramways for conveyance of goods, if this were practicable.

This continuous network of tramways covers the following street mileage, viz. :—

	Route Miles.
Ashton-under-Lyne Corporation	5¼
Bolton Corporation	28¾
Bury Corporation	23¾
Lancashire United	33⅞
Liverpool Corporation	72¾
Manchester Corporation	96¾
Oldham Corporation	20¼
Oldham, Ashton and Hyde Company ...	9¼
Rochdale Corporation	16¾
Salford Corporation	30¼
Stalybridge, Mossley, etc., Joint Board ...	23¾
Stockport Corporation	20
Wigan Corporation	21½
	403

In a similar manner are the large industrial areas of Yorkshire linked together by tramway lines, and it does appear somewhat strange to outsiders that advantage has not heretofore been taken of this fact for the transport of other than passenger traffic.

Of course it is apparent to all interested in transport work—not only in the case of merchandise but in the case of passengers also—that the lesser number of hands such traffic has to pass through the better opportunities there are for organisation, and greater are the facilities to be afforded. Just for a moment let us glance at the position of a large city handling a busy passenger street traffic. Under municipal administration traffic can be dealt with on well organised lines with fares and services fixed on an equated basis, but if half a dozen or more private individuals were catering for the passenger traffic then disorganisation would follow and constant dissatisfaction ensue.

If the transport of merchandise over certain areas could be dealt with under one board or organisation there is no doubt that many of the grievances that at present exist would be removed, and many facilities and benefits would follow, but whether such a system could be introduced is a matter for the consideration of the whole of the interested parties in the several areas.

There have been several instances in this country where the use of tramways has not been solely confined to passenger traffic, and in order that there may be no misconception of the extent to which

Digitized by Google

this has been done it is perhaps advisable that a brief description should be given of each case. Taken in alphabetical order they are as follow :—

BURNLEY.

In September, 1912, the Corporation of Burnley commenced to run a goods waggon for the conveyance of heavy parcels, i.e., parcels between 56 lb. and 5 cwts. The charges were based on 3d. per cwt. per package, with a minimum charge of 3d. The goods were placed in an open wagon of the railway type, and if necessary covered with a sheet. This wagon was placed *in front* of a service car and propelled along the tramways. The fact that the wagon was placed in front of the car is worthy of notice, together with the opinion of Mr. Henry Mozley, the general manager of the Burnley Corporation Tramways. He states :—" It will be found much safer and more convenient to propel the wagon in front of a car than behind as a trailer. The driver is much more able to look after the safety of the wagon in the streets than the conductor on the rear platform of the car, as he is frequently away from his post, and passengers are in no danger whatever as they would be if the wagon was used as a trailer." It was found possible, without any inconvenience, to place this wagon in front of passenger cars working on a ten minutes' service. The wagon was run at specified times, and was allowed to stand at the terminus for ten minutes, and the sender or receiver of the goods had to meet the wagon on its arrival. The financial results were not satisfactory, and the daily running of the wagon has been abandoned, but it is now run on receipt of an order and a guaranteed load which will produce not less than 4s.

is 340 yards from the main line of tramways, and the Corporation incurred the expense of £1,243 for the requisite tramway connection. At the other end, each mill owner constructed his own tramway connection. Two self-propelled wagons were built, but only one of these is in daily use. From the illustration appended it will be seen that the wagons are similar to railway wagons, but are mounted on an ordinary tramway truck, and have a platform at each end and a trolley standard mounted on a framework in the centre. The bodies are 16 ft. long, 6 ft. 2 in. wide, and 3 ft. 9 in. deep, inside measurements. They are equipped with two Westinghouse No. 20 motors of 45 H.P. each. The tare weight is 9 tons 12 cwts., and the carrying capacity 10 tons, making a gross weight of 19 tons 12 cwts. The coal is discharged either at each side of the wagon, or from the bottom of the wagon through hoppers. During the year ending March 31, 1916, 12,121 tons of coal were conveyed.

LEEDS.

During the summer of 1910, the Corporation completed negotiations with certain contractors for the sand required in connection with the new filter beds of the Waterworks Department at Headingley. The quantity required was approximately 30,000 tons, and the distance about 3½ miles from the Sovereign Street Depot of the tramways department, which has a wharf on the river and canal bank.

To enable the work to be carried out suitable wagons with hoppers, and a 2-ton electric crane were purchased and installed. The conveyance began in September, and at March 31 following about 28,000 tons had been safely delivered, the revenue from this amounting to £1,660. After providing for all necessary charges, including

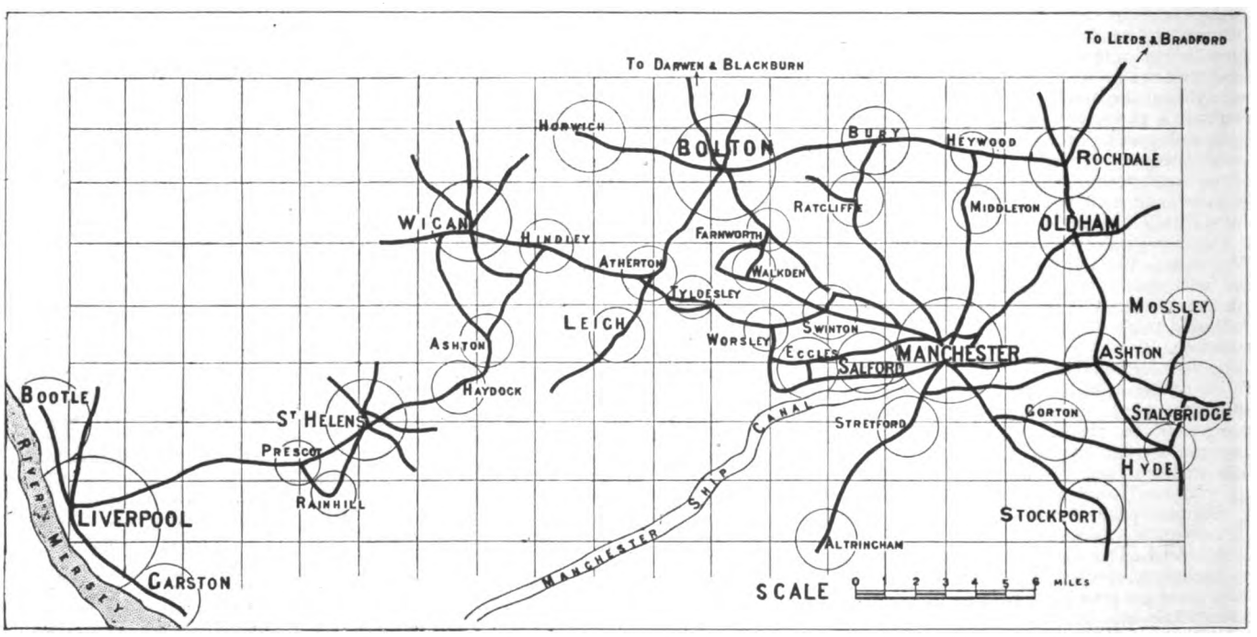

Map showing the Tramway Connections of an Important Section of Industrial Lancashire and Cheshire and the Accessibility to the Liverpool and Manchester Docks.

GLASGOW.

By the Vale of Clyde Tramways Act, 1871, the Glasgow Corporation have to allow the use of the tramways for the conveyance of goods and mineral traffic, with wagons and other vehicles in ordinary use on railways, upon payment to the Corporation of tolls, not exceeding six-tenths of a penny per ton-mile, on the weight of traffic so conveyed, exclusive of the weight of the vehicle, empty vehicles passing free of toll ; provided always that the Corporation shall be entitled to charge for traffic conveyed for three miles, or any shorter distance, any sum not exceeding twopence per ton.

This arrangement is at present in operation for the conveyance of materials from a railway station to one of the shipbuilding yards, a distance of nearly half a mile, for which the Corporation charge 2d. per ton. This was originally done by horse traction, but in 1905 it was considered advisable to use electricity, and the shipbuilding company provided an electric locomotive to haul wagons. In addition to the 2d. per ton for the use of the track, the Corporation now receive 1d. per ton for the supply of electricity. The weight dealt with in this way has been as much as 160,000 tons per annum.

HUDDERSFIELD.

Since September, 1904, the Corporation of Huddersfield has been utilising the tramways for the conveyance of coal from a railway siding to three different mills, two of which are a distance of three miles away, and the other five miles. The difference in level between the railway siding and the street is such as to allow the railway wagons to run over and discharge the coal into shoots, which empty into carts or tramway vehicles. This makes it possible to deal with coal delivered at the sidings from any colliery. The railway siding

full track maintenance, a very satisfactory net profit resulted to the undertaking. The cars conveying the material were all fitted with standard equipments, and were easily able to maintain the same effective speed as the ordinary service car, and therefore, although the whole of the work was carried on during the working day, it is stated that not the slightest inconvenience was caused to the travelling public. In the following year the balance of the 30,000 tons was conveyed, and the revenue received amounted to £248.

In a recent communication, Mr. J. B. Hamilton, the general manager of the Leeds City Tramways undertaking, states :—" Since that date the wagons have been found to be of very great use in conveying material for the use of the tramway and other municipal departments, but no further contracts were entered into until 1915, when further developments took place."

The developments referred to are as follow :—An agreement was entered into with the Leeds Fireclay Company, whereby fireclay and coal was conveyed over the tramway lines from the company's mines in Harehills to the works at Wortley and Elland Road, a distance of fully five miles. The operations commenced on October 4, 1915, but owing to war conditions the amount to be carried was much less than was anticipated.

For this purpose it was necessary to construct connections (at the company's expense) at the above-named termini, the hopper wagons owned by the department being utilised for the conveyance of the minerals. Mr. Hamilton in his annual report states :—

> " This commencement in the carriage of goods traffic for the general public marks an important era in the developments of the business of the tramway undertaking.

Digitized by Google

"In each of the Bills authorising the construction and operation of tramways in Leeds and district which have been passed by Parliament the very fullest powers for conveyance of goods, minerals, etc., upon the tramway lines have been carefully provided for, and no doubt this will in the future be found to be most valuable in serving the citizens.

"Owing to the contour of the district, all the railways and canals are placed in the southern half of the city, leaving considerable districts, principally residential, which are long distances from the railway and goods termini.

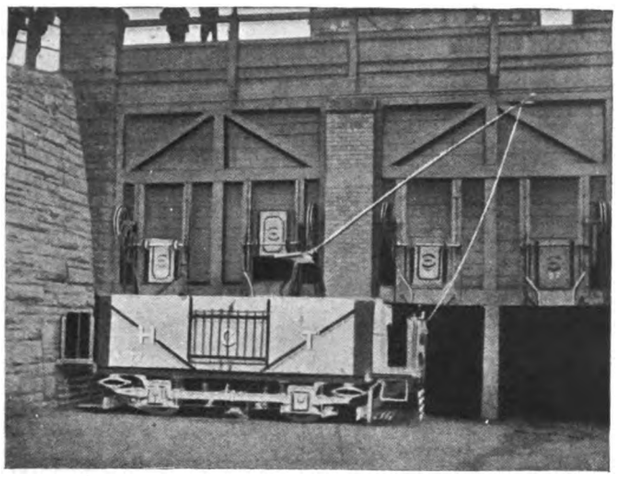

Huddersfield Tramway Wagon being Loaded with Coal.

"A properly devised scheme, by utilising the powers of the tramway undertaking to convey minerals and goods over its routes, would undoubtedly lower the cost of conveyance of materials to and from such districts, and very much reduce the wear and tear on the public highways."

We understand Mr. Hamilton is now engaged in preparing a scheme for submission to the tramways committee which will bring into effect the views expressed in his report, and that the experience gained by the conveyance of fireclay at the present time has been most satisfactory and encouraging.

There have also been other instances where the use of tramways cannot be said to have been confined exclusively to passenger traffic. A number of tramway systems convey their own permanent way materials on the tramways, and there are several systems on which important parcel departments have been instituted and special vans provided. In this connection we may mention the case of the Manchester tramways undertaking and Sutton and Company. The judgment which was obtained in this case has a most important bearing on the powers of a Corporation, and although of a somewhat lengthy character, we consider should not be omitted from a paper of this description.

This was an application in the High Court of Justice (Chancery Division) in February, 1906, by Messrs. Sutton and Company, for an injunction to restrain the Corporation of Manchester from acting as carriers or delivery agents except on their tramways, and from expending any of the corporate monies for that purpose.

The intention of the Corporation was to put into operation a large and comprehensive scheme. They proposed—

(*a*) To accept "cash on delivery parcels, i.e,, parcels where the value thereof is to be collected by them on delivery and subsequently handed to the senders.

(*b*) "Express delivery," i.e., parcels to be delivered by special messengers at special rates and to insure parcels.

(*c*) To act as agents for all railway companies for the receipt of parcels, and to pay to the companies monthly all monies due to them for the carriage of parcels, in consideration of a payment to the Company of a penny per parcel for collection.

(*d*) To collect and deliver parcels outside the radius of their tramway lines altogether, between places having no connection with their tramways, and of goods which have never travelled and are not intended to travel by their tramways at all.

Mr. Justice Farwell stated :—

This Act, in my opinion, enables the Corporation to run carriages and take tolls on all the network of tramways mentioned therein, and use such tramways for the purpose of carrying passengers, and of conveying and delivering animals, goods, minerals, and parcels. Mr. Upjohn pressed upon me that there is no power to carry or deliver, but merely a power to use the tramways for the purpose of carrying and delivering, but this appears to me too narrow a ground to found a decision. I refer to the Railway Clauses Consolidation Act, 1845, section 86, and I find that there is no power to carry generally thereby conferred, but a power to "carry and convey upon the railways all such passengers, goods, etc." I am unable to see any real distinction between this and the power given to the Corporation by sections 8 and 22 of the Act, 1899. But a railway company acting "as all railway companies now elect to act, and as the defendants act," as carriers, and not as either toll takers or conveyers (see Mr. Justice Wills' judgment in "Hall *v.* L.B.S. Railway Company," 15 Q.B.D., page 557), have undertaken the ordinary duties of a carrier, as Mr. Justice Byles put it in "Taylor *v.* G.N.R.," L.R.I.C.P. 385, "the first duty of a common carrier is to carry the goods safely, the second is to deliver them." This duty to deliver would exist without the express use of the word in section 22, and I cannot read that section as restricting the Corporation to deliver upon the tramways in the absence of custom or of special contract.

I apprehend that a railway company is not bound to deliver at the house or shop of the consignee, but if they do not they are bound to keep the goods safely for a reasonable time, and to deliver to the consignee or his agents when he calls for them. But there is nothing *ultra vires* in their delivering by cart or otherwise, at the consignee's house or to any other place authorised by him, including the station of a railway company, such goods as they have brought on their tramway lines ; such delivery is fairly incidental to their authorised business. As Lord Salisbury puts it in "Sowerby *v.* G.N.R.,"

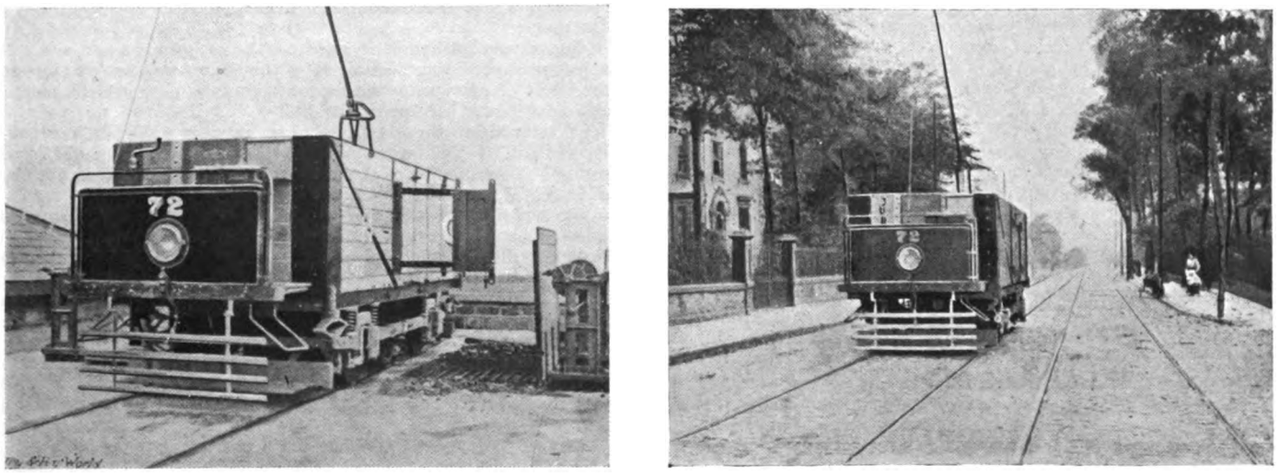

Wagons Used for the Conveyance of Coal—Huddersfield Corporation Tramways.

7 R and C Cases, at page 170, "They (that is, the Great Northern Railway) are permitted by law to carry on the business, not only along their lines, but also in connection with and as part of the same general undertaking by which they make profit—the business of distributing the goods which they so bring from distant points to the places where the different consignees intend they shall be delivered. For that purpose they have to build stations both for the receipt and dispatch of goods which are so entrusted to them." It would be difficult in the present case to put any practical limits to the place of delivery ; it cannot be at the terminus only—this is

Digitized by Google

probably in the middle of the highway—some radius of space within which a receiving store may be situate must be allowed, and some means of conveying to this store must be permitted ; there is no ground for confining it to manual labour—indeed, the weights mentioned in the schedule of tolls negative this—it must therefore be open to the defendants to use horses and carts even to get the goods to their own depot, and if they can do this I see no reason why they should not be allowed to convey them to the consignee's address, or some other place named by him. So far therefore as the expenditure complained of arises out of the working of their tramways undertaking as explained above, I can see no objection to it. The defendants are empowered to build goods stations for the reception and for the delivery of goods ; to provide and pay for carts and horses and the like for collection and for distribution and to pay wages to men employed for these purposes ; to provide buildings to house the horses and carts so used, to receive and transmit goods by rail, and to insure, for inasmuch as a common carrier is an insurer of the goods entrusted to him at common law, it must be open to the defendants to make a bargain limiting such liability or undertaking it on special terms. So far as regards " cash on delivery goods," I have no evidence that this is part of the business of a common carrier, and I can only say that if it is then the Corporation can accept goods for carriage and delivery on their tramways on those terms.

But this is all restricted to goods which travel along the tramways or some part thereof ; there is nothing in the Acts to authorise the Corporation to act as carriers generally without reference to their tramways. The question, as is pointed out in " The Attorney General *v.* The London County Council, 1901," 1 Chancery, page 781, is not whether the business can be conveniently or advantageously conducted with the tramways business, but whether it is by necessary implication incidental or accessory to it—and I think that it is not—to collect and deliver parcels for the tramways is fairly incidental, and such reasoning would authorise the railway company to carry on a coal merchant's business, because they must buy coal, and this was restrained in " The Attorney-General *v.* The Great Northern Railway," 29 Law Journal (Chancery), page 794. For the same reasons I hold that the Corporation cannot act as general agents for the railway companies, but only in respect of tramway-borne goods. The defendants, however, further contend, and I think rightly, that the Corporation can so act by virtue of its corporate existence, and that this court will only interfere to prevent the expenditure of the Borough Fund on such a venture, but they say also that there is nothing to show that they have made any such expenditure. I have, however, already stated that they threaten and intend to do so, and I am not satisfied that they have not already done so. It is obvious that a delivery service by carts to and from villages not connected with the company, and a general agency for all railway companies, must entail expense even if the same carts and men be used as are employed ordinarily in tramway service proper ; more of both are required, and there is wear and tear to be considered ; the horse that delivered tramway-borne parcels only might last for years, while the journeys between outside villages might break him down in twelve months. I cannot believe that a large general delivery service and a general railway agency can be added to a service limited to the connection with tramways without expense. No evidence has been given on the amount of such expenditure, but the plaintiff is, in my opinion, entitled to an account at his own risk of all sums so expended.

I propose to make a declaration that the defendants are not entitled to expend any part of the city funds or the receipts of their tramway undertaking, or the proceeds of any city rate, or any other monies of the defendants or the city, for the purpose of establishing or maintaining or carrying on the business of carriers, except as part of and in connection with, their tramway undertaking, and in respect of articles carried along all or part of the tramways for the time being belonging or in lease to the Corporation, or on which they have power to place or run carriages, and to grant an injunction in similar terms.

Having endeavoured as far as possible to submit the past history of the subject, we will now consider whether there are any legal, physical, or financial difficulties which prevent the utilisation of our tramways for the conveyance of goods.

HAVE WE AS TRAMWAY AUTHORITIES SUFFICIENT POWERS ?

1. *To undertake the conveyance of goods on tramways ?*

There would appear to be no doubt that this we have. The usual clause reads, " The Corporation may demand and take in respect of minerals, merchandise, articles, and things conveyed by them on the Corporation tramways, including every expense incidental to the conveyance, any rates or charges not exceeding those specified in the schedule to this Act, subject to the regulations in that behalf therein contained."

In the case of the Manchester Corporation *v.* Sutton and Company previously quoted, it was decided that the words " including every expense incidental to the conveyance " empowered the Corporation to build warehouses and to undertake the collection and delivery of goods provided such goods in the course of transit travelled along the tramways. There would therefore appear to be no legal difficulty as to the actual conveyance.

2. *To run two or more attached vehicles on tramways ?*

This, of course, could not be done without the consent of the Board of Trade. The Liverpool Corporation have recently been granted provisional authority to run two or more vehicles attached, and no difficulty need be anticipated in this direction.

3. *To lay down junctions and sidings into railway or dockyards and into mills, warehouses, etc.?*

The laying down of junctions, sidings, etc., is usually restricted in the local Tramway Acts to such as may be " found necessary or convenient for the efficient working of the Corporation tramways or providing access to any warehouses, stables, or carriage houses, depots, engine houses, generating stations, or works of the Corporation." There is therefore no power granted to construct lines into railway or dockyards or into mills and warehouses which are not owned by the Corporation, and if this were done it would have to be undertaken by the proprietors and, of course, with the consent of the road authority.

The Tramways Act of 1870 foreshadowed the probable use of tramways lines for other than passenger traffic, yet for 46 years, with the very few exceptions to which we have referred, the use of tramways in this country has been confined to passenger traffic and the conveyance of parcels. The 1870 Act contains the following clauses :—

25. Every tramway which is hereafter authorised by special Act shall be constructed on such gauge as may be prescribed by such special Act, and if no gauge is thereby prescribed, on such gauge as will admit of the use upon such tramways of carriages constructed for use upon railways of a gauge of 4 ft. 8½ in., and shall be laid and maintained in such a manner that the uppermost surface of the rail shall be on a level with the surface of the road, and shall not be opened for public traffic until the same has been inspected and certified to be fit for such traffic, in the prescribed manner.

34. The promoters of tramways authorised by special Act, and their lessees, may use on their tramways carriages with flange wheels or wheels suitable to run on the railway prescribed by such Act ; and, subject to the provisions of such special Act and of this Act, the promoters and their lessees shall have the exclusive use of their tramways for carriages with flange wheels or other wheels suitable only to run on the prescribed rail.

54. If any person (except under a lease from or by agreement with the promoters, or under license from the Board of Trade, as by this Act provided) uses a tramway or any part thereof with carriages having flange wheels or other wheels suitable only to be run on the rail of such tramway, such person shall for every such offence be liable to a penalty not exceeding £20.

We submit the inference to be drawn from a perusal of the above clauses is that in 1870 it was intended that the same vehicle should, if necessary, be used on the tramways and on the railways, and that the railway authorities or other persons might by agreement acquire the rights of usage of the tramway lines.

We would next draw attention to a clause which is now usually found in the Tramways Acts obtained by municipalities (Salford Corporation Act of 1899 and Bury Corporation Act of 1901), which reads :—

" The tramways shall be constructed on a gauge of 4 ft. 8½ in., but carriages or trucks adapted for use upon railways shall not be run thereon."

This clause, although it may not have been framed with the object of superseding Section 25 of the Tramways Act of 1870, has the effect of preventing the use on tramways of a vehicle which is also adapted for use upon railways.

On referring to the Standing Orders relating to Bills deposited in Parliament, it will be found that provision is still made for the running on tramways of " carriages or trucks adapted for use upon railways," Clause number 13 reading as follows :—

" Where for a distance of 30 ft. or upwards it is proposed that a less space than 9 ft. 6 in. shall intervene between the outside of the footpath on either side of the road and the nearest rail of the tramway, or a less space than 10 ft. 6 in. if it is intended to run on the tramway carriages or trucks adapted for use upon railways." So that evidently the before-mentioned clause (Salford Corporation Act, 1899, and Bury Corporation Act, 1901), has been inserted into municipal Acts which only provide this space of 9 ft. 6 in. (and we take it that the cases where 10 ft. 6 in. has been provided would be exceptional) to secure compliance with this Standing Order, the object of which no doubt was to provide for the greater " overhang " of a railway wagon as compared with a tramcar.

In the utilisation of tramways for the conveyance of goods however great an advantage it might be to use the same vehicle both on railway lines and on tramway lines, we must at the outset accept the following facts :—

(*a*) That railway wagons cannot be run along tramways as at present constructed, because their overhang is too great as against the 11 in. in the case of a tramcar. The wheels, which are 5 in. wide and have a flange of 1 in., are not suitable for grooved rails.

(*b*) That tramway wagons cannot be used on railway lines because the wheels are not wide enough to pass over the gap of 4 in. in railway crossings—the wheel flanges are too small to safely negotiate the curves even at the slow speed attained in goods yards or sidings.

Digitized by Google

In dealing with the general subject of the transport of goods, we have confined our attention principally to the following classes, as being those which might afford fields for operation by tramway undertakings, namely, the collection and delivery of goods :—

(1) Between towns separated some distance apart, i.e., Liverpool and Manchester ; and

(2) Between towns fairly adjacent to each other, as demonstrated in the following diagram.

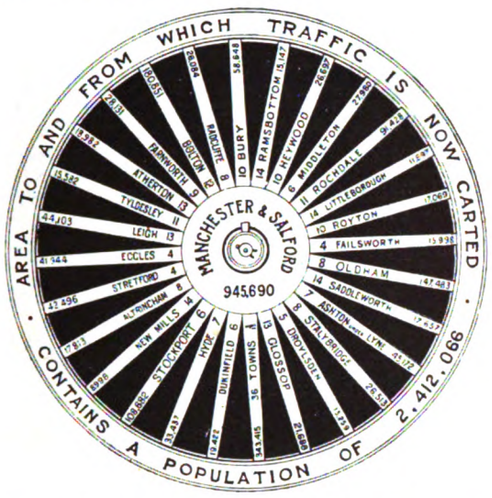

(3) Between dock or railway yards and the mills, manufactories, etc., in the immediate locality.

We have first to consider what are usually the methods in vogue for dealing with this traffic, and taking the above in numerical order we find :—

Between towns separated some distance apart.

1. This work is carried out by the combined use of horse, petrol, or steam vehicles, and railway lines and wagons. How does the position of the tramway undertakings compare in this case ? The goods have to be collected from a point and conveyed to a railway siding or depot (they could be just as easily collected and conveyed to a tramway depot), they are then transported by rail to another depot or siding in the town of delivery (they could be just as easily conveyed from the tramway depot over the tramway lines to the tramway depot in the town of delivery) ; they are then conveyed by horse, petrol, or steam vehicle to the mill, works, etc., where they are required (this work could be just as easily undertaken by the tramway authority).

What, then, are the advantages possessed by either party ?

The railway companies are enabled to transport large train loads at one time which the tramway undertakings could not do. Nor could the tramway undertaking from a financial point of view deal with loads of a small character, as the revenue to be derived would not cover the working expenses. But with loads of a moderate character the cost of transport between towns would certainly be cheaper as compared with the present railway charges.

Taking, for instance, the cost of providing and running on the rails a self-propelled tramway vehicle carrying 10 tons at 10d. per mile—(again remembering that not only must there be a sufficient load but also a sufficient distance, for clearly we could not undertake to carry 10 tons one mile for 10d., any more than we could undertake to carry one ton 10 miles for 10d.)—and assuming a distance of 25 miles, and making no allowance for a return load, the tramway charge would be 41s. 8d., or a carriage rate of 4s. 2d. per ton, whereas the railway rate (an actual case having been taken) was 13s. 2d. per ton. This leaves a large margin out of which to provide any warehousing or loading facilities at tramway depots.

It must, however, be expected that as soon as it became a question of competition as to which could do the work the cheapest, the advantage would be decidedly with the railway company, and whilst it may be in the interests of the trading community that the railway companies should be called upon to face competition, this alone is not sufficient to warrant municipalities entering into such competition.

The tramway undertakings might be able to still further reduce the handling of these goods by the laying down of sidings (where convenient) from the tramway lines direct to the mills, warehouses, works, etc.

But even under the most favourable circumstances, i.e., where the mill or warehouse is on the line of route, and there is sufficient space to build a tramway curve and line to the point of loading and unloading, there must be the requisite points and crossings, and although the extent of traffic in exceptional cases might warrant the expense of these, no tramway manager wishes to increase the number of points and crossings on a line used for passenger traffic. There, however, may be localities in our manufacturing districts where there is a cluster of mills and warehouses, and where it might be of advantage to construct a branch line for the conveyance of goods. To obtain access to the large warehouses of our cities (usually situated in very narrow streets) by means of tramway sidings is entirely out of the question.

On this point we quote from the paper (previously referred to) of Mr. Edwardes. He said :—

> "I have gone into the question very carefully with a great number of manufacturers, and have found that the small amount of tonnage handled in a mill or factory during twelve months would not pay the interest and sinking fund in connection with the erection of a siding for carriage of goods into every mill, but I see no reason why central goods yards should not be established in the manufacturing areas, and the goods transhipped on to the motor or horse lorries and delivered to the various mills by them."

If the transport of goods over the tramway lines between towns of the character referred to developed to any large extent, then it might be found desirable to construct central goods depots (in lieu of the use of tramway depots) at points or positions found to be most suitable.

There is also one other phase to be considered in referring to this class of business, and which is dealt with later in the paper, and that is the introduction of a vehicle that could utilise to some extent the benefit of the tramway system, and at the same time dispense with much of the expense consequent upon the several processes of handling now in vogue.

Between towns fairly adjacent to each other.

2. On referring to the diagram, on a previous page, it is apparent that in large industrial areas there must be a considerable interchange of goods traffic of a varying character between towns lying adjacent to each other. This work is at the present time partly carried out by the utilisation of the railways (as mentioned in the previous classification), but mostly by the employment of horse, petrol, or steam vehicles. Can tramway undertakings compete successfully for this traffic ? We are forced to the conclusion that this can only be done by the use of a vehicle which could avail itself in part of the benefit of the tramways and yet be on equal terms in the handling of the goods, and which we will refer to after the next classification. Where the goods are conveyed partly over the railway, as in Class 1, then the handling by the tramway undertakings would be on equal terms with that of the railway, with a possible reduction, as in the previous case ; but the length of tramway to be utilised would be of a shorter character, and the cheapness of transportation less in proportion. When the goods are conveyed by vehicles (horse, petrol, or steam), the handling charges are reduced to a minimum, and the financial benefit would be entirely in favour of this method, except probably in the case of horse vehicle transportation, but even then the cost of handling forms such a serious item in the consideration of the subject that it would be unsafe to say that the tramway method would be the cheaper.

Between dock and railway yards and the mills and warehouses.

3. The work referred to in this classification may be said to-day to be entirely carried out without the utilisation of railway lines, but solely by horse, petrol, or steam vehicles, with one handling for loading and another for unloading. Can the tramway undertakings compete successfully in this case ? Except in isolated cases where conditions are particularly favourable (such as the Huddersfield, Leeds, and Glasgow instances) we are of opinion that they could not. With the introduction, however, of some such vehicle as that referred to in paragraphs 1 and 2 we believe to a very large extent they could. Therefore in considering all these classes of work we arrive at the same conclusion, i.e., the necessity for a vehicle which can make use to a great extent of our tramways and at the same time reduce the handling of the goods to a minimum. A vehicle of this description (which by the kindness of the designer we have had the pleasure of inspecting) has been introduced as an experiment by Mr. C. J. Spencer, the general manager of the Bradford Corporation Tramways.

It may shortly be described as a

Railless Trolley Battery Vehicle.

In appearance it is similar to a petrol-driven wagon with the addition of a trolley and boom. Details of equipment :—The equipment of the chassis of the railless trolley battery vehicle is identical with the ordinary railless trolley chassis as used on the Bradford Tramways, that is to say, two 20 H.P. motors with ordinary series—parallel control, and will therefore operate on a 500-volt circuit. The earthing device is an extension of the steering arm of the vehicle bearing on the track by the medium of a cast-iron block, and at the same time automatically steering the vehicle. (This device, which has been used with considerable success for some time, in connection with the ordinary trackless trolley cars when taking them over the tramway routes to depot, was designed by the general manager of the Rotherham tramways, Mr. E. Cross.)

The accumulators employed are of the Edison type—120 cells, giving a normal voltage of 150.

They supply current to the ordinary 500-volt motors, the only difference being that the motor with battery supply runs correspondingly slower, that is, *pro rata* to the voltage, but as the torque of

Digitized by Google

a series motor is proportional to the current passing through the windings, the vehicle is capable of climbing steep gradients but at a speed corresponding to the low voltage.

Whilst the vehicle is running on the 500-volt circuit the batteries may be in series with the motors, thus charging them whilst the car is in trolley service.

The battery is capable of running the vehicle about ten miles.

The change-over from the battery to overhead wire is merely a question of throwing over a switch, the putting of the trolley on the wire and the earth connector on to the steering gear.

Photographs of the vehicle are appended.

Mr. Spencer has very kindly supplied some details as to the usage of the vehicle to date, as follows :—

"The experimental vehicle for this purpose was constructed and actually put into use on May 15, 1916, and has been running up to June 17 inst.

"During that period 741 miles have been run, and 247 tons of material have been carried varying distances, and according to market rates it has earned £73 14s. Various kinds of merchandise have been handled, including wool, stone, vitriol, sand, and other material.

"In this period 85½ hours have been spent in the depot, where the vehicle has been undergoing various experimental alterations and repairs to chassis. Had these alterations and repairs not been necessary (and they would not have been had not the vehicle been an experimental one) the vehicle would have been available for a further 85½ hours, and under those circumstances the total earnings would have been £17 more, making a total of £90 14s.

"In order to arrive at the cost of earning this money it would be obviously unreliable to take the actual expenditure on this experimental vehicle. There would, first of all, be great difficulty in arriving at the correct capital value of the vehicle in question. The chassis and equipment which are being used have been taken, almost literally, off the scrap heap, and therefore one might be tempted to give a very low capital value to the apparatus.

"It is therefore necessary to assume what would be the price under normal conditions of special vehicles for the work. I estimate that a vehicle, including accumulators, would cost from £800 to £900."

After a careful comparison of working costs of this type of vehicle as against petrol-driven vehicles Mr. Spencer is of opinion that the advantage is much in favour of the electric battery type, and he states :—

"Summed up it seems that this vehicle would cost in round figures £10 per week, working six days per week and running 240 miles, against £12 5s. for a petrol vehicle doing the same work. The figures, so far as the actual revenue from the experiment is concerned, must be examined in the light of the fact that we have been able to select very advantageous traffic and obtain, in some cases, a return load. If this vehicle is used in its proper sphere, viz., doing a large percentage of its work on the tramway track and using power from the tramway trolley wire, its operating costs will be from 20 per cent. to 25 per cent. less than a petrol vehicle doing the same work in the same time. Generally the experiment has been exceedingly successful, and gives promise of good results in the future."

Whether such a vehicle would be sanctioned for general use by the Board of Trade under the existing powers granted to Corporations for the working of tramways is somewhat doubtful, but it is more than probable that little difficulty would be experienced in the obtaining by such authorities of additional powers to run these vehicles where it was shown that their introduction would benefit industry in many directions.

SUMMARY.

We must apologise for the somewhat lengthy character of the paper submitted to the conference, but we felt that the subject was one which was worthy of our careful consideration, and that the data supplied by us might be found useful to many of our members.

We would desire to summarise our opinions in the following manner, namely :—

1. That the utilisation of tramways between towns fairly distant apart for the conveyance of goods would prove of a remunerative character under certain conditions, which we have already referred to.
2. That there should be no difficulties in the way of interchange of goods traffic over various tramway undertakings, as the interchange of passenger traffic under like conditions has already proved capable of easy and smooth working.
3. That the work should be undertaken by a Joint Board representing the several tramway undertakings interested.
4. That the utilisation of tramways for short distance goods traffic does not offer any prospects of a remunerative character, unless
   (*a*) A vehicle can be used which can avail itself of some of the benefits of the tramway system, and compete on other terms equally with the vehicles at present carrying out this work ; and
   (*b*) That works and depots or sidings are situated at a favourable distance from the tramway lines, as in the case of Leeds, Huddersfield, etc., to which reference has already been made.

We desire to thank the various gentlemen who have assisted us in the preparation of the paper by the loan of blocks and the verifying of details of their respective undertakings.

Railless Trolley Battery Vehicle—Bradford Corporation Tramways.

THE DISCUSSION.

Mr. C. J. SPENCER (general manager, Corporation Tramways, Bradford).—I should like to congratulate the authors on their excellent paper. I think I was somewhat instrumental in asking them to read this paper, and it is only very proper that I should take the first opportunity of thanking them for their work. In my judgment the subject they have selected is most opportune. The war has certainly given the whole nation, if not the whole world, a thorough shaking up. Old prejudices and old ideas are being abandoned, and new ideas are being, and will be, carefully scrutinised and examined. In no domain will the healthful effect be felt so much as in the transport world. It is therefore particularly opportune that we municipal tramway operators should consider how best we may help in solving the great transit problems of the future. I hope our past achievements will act as a plea for a respectful hearing for anything that we may suggest in this direction in the future. It seems that if we can handle passenger traffic to public advantage, we ought also to be able to handle goods traffic to public benefit.

The authors, however, quite properly submit the whole problem to a very searching and detailed examination as to what class of traffic might be most advantageously handled by tramways, and what class of traffic may not be advantageously handled by tramways. It is, of course, obviously and absolutely true that unless tramway systems can handle traffic more economically than it is handled at present, using the word "economical" in its broadest and widest sense, it is useless to put forward any scheme. The whole question may therefore be summed up in a few words. Can tramways be utilised for the conveyance of goods and merchandise to the public advantage ? It follows that unless the income obtainable from the handling of merchandise is at least equal to the expenditure, it would be useless to consider the matter further. At

Digitized by Google

what cost per ton mile is it likely that a tramway can handle goods? Taking a very rough and ready and admittedly a broad estimate, if a tramway system had, say, 100 cars, each car with its average load weighing, say, 10 tons, running, let us say, 100 miles per car per day, it means that in the gross 1,000 tons are carried 100 miles per day, or 100,000 ton miles. If the total cost of operation be taken at 10d. per car mile, the cost will be 1d. per ton mile gross. Let us suppose that if instead of carrying passengers we were carrying goods, and that the dead load to be carried was 50 per cent. of the total load, it would mean that the net cost would be 2d. per ton mile. It may, of course, be urged, and quite properly, that some fallacies underlie this very rough and ready method of estimation. Not every vehicle would be full of merchandise all the time; neither does it follow that the average speed of the vehicle would be so good as the average speed of vehicles carrying passenger loads. The question of dead time when the vehicle is being loaded and unloaded would have to be taken into consideration. It must be remembered that we are dealing with a dead load and not a live load—a dead load that has to be put on the vehicle as against a live load which puts itself there, and so on. On the other hand, it must not be forgotten that the vehicles themselves need not be so expensive as the vehicles carrying passengers; that the cost of ticket collection, ticket checking, etc., would be considerably modified. But I submit that there is, broadly, a *prima facie* case for examination, and what is of first-class importance is that a very big percentage of the capital expenditure of a tramway would, in the event of goods being carried over the same lines as passenger lines, be divided by a much higher car mileage; that is to say, the tramways transit machine is not now in most cases used to anything like its full capacity, and, to quote a phrase from our friends the electrical engineers, the addition of goods traffic would improve the load-factor materially. At any rate, any figure in the neighbourhood of 2d., 3d., or even 6d. per ton mile for pure transit is a figure well worth considering.

Can tramway vehicles handle traffic at a less cost than petrol or steam? I have had a very considerable amount of experience with petrol vehicles, and I have had the advantage of long consultation with transport experts who have had experience with both steam and petrol vehicles of modern construction, and the general impression formed in my mind is that there is not much to choose between the relative efficiency of either petrol or steam, working under normal conditions, and everything considered, so that in comparing hypothetical tramway costs with petrol costs, one is not in reality leaving out the steam vehicle. Electric power is considerably cheaper than petrol power. The cost of repairs, lubrication, and even driving is cheaper with electric vehicles, whether on rails or off rails, than petrol, and so far as one can see is likely to continue so. On the other hand, the flexible character of a self-contained car is a very valuable asset. Quoting *Punch*, "It is not confined to a silly groove," so that it may be a question of debate and experience as to which class of vehicle is the most suitable for any definite class of traffic. In making comparisons, however, between tramways and petrol, it must be remembered that the petrol goods vehicle does need a road on which to run, and, at the present time, it does not provide and maintain that road; but the road has to be provided, and its cost both for provision and maintenance has to be paid for, and if the question be examined from a broad public point of view, the cost of road provision and wear must be added to transit costs. In the case of a tramway, of course, the road is provided and maintained by the tramway authority, and the cost of the road provision and maintenance is, of course, automatically charged against the income of anything carried over it.

The main question in connection with the proposal to carry goods on tramways is: "Will the carrying of goods by tramways help in any way to solve street congestion?" Is it not quite correct to say that the proposition resolves itself into a question of replacing a disorganised system of transit by an organised system? Is it better to allow transport to remain in the hands of sundry individuals, who of necessity are disorganised, and are not using—in the broad sense—the best vehicle for the work which they may be doing, nor are they, nor can they, be properly controlled by the street or other authority in which they are operating? A public, or even a semi-public, body, working under suitable legislation is of necessity more amenable to the public interest than unorganised and largely irresponsible bodies or individuals. Again, has it not been proved in the past that the placing of passenger traffic under the control and management of properly organised bodies has resulted in great public advantage? Is it not, therefore, reasonable to expect that the placing of goods transport under similar control and management would result in similar conditions? It has been pointed out to me by men who are very greatly concerned in the future industrial warfare of this country—and who are certainly not pro-tramway—that the future of this country depends largely upon the efficiency of its transport, and particularly of local transport. What then can we, as municipal tramway men, offer towards an improvement of our present system or want of system? I submit that we can offer an organised system for a disorganised system, and whether we use vehicles with flange wheels or vehicles with rubber tires, vehicles run by electricity or vehicles using petrol, the issue is scarcely affected. Certain it is that if tramway undertakings are charged with the duty of handling goods traffic, they will, if they are allowed, use the most efficient vehicles for the purpose, and keep abreast of the times. Surely as tramway men we can claim that we have "won our spurs" with passenger traffic and are therefore worthy of being considered in questions where the carriage of goods is concerned.

I apologise for not having quite acted the part of critic of the paper. My difficulty was that I had very little to criticise. I thought I might add a little to the paper and to some extent join with the authors in this matter.

Ald. VARWELL (Exeter).—Does the question of gradient come in?

Mr. SPENCER.—No, it does not affect the matter.

Mr. H. MOZLEY (vice-president, general manager, Burnley Corporation Tramways).—Mr. President, as an old goods traffic man, perhaps you will excuse me if I get up, as there seems to be a good deal of hesitation below the table. This is a subject in which I have taken an interest ever since I became acquainted with tramway work. As to the general desirability of tramways handling goods traffic, I do not think that there can be two opinions if you consider the advantages. At any rate, you will see that the authors of the paper have not questioned the advantages to be derived from handling goods traffic. Perhaps I need not labour that side of the question, for it is obvious that in an area, say, covered by a ten-mile radius from a big centre, the local goods traffic must be of considerable volume, and the railway companies do not care to be bothered with such short journey traffic. I have found in Burnley the railway people are quite open to deal with us in handing goods over to us and collecting goods to be forwarded during the experiment with the goods wagon, to which the authors of the papers have referred. But in dealing with this question generally, and in reference to the paper, I should like to make a few additional remarks. I think that the paper has been praised very much by our hon. secretary, but perhaps I could have added a few additional remarks, or a few items, if they had taken the trouble to consult me.

Mr. HOLFORD.—We did, Mr. Mozley.

Mr. MOZLEY.—There is one very important matter if you are considering the question of handling goods traffic—you must look to your statutory charges. In the early eighties, when I first dealt with the question, I found the company powers assumed train loads, that they were so low that it would be impossible to handle small loads, and therefore after giving the system of goods on road and rail truck a trial with a locally converted wagon, we found if we had succeeded in obtaining a successful truck, we could not make a profit because the statutory charges assumed train loads. Happily, now Parliament has sanctioned such statutory charges as will enable us to handle single wagon loads, or two or three, but not train loads. If you will just make a note of these figures and compare them with your own charges at home, perhaps you will see how this important question stands with regard to yourselves. For coal, coke, etc., 3d. per ton mile, with a minimum of three miles for charges. I should emphasise the point that in all these charges there is a minimum, of three miles. For iron ore, etc., 4d. per ton mile; sugar, grain, corn, etc., 5d. per ton mile; cotton, wools, drugs, etc., 6d. per ton mile; carriages, 1s. per mile; small packages—7 lb. 3d., 14 lb. 5d., 28 lb. 7d., 56 lb. 9d.; above and under 500 lb. any charge the Corporation think fit to make. If you have statutory charges similar to these, I think that if it is possible to obtain a suitable vehicle to handle goods traffic, it could be done with advantage to ourselves and advantage to the community—the commercial community—and if you can convince them of this, I have no doubt that a very great advantage both to the tramway undertaking and to the commercial community would obtain. Referring to the paper again as far as night traffic is concerned, I think night traffic would be intolerable; it is quite objectionable and altogether unnecessary. You can work goods traffic in the day time amidst your ordinary services just as easily as you can passenger traffic. I do not see the slightest difficulty about that. Then the authors refer to large areas. They have taken the systems on the Manchester side. Now I would have you observe that there they are all 4 ft. 8½ in. gauge, but on the western side, what we call the north-east division of Lancashire, we are all 4 ft. guage, and we have a similar network, which in time, I believe, will have physical connections from Bradford down to Darwen and including the Rossendale valley. Then this goods traffic would become a very important matter indeed. Of course, running powers and interchange of traffic are quite as easy to arrange as is the case with passenger traffic, but there again you will have to be careful; you will find that there is a variety in your statutory charges. There is another difficulty which we found in handling the road and rail wagon. We gave it a thorough trial. Now, we have the ancient carrier; the ancient carrier is going on to-day as he has done for hundreds of years, that is, I believe, ever since the introduction of wheeled vehicles. We have from our centre to the outer districts, covering a radius of ten miles, carriers going daily with loads from one ton and upwards. It was that class of traffic that I was catering for with this experimental goods wagon, and I believe that we can only handle that traffic successfully by the use of a road and rail truck. The vehicle must go to the collecting point—that is the manufactories, warehouses, or to the shops—and deliver the goods to the consignee wherever he may

Digitized by Google

be, both along the road and at the end of the journey. Only in that way can we put ourselves in a position to do this work. Otherwise that traffic will never be secured. There again—and Mr. Baker will support me in this, and will show you how aged the question is—Perrett, a French tramway engineer, devised a very good road and rail truck, and I went to inspect it in the Rochdale depot. But I found that it was too heavy and complicated for practical use. But it does show that this problem is one that can be solved, in my opinion, provided that we have sufficient encouragement in the offer of traffic. The road and rail truck which we tried was merely fit for horse haulage; it would not stand mechanical traction; it would not keep to the rail. I believe the road and rail truck is the ideal and true solution of the problem. Whilst I am on that, I might refer to Bradford, because I believe that is likely to be a very successful method of dealing with goods traffic, simply because it has been going on for years in the shape of petrol and steam. It is not a tramway method, except so far as obtaining power is concerned. If you are going to adopt the Bradford system, then we shall have to go to Parliament for fresh powers. We have no powers to deal with heavy motor traffic, and therefore there is a difficulty there which will have to be overcome before we can do it. But it does seem to me that that is another very fine alternative to the road and rail truck. Then there is a question or two that I would like to put to Mr. Hamilton, whom I am glad to see here smiling as usual. I find that according to the paper he is carrying minerals at the rate of 1s. 2·22d. per ton for 3¾ miles. This works out at 4d. per mile. How can he make a profit out of that? We could not handle minerals at 4d. per mile, that is certain. Perhaps he will explain that to us. Then he has also entered into a contract for the carriage of fireclay; perhaps he will also tell us what rates he is going to charge for that, and also what his statutory charges are, so that I can make a useful comparison. Then I was surprised to see that the authors of the paper say that there is no power for a tramway undertaking to make sidings to works, etc. I believe that they are entirely wrong, at least they are so far as we are concerned. We have the power to put a siding down to a works, not our own but anybody's works. The clause authorising these sidings is as follows:—"The Corporation . . . make maintain alter and remove such crossings passing places sidings junctions and other works in addition to those particularly specified in and authorised by this Act as they find necessary or convenient for the efficient working of the tramways by this Act authorised or for providing access to any warehouses stables or carriage-houses or works of the Corporation or their lessees." It would be foolish to give us statutory powers to carry minerals, coals, and carriage of all kinds of things without some means of carrying it out. Therefore I believe the authors are quite wrong in regard to saying that a tramway undertaking has no power to put down sidings to other people's works. And, in fact, you have Huddersfield contradicting you right away; there they have put down sidings in a colliery which cost £1,000. So it is quite clear from that that you are wrong on that point. You have listened to me with great patience, and I thank you. It is an old subject with me, and I rather believe that I have not heard the last of it, now that it has been so ably dealt with by my friends Mr. Holford and Mr. Clough. But I do hope that we shall find the best minds in the tramway world studying the subject and dealing with it in a thorough manner. I mean, I hope that the inventors will do something, for I do not think that we have yet got a suitable vehicle to deal with goods traffic on tramways, and if what these gentlemen have done encourages tramway undertakers to experiment in carrying on a goods traffic, then I shall be very thankful indeed, because I think, after many years' consideration of the question, I have failed in my own district.

Mr. J. B. Hamilton (general manager, Corporation Tramways, Leeds).—I desire at the outset to congratulate the authors of the paper. I was quite prepared to give them a whole-hearted eulogium for the method in which they have handled this question until I heard that they had not consulted Mr. Mozley. (Laughter.) I think that shows a lack of knowledge on their part which ought to receive our very severe censure. However, notwithstanding that disability, I think they have produced something which ought to direct attention to a very serious problem of the moment. The question of the utilisation of tramways for goods traffic presents itself to my mind from two points of view—the first being in the interests of the city, what we shall avoid in removing or reducing the inconveniences and street congestion which arises from the carriage of goods and minerals on other vehicles than by rail transit. In our particular case at Leeds, the whole of the material we are now carrying, between 400 and 500 tons a week, used to be conveyed in ancient steam tractors with trailers. Their passage through the busy streets was a constant source of danger and annoyance to the persons using those thoroughfares. As compared with that method the minerals are now conveyed in a not, perhaps, very perfect wagon, because we have not got a perfect one yet according to Mr. Mozley, but in a vehicle which compared with the old state of affairs is certainly much less obtrusive, and which follows the orderly line of traffic in the streets. From that point of view it is a great advantage to the city, and in that connection I think many of our cities might very properly consider the conveyance of some portion of the heavy traffic which is now conveyed by steam tractors or petrol or horses along the street. It would, I think, assist in the elucidation of the problem which we were considering to some extent this forenoon. Now, the second point of view is the question of relative finance. I have no doubt in my own mind whatever that as compared with the non-rail form, given suitable conditions, goods can be conveyed at a cost and at prices which no steam or petrol vehicle can face. Recently we had a contract given to us by the company which is referred to in the paper, and it was arranged at prices which are considerably less than they were paying at a time when there was very keen competition for the business. So we have obtained the advantage of removing the old objectionable form of traffic from the streets and are conveying it at prices which are much less to senders and are remunerative to us. On that point, I was sorry to hear my friend Mr. Spencer talking about 2d. a mile. Notwithstanding that, Mr. Mozley refers to 3d. and 4d. as being practically the statutory charge allowed by Parliament in the case of Burnley for the conveyance of goods of that class—heavy minerals, fireclay, and so on. Our figure in Leeds is approximately 3d. per ton mile. When I came to consider the question of cost, I satisfied myself that we could not, looking to the delay in loading and unloading, the provision of special vehicles, and so on, face it at our schedule price of 2d. per ton mile. I can quite understand that in the early days, when these schedules attached to tramway powers were arranged, that the tramway men of those days had a very remote expectation in their minds of carrying any goods traffic, for if they had gone into the matter there is no question at all that they would have seen that the schedule prices were far too low. The consequence is we have made an arrangement, and our price is arranged at 3d. per mile. A rate per mile is, of course, merely a relative term, because it may depend on varying conditions. We are carrying five miles—from one side of the central portion of the city to the other—avoiding as far as we can the busiest streets, and all these conditions have to be allowed for. The senders do the loading and assist us in the emptying, and they have paid for all the terminal connections. In the result we make a very little profit out of it after covering our working expenses, etc. I mention those figures in this detail because I suggest that tramway undertakers who are considering this question, or who may have to consider it in the near future, ought to see that their powers are brought into line with what I think will be found to be the necessary practice. I do not think there is any other point, and I have answered Mr. Mozley's question.

Mr. R. H. Wilkinson (general manager, Huddersfield Corporation Tramways).—Referring to the statement made in the paper (on page 275), "Taking, for instance, the cost of providing and running on the rails a self-propelled tramway vehicle carrying ten tons at 10d. per mile," and then a comparison is made with the railway cost. I should like to point out that in this calculation it has never been considered what the cost would be if the vehicle conveyed 20 tons or, in other words, had a trailer attached conveying a total load of 20 tons, with the same driver and conductor. The cost would then be considerably reduced. A railway certainly has many trailers, but even with this great advantage it appears that their cost of carriage is about three times the cost given for a single tramway vehicle. After my twelve years' experience conveying coal by the tramways, I agree that the rate of 10d. a mile is a very fair figure at which goods could be conveyed. A few years ago I had to consider the question of goods haulage on rather a large scale, whereby the tramways would have been handling about 159,000 tons of goods a year. I drew up a scheme for conveying those goods from the railway siding to the works, which were only ¾ mile away, by means of a self-propelled truck with a flat top, capable of carrying a railway goods wagon complete with its load, the truck to run on the tramway lines and driven by motors in the ordinary way. This would avoid the handling at the railway siding and considerably reduce the cost of conveyance. Now for that purpose I intended laying a track especially for the purpose all the way, not utilising the existing lines at all, owing to the width of the railway wagons, and was quite confident that I could have carried those goods at the 3d. per ton per mile rate even for that short distance. Unfortunately the railway company prevented the above scheme being carried out. Whilst considering this matter, my attention was called to the fact that a similar scheme had been in operation in Germany for some years. I therefore went over to Germany and saw the very thing I had been planning in actual use. Whilst there I also saw a light railway which had been constructed, reaching out several miles into the country, and they charged at the rate of 7d. per ten tons per mile. I am quite convinced in my own mind that goods can be carried at a remarkably cheap rate. There is just this about it; when once the system has been inaugurated there is little further trouble. It is a dead load in every sense of the word, no complaints of any description coming in. I think that is all I can usefully add to the paper.

Mr. J. M. McElroy (general manager, Corporation Tramways, Manchester).—In connection with this subject of carrying goods on the tramways, I think we may say there has been a maximum of talking and a minimum of doing. I think that about hits the situation. I was reading the other day that when the Tramways Act of 1870 was before the committee, it was at the suggestion of

Digitized by Google

certain Lancashire people—the authors of the paper to-day are Lancashire men—that the clause about running railway trucks on tramways was inserted with the object of facilitating the delivery of goods from the railway to the various warehouses, stores, etc., in Lancashire. That was the object of putting in the words which the authors have mentioned. Now, if we are to look into the general principles of this matter we should ask ourselves, why were rails put down in streets at all? They were put down because far-sighted people could see that by running vehicles with metal wheels on metal rails they could for a given expenditure of energy carry about twice the load that they could on ordinary road vehicles. That was the elementary principle which caused tramways to be laid down and used in the streets. It acted very well for carrying passengers, because passengers collect and deliver themselves; they walk to the tramway and they walk away, and there is no trouble in collecting or delivering. But immediately we begin to touch goods we are up against the terminal difficulties. We have either to carry the goods to the tramways by separate vehicle or we have to put sidings into the warehouses. If we carry goods to the tramway and deliver them by means of separate vehicles from the tramways, then unless we have a fairly long run, say, as the authors have suggested, 25 miles, the advantage of the cheap transit on the tramways may be watered down by the terminal charges. That is a very elementary principle which we should never forget. Now then, as regards carrying on rails, even as far as 25 miles, unless we have actual sidings my opinion is that there may be difficulties in successfully competing with the railways. So it comes to this; it is obvious that the advantage of using tramways for carrying of goods is confined, speaking generally, to those places where we can construct tramway sidings into works and can collect and deliver the goods by vehicles run entirely on the tramway rails. Do we not observe this in connection with our own permanent way? We use our tramways for carrying permanent way material when we can run direct into the depot, and carry the goods right on to the job on a tramway vehicle. But even in our permanent way departments there are many loads which we have to carry off the tramways, and in these cases we use petrol, electric, or horse vehicles, because the material cannot economically be carried on tramways on account of the terminal difficulties. Since our good friend Mr. Bellamy brought forward this subject at our Liverpool conference in 1904, there has been a revolution in road transit. The petrol vehicle has come along, and it has absolutely revolutionised road transit. In those days we did not clearly foresee what the petrol vehicle was going to do as a commercial vehicle. I do not care to say that tramways cannot be utilised for carrying goods, but the introduction of the petrol, steam, and electric vehicles has so revolutionised matters that we shall have to hesitate very much before saying that tramways can be generally used for carrying goods, except in the special cases mentioned. Mr. Spencer's vehicle is an exceedingly good one, but it only incidentally touches the subject of this paper. The authors started out to talk about the carrying of goods on the tramways so as to obtain the advantage of the cheap transit of running on rails. Mr. Spencer's vehicle makes the attempt to get cheaper transit, not by running on rails, but by taking energy from the trolley line, and in this way he hopes to beat the petrol vehicles. He thinks that if he can get cheaper energy from a central power station he can successfully compete with petrol, steam, or battery vehicles. If he can do it, his vehicle will undoubtedly be a great advantage, provided the disadvantages from other points of view do not outweigh the economical one.

Mr. W. CLOUGH (general manager, Bury Corporation Tramways), in reply, said: Mr. Holford and I discussed who should read this paper; it was arranged that he should do so and that I should reply to the discussion. However, Mr. President, I do not find much in the discussion to reply to, but I will say to Mr. Mozley that I think it was rather too bad of him. Being on the Executive Committee of this association, he was one of those who compelled us to deal with this subject, and he comes here and tells us that it is an old subject. Although Mr. Mozley is an old goods traffic man, he has altogether—and he admits it—failed to arrive at a solution of this goods traffic business. Then he puts on us the solution of the problem which has baffled him. That was not quite fair. Mr. Mozley is somewhat concerned that he cannot carry goods in Burnley, and he says that within a ten-mile radius there are goods to be carried, and he is concerned that he cannot carry them at 3d. per ton per mile. Now, Mr. Mozley, if you can get 1s. 3d. a mile out of that traffic, why should you not get it as well as the revenue from your present passenger traffic? Mr. Holford and I have gone carefully into this, and we can assure you, Mr. Mozley, that you are all right at 3d. per ton per mile. You said you could not make a profit because the charges were too low, being based on train loads.

Mr. MOZLEY.— said the companies in 1879. The new statutory charges which I quoted are quite different.

Mr. CLOUGH.—There is no suggestion on our part that this goods traffic might take place in the night time. We never suggested that at all; if you will look in the paper you will find that is so. In Mr. Mozley's words, it would be "intolerable and altogether unnecessary"; we agree with him that it can be done in the day time, and that there are times of the day on most provincial systems when you can pass along goods traffic without intertering in any way with the passenger traffic. On the question of gauge, I looked on the map carefully to see where Burnley was—(laughter)—to see what the gauge was, but that did not interfere with our map. We agree that to use for goods traffic the vehicle of Mr. Spencer, Parliamentary powers would have to be sought. I do not find there is much else to reply to. The main principle Mr. Holford and I found in this matter was that if we could get the towns in Lancashire with sufficient distance between them and with sufficient loads to be carried—you must have a load and you must have the distance—then a tramway was in just as good a position as a railway to undertake the conveyance of goods. We could convey the goods as easily between each of the depots as the railway company can convey them between their present railway goods yards. They have to deliver the goods, the tramways would have to deliver the goods. We went to see Mr. Spencer's vehicle, and we thought that was the better use to put it to—to distribute the goods from the tramway depot. I was hoping we should have had a good discussion. I thank you very much, on Mr. Holford's behalf and my own, for the kind attention which you have given to our paper.

A hearty vote of thanks was accorded to Mr. Holford and Mr. Clough for their paper, and to the president for presiding.

The conference then concluded.

FRIDAY'S PROCEEDINGS.

ANNUAL BUSINESS MEETING.

The fifteenth annual general meeting of the Association was held on Friday, September 22, at the Surveyors' Institution, Great George Street, London, S.W. The President (Mr. Peter Fisher), occupied the chair, supported by the following members of the Executive Council:—Vice-president, Mr. H. Mozley, Alderman H. Linsley, J.P., Mr. A. R. Fearnley, Mr. J. Dalrymple, Mr. A. Baker, Mr. W. Clough, Alderman S. Flint, J.P., Mr. T. B. Goodyer, Councillor G. A. Johnston, J.P., Mr. J. B. Hamilton (past president), Mr. G. W. Holford, Mr. J. M. McElroy, Alderman J. Miles, J.P., Mr. S. F. James (hon. solicitor), and Mr. C. J. Spencer (hon. secretary and treasurer).

The HON. SECRETARY read the notice convening the meeting.

The PRESIDENT.—The minutes of the last annual general meeting are printed in the Proceedings of the Association, and they are generally taken as read. Is that your pleasure?

The minutes were then formally confirmed.

The HON. SECRETARY announced the arrangements for an inspection of London County Council trailer cars, a visit to the London County Council generating station at Greenwich and central repair depot, and for inspecting the work of the Woods-Gilbert rail planer at Bexley Heath.

The PRESIDENT.—The next item on the agenda is "president's remarks." There is only one that I have the privilege of making this morning, and it is this, to express the hope that the business may be got through as expeditiously as possible, seeing we have an appointment at 12 o'clock on the Embankment. In addition, we want to have a few minutes placed at the disposal of members to ask questions or submit any information they may have to present to us on any subject they may consider of importance.

ANNUAL REPORT OF THE EXECUTIVE COUNCIL.

The annual report of the Executive Council was then submitted. (The text of the report is given on pages 283-286.)

The PRESIDENT.—Members are entitled to ask any question or to discuss this report.

Councillor HIGHAM (Vice-chairman, Blackburn Tramways Committee) moved the deletion of the paragraph headed "British Trade After the War" (page 285).

The PRESIDENT.—You will observe from the information given under that heading that another association has brought this to our notice, and, as indicated in the address yesterday, we really have some grounds for concern for the future. We believe that the economic struggle in the future will be very severe, and we are just anxious that everyone will put his back into this business and so do his best to hold up the British end of the plank. That is all we mean in those few words.

Councillor HIGHAM.—But I want to point out that you are opposing the British end of the stick. As I read the resolution of the I.M.E.A., they view with deep concern the possibility of being forced to hold up the British end of the stick. I want to know why the Council or this Association should support them in that. I contend that it is our duty, all of us, to hold up the British end of the stick as much as possible. I believe that in passing this resolution we are going against that.

The PRESIDENT.—Is there any other question to be raised on this report?

Digitized by Google

Councillor HIGHAM.—Is there no member of the Executive Council able to answer my question? We want a lead in this matter. We want to know what is the position of the Executive Council; we do not want the matter shelved by proceeding to something else. I hope there is some member of the Executive Council who will answer the question.

The PRESIDENT.—I have answered it in my way; perhaps the Hon. Secretary will add something.

Councillor HIGHAM.—If there is no better explanation than what has been given I shall move the deletion of this paragraph from the report, because I believe that to pass a resolution like this is practically to express the idea that we cannot possibly do without trade with the countries with whom we are at present at war. That is how it strikes me. The Board of Trade sub-committee's recommendation is perfectly simple to my mind, and as far as the explanation I have heard up to now, it must be simple. It reads thus:—"All Government departments, local authorities, and statutory bodies entrusted with the control of monies raised by taxes or rates should be under legal obligation to purchase, so far as possible, only goods produced within the British Empire." Now, I cannot understand why we should oppose that. We are fighting a war such as the world has never seen before, and if at the conclusion of this war we are not going to do all we can to prevent Germany or her Allies from raising their heads again in the manner they have done in the past, then I say the generations that follow us are going to have to face a war as terrible as this. The one way to my mind in which this country can prevent any recurrence of the present horrible struggle is to do what this recommendation asks us, viz., that after the war we should do all that lies in our power to prevent Germany economically from ever being able to raise the monies required to arm or fight and slave for another struggle. To my mind this recommendation of the Board of Trade sub-committee is framed with that end in view, and it is a certainty if we do not follow that out it will enable the enemy to raise hopes again, involving us in another struggle. If we can do without German manufactured goods and German firms at a time like this, if our tramways, as you pointed out, sir, in your able presidential address yesterday, have gone on so well, if fares have been allowed to go on without being raised scarcely at all, if we can do that without the aid of Germany in times of stress surely we can do it after the war, to enable us to prevent them ever economically raising their heads as far as we possibly can. In face of the fact that the Executive Council themselves do not seem to understand where they are in supporting what the I.M.E.A. proposes, I have great pleasure in moving the deletion of this paragraph which contains the resolution.

Councillor W. R. CLARKE (chairman, Walthamstow Tramways Committee).—I have much pleasure in seconding that. I cannot see why the Executive Council should view with concern a measure that will give the trade to England and not to your enemies. They give you "as far as possible," and I take it, Mr. President, that means the whole. I happen to be one of those individuals who think we are able to produce as good stuff in England as they can in Germany, and under those circumstances——

Mr. J. DALRYMPLE (general manager, Glasgow Corporation Tramways).—I rise to a point of order. Is there anything in the resolution that affects Germany? Is Germany even mentioned or suggested? I beg to suggest that these two gentlemen are entirely out of order.

The PRESIDENT.—I think that the gentlemen who have just spoken have taken rather a limited view of the subject. This is not to prevent Germany from replacing the damage done in Belgium, or to prevent her from paying those great indemnities which we and others hope to get. Germany will have to have some means of earning the money that she must pay. We are going to compete with Germany, and I trust we shall be able to defeat her, but that is not the point at all; that economical question I do not think arises in the way that has been put forward by these two gentlemen. If we are only going to use materials and articles produced in this country, what are other countries going to do for us? Shut us out from purchasing from them, and they will not purchase from us? That may be, but a question of that kind is not one that we can discuss here this morning.

Councillor W. R. CLARKE (Walthamstow).—On a point of order, I do not know whether we are in order or not.

The PRESIDENT.—It is the fact that Germany is not mentioned here at all. You two gentlemen are suggesting that we are bringing up Germany by adopting this resolution of the Executive Committee, but there is nothing in it to give you any reason to say that at all.

Councillor HIGHAM.—I submit that your resolution is in support of the I.M.E.A., which opposes this recommendation of the sub-committee of the Advisory Committee of the Board of Trade. That recommendation advises that all local authorities and other statutory bodies whose money is raised by rates and taxes shall be legally required, as far as possible, to purchase things manufactured in the British Empire, not simply in this country.

Mr. J. DALRYMPLE (Glasgow).—I rise to another point of order—is our revenue raised by rates or taxes?

The PRESIDENT.—I do not think so, sir.

Alderman S. FLINT, J.P. (chairman, Leicester Tramways Committee).—I think there is a certain amount of misapprehension somewhere, and I think there is no sign of weakness in admitting it. Personally, I think the position taken up by our friends on that side of the room, if it is in order, is a correct one, and I do not think we shall be doing anything wrong by agreeing with it. I only speak for myself, as one of the Executive Council, and I think we shall be well advised to drop that clause altogether.

Mr. C. J. SPENCER (hon. secretary).—May I attempt to explain matters? Will you please first of all carefully read the recommendation of the sub-committee of the Board of Trade? It is:—"All Government departments, local authorities, and statutory bodies entrusted with the control of monies raised by taxes or rates should be under legal obligation to purchase, so far as possible, only goods produced within the British Empire." Now, whether that is good or whether it is bad, why should it apply only to local authorities? Why should we as municipal tramway operators or as electrical engineers be compelled to buy in a restricted market when the rest of the community can buy where they like? Now is not that our position as municipal tramwaymen? (A member: "No."). You have of course read into this that we must not in the future trade with Germany or with somebody else, but it also means that we must not trade with France, that we must not trade with Russia, that we must not trade with a score of other places. As the resolution reads, your Executive Council view it with very grave concern—the report states that they are concerned in any attempt to restrict the activities, the business activities, of municipal tramways, and that is the idea of the report.

Mr. H. H. GORDON, J.P. (deputy chairman, London County Council).—I would urge that after the clear explanation given by the Secretary, the matter should be allowed to drop. I speak as one who is particularly interested in the L.C.C. Tramways. We have to meet very strenuous opposition, we are a commercial trading concern, we are to be under a legal obligation to purchase only at home, whereas our competitors may do exactly what they like. It may be right, no doubt we shall do this—in fact, in the L.C.C. we always give a preference to the home market—but that is a different thing to asking us to bind ourselves under legal obligation to purchase only at whatever prices any ring of home manufacturers may put upon us. That is the only point. Nobody in this country wishes to bolster up Germany, I do not yield in my patriotism to any member who has spoken, but it is a different thing to say that I must bind myself hand and foot to buy in a restricted market, and with all due respect I venture to think that the resolution the Executive Council came to is the right one. We do not want to bolster up Germany, but at the same time we do not want to tie ourselves hand and foot in our commercial undertakings, while our competitors are left free to to do as they please.

Councillor HIGHAM.—May I point out that the secretary and Mr. Gordon have entirely misrepresented the Board of Trade recommendation. The last speaker laid particular stress on the fact that we are binding ourselves hand and foot to purchase only in the British Empire, whereas the recommendation says to purchase "as far as possible"; that makes all the difference between your interpretation and the larger definition of it.

The PRESIDENT.—Do the mover and seconder of the amendment to delete this paragraph insist on their motion?

Councillor HIGHAM.—I insist as mover.

The PRESIDENT.—Very well. I will put the motion.

On being put to the meeting the amendment was lost.

Councillor J. TIMPSON (chairman, Portsmouth Tramways Committee).—I want to refer to the question of disabled soldiers and sailors mentioned in the report. You will remember that every municipality gave an undertaking that all men discharged from the services should be reinstated. At Portsmouth we are being met with a rather serious difficulty in connection with this matter, that is to say, up to now a good many of our men have returned physically unfit to undertake the position they vacated on joining the services. I do not know whether the Council of the Association has taken that aspect of the matter into consideration or considered what is best to be done with these men. We are rather in a difficult position as far as these men are concerned in Portsmouth. Men are returning weekly, they come and offer themselves, of course, under the promise which was given them, yet they are physically unfit to undertake the work. I particularly allude to motormen who are coming back very weak and quite unable to take up their old positions on the cars they left. This is a matter which to my mind will go on and the difficulty will increase.

The PRESIDENT.—That is a question which we will consider at the right time, when the other business has been considered.

Mr. L. E. HARVEY (manager and engineer, Ilford Tramways).—I wish to refer to the paragraph on Lights (Vehicles) Order, 1915. I should like to draw the attention of the Executive to the fact that in the metropolitan area the police are enforcing this Order for placing lights on the front and rear of cars. Outside the metropolitan area I believe the Executive Council have got the consent of the Home Office to forgo this provision, but in the metropolitan area we are now having to put these lights on the front and rear of cars at great expense. Not only that, but I am officially informed that in the future it is going to be a permanency and not a question for the duration of the war only.

The PRESIDENT.—That will be a very suitable question for the Executive Council to consider later.

Digitized by Google

Mr. G. W. HOLFORD (general manager, Salford).—I beg to move the adoption of the report.

Mr. T. B. GOODYER (general manager, Croydon).—I beg to second.

The motion was agreed to.

TREASURER'S REPORT AND STATEMENT.

The PRESIDENT.—The next item is the treasurer's statement of accounts and balance sheet.

HON. SECRETARY and TREASURER.—The accounts and balance sheet are set out at the back of the report. It is my duty to read the auditor's certificate as follows:—"In accordance with the provisions of the Companies (Consolidation) Acts, 1908 and 1913, I beg to report that I have obtained all the information and explanations required respecting the accounts of the Association, and in my opinion the above balance sheet is properly drawn up so as to exhibit a true and correct view of the state of the Association's affairs, according to the best of my information and the explanations given to me, and as shown by the books of the Association. (Signed) William J. McCombe, auditor, Hull, August 8, 1916."

Mr. J. B. HAMILTON (general manager, Leeds).—I move the adoption of the treasurer's report, statement of accounts, and the balance sheet.

Mr. A. ELLIS (engineer and manager, Cardiff) seconded the motion, which was agreed to.

The meeting then proceeded to the election of office bearers for the ensuing year.

ELECTION OF PRESIDENT.

The PRESIDENT.—The first office to be filled is that of president. I have the honour of submitting to you the name of Mr. Henry Mozley, general manager, Burnley Corporation Tramways. (Applause.) It requires no eloquence to commend Mr. Mozley to you.

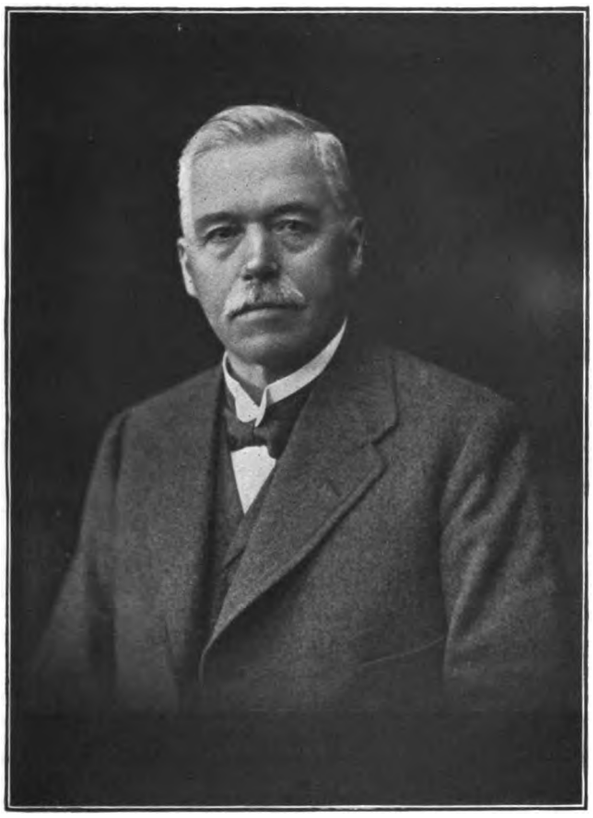

Mr. Henry Mozley.

Among tramway men in Great Britain there is no better known man than Mr. Mozley. I have not the slightest doubt that he will maintain the dignity and efficiency of this Association during his year of office as well as has ever been done. I have pleasure in submitting the name of Mr. Henry Mozley as president. (Cheers.)

Alderman F. A. DUNSFORD, J.P. (chairman, Southampton Tramways Committee).—I have very much pleasure in seconding. I have known Mr. Mozley for a great many years. He has attended every conference that I have attended. I think we are safe in the hands of Mr. Mozley, and that the appointment will be very popular.

The motion was agreed to with acclamation.

Mr. HENRY MOZLEY (general manager, Burnley).—Mr. President and gentlemen, I thank you very heartily for the high honour you have conferred upon me. I recognise that it is a position of great responsibility, and I shall do my best to uphold the honour of the Association and its usefulness. We ourselves appreciate the importance of the Association, and know the vast amount of business which we have to look after. A few figures, which will not take a moment in reading, will help outsiders also to realise the value of an institution of this character in connection with tramways. The latest figures are for the year 1913, and owing to the war we have had none for 1914-15, but these are quite sufficient:—

Capital Expenditure.	Percentage of Total.
£52,449,469 Local Authorities	68
£24,749,211 Companies	32
Route Length.	
1,616 miles: Local Authorities	60
1,044 miles: Companies	40
Number of Cars.	
9,342 Local Authorities	73
2,931 Companies	27

Corporation employees, 55,208.
Total capital expenditure, £77,198,000.
Total route length, 2,660 miles.
Total number of cars, 12,773.
Paid in relief of rates or for other purposes, £609,466.

I would like to say a word or two with regard to the work of the Association in the future. I think that work is likely to be of even more importance and heavier than it has been in the past. But happily I have been preceded by a number of gentlemen of very wide experience and capability, and therefore I enter this office with far more confidence than I otherwise should have done. I promise you that during my presidential year I shall do everything I can to forward the interests of the Association. I beg to thank you. (Applause.)

THE VICE-PRESIDENT.

The PRESIDENT.—The next appointment is that of vice-president, and I shall be glad to receive a nomination.

Alderman S. FLINT, J.P. (chairman, Leicester Tramways Committee).—It is always a pleasure to give honour where honour is due, and I am sure that course generally prevails in our conferences. I have very great pleasure in proposing the name of Alderman John Miles, J.P., the chairman of Bolton Tramways Committee, as vice-president. Succeeding, as he will, in the natural efflux of time, to the presidency of the Association, we know that Alderman Miles is an enthusiastic worker. He has done good work in his own town, and has been a very devoted and loyal worker in the cause. He is fully qualified for this position by the loyal and earnest service he has rendered, not only to our conferences, but also in the work of the Executive Council. We feel as we look upon him we can venerate him, and we shall be able to look up to him with respect as a man of mature years and of solid service. I am sure that he will uphold the dignity and usefulness of the position.

Mr. G. W. HOLFORD (general manager, Salford).—I have very great pleasure in seconding the proposal that Alderman Miles be elected vice-president. I happen to know him well, being in Lancashire, not only in connection with the work of the parent Association, but also with regard to the branch work we carry on up there. We always find Alderman Miles ready to come and give a hand and to do anything for our tramway systems. He is extremely courteous; in fact, I do not know a more courteous gentleman anywhere, and under him I am sure we shall get along as well as we have done in the past when it comes to the turn of Alderman Miles to be elected to the presidency. (Applause.)

The PRESIDENT.—Are there any other nominations?

None being forthcoming, Alderman Miles was declared unanimously elected.

Alderman JOHN MILES, J.P. (chairman, Bolton Corporation Tramways Committee).—Mr. President, Alderman Flint, and Mr. Holford, I am so taken by surprise that I can only express to you my deep gratification that I have been thought at all worthy to occupy the position of vice-president of this Association—this useful institution. It is quite true that I do take a very warm interest in its work, and in my humble way I have tried to do the best I can for my own town, which I love so well. I cannot accept one compliment which has been paid me of being good-looking—I do not accept that. (Laughter.) I am what I am, and I can only promise faithfully to do the very best I can in the interests of this institution of which I have such great pride in being a member. Please accept that as being the very best thanks I can give you all for the great honour which you have been good enough to bestow upon me. (Applause.)

On the suggestion of Mr. A. BAKER (general manager, Birmingham Corporation Tramways), it was decided, in view of the business to be transacted, to defer the 12 o'clock inspection of London County Council trailer cars, Mr. J. K. Bruce (deputy chief officer of London County Council tramways) kindly undertaking to arrange for this inspection to take place when the members left for the Greenwich generating station and the Bexley tramway works.

The thanks of the meeting were accorded to Mr. Bruce for his courtesy.

Digitized by Google

ELECTION OF MEMBERS TO THE EXECUTIVE COUNCIL.

The PRESIDENT.—We have now to proceed to the nomination of members of the Executive Council, and I will ask the secretary to explain the position.

The HON. SECRETARY.—I think you all have printed ballot papers. There are five vacancies on the Executive Council. Two members of the Council retire by rotation this year, namely, Mr. W. Clough (Bury), and Mr. T. B. Goodyer (Croydon). Mr. J. Dalrymple, whose period as a past president expires, is eligible for election on the Executive Council; failing election at this meeting, Mr. Dalrymple will be without a position on the Executive Council for the coming year. I have already told you that there are five vacancies. Mr. Clough, Mr. Goodyer, and Mr. Dalrymple are available, and nominations are required to fill the other two vacancies. It is suggested by the Executive Council, although, of course, it is a matter for this meeting and a matter for nomination, that Mr. W. J. McCombe (Hull), who has retired from the auditorship of the Association, might well be nominated and put on the Executive Council, and also our good friend, Sir John W. Courtis, as representing the committee side. But that is entirely a matter for nomination, and all those five members must be nominated at this meeting, and, of course, as many more as the Association decide upon.

Mr. John Aldworth and Mr. L. Slattery were appointed scrutineers.

Mr. J. BARNARD (general manager, Bolton Corporation Tramways).—I should like to ask the secretary if there are not two laymen vacancies this year?

The HON. SECRETARY.—The by-laws set forth what shall be the minimum proportion of laymen to managers. As a matter of fact last year the number of committee members on the Executive Council was in excess of the minimum requirement set out in the by-laws.

The following gentlemen were nominated:—Sir J. W. Courtis, Mr. W. J. McCombe, Councillor Timpson, Mr. W. Clough, Mr. T. B. Goodyer, and Mr. J. Dalrymple.

HON. SECRETARY AND TREASURER.

Alderman H. LINSLEY, J.P. (chairman, Salford Tramways Committee and past president).—It gives me great pleasure to propose the re-election of our old friend, Mr. C. J. Spencer, of Bradford, as hon. secretary and treasurer. In spite of anything he may say to the contrary, I hope that the meeting will unanimously elect him. He would be very hard to follow, although he himself had an excellent man to follow. I am pleased to say that the secretarial duties during the time Mr. Spencer has been our hon. secretary have been performed in a manner highly satisfactory to everyone, and his great knowledge of the business of the Association makes it most important that he should be re-elected.

Alderman J. MILES, J.P. (Bolton).—I have great pleasure in seconding. I have had the pleasure of moving it on more than one occasion and I did my best to be eloquent. I want you to understand that in my opinion a better secretary could not be found if you went through the whole country. Now that is a good deal to say, but I know him. I know how courteous, how kind he is, how attentive he is to his work, and how greatly he has the interests of this important Association at heart. I trust we may have the advantage of his services for many years. (Applause.)

The motion was carried with acclamation.

Mr. C. J. SPENCER (Bradford).—Mr. President and gentlemen, it is a source of great gratification to hear the way in which you have proposed, seconded, and carried this resolution. This is the end of my fifth year in this position, and I was hoping that I might get somebody who would take on the burden and responsibility which naturally appertains to a secretary. Unfortunately, however, I have not been able to succeed in finding a gentleman who will take on this office, which certainly has its good points and also its bad ones. But if you do desire me to continue for another year I shall be very glad to serve you to the best of my ability. I think, however, it is only my duty to say, and to say it in the presence of my own deputy chairman, who is here to-day, that it would be impossible for me to carry on the business of this Association without the hearty consent of the Bradford Corporation. Now, I do not know whether I am entitled to continue for another year without the full consent of that body. The position of course entails a good deal of office work. When the matter was mentioned to them some five years ago, they very willingly and very heartily said "you must do what you can," and gave me very full powers. But the matter is now going on into the sixth year, and really they ought to be consulted before I finally decide to continue the work. I do not know whether Mr. Lund, my deputy chairman, who is here would like to say a word; but I feel a little diffident in going on longer without knowing what the opinion of my principals may be.

Councillor J. LUND (vice-chairman, Bradford Tramways Committee).—I think our committee will take the re-electing of Mr. Spencer so unanimously this morning as a great honour, and I do not doubt that they will be quite agreeable for him to continue the work which he has done so well during the past five years.

Mr. SPENCER.—After that, Mr. President and gentlemen, I cannot but continue my duties for another year. (Applause.)

HON. AUDITOR AND HON. SOLICITOR.

The PRESIDENT.—With reference to the appointment of hon. auditor, as you have already been advised the name of Mr. J. F. Simpson, engineer and manager, Preston Corporation Tramways, has been put forward for election, and notice was duly given in the notice convening the meeting.

Mr. J. S. D. MOFFET (general manager, West Ham) moved the election of Mr. J. F. Simpson as hon. auditor.

Mr. R. R. GREENE (general manager, Wallasey) seconded and the motion was agreed to.

Mr. J. F. SIMPSON (Preston).—I thank you, Mr. President and gentlemen, for the honour you have done me.

The HON. SECRETARY.—One of our hon. solicitors, as you see on the paper, is Mr. Pickmere, town clerk of Liverpool. In the ordinary course of business he would have again come before you for re-election. But Mr. Pickmere is an exceedingly busy man, and whilst he is of great assistance to us he cannot devote very much time to his office, and we need a lot of time to do our business. Still in his important position as town clerk he is of great value. But in Mr. S. F. James,

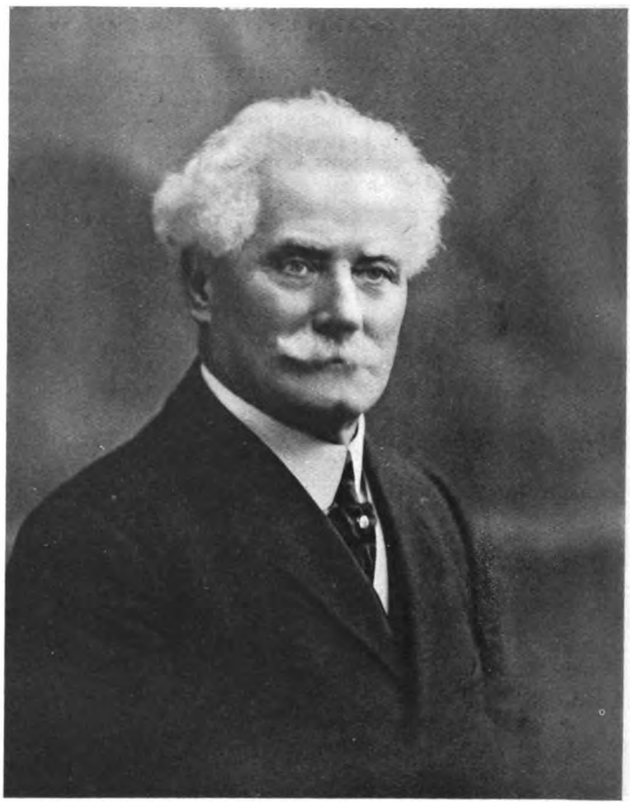

Alderman John Miles, J.P.

who unfortunately is out of the room just now, we have a gentleman who has been of very great assistance indeed in regard to the detail work. He has at all times freely given his advice, assistance, and time to the Association. But a change has taken place during the year in his circumstances, which technically makes him ineligible for membership. It is an Article of the Association that a member must be a representative of a town where municipal tramways are in operation. The Corporation of Ilkeston, where Mr. James is town clerk, have sold their tramways, and they are no longer operators of municipal tramways. That is very little short of a disaster to the Executive Council and to the Association, for Mr. James has become exceedingly valuable to the Executive Council, and it was decided to confer honorary membership upon our good friend Mr. James, so that we may retain him as our legal adviser. I move that Mr. S. F. James be appointed an hon. member of the Association in recognition of his services as our hon. solicitor.

Mr. J. B. HAMILTON seconded the motion, which was agreed to.

Mr. E. R. Pickmere, town clerk of Liverpool, and Mr. S. F. James, town clerk of Ilkeston, were then unanimously re-elected as hon. solicitors.

The HON. SECRETARY.—Mr. James has asked me in his absence to say that he is willing to continue the work and thanks you for the honour you have conferred upon him.

Digitized by Google

The PRESIDENT.—We have now come to the end of the printed agenda.

An informal discussion on various matters then took place.

VOTE OF THANKS TO THE PRESIDENT.

Alderman H. LINSLEY, J.P. (chairman, Salford Tramways Committee).—I have a resolution put into my hand which I shall propose with great pleasure, though I think it is a duty which ought to fall to our vice-president. It is that the best thanks of this meeting be tendered to our president for his services during the past year. Now the bulk of the members do not see very much of the president, except at these annual gatherings. I am sure that everyone will admit that during the past two days that we have met here the president has occupied the chair with very great ability. He has been suffering from loss of voice, but he has shown this morning that not only can he be firm, but also that when the president has ruled the matter is settled. With regard to the Executive Council I can say that our president has been of very great service. He has only missed one or two meetings, and we can quite understand that when we remember the long distance he has to come and that during the winter months he may be prevented by snowstorms. He has been an exemplary president and has fulfilled all the expectations we entertained of him. I have great pleasure in moving that our hearty thanks be tendered to him for his services. (Applause.)

Alderman Sir J. W. COURTIS, J.P. (chairman, Cardiff Tramways Committee).—I have much pleasure in seconding. I have not had the opportunity of meeting the president on the Executive Council, but I am pleased to say that I shall have that pleasure in future, the members having to-day done me the honour of electing me to a seat on that body. Whenever I have met him, he has always impressed me with his sterling qualities and he has certainly to-day proved them by the way in which he has ruled the meeting.

Mr. W. H. LITTLER (ex-member of Council).—As your guest to-day and not as a member of the Association I should like, if you will permit, to associate myself with the vote of thanks to your president, and in doing so I look back for nine or ten years, possibly for eleven, during which I have been backwards and forwards to these conferences. The presence of your president here to-day reminds me of the many excellent presidents who have presided over the meetings. My reason for rising now was partly to apologise for abandoning the Executive Council so quickly after the members had done me the honour last year of appointing me to it. But the explanation is that an accident took me out of public life. I am sorry to part with public life; I am sorry to be out of tramway work. But when I look back over 16 years of pretty strenuous effort and work, and on all the friendly associations connected with those years, no memories which I shall carry away with me will be more fragrant or sweeter than those of my membership with you as individual men in this Association. I wish the Association every prosperity; it has done excellent work in the past, and we of medium sized or small undertakings owe you a deep debt for the work you have done and the protection you have afforded us. I shall carry away with me the most pleasant memories of you both as individuals and as an organised body. I thank you for the many kindnesses I have received at all your hands. (Applause.)

The motion was adopted with acclamation.

The PRESIDENT.—I am very much obliged to you for the very kind words said on my behalf to-day by Alderman Linsley and Sir John Courtis, who have proposed and seconded the vote of thanks. I have felt very much the honour of being president of the Association, and although I have been a member of the Executive Council practically during the whole existence of the Association, this past year has brought me more in contact with the secretary, who has got his hand on the pulse of the tramway world. I have therefore more interest in the work which the Association is doing, and I have wondered what effect it would have if Corporations realised what the Municipal Tramways Association has done on behalf of municipal tramways. The Corporations have not the slightest idea of the number of important questions that have come before us during the last three or four years. Take as an example, the Lights (Vehicles) Order, 1915: now if that Order had been carried out in the form in which it was originally produced, it would have cost tramway undertakings more money to have equipped those cars and rewired them than would be paid in subscriptions to this Association by municipalities and in expenses of their representatives to our conferences in perpetuity. There is not the slightest doubt about it. If we had had to invest the money to carry out these alterations as originally proposed, the proceeds would have been sufficient to have paid municipal representatives' fees for an indefinite period. That is only one point. Scores of items constantly arise that are of great interest and importance to tramway operators, and a strong body like the Municipal Tramways Association is required to deal with them and to know what they are talking about. It is no use going before a Government department unless you know exactly what you want. However, perhaps I am wandering away from the point, which is to say how much I have enjoyed being president of this Association for the past year. Apart from the education it has been to me, it has been a great pleasure to meet such an amiable assembly of members. In a final word, allow me to thank you. (Applause.)

ANNUAL REPORT OF THE EXECUTIVE COUNCIL OF THE MUNICIPAL TRAMWAYS ASSOCIATION.

The report of the Executive Council on the work for the past year was as follows:—

ANNUAL CONFERENCE.

Having regard to the European crisis, the Council decided to hold business meetings in London in lieu of the Annual Conference, devoting one day entirely to the discussion of papers, and the second day to the ordinary Annual General Meeting.

NEW MEMBERS AND RESIGNATIONS.

The following have joined the Association during the year:—

Managers—

W. H. Ellis, traffic superintendent, Corporation Tramways, Chester.

G. F. Naylor, general manager and engineer, Corporation Tramways, Nelson.

P. Priestley, general manager, Corporation Tramways, Oldham.

C. O. Silvers, general manager and engineer, Corporation Tramways, Wolverhampton.

The following have retired from the Association during the year:—

J. W. Dugdale, late general manager, Corporation Tramways, Oldham.

Alderman J. H. Rodgers, (Member of Executive Council), late Chairman of the Newcastle Corporation Tramways Committee.

Alderman H. W. Littler (Member of Executive Council), late Chairman of the West Ham Corporation Tramways Committee.

The Council decided to leave the positions on the Executive Council vacant until the annual meeting.

The Council regret to record the deaths of Mr. W. A. Luntley, general manager of the Wolverhampton Corporation Tramways, and of Mr. J. Gardner, general manager of the Chester Corporation Tramways.

MEMBERSHIP.

Appended is a comparative summary of the members for the past four years.

	1912–13	1913–14	1914–15	1915–16
Honorary members ...	1	1	1	1
Local authorities ...	75	75	76	76
Managers and assistants	109	111	111	112

MEETINGS OF EXECUTIVE COUNCIL.

Since the last annual meeting the Council have held seven meetings, namely, at Sheffield (2), Leeds (3), Bradford, and Manchester.

INCOME TAX—ASSESSMENT OF MOTOR OMNIBUSES.

The Joint Committee comprising representatives of the undermentioned bodies—

The Municipal Tramways Association (Inc.),
The Institute of Municipal Treasurers and Accountants (Inc.),
The London Omnibus Owners' Federation,
The Provincial Omnibus Owners' Association (Inc.),
The Tramways and Light Railways Association,

have submitted a report, and furnished evidence respecting the operation of motor omnibuses to the Chief Inspector of Taxes, with a view to the adoption of a uniform method of determining depreciation allowances for income tax purposes.

The following comprises the committee of the M.T.A.: —Mr. P. Fisher (president), Mr. H. Mozley (vice-president), Messrs. J. Dalrymple, A. R. Fearnley, J. M. McElroy, and C. J. Spencer (hon. secretary).

Mr. J. M. McElroy (Manchester) and Mr. C. J. Spencer (hon. secretary) are the representatives of the Association on the Joint Committee dealing with this matter.

DEVELOPMENT OF THE ELECTRIC VEHICLE.

The following was the constitution of the committee between April 1, 1915, and March 31, 1916:—

Representing the Incorporated Municipal Electrical Association.—F. Ayton (engineer and manager, Ipswich Corporation Electric Supply and Tramways Department), J. W. Beauchamp (engineer and manager, West Ham Corporation Electric Supply), R. A. Chattock (city electrical engineer, Birmingham), A. C. Cramb (borough electrical engineer, Croydon—president, I.M.E.A.), J. Christie (engineer and manager, Brighton Corporation Electric Supply), J. E. Edgcombe (borough electrical engineer, Kingston-upon-Thames), H. Faraday Proctor (engineer and general manager, Electricity Department, City of Bristol—hon. sec., I.M.E.A.), A. H. Seabrook (manager, St. Marylebone Electric Supply).

Representing Commercial Motor Users' Association, Incorporated.—E. S. Shrapnell-Smith.

Representing Provincial Electric Supply Companies.—F. E. Gripper (managing director, Edmundson's Electricity Corporation, Limited, London).

Representing Electrical Contractors' Association.—W. R. Rawlings.

Digitized by Google

Councillor HIGHAM.—Is there no member of the Executive Council able to answer my question? We want a lead in this matter. We want to know what is the position of the Executive Council; we do not want the matter shelved by proceeding to something else. I hope there is some member of the Executive Council who will answer the question.

The PRESIDENT.—I have answered it in my way; perhaps the Hon. Secretary will add something.

Councillor HIGHAM.—If there is no better explanation than what has been given I shall move the deletion of this paragraph from the report, because I believe that to pass a resolution like this is practically to express the idea that we cannot possibly do without trade with the countries with whom we are at present at war. That is how it strikes me. The Board of Trade sub-committee's recommendation is perfectly simple to my mind, and as far as the explanation I have heard up to now, it must be simple. It reads thus:—"All Government departments, local authorities, and statutory bodies entrusted with the control of monies raised by taxes or rates should be under legal obligation to purchase, so far as possible, only goods produced within the British Empire." Now, I cannot understand why we should oppose that. We are fighting a war such as the world has never seen before, and if at the conclusion of this war we are not going to do all we can to prevent Germany or her Allies from raising their heads again in the manner they have done in the past, then I say the generations that follow us are going to have to face a war as terrible as this. The one way to my mind in which this country can prevent any recurrence of the present horrible struggle is to do what this recommendation asks us, viz., that after the war we should do all that lies in our power to prevent Germany economically from ever being able to raise the monies required to arm or fight and slave for another struggle. To my mind this recommendation of the Board of Trade sub-committee is framed with that end in view, and it is a certainty if we do not follow that out it will enable the enemy to raise hopes again, involving us in another struggle. If we can do without German manufactured goods and German firms at a time like this, if our tramways, as you pointed out, sir, in your able presidential address yesterday, have gone on so well, if fares have been allowed to go on without being raised scarcely at all, if we can do that without the aid of Germany in times of stress surely we can do it after the war, to enable us to prevent them ever economically raising their heads as far as we possibly can. In face of the fact that the Executive Council themselves do not seem to understand where they are in supporting what the I.M.E.A. proposes, I have great pleasure in moving the deletion of this paragraph which contains the resolution.

Councillor W. R. CLARKE (chairman, Walthamstow Tramways Committee).—I have much pleasure in seconding that. I cannot see why the Executive Council should view with concern a measure that will give the trade to England and not to your enemies. They give you "as far as possible," and I take it, Mr. President, that means the whole. I happen to be one of those individuals who think we are able to produce as good stuff in England as they can in Germany, and under those circumstances——

Mr. J. DALRYMPLE (general manager, Glasgow Corporation Tramways).—I rise to a point of order. Is there anything in the resolution that affects Germany? Is Germany even mentioned or suggested? I beg to suggest that these two gentlemen are entirely out of order.

The PRESIDENT.—I think that the gentlemen who have just spoken have taken rather a limited view of the subject. This is not to prevent Germany from replacing the damage done in Belgium, or to prevent her from paying those great indemnities which we and others hope to get. Germany will have to have some means of earning the money that she must pay. We are going to compete with Germany, and I trust we shall be able to defeat her, but that is not the point at all; that economical question I do not think arises in the way that has been put forward by these two gentlemen. If we are only going to use materials and articles produced in this country, what are other countries going to do for us? Shut us out from purchasing from them, and they will not purchase from us? That may be, but a question of that kind is not one that we can discuss here this morning.

Councillor W. R. CLARKE (Walthamstow).—On a point of order, I do not know whether we are in order or not.

The PRESIDENT.—It is the fact that Germany is not mentioned here at all. You two gentlemen are suggesting that we are bringing up Germany by adopting this resolution of the Executive Committee, but there is nothing in it to give you any reason to say that at all.

Councillor HIGHAM.—I submit that your resolution is in support of the I.M.E.A., which opposes this recommendation of the sub-committee of the Advisory Committee of the Board of Trade. That recommendation advises that all local authorities and other statutory bodies whose money is raised by rates and taxes shall be legally required, as far as possible, to purchase things manufactured in the British Empire, not simply in this country.

Mr. J. DALRYMPLE (Glasgow).—I rise to another point of order—is our revenue raised by rates or taxes?

The PRESIDENT.—I do not think so, sir.

Alderman S. FLINT, J.P. (chairman, Leicester Tramways Committee).—I think there is a certain amount of misapprehension somewhere, and I think there is no sign of weakness in admitting it. Personally, I think the position taken up by our friends on that side of the room, if it is in order, is a correct one, and I do not think we shall be doing anything wrong by agreeing with it. I only speak for myself, as one of the Executive Council, and I think we shall be well advised to drop that clause altogether.

Mr. C. J. SPENCER (hon. secretary).—May I attempt to explain matters? Will you please first of all carefully read the recommendation of the sub-committee of the Board of Trade? It is:—"All Government departments, local authorities, and statutory bodies entrusted with the control of monies raised by taxes or rates should be under legal obligation to purchase, so far as possible, only goods produced within the British Empire." Now, whether that is good or whether it is bad, why should it apply only to local authorities? Why should we as municipal tramway operators or as electrical engineers be compelled to buy in a restricted market when the rest of the community can buy where they like? Now is not that our position as municipal tramwaymen? (A member: "No."). You have of course read into this that we must not in the future trade with Germany or with somebody else, but it also means that we must not trade with France, that we must not trade with Russia, that we must not trade with a score of other places. As the resolution reads, your Executive Council view it with very grave concern—the report states that they are concerned in any attempt to restrict the activities, the business activities, of municipal tramways, and that is the idea of the report.

Mr. H. H. GORDON, J.P. (deputy chairman, London County Council).—I would urge that after the clear explanation given by the Secretary, the matter should be allowed to drop. I speak as one who is particularly interested in the L.C.C. Tramways. We have to meet very strenuous opposition, we are a commercial trading concern, we are to be under a legal obligation to purchase only at home, whereas our competitors may do exactly what they like. It may be right, no doubt we shall do this—in fact, in the L.C.C. we always give a preference to the home market—but that is a different thing to asking us to bind ourselves under legal obligation to purchase only at whatever prices any ring of home manufacturers may put upon us. That is the only point. Nobody in this country wishes to bolster up Germany, I do not yield in my patriotism to any member who has spoken, but it is a different thing to say that I must bind myself hand and foot to buy in a restricted market, and with all due respect I venture to think that the resolution the Executive Council came to is the right one. We do not want to bolster up Germany, but at the same time we do not want to tie ourselves hand and foot in our commercial undertakings, while our competitors are left free to to do as they please.

Councillor HIGHAM.—May I point out that the secretary and Mr. Gordon have entirely misrepresented the Board of Trade recommendation. The last speaker laid particular stress on the fact that we are binding ourselves hand and foot to purchase only in the British Empire, whereas the recommendation says to purchase "as far as possible"; that makes all the difference between your interpretation and the larger definition of it.

The PRESIDENT.—Do the mover and seconder of the amendment to delete this paragraph insist on their motion?

Councillor HIGHAM.—I insist as mover.

The PRESIDENT.—Very well. I will put the motion.

On being put to the meeting the amendment was lost.

Councillor J. TIMPSON (chairman, Portsmouth Tramways Committee).—I want to refer to the question of disabled soldiers and sailors mentioned in the report. You will remember that every municipality gave an undertaking that all men discharged from the services should be reinstated. At Portsmouth we are being met with a rather serious difficulty in connection with this matter, that is to say, up to now a good many of our men have returned physically unfit to undertake the position they vacated on joining the services. I do not know whether the Council of the Association has taken that aspect of the matter into consideration or considered what is best to be done with these men. We are rather in a difficult position as far as these men are concerned in Portsmouth. Men are returning weekly, they come and offer themselves, of course, under the promise which was given them, yet they are physically unfit to undertake the work. I particularly allude to motormen who are coming back very weak and quite unable to take up their old positions on the cars they left. This is a matter which to my mind will go on and the difficulty will increase.

The PRESIDENT.—That is a question which we will consider at the right time, when the other business has been considered.

Mr. L. E. HARVEY (manager and engineer, Ilford Tramways).—I wish to refer to the paragraph on Lights (Vehicles) Order, 1915. I should like to draw the attention of the Executive to the fact that in the metropolitan area the police are enforcing this Order for placing lights on the front and rear of cars. Outside the metropolitan area I believe the Executive Council have got the consent of the Home Office to forgo this provision, but in the metropolitan area we are now having to put these lights on the front and rear of cars at great expense. Not only that, but I am officially informed that in the future it is going to be a permanency and not a question for the duration of the war only.

The PRESIDENT.—That will be a very suitable question for the Executive Council to consider later.

Digitized by Google

Mr. G. W. HOLFORD (general manager, Salford).—I beg to move the adoption of the report.

Mr. T. B. GOODYER (general manager, Croydon).—I beg to second.

The motion was agreed to.

TREASURER'S REPORT AND STATEMENT.

The PRESIDENT.—The next item is the treasurer's statement of accounts and balance sheet.

HON. SECRETARY and TREASURER.—The accounts and balance sheet are set out at the back of the report. It is my duty to read the auditor's certificate as follows:—"In accordance with the provisions of the Companies (Consolidation) Acts, 1908 and 1913, I beg to report that I have obtained all the information and explanations required respecting the accounts of the Association, and in my opinion the above balance sheet is properly drawn up so as to exhibit a true and correct view of the state of the Association's affairs, according to the best of my information and the explanations given to me, and as shown by the books of the Association. (Signed) William J. McCombe, auditor, Hull, August 8, 1916."

Mr. J. B. HAMILTON (general manager, Leeds).—I move the adoption of the treasurer's report, statement of accounts, and the balance sheet.

Mr. A. ELLIS (engineer and manager, Cardiff) seconded the motion, which was agreed to.

The meeting then proceeded to the election of office bearers for the ensuing year.

ELECTION OF PRESIDENT.

The PRESIDENT.—The first office to be filled is that of president. I have the honour of submitting to you the name of Mr. Henry Mozley, general manager, Burnley Corporation Tramways. (Applause.) It requires no eloquence to commend Mr. Mozley to you.

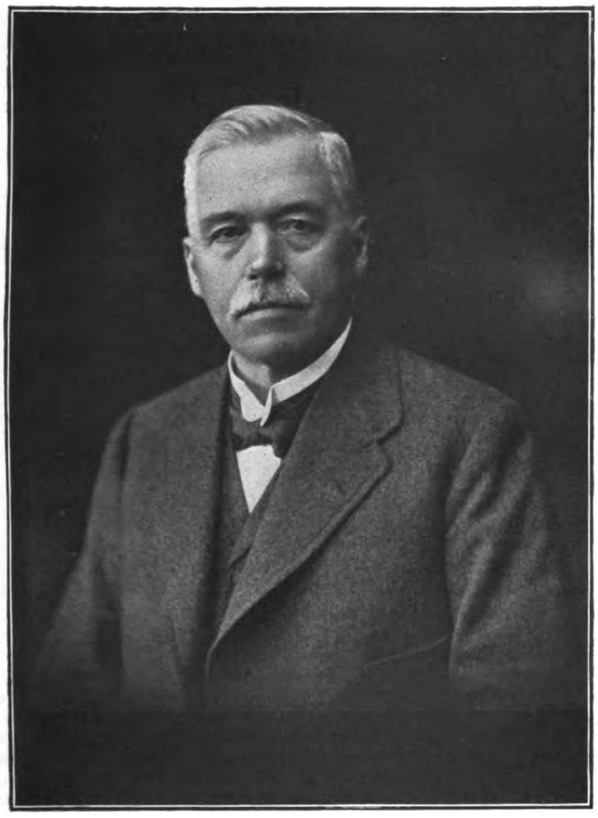

Mr. Henry Mozley.

Among tramway men in Great Britain there is no better known man than Mr. Mozley. I have not the slightest doubt that he will maintain the dignity and efficiency of this Association during his year of office as well as has ever been done. I have pleasure in submitting the name of Mr. Henry Mozley as president. (Cheers.)

Alderman F. A. DUNSFORD, J.P. (chairman, Southampton Tramways Committee).—I have very much pleasure in seconding. I have known Mr. Mozley for a great many years. He has attended every conference that I have attended. I think we are safe in the hands of Mr. Mozley, and that the appointment will be very popular.

The motion was agreed to with acclamation.

Mr. HENRY MOZLEY (general manager, Burnley).—Mr. President and gentlemen, I thank you very heartily for the high honour you have conferred upon me. I recognise that it is a position of great responsibility, and I shall do my best to uphold the honour of the Association and its usefulness. We ourselves appreciate the importance of the Association, and know the vast amount of business which we have to look after. A few figures, which will not take a moment in reading, will help outsiders also to realise the value of an institution of this character in connection with tramways. The latest figures are for the year 1913, and owing to the war we have had none for 1914-15, but these are quite sufficient:—

Capital Expenditure.	Percentage of Total.
£52,449,469 Local Authorities	68
£24,749,211 Companies	32
Route Length.	
1,616 miles: Local Authorities	60
1,044 miles: Companies	40
Number of Cars.	
9,342 Local Authorities	73
2,931 Companies	27

Corporation employees, 55,208.
Total capital expenditure, £77,198,000.
Total route length, 2,660 miles.
Total number of cars, 12,773.
Paid in relief of rates or for other purposes, £609,466.

I would like to say a word or two with regard to the work of the Association in the future. I think that work is likely to be of even more importance and heavier than it has been in the past. But happily I have been preceded by a number of gentlemen of very wide experience and capability, and therefore I enter this office with far more confidence than I otherwise should have done. I promise you that during my presidential year I shall do everything I can to forward the interests of the Association. I beg to thank you. (Applause.)

THE VICE-PRESIDENT.

The PRESIDENT.—The next appointment is that of vice-president, and I shall be glad to receive a nomination.

Alderman S. FLINT, J.P. (chairman, Leicester Tramways Committee).—It is always a pleasure to give honour where honour is due, and I am sure that course generally prevails in our conferences. I have very great pleasure in proposing the name of Alderman John Miles, J.P., the chairman of Bolton Tramways Committee, as vice-president. Succeeding, as he will, in the natural efflux of time, to the presidency of the Association, we know that Alderman Miles is an enthusiastic worker. He has done good work in his own town, and has been a very devoted and loyal worker in the cause. He is fully qualified for this position by the loyal and earnest service he has rendered, not only to our conferences, but also in the work of the Executive Council. We feel as we look upon him we can venerate him, and we shall be able to look up to him with respect as a man of mature years and of solid service. I am sure that he will uphold the dignity and usefulness of the position.

Mr. G. W. HOLFORD (general manager, Salford).—I have very great pleasure in seconding the proposal that Alderman Miles be elected vice-president. I happen to know him well, being in Lancashire, not only in connection with the work of the parent Association, but also with regard to the branch work we carry on up there. We always find Alderman Miles ready to come and give a hand and to do anything for our tramway systems. He is extremely courteous; in fact, I do not know a more courteous gentleman anywhere, and under him I am sure we shall get along as well as we have done in the past when it comes to the turn of Alderman Miles to be elected to the presidency. (Applause.)

The PRESIDENT.—Are there any other nominations?

None being forthcoming, Alderman Miles was declared unanimously elected.

Alderman JOHN MILES, J.P. (chairman, Bolton Corporation Tramways Committee).—Mr. President, Alderman Flint, and Mr. Holford, I am so taken by surprise that I can only express to you my deep gratification that I have been thought at all worthy to occupy the position of vice-president of this Association—this useful institution. It is quite true that I do take a very warm interest in its work, and in my humble way I have tried to do the best I can for my own town, which I love so well. I cannot accept one compliment which has been paid me of being good-looking—I do not accept that. (Laughter.) I am what I am, and I can only promise faithfully to do the very best I can in the interests of this institution of which I have such great pride in being a member. Please accept that as being the very best thanks I can give you all for the great honour which you have been good enough to bestow upon me. (Applause.)

On the suggestion of Mr. A. BAKER (general manager, Birmingham Corporation Tramways), it was decided, in view of the business to be transacted, to defer the 12 o'clock inspection of London County Council trailer cars, Mr. J. K. Bruce (deputy chief officer of London County Council tramways) kindly undertaking to arrange for this inspection to take place when the members left for the Greenwich generating station and the Bexley tramway works.

The thanks of the meeting were accorded to Mr. Bruce for his courtesy.

Digitized by Google

ELECTION OF MEMBERS TO THE EXECUTIVE COUNCIL.

The PRESIDENT.—We have now to proceed to the nomination of members of the Executive Council, and I will ask the secretary to explain the position.

The HON. SECRETARY.—I think you all have printed ballot papers. There are five vacancies on the Executive Council. Two members of the Council retire by rotation this year, namely, Mr. W. Clough (Bury), and Mr. T. B. Goodyer (Croydon). Mr. J. Dalrymple, whose period as a past president expires, is eligible for election on the Executive Council; failing election at this meeting, Mr. Dalrymple will be without a position on the Executive Council for the coming year. I have already told you that there are five vacancies. Mr. Clough, Mr. Goodyer, and Mr. Dalrymple are available, and nominations are required to fill the other two vacancies. It is suggested by the Executive Council, although, of course, it is a matter for this meeting and a matter for nomination, that Mr. W. J. McCombe (Hull), who has retired from the auditorship of the Association, might well be nominated and put on the Executive Council, and also our good friend, Sir John W. Courtis, as representing the committee side. But that is entirely a matter for nomination, and all those five members must be nominated at this meeting, and, of course, as many more as the Association decide upon.

Mr. John Aldworth and Mr. L. Slattery were appointed scrutineers.

Mr. J. BARNARD (general manager, Bolton Corporation Tramways).—I should like to ask the secretary if there are not two laymen vacancies this year?

The HON. SECRETARY.—The by-laws set forth what shall be the minimum proportion of laymen to managers. As a matter of fact last year the number of committee members on the Executive Council was in excess of the minimum requirement set out in the by-laws.

The following gentlemen were nominated:—Sir J. W. Courtis, Mr. W. J. McCombe, Councillor Timpson, Mr. W. Clough, Mr. T. B. Goodyer, and Mr. J. Dalrymple.

HON. SECRETARY AND TREASURER.

Alderman H. LINSLEY, J.P. (chairman, Salford Tramways Committee and past president).—It gives me great pleasure to propose the re-election of our old friend, Mr. C. J. Spencer, of Bradford, as hon. secretary and treasurer. In spite of anything he may say to the contrary, I hope that the meeting will unanimously elect him. He would be very hard to follow, although he himself had an excellent man to follow. I am pleased to say that the secretarial duties during the time Mr. Spencer has been our hon. secretary have been performed in a manner highly satisfactory to everyone, and his great knowledge of the business of the Association makes it most important that he should be re-elected.

Alderman J. MILES, J.P. (Bolton).—I have great pleasure in seconding. I have had the pleasure of moving it on more than one occasion and I did my best to be eloquent. I want you to understand that in my opinion a better secretary could not be found if you went through the whole country. Now that is a good deal to say, but I know him. I know how courteous, how kind he is, how attentive he is to his work, and how greatly he has the interests of this important Association at heart. I trust we may have the advantage of his services for many years. (Applause.)

The motion was carried with acclamation.

Mr. C. J. SPENCER (Bradford).—Mr. President and gentlemen, it is a source of great gratification to hear the way in which you have proposed, seconded, and carried this resolution. This is the end of my fifth year in this position, and I was hoping that I might get somebody who would take on the burden and responsibility which naturally appertains to a secretary. Unfortunately, however, I have not been able to succeed in finding a gentleman who will take on this office, which certainly has its good points and also its bad ones. But if you do desire me to continue for another year I shall be very glad to serve you to the best of my ability. I think, however, it is only my duty to say, and to say it in the presence of my own deputy chairman, who is here to-day, that it would be impossible for me to carry on the business of this Association without the hearty consent of the Bradford Corporation. Now, I do not know whether I am entitled to continue for another year without the full consent of that body. The position of course entails a good deal of office work. When the matter was mentioned to them some five years ago, they very willingly and very heartily said "you must do what you can," and gave me very full powers. But the matter is now going on into the sixth year, and really they ought to be consulted before I finally decide to continue the work. I do not know whether Mr. Lund, my deputy chairman, who is here would like to say a word; but I feel a little diffident in going on longer without knowing what the opinion of my principals may be.

Councillor J. LUND (vice-chairman, Bradford Tramways Committee).—I think our committee will take the re-electing of Mr. Spencer so unanimously this morning as a great honour, and I do not doubt that they will be quite agreeable for him to continue the work which he has done so well during the past five years.

Mr. SPENCER.—After that, Mr. President and gentlemen, I cannot but continue my duties for another year. (Applause.)

HON. AUDITOR AND HON. SOLICITOR.

The PRESIDENT.—With reference to the appointment of hon. auditor, as you have already been advised the name of Mr. J. F. Simpson, engineer and manager, Preston Corporation Tramways, has been put forward for election, and notice was duly given in the notice convening the meeting.

Mr. J. S. D. MOFFET (general manager, West Ham) moved the election of Mr. J. F. Simpson as hon. auditor.

Mr. R. R. GREENE (general manager, Wallasey) seconded and the motion was agreed to.

Mr. J. F. SIMPSON (Preston).—I thank you, Mr. President and gentlemen, for the honour you have done me.

The HON. SECRETARY.—One of our hon. solicitors, as you see on the paper, is Mr. Pickmere, town clerk of Liverpool. In the ordinary course of business he would have again come before you for re-election. But Mr. Pickmere is an exceedingly busy man, and whilst he is of great assistance to us he cannot devote very much time to his office, and we need a lot of time to do our business. Still in his important position as town clerk he is of great value. But in Mr. S. F. James,

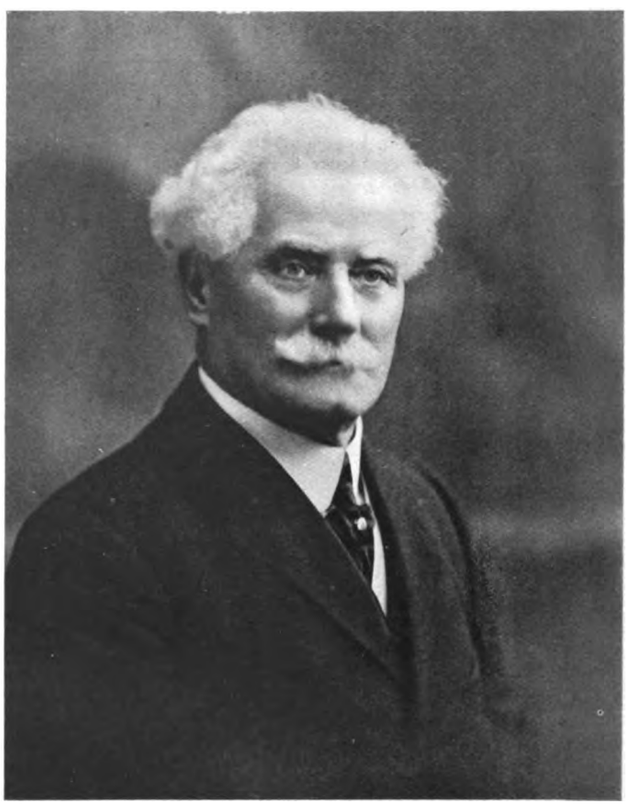

Alderman John Miles, J.P.

who unfortunately is out of the room just now, we have a gentleman who has been of very great assistance indeed in regard to the detail work. He has at all times freely given his advice, assistance, and time to the Association. But a change has taken place during the year in his circumstances, which technically makes him ineligible for membership. It is an Article of the Association that a member must be a representative of a town where municipal tramways are in operation. The Corporation of Ilkeston, where Mr. James is town clerk, have sold their tramways, and they are no longer operators of municipal tramways. That is very little short of a disaster to the Executive Council and to the Association, for Mr. James has become exceedingly valuable to the Executive Council, and it was decided to confer honorary membership upon our good friend Mr. James, so that we may retain him as our legal adviser. I move that Mr. S. F. James be appointed an hon. member of the Association in recognition of his services as our hon. solicitor.

Mr. J. B. HAMILTON seconded the motion, which was agreed to.

Mr. E. R. Pickmere, town clerk of Liverpool, and Mr. S. F. James, town clerk of Ilkeston, were then unanimously re-elected as hon. solicitors.

The HON. SECRETARY.—Mr. James has asked me in his absence to say that he is willing to continue the work and thanks you for the honour you have conferred upon him.

Digitized by Google

The PRESIDENT.—We have now come to the end of the printed agenda.

An informal discussion on various matters then took place.

VOTE OF THANKS TO THE PRESIDENT.

Alderman H. LINSLEY, J.P. (chairman, Salford Tramways Committee).—I have a resolution put into my hand which I shall propose with great pleasure, though I think it is a duty which ought to fall to our vice-president. It is that the best thanks of this meeting be tendered to our president for his services during the past year. Now the bulk of the members do not see very much of the president, except at these annual gatherings. I am sure that everyone will admit that during the past two days that we have met here the president has occupied the chair with very great ability. He has been suffering from loss of voice, but he has shown this morning that not only can he be firm, but also that when the president has ruled the matter is settled. With regard to the Executive Council I can say that our president has been of very great service. He has only missed one or two meetings, and we can quite understand that when we remember the long distance he has to come and that during the winter months he may be prevented by snowstorms. He has been an exemplary president and has fulfilled all the expectations we entertained of him. I have great pleasure in moving that our hearty thanks be tendered to him for his services. (Applause.)

Alderman Sir J. W. COURTIS, J.P. (chairman, Cardiff Tramways Committee).— I have much pleasure in seconding. I have not had the opportunity of meeting the president on the Executive Council, but I am pleased to say that I shall have that pleasure in future, the members having to-day done me the honour of electing me to a seat on that body. Whenever I have met him, he has always impressed me with his sterling qualities and he has certainly to-day proved them by the way in which he has ruled the meeting.

Mr. W. H. LITTLER (ex-member of Council).—As your guest to-day and not as a member of the Association I should like, if you will permit, to associate myself with the vote of thanks to your president, and in doing so I look back for nine or ten years, possibly for eleven, during which I have been backwards and forwards to these conferences. The presence of your president here to-day reminds me of the many excellent presidents who have presided over the meetings. My reason for rising now was partly to apologise for abandoning the Executive Council so quickly after the members had done me the honour last year of appointing me to it. But the explanation is that an accident took me out of public life. I am sorry to part with public life; I am sorry to be out of tramway work. But when I look back over 16 years of pretty strenuous effort and work, and on all the friendly associations connected with those years, no memories which I shall carry away with me will be more fragrant or sweeter than those of my membership with you as individual men in this Association. I wish the Association every prosperity; it has done excellent work in the past, and we of medium sized or small undertakings owe you a deep debt for the work you have done and the protection you have afforded us. I shall carry away with me the most pleasant memories of you both as individuals and as an organised body. I thank you for the many kindnesses I have received at all your hands. (Applause.)

The motion was adopted with acclamation.

The PRESIDENT.—I am very much obliged to you for the very kind words said on my behalf to-day by Alderman Linsley and Sir John Courtis, who have proposed and seconded the vote of thanks. I have felt very much the honour of being president of the Association, and although I have been a member of the Executive Council practically during the whole existence of the Association, this past year has brought me more in contact with the secretary, who has got his hand on the pulse of the tramway world. I have therefore more interest in the work which the Association is doing, and I have wondered what effect it would have if Corporations realised what the Municipal Tramways Association has done on behalf of municipal tramways. The Corporations have not the slightest idea of the number of important questions that have come before us during the last three or four years. Take as an example, the Lights (Vehicles) Order, 1915: now if that Order had been carried out in the form in which it was originally produced, it would have cost tramway undertakings more money to have equipped those cars and rewired them than would be paid in subscriptions to this Association by municipalities and in expenses of their representatives to our conferences in perpetuity. There is not the slightest doubt about it. If we had had to invest the money to carry out these alterations as originally proposed, the proceeds would have been sufficient to have paid municipal representatives' fees for an indefinite period. That is only one point. Scores of items constantly arise that are of great interest and importance to tramway operators, and a strong body like the Municipal Tramways Association is required to deal with them and to know what they are talking about. It is no use going before a Government department unless you know exactly what you want. However, perhaps I am wandering away from the point, which is to say how much I have enjoyed being president of this Association for the past year. Apart from the education it has been to me, it has been a great pleasure to meet such an amiable assembly of members. In a final word, allow me to thank you. (Applause.)

ANNUAL REPORT OF THE EXECUTIVE COUNCIL OF THE MUNICIPAL TRAMWAYS ASSOCIATION.

The report of the Executive Council on the work for the past year was as follows :—

ANNUAL CONFERENCE.

Having regard to the European crisis, the Council decided to hold business meetings in London in lieu of the Annual Conference, devoting one day entirely to the discussion of papers, and the second day to the ordinary Annual General Meeting.

NEW MEMBERS AND RESIGNATIONS.

The following have joined the Association during the year :—

Managers—

W. H. Ellis, traffic superintendent, Corporation Tramways, Chester.

G. F. Naylor, general manager and engineer, Corporation Tramways, Nelson.

P. Priestley, general manager, Corporation Tramways, Oldham.

C. O. Silvers, general manager and engineer, Corporation Tramways, Wolverhampton.

The following have retired from the Association during the year :—

J. W. Dugdale, late general manager, Corporation Tramways, Oldham.

Alderman J. H. Rodgers, (Member of Executive Council), late Chairman of the Newcastle Corporation Tramways Committee.

Alderman H. W. Littler (Member of Executive Council), late Chairman of the West Ham Corporation Tramways Committee.

The Council decided to leave the positions on the Executive Council vacant until the annual meeting.

The Council regret to record the deaths of Mr. W. A. Luntley, general manager of the Wolverhampton Corporation Tramways, and of Mr. J. Gardner, general manager of the Chester Corporation Tramways.

MEMBERSHIP.

Appended is a comparative summary of the members for the past four years.

	1912–13	1913–14	1914–15	1915–16
Honorary members ...	1	1	1	1
Local authorities ...	75	75	76	76
Managers and assistants	109	111	111	112

MEETINGS OF EXECUTIVE COUNCIL.

Since the last annual meeting the Council have held seven meetings, namely, at Sheffield (2), Leeds (3), Bradford, and Manchester.

INCOME TAX—ASSESSMENT OF MOTOR OMNIBUSES.

The Joint Committee comprising representatives of the undermentioned bodies—

The Municipal Tramways Association (Inc.),
The Institute of Municipal Treasurers and Accountants (Inc.),
The London Omnibus Owners' Federation,
The Provincial Omnibus Owners' Association (Inc.),
The Tramways and Light Railways Association,

have submitted a report, and furnished evidence respecting the operation of motor omnibuses to the Chief Inspector of Taxes, with a view to the adoption of a uniform method of determining depreciation allowances for income tax purposes.

The following comprises the committee of the M.T.A.: —Mr. P. Fisher (president), Mr. H. Mozley (vice-president), Messrs. J. Dalrymple, A. R. Fearnley, J. M. McElroy, and C. J. Spencer (hon. secretary).

Mr. J. M. McElroy (Manchester) and Mr. C. J. Spencer (hon. secretary) are the representatives of the Association on the Joint Committee dealing with this matter.

DEVELOPMENT OF THE ELECTRIC VEHICLE.

The following was the constitution of the committee between April 1, 1915, and March 31, 1916 :—

Representing the Incorporated Municipal Electrical Association.—F. Ayton (engineer and manager, Ipswich Corporation Electric Supply and Tramways Department), J. W. Beauchamp (engineer and manager, West Ham Corporation Electric Supply), R. A. Chattock (city electrical engineer, Birmingham), A. C. Cramb (borough electrical engineer, Croydon—president, I.M.E.A.), J. Christie (engineer and manager, Brighton Corporation Electric Supply), J. E. Edgcombe (borough electrical engineer, Kingston-upon-Thames), H. Faraday Proctor (engineer and general manager, Electricity Department, City of Bristol—hon. sec., I.M.E.A.), A. H. Seabrook (manager, St. Marylebone Electric Supply).

Representing Commercial Motor Users' Association, Incorporated.—E. S. Shrapnell-Smith.

Representing Provincial Electric Supply Companies.—F. E. Gripper (managing director, Edmundson's Electricity Corporation, Limited, London).

Representing Electrical Contractors' Association.—W. R. Rawlings.

Digitized by Google

Representing British Electrical and Allied Manufacturers' Association.—R. A. R. Bolton (Siemens Brothers' Dynamo Works Company, Limited), A. R. Everest (British Thomson-Houston Company, Limited), E. S. New (D.P. Battery Company, Limited), C. C. Rattey (Electrical Power Storage Company, Limited).

Representing Incorporated Association of Electric Power Companies.—J. S. Highfield (chief engineer, Metropolitan Electric Supply Company, London).

Representing Makers of Electric Vehicles.—E. W. Curtis (managing director, General Vehicle Company, London), A. E. Meaden (Wolseley Motors, Limited), J. F. Monnot (Arrol-Johnston, Limited), P. A. Mossay (Ransomes, Sims and Jefferies, Limited).

Representing Edison Accumulators Limited, London.—W. H. L. Watson.

Representing the British Electrical Federation, Limited.—R. J. Howley.

Representing Chelsea Electricity Supply Company, Limited.—P. Still.

Representing Garage Proprietors.—G. H. Heath (Heath's Garage, Limited, Birmingham).

Representing the Institution of Municipal and County Engineers.—A. E. Collins (city engineer, Norwich).

Representing the Municipal Tramways Association (Incorporated).—A. R. Fearnley (general manager, Sheffield Corporation Tramways).

Representing the Tramways and Light Railways Association.—A. V. Mason (general manager, South Metropolitan Tramways and Lighting Company).

A number of meetings of this committee, whose main object is to encourage the development of the electric vehicle, have been held in London during the year, under the chairmanship of Mr. R. A. Chattock, Birmingham. Excellent progress seems to have been made in the standardisation of apparatus in connection with electric vehicles, particularly affecting lead acid accumulator plates, and charging plugs.

The committee have been in communication with representative electrical engineers in the Colonies, with a view to the British electric vehicle standards being adopted throughout the Empire.

Representation has been obtained on the tire and road wear Research Committee.

The Electric Vehicle Association of America having ceased to exist as a separate body, the committee are now affiliated with the Electrical Vehicle Section of the National Electric Light Association of America, which has a membership of about 14,000.

The full report of the committee for the year ending March 31, 1916, appears in the proceedings of the I.M.E.A.

Maintenance of Bridges.—Motor Traffic over Railway Bridges.

Apropos the decision in the Sharpness New Docks and Gloucester and Birmingham Navigation Company *v.* Attorney-General (at the relation of the Corporation of Worcester), which appeared in the last report of the Council, the following recent decision will be of interest to members :—

Attorney-General (on the Relation of Pickfords Limited) *v.* Great Northern Railway Company.

(Before the Lord Chancellor, Lord Loreham, Lord Haldane, Lord Shaw of Dunfermline, and Lord Sumner.)

Judgment was delivered in this appeal in the House of Lords on July 21 from a decision of the Court of Appeal, which reversed a decision of Mr. Justice Warrington. The main question at issue was as to the condition of strength in relation to traffic in which the respondents were bound to maintain a railway bridge built over a public highway under the powers of a special Act, which incorporated the Railways Clauses Consolidation Act, 1845. The bridge carried the highway leading from Hornsey Road to Crouch End across the Great Northern Railway, and it was completed in 1867. Since that time heavy motor traffic had become common on this highway. The appellant contended that the respondents were bound to maintain the bridge in a condition to support all traffic which might reasonably be expected from time to time to pass along the highway. The respondents, while admitting their liability to maintain the bridge, contended that their obligation was to be measured by the traffic which existed at the time when the bridge was made.

Mr. Justice Warrington gave judgment in favour of the appellant ; but the Court of Appeal (Lords Justices Swinfen Eady, Phillimore, and Bankes) reversed his decision, and held that the respondents were not bound to maintain a bridge stronger than that originally constructed.

The appeal was twice argued in the House of Lords.

Sir Robert Finlay, K.C., Mr. Ernest Charles, K.C., and Mr. W. A. Jowitt appeared for the appellant, and Mr. Tomlin, K.C., Mr. Vernon, and Mr. Andrews-Uthwatt for the respondents.

The Lord Chancellor said that the question raised was of unusual importance and in his opinion the judgment of the Court of Appeal was right, and this appeal should be dismissed with costs. Lord Loreburn, Lord Shaw of Dunfermline, and Lord Sumner gave judgment to the same effect, Lord Haldane alone dissenting.

Supply of Tramway Tickets.

The following Proclamation was issued in February, 1916 : —

" As from and after March 1, 1916, subject as hereinafter provided, the importation into the United Kingdom of the following goods is hereby prohibited, viz. :—

All materials for the manufacture of paper, including wood pulp, esparto grass, linen, and cotton rags.

Paper and cardboard (including strawboard, pasteboard, millboard, and wood pulp board), and manufactures of paper and cardboard.

All periodical publications, exceeding 16 pages in length, imported otherwise than in single copies through the post.

Tobacco, unmanufactured and manufactured (including cigars and cigarettes).

Furniture woods, hard woods, and veneers.

Stones and slates.

Provided always, and it is hereby declared, that nothing in this Proclamation shall apply to any goods of the description specified which are imported under licence given by or on behalf of the Board of Trade, and subject to the provisions and conditions of such licence."

The following gentlemen have been appointed on a Commission to grant licences for the importation of such quantity or such proportion of these goods as the Board of Trade may from time to time direct, and to arrange for the importation of this quantity or proportion and for the distribution of the imports among paper makers and paper users on such terms as may appear to the Commission to be equitable :—

The Right Hon. Sir Thomas Whittaker, M.P. (chairman) ; Sir Rowland Bailey, C.B., I.S.O., M.V.O.; George Brown, Esq.; W. Howard Hazell, Esq.; James Jeremiah, Esq.; Sir Frederick Macmillan, Kt.; Sir Walter Nugent, Bart., M.P.; Ernest Parke, Esq.; Oswald Partington, Esq., M.P.; Albert Reed, Esq.; The Right Hon. Sir Albert Spicer, Bart., M.P.; The Hon. John Singleton Clemons (secretary).

Negotiations have taken place between the Municipal Tramways Association and the Commission with the object of treating paper for tramway tickets as exceptional, but unfortunately the Commission were unable to make any exception in the case of a licence issued to manufacturers of tramway tickets, it being held that there is an adequate supply of paper for this purpose.

The restricted importation of wood pulp has meant a great increase in the cost of tramway tickets, and the future is by no means free from anxiety.

Election of President.

The Executive Council have given this matter careful consideration, and submit the following report :—

The Executive Council have taken into careful consideration the resolution referred to them by the annual meeting held in London in September, 1915, as under :—

" That the Executive Council take into consideration the advisability of, and report as to the steps to be taken in after years, for filling the position of president alternately by a committee and a managerial member."

In order to gain information on this matter inquiries have been addressed to the undermentioned associations and institutions, who have supplied details of their procedure :—Association of Municipal Corporations, Chief Constables' Association, County Councils' Association, Incorporated Society of Inspectors of Weights and Measures, Institution of Automobile Engineers, Institution of Civil Engineers, Institution of Municipal and County Engineers, Institution of Mechanical Engineers, Incorporated Municipal Electrical Associations, Institution of Electrical Engineers, Institution of Gas Engineers, Institution of Municipal Treasurers and Accountants, Institution of Water Engineers, Sanitary Inspectors' Association, Tramways and Light Railways Association.

The Council beg to tender to such associations and institutions their thanks for the information so fully and freely offered.

Unfortunately the information gleaned does not help the Council very much, as many of the bodies above referred to are purely professional, and consequently the question at issue does not apply to them.

The Executive Council consider that the election of the president should in all cases be based upon the principle that the gentleman proposed for the office should be one who, by common consent, has rendered such distinguished service to the tramway industry, either as a member of the association or otherwise, as obviously would entitle him to hold the high office of president of the Municipal Tramways Association.

If this principle be accepted it follows that the choice open to the association should be as wide as possible, and should not be restricted to any particular class of member. As, however, there appears to be a feeling that the election of president should alternate between the two classes of members, viz., committee and managerial members, the Executive Council feel that this practice might be followed, unless in any particular year circumstances arise in which it may be found desirable, in the interests of the association, to act otherwise.

It is suggested that certain alterations to the Articles of Association should be made in order to enable the association to appoint a chairman of the Executive Council, who need not necessarily be the president of the Association.

Signed on behalf of the Executive Council,

PETER FISHER, *President.*

Digitized by Google

Tramway Tire Supplies during War Time.

In order to meet the difficulties encountered in obtaining supplies of tires a Joint Committee, comprising Mr. H. England, Mr. F. Bland, and Mr. J. B. Tippetts, representing the Tramways and Light Railways Association, and Mr. W. Clough (Bury), Mr. A. R. Fearnley (Sheffield), and Mr. C. J. Spencer (Bradford), representing the Municipal Tramways Association, have met in conference representatives of the leading firms of tire makers. It was felt that if tramway undertakings could arrange to standardise their tires, in order to reduce the number of sizes in use, the situation might be eased very considerably, and that possibly this step would favourably affect prices. Inquiries were made from the various tramways, both municipal and company controlled, as to the size of tires and quality used, and a tabulation of the information was prepared and submitted to the Joint Committee.

The Executive Council did not feel justified in recommending the acceptance of the terms agreed upon between the Tramways and Light Railways Association and the steel manufacturers.

Rail Corrugation.

Unfortunately the war has greatly interfered with the activity of this special committee, but notwithstanding the many difficulties the sub-committees have continued their experiments, and the Southern Section, under the chairmanship of Mr. W. Worby-Beaumont, M.Inst.C.E., have reported certain interesting observations in connection with their experiments on the London County Council Tramways.

Tramway Protective Clauses in Water Bills.

In the last session of Parliament protective clauses in favour of tramway undertakings were inserted for the first time in a Water Bill in respect of posts, mains, cables, and other apparatus. The Bill was promoted by the Metropolitan Water Board. It is to be hoped that the innovation will be followed in all similar Bills.

Retention of Tramway Employees.

The question of retention of indispensable tramway employees has had the careful consideration of the Executive Council, and in order that some definite policy might be adopted it was decided to seek an interview with the Reserved Occupations Committee with a view to getting certain indispensable classes of employees scheduled.

The following representatives attended a conference convened for this purpose:—On behalf of the Municipal Tramways Association (Inc.)—H. Mozley (vice-president), A. R. Fearnley (past president), C. J. Spencer (hon. secretary). On behalf of the Tramways and Light Railways Association—Mr. J. Devonshire. On behalf of the British Electrical Federation—Mr. R. J. Howley.

It was agreed at this conference that tramway undertakings were of great national importance, and ought to be able to retain certain indispensable sections of employees. The Reserved Occupations Committee recognised that tramways were essential to commerce, and that interference with their efficiency would have a serious effect both on the output of munitions and the commercial welfare of the country.

On May 1, 1916, the Government departments concerned certified, after consultation with the Army Council, that certain tramway employees may be considered as indispensable.

Munitions of War (Amendment) Act, 1916.

Tramway undertakings throughout the country have experienced considerable difficulty due to the enlistment of skilled men. The Minister of Munitions agreed on hearing representation on behalf of the Association to insert a clause in the Munitions of War (Amendment) Bill, 1916, extending the term "munition work'" to cover tramway facilities, in cases where such services were deemed of importance to the manufacture of munitions, and since the passing of the Act many undertakings have been certified as coming within its provisions, which impose certain restrictions and reservations upon employers and employees as to leaving certificates, etc.

The Council take this opportunity of recording their appreciation of the valuable advice and service freely given by the late Sir George Scott Robertson, K.C.S.I., M.P. (Member for Central Bradford), and Sir William Middlebrook, M.P. (Member for South Leeds) in connection with the above matter. In these negotiations the Association was closely in touch with the Association of Municipal Corporations, from whom every assistance was received.

The following special resolution was passed:—"That the Executive Council were impressed with the perseverance of the hon. secretary in carrying out this arrangement, and decided to record their appreciation of his efforts in securing recognition of tramway undertakings in connection with 'munitions work.'"

Classification of Tramway Material.

In order to ensure the prompt delivery of material required for the maintenance and repair of rolling stock and permanent way, the Ministry of Munitions agreed to classify such material in Class B, which arrangement has facilitated the delivery of the requisite material for this purpose.

Women as Tramcar Conductors.

In order to meet the stress of circumstances, tramway undertakings generally have adopted female labour in various capacities, and at the present time 8,433 women are employed as conductors and 176 women as drivers on municipal tramway undertakings.

In connection with the employment of women as tramcar conductors some difficulty arose in the Metropolitan area, due to the attitude of the Commissioner of Police in refusing to grant licences, and in accordance with the resolution passed at the last Annual General Meeting, representation was made to the Home Secretary on behalf of the members in that area with the object of removing the restrictions on the employment of women, and it was largely owing to the action taken by the Association that the Commissioner of Police subsequently modified his views and agreed to grant licences on application being made.

Disabled Soldiers and Sailors.

The following report of the National Service Committee of the Institution of Electrical Engineers on the subject of formulating some scheme whereby the Institution might be of some assistance in training and finding employment for disabled soldiers and sailors was considered by the Executive Council:—

The Institution of Electrical Engineers.

Report of the National Service Committee.

The committee have considered the following reference from the Council:—

"To consider and report to the Council on a letter from the president on the subject of forming some scheme whereby the Institution may be of assistance in finding employment for disabled soldiers and sailors."

The committee report as follows:—

(1) The committee consider that it is desirable to form such an organisation, and they recommend that letters be written to the electric supply undertakings and to manufacturers to ascertain whether they can employ disabled men who have received some sort of preliminary training in the duties of switchboard attendants.

(2) If a satisfactory response is received the committee recommend that they be empowered to consider the manner of arranging for the training of these men, obtaining means for carrying out the same, and selecting and distributing applicants for positions.

(3) The committee recommend also that the I.M.E.A., B.E.A.M.A., and other associations be informed of what the Institution is doing in the matter.

After full consideration the Council decided that, whilst having every possible sympathy with the objects named, they could not recommend the various municipal tramway undertakings to adopt the suggestion, in view of the fact that large numbers of tramway men had been granted leave of absence in order to serve with His Majesty's Forces, and their positions were being kept open for them. Tramway undertakings had already incurred a great obligation in this direction and were therefore reluctant to commit themselves further at the present time.

Lights (Vehicles) Order, 1915.

The Order of the Secretary of State dated December 15, 1915, framed under Regulation 2 of the Defence of the Realm (Consolidation) Regulations, 1914, as to lights on vehicles in places outside the Metropolitan and City of London Police Districts, provided (*inter alia*) as under:—

Part I.

(1) Every vehicle on any street, highway, or road to which the public have access in any part of England or Wales, excepting the Metropolitan and City of London Police Districts, between half an hour after sunset and half an hour before sunrise, must carry lamps as follows:—

(*a*) At the front, a lamp or lamps displaying to the front a white light. If only one lamp is carried for this purpose on any vehicle other than a bicycle, tricycle, or handcart, it must be placed on the extreme off, or right-hand side of the vehicle; if a second lamp is carried it must be placed in the corresponding position on the extreme near, or left-hand side of the vehicle, and

(*b*) At the rear, a lamp displaying to the rear a red light. The lamp carried for this purpose on any vehicle other than a bicycle, tricycle, or handcart must be placed on the off or right-hand side of the vehicle.

The Executive Council were of opinion that when these regulations were drafted, the special circumstances of tramways had been overlooked, and it was pointed out to the Home Office that the provision of lights in the positions indicated would be a very difficult matter, especially in view of the shortage of staff, and further, that the installation of lamps on the extreme off side of a tramcar would be inviting danger.

As a result of representation to the Home Office, it was agreed that the above regulations should not apply to tramcars, and that the red light, as provided for in paragraph 1 of Part I., at the rear, need not be on the off side, and if two lights are carried at the front, one being on the off side, the second need not be on the extreme near side in a corresponding position to the light on the off side.

British Trade after the War.

The following resolution was passed by the Council of the I.M.E.A. respecting a report of a Sub-committee of the Advisory Committee to the Board of Trade on Commercial Intelligence as to measures

Digitized by Google

for securing the position after the war of certain branches of British industry :—

I.M.E.A. Council, March 17, 1916.

" That the Council, whilst being anxious in every way to encourage British trade and the purchase of home manufactures, and being prepared heartily to support measures taken to this end by legislation or otherwise, view with deep concern Recommendation 6 (*b*) of the Sub-committee of the Advisory Committee of the Board of Trade to the effect that—' All Government departments, local authorities, and statutory bodies entrusted with the control of monies raised by taxes or rates, should be under legal obligation to purchase, so far as possible, only goods produced within the British Empire.' "

The Council agreed with the principle enunciated in the above resolution of the I.M.E.A.

Motor Omnibus Traffic, Road Maintenance, Etc.

No further action has been taken in this matter during the year, the whole subject being in suspense until after the war. The attention of members is drawn to the following special legislation enacted during the year, which vitally affects municipal tramways :—

Local Government (Emergency Provisions) Act, 1916.

Prohibition for the Establishment of New Routes for Omnibuses.

20. (1) Notwithstanding anything in any statute it shall not be lawful after the passing of this Act for any omnibus to ply for hire on or use any route which has not been regularly used by omnibuses plying for hire within two years prior to March 1, 1916, except with the consent of the highway authority or, if more than one, every highway authority liable for the maintenance and repair of the highways along which the route runs, which consent may be given on such conditions as the highway authority may consider fit, or, if in the opinion of the Local Government Board such consent is unreasonably refused, or if such conditions are unreasonable, without the consent of the Local Government Board ; and if any person drives an omnibus or allows an omnibus to be driven along any route in contravention of this provision, he shall, on summary conviction, be liable to a fine not exceeding £5 and to a further penalty not exceeding 40s. for every mile travelled by every omnibus in contravention of the provisions of this section, all penalties recoverable under this section to be paid into the funds of the highway authority concerned.

Provided that nothing in this section shall apply where a route is altered in consequence of the temporary diversion of traffic on account of the breaking up of any road or in pursuance of the directions of any police authority or other directions lawfully given.

Provided also that nothing in this section shall apply to any omnibus plying for hire on or using any route in any case where the Admiralty, Army Council, or Minister of Munitions are of opinion that an omnibus service is necessary for and is to be used by munition workers or other persons engaged on Government war service.

(2) This section shall not be deemed to detract from any existing powers of highway authorities in regard to omnibuses.

(3) For the purposes of this section the expression " omnibus " includes every omnibus, chars-a-banc, wagonette, brake, stage coach, or other carriage plying for hire or used to carry passengers at separate fares.

It has been noted that certain action is being taken by the County Councils' Association under these powers. The Council is watching this, and if anything arises will take steps to safeguard the interests of the Association, as far as possible.

Standardisation of Tramway Rails, Tires, Axles, and Springs.

The Sub-committees of the Engineering Standards Committee dealing with these matters having had no meetings during the year, the Council representatives have nothing to report.

The Council regret to note the tragic death of Mr. Leslie S. Robertson, secretary of the Engineering Standards Committee, who accompanied Lord Kitchener on H.M.S. *Hampshire*. Mr. Robertson has been the secretary to the Standards Committee since its formation, and in that capacity has rendered invaluable service to the engineering profession. His unfailing courtesy and urbanity endeared him to all those with whom he came in contact, and the Council, as representing one engineering branch, feel that they have lost a most able friend.

Meeting of Managers' Section.

In accordance with the resolution passed at the meeting of the Managers' Section at the last Annual Conference in London, the Council considered this matter early in the year and decided, in view of the extraordinary circumstances still prevailing, to abandon the Half-yearly Spring Meeting this year.

Tramways and Light Railways Association Congress.

The Tramways and Light Railways Association very kindly extended invitations for representatives to attend their Annual Congress in London, but unfortunately pressure of business prevented their attendance.

Finance.

The Council have to report that the finances of the Association are in a satisfactory state.

By order of the Executive Council,

Peter Fisher, *President.*
C. J. Spencer, *Hon. Secretary.*

FINANCIAL REPORTS AND MEETINGS.

Kalgoorlie Electric Tramways Company.—The accounts for 1915 show that after charging £4,000 for depreciation, and £9,206 for debenture interest, the adverse balance of £12,520 brought forward has increased to £18,520.

W. T. Henley's Telegraph Works Company announce an interim dividend on the preference shares at the rate of 4½ per cent. per annum, less income-tax, and on the ordinary shares at the rate of 10 per cent. per annum, less income-tax, for the half-year ending June 30 last.

Silverton Tramways.—The report for the half-year to June 30 states that the revenue amounted to £57,219, and, adding £24,000 transferred from reserve No. 2 and £30,902 brought in, the total is £112,121. After deducting expenses and income and other taxes, dividends amounting to £50,000 are declared, carrying forward £27,805.

Hong-Kong Tramways.—The report for 1915 shows a net profit, after writing £6,625 off for depreciation, and including £6,897 brought forward, of £18,071. A dividend of 12 per cent. has been declared, and a further £2,000 has been written off the cost of the undertaking, leaving £6,321 to be carried forward. The net profit has increased from £9,500 to £11,200, while the dividend is 2 per-cent. more than in 1914, and within ½ per cent. of the rate paid for 1913.

Dumbarton Burgh and County Tramways.—At the annual meeting, Mr. George Balfour, who presided, said the total receipts for the year amounted to £26,041, being an increase of £2,737. Expenses had increased by £2,052, the increased expense being distributed as follows :—Traffic expenses, £844 ; general expenses, £148 ; repairs and maintenance, £722 ; electricity supply, £338. The increased expenses were entirely due to abnormal cost of material and labour, but the net profit available for distribution was increased by upwards of £700 compared with the preceding year. The following dividends were declared :—On the preference shares at the rate of 6 per cent. per annum for the half-year to July 31, and on the ordinary shares of 1½ per cent. for the year, in each case under deduction of income-tax.

Montreal Tramways Company.—For the year ended June 30 last this company paid a dividend of 10 per cent., as compared with 7½ for the year 1912-13. The gross earnings increased by $84,533. There was a decrease of $6,043 in expenses of operation. The net gain was $91,477, or equal to 3¼ per cent. The expense ratio to gross earnings declined by nearly 1 per cent., to 56 per cent. After providing for the dividend of 10 per cent. on the larger amount of capital there is a surplus of $185,126, or $60,500 higher than for the preceding year ; $313,576 was debited to the contingent renewals account. The company has been included in the Treasury list of dollar securities that the Government are controlling by borrowing or purchase. Holders who deposit their securities gain ½ per cent. more interest.

Aberdeen Suburban Tramways Company.—At the half-yearly meeting, Mr. J. Mearns (chairman) said that the net profit was less than the corresponding period of the previous year. Revenue was slightly greater, but wages, maintenance, and road repairs had gone up, and the materials they required were almost unprocurable. The balance, amounting to £3,209, the directors proposed to apply as follows :—£1,200 to renewal and depreciation account, which would then stand at £16,700 ; a dividend at the rate of 5 per cent. for the past year on the paid-up capital, £1,562 ; directors' fees, £31 ; leaving to be carried forward, £415. Since the inception of the company the directors had set aside sums varying from £1,000 to £1,500 per annum in building up a reserve fund, which now stood at £16,700, or more than half the subscribed capital. £4,594 was last year paid by the company to the Corporation after deducting £1,992 allowed for traffic expenses and general charges. The system would, if ever amalgamated with the Corporation lines, be a profitable purchase for the city.

National Electric Construction Company, Limited.—In their report for the past year the directors state that the working of the various undertakings resulted in a loss of £3,650, after providing £3,750 for debenture interest and £1,550 for debenture redemption. The profit on contracts completed and in progress was £2,652, against £4,324, and the revenue from investments decreased, such revenue (less interest paid) being £3,392 against £4,386. There was a loss of over £2,000 in connection with an accident on the Dewsbury and Ossett tramway undertaking in October last. (The accident was due to a car getting beyond control on a descent, leaving the rails and damaging a building.) Half of the loss is apportioned to the present accounts. The board add that but for this accident the profit from the Dewsbury, Ossett and Soothill Nether Tramways would have been a record. In the case of several of the undertakings in which the company is interested, particularly those at Rhondda, Mexborough, Swinton, and Muselburgh, the shortage of labour has been acute. The price of fuel and of materials required for repairs has increased enormously.

Digitized by Google

Bombay Tramways and Electric Supply Company.—At the annual meeting, held at Bombay, Sir Sassoon David presided. In moving the adoption of the report, the chairman said this was the first occasion that the general meeting of the company had been held in India. Notwithstanding the serious handicap of the war, both the gross and net revenue of the undertaking had continued on the upward grade. For the year under review, as compared with the previous year, the former recorded an advance of Rs. 1,23,000. and the latter an advance of Rs. 1,66,400. This comparison was with a year seven months of which were prior to the war. If they compared the same figures with the year 1913, a year of peace, then the increase in net earnings amounted to not less than Rs. 3,46,600. These figures were testimony to the soundness of the business, and to the care and prudence with which it was administered. After meeting all fixed charges, and defraying all the operating expenses and maintenance charges, and making the appropriations to various funds, the balance of net profit justified them in recommending a dividend at the rate of 7 per cent. per annum on the ordinary shares. This would leave £9,602 to be carried forward to this year's revenue as against a sum of £8,326 brought in last year.

United Electric Car Company.—The report for the year ended June 30 shows that, after charging £5,228 for depreciation (including £4,500 added to reserve), the profit is £6,562, to which has to be added £4,707 brought forward. After deducting £6,000 for the preference dividend in each half-year, £5,270 is carried forward. At the annual meeting on September 20, Mr. Robert B. Barningham (chairman) moved the adoption of the report. He stated that throughout the year the works had not been employed at anything like their full capacity. The orders for cars in progress twelve months ago had all been completed and delivered, and very few orders for tramcars had been received during the year. Corporations at home were holding back their orders at the present time, and foreign trade they could hardly expect. The directors had obtained all the Government work they could get, but there was not much chance for the company to share in large profits. They had had a fair share of Government work in motor and general service wagons and pontoons. He had good hopes that the company would be ultimately paid for the cars they had delivered, chiefly in South America, but one could not say how the purchasers, who were chiefly in occupied territory in Belgium, would come out of it all. He was satisfied that when hostilities ceased there would be plenty of work both at home and abroad, as the great bulk of the cars had been running many years and must be renewed. The meeting re elected Messrs. R. H. Prestwich and the chairman as directors.

Salford Corporation Tramways.—Mr. G. W. Holford's annual report to the Tramways Committee is summarised in its financial aspect in the appended table, which also gives the corresponding figures for the two preceding years. Of the 75¾ miles of tramways worked by the corporation, 36¾ miles are owned by the authority, the remainder being lines leased by surrounding towns and lines in Manchester and Worsley over which running powers are granted, while 2½ miles in Trafford Park are worked jointly with Manchester Corporation. A record number of passengers were carried, the figure being 56,458,266, an increase of 2,114,358 on 1915, the previous best. The earnings per car-mile were 11·853d., the highest on record, but owing to the depleted staff the car mileage was only 5,495,295, as against 5,828,232 in 1914-15 and 6,235,278 in 1913-14. In order to permit of the payment of £22,000 in relief of the rates, £3,526 has been transferred to the current account from the depreciation and renewals fund. The balance remaining in the depreciation fund is £21,266. From the commencement of the undertaking £107,713 has been paid into this fund, of which £86,446 has been expended.

	1916-15.	1915-14.	1914-13.
Capital expenditure	£752,263	£725,485	£723,923
Amount outstanding	£501,285	£511,853	£532,821
Traffic revenue	£271,403	£257,935	£272,758
Total revenue	£271,554	£257,977	£272,812
Working expenses	£169,916	£170,521	£178,770
War allowances	£13,136	£6,227	—
Gross balance	£88,502	£81,229	£94,042
Net profit	£22,000	£34,265	£22,000
Passengers carried	56,458,266	54,343,908	53,124,546
Fare per passenger	1·149d.	1·134d.	1·227d.
Car mileage	5,495,295	5,828,238	6,235,278
Units per car-mile	1·793	1·667	1·606
Power cost per car-mile ...	2·172d.	2·050d.	1·936d.
Traffic receipts per track-mile	£3,580	£3,403	£3,646
Traffic receipts per car-mile ...	11·853d.	10·622d.	10·499d.
Expenses per car-mile ...	7·420d.	7·022d.	6·881d.
Ratio of working expenses ...	62%	66%	65%
Total track mileage	75m. 64c.	75m. 64c.	75m. 64c.
Number of cars in stock ...	210	200	200

Bradford Corporation Tramways.—Subjoined will be found the chief items in the accounts for the year ended March 31, 1916, and also for the two preceding years. In his 18th annual report to the Tramways Committee, Mr. C. J. Spencer, general manager, observes that this first complete year under war conditions brought an ever increasing stress of circumstances. Traffic revenue (excluding railless) increased by £9,480, and notwithstanding a decrease of 316,865 in the car mileage, or 5 per cent., the revenue increased 3·8 per cent., which was about the usual normal yearly increase. Despite this increase in the expenditure, the net growth of revenue was £6,836. A closer examination of the year's trading, the manager says, is not so reassuring. Expenditure per car-mile had risen to the record figure of 9·109d., and had the receipts been the same per car-mile as the average of the previous five years, there would have been a loss of nearly ½d. per car-mile, representing a sum of £12,900. The higher costs in the main might be allocated to the increased costs of labour, material, and power. The cost of labour had risen to 40 per cent. of the total income and 54 per cent. of the total expenditure. Mr. Spencer points out that there is no real economy in the decrease of £2,000 in the cost of permanent way maintenance and of £3,261 in the cost of car repairs. These decreases were due to shortage of labour, which had led to 20 cars being entirely withdrawn from service as unsafe for public operation. While the cost of operation, apart from financial charges, had reached a record figure, the average fare per passenger was at a record low figure of 1·047d., or 1·13 per cent. lower than last year and 10 per cent. lower than 1910-11.

	1916-15.	1915-14.	1914-13.
Capital expenditure	£1,043,135	£1,043,054	£1,040,118
Amount outstanding	£590,988	£634,618	£653,504
Traffic revenue	£314,486	£309,321	£298,525
Total revenue	£341,624	£329,888	£317,133
Working expenses	£246,613	£243,312	£231,151
War allowances	£8,338	£2,784	—
Gross balance	£86,673	£83,792	£85,982
Net profit	£29,771	£32,442	£29,447
Passengers carried	74,082,612	70,077,271	67,675,166
Fare per passenger	1·047d.	1·059d.	1·058d.
Car mileage	5,877,192	6,194,057	6,206,239
Units per car-mile	1·990	1·900	1·894
Power cost per car-mile ...	2·165d.	2·027d.	1·948d.
Traffic receipts per track-mile	£2,892	£2,807	£2,793
Traffic receipts per car-mile ...	12·842d.	11·816d.	11·486d.
Expenses per car-mile ...	9·450d.	8·774d.	8·376d.
Ratio of working expenses ...	74·630%	74·600%	73·138%
Total track mileage	118m. 15ch.	118m. 9ch.	106m. 29ch.
Number of cars in stock ...	236	252	245

CONTRACTS AND ORDERS.

Walsall Tramways Committee have accepted the tender of J. Parkinson and Son to supply a lathe, etc.

Salford Council have ordered a steam recorder from the Lea Recorder Company, and a feed-water heater from Royles, Limited.

E. Green and Son, Limited, have received an order for an economiser and accessories to be supplied to Wakefield electricity works.

Aberdeen Tramways Committee have placed a contract with the British Thomson-Houston Company for the supply of two traction motors.

West Hartlepool Council have placed an order with the New Conveyor Company for a coal and ash conveyor at the extension of the electricity works that is about to be erected.

Hadfields, Limited, have received a contract from Salford Tramways Committee for the supply of manganese steel crossings, required for renewing the tramway junction at Lower Broughton Road.

Walthamstow Council have allotted contracts as follow:—British Thomson-Houston Company, extra high-tension switchgear; General Electric Company, low-tension switchgear; Bruce Peebles and Company, motor converter.

Hawthorn (Victoria) Tramways Trust have placed the following contracts:—Australian General Electric Company and British Westinghouse Company, motor equipment; Horrocks and Roxburgh, Limited, crossovers; Messrs. Duncan and Fraser, 15 car bodies.

Belfast Tramways Committee have decided to replace eight mechanical stokers in the electricity station by four of an improved pattern, thus greatly increasing the efficiency of the station. An order has been given to Messrs. Babcock and Wilcox for four chain grate stokers, at £1,870.

Shepherd's Parging Block Company, Limited, of Rochdale, have received an order from the borough engineer of Rotherham for block parging to be fixed in connection with the new track work on the extension of the Rotherham Corporation Tramways, and from Haslingden Council for the tramways in that borough.

Manchester Tramways Committee has allotted the following contracts:—F. Smith and Company, Limited, copper trolley wire; J. Waddington and Company, indigo blue serge; W. Lupton and

Digitized by Google

Company, indigo blue pilot; N. Hope and Son, drivers', etc., timekeepers' and traffic inspectors' cloth caps; W. Walsh and Son, timekeepers' straw caps; C. Dillingham and Sons, drivers', guards' and point boys' straw caps; G. Cadwell and Company, women guards' straw hats; Briggs, Jones and Gibson, Limited, making-up uniform clothing.

Portsmouth Tramways Committee have allotted contracts for supplies as appended:—British Thomson-Houston Company, incandescent lamps; British Westinghouse Company, fibre sheet and mica; W. Atkins and Company, tool steel and files and rasps; Pilkington Brothers, car side and end glasses and sheet glass; T. H. Harvey, creosote oil and pitch; J. L. Duguid and Company, metal polish; Engelbert and Company, motor gear grease; W. B. Dick and Company, motor bearing, engine, cylinder, and cleaning oils; Fleming, Birkby and Goodall, crossovers, terminal clamps, splicing ears, etc., and trolley wheel bushes; F. Smith and Company, span and guard wire; Engineering Supplies Company, plain ears, frogs, and span section insulators and controller angers; Gabriel and Company, brake ratchets and lifeguard springs; F. W. Rowlands and Company, car gear wheels and pinions; West Bromwich Spring Company, springs and spring washers; Wm. Brunton and Son, armature binding wire; Smith Brothers and Hill, sand tubes, spring washers, motor springs, etc.; Anti-Attrition Metal Company, bushed and unbushed trolley wheels, axle box bearings, and key plates; Brommell Patents Company.

PERSONAL.

Sir Charles Parsons has been elected president of the British Association for 1917.

Mr. C. Ormrod, chief clerk, Bolton Corporation Tramways, has been appointed chief traffic assistant.

Mr. H. S. Ellis, borough electrical engineer at South Shields, has been voted an addition of £50 to his annual salary of £450.

Sir John Corke, a former chairman of Portsmouth Tramways Committee, has been selected as Mayor for the fifth year in succession.

Mr. E. Grimes, station engineer of Hackney Electricity Works, has been appointed superintendent of the Barking Council's power-station.

Mr. Algernon Law, C.B., Controller of Commercial and Consular Affairs at the Foreign Office, has been given the dignity of Knight-Commander of the Order of St. Michael and St. George.

Mr. G. H. Anger, managing director of the Anger Manufacturing and Supply Company, Limited, of Preston, Lancs., sailed for New York on October 3 on a business trip to the United States.

The Hon. Elaine Jenkins, the younger daughter of the late Lord Glantawe, has been elected chairman of Swansea and Mumbles Railway Company, after serving the company as a director for some time.

Sir Robert Hadfield contributed an article to the "Business and Organisation" columns of a daily contemporary in support of railway nationalisation from the point of view of promoting British trade.

Miss Jessie B. Hamilton, second daughter of Mr. J. B. Hamilton, commercial manager to Leeds Corporation, and Mrs. Hamilton, was married on September 15 to Lieutenant Somerville, of the Scottish Rifles.

Mr. George Balfour, of Messrs. Balfour, Beatty and Company, Limited, is one of the new directors added to the board of the Metropolitan Electric Supply Company, on the suggestion of the shareholders' committee.

Mr. S. Y. Maling, on leaving the electrical department of Melbourne Corporation to become deputy manager of the Sydney electric supply undertaking, has been presented with several gifts by the Melbourne staff and employees.

Conductor M. Smith, Dublin United Tramways Company, while passing Mount Bridge, heard a splash in the canal, and noticed a boy in the water. Leaving his car, he jumped in and brought the lad ashore. This is the second occasion on which he has saved life.

Mr. H. E. Duke, Chief Secretary for Ireland, has resigned the chairmanship of the Board of Referees, appointed to hear appeals under the excess profits tax provisions of the Finance Bill, and will be succeeded by Sir Charles B. Renshaw, chairman of the Caledonian Railway Company.

G.E.C. Directorate.—New directors of the General Electric Company are Messrs. M. F. Armstrong, G. H. Ide, and M. Solomon. Mr. Ide, who is manager of the metal works, has been with the company for twenty years, while Mr. Solomon, manager of the carbon works, has seen upwards of fourteen years' service.

British Thomson-Houston Directorate.—At a recent board meeting of the British Thomson-Houston Company, Ltd., Mr. J. F. Nauheim retired from the chairmanship as from September 30. The managing director, Mr. H. C. Levis, was appointed chairman of the board, and he also retains the managing directorship of the company.

Sir Sassoon David was re-elected a director of the Bombay Tramways Company at the first annual meeting held in Bombay since the removal of the offices from London. Mr. A. H. Froom was also re-elected, and Mr. F. C. Rimington, managing director, was given a seat on the board during the period he remains in India.

Mr. A. Nichols Moore, borough electrical engineer of Newport, Mon., has been requested by the Board of Management to a national shell factory to act in an advisory capacity to the board, and also to supervise the electrical equipment. The Council, acting upon the recommendation of the Electricity and Tramways Committee, have permitted him to take up these duties.

Mr. R. B. Leach was presented with a smoker's outfit by the staff of Heywood Corporation Tramways and Electricity Department on the occasion of his departure to take up the duties of electrical engineer and manager to Loughborough Council. Accompanying the gift was an address in which the contributors expressed their appreciation of the kindness that Mr. Leach had shown to the staff during his three and a half years' service as manager and engineer.

Mr. D. H. Davies, chief electrical assistant of the Stockton-on-Tees electricity undertaking, has been appointed electrical engineer and tramways manager to Heywood Corporation in succession to Mr. R. E. Leach, who has been appointed electrical engineer at Loughborough. Mr. Davies, who is 35 years of age, has been at Stockton five years, and he has also served at Darlington, Bury, and Manchester. The salary is £200 per annum, and there were fifty applications.

Mr. A. L. C. Fell, chief officer of the London County Council Tramways, has, we regret to state, suffered a relapse after the illness that overtook him early in the year. His medical adviser has ordered him to undertake a six months' tour. The unwelcome news of Mr. Fell's relapse was received with great regret at the annual conference of the Municipal Tramways Association, and a resolution of sympathy was passed coupled with an expression of hope that Mr. Fell would return with renewed vigour. Prior to his illness Mr. Fell and his wife entertained convalescent colonial soldiers at their residence.

Melbourne Tramways Board.—The Board appointed by the Government of Victoria under the temporary Act for taking over the undertaking of the Melbourne Tramways and Omnibus Company comprises Mr. C. Templeton (chairman), Sir David Hennessy, and Sir Henry Weedon (Melbourne City Council), Mr. A. Renfrew (Fitzroy Council), and Mr. F. T. Hickford (Brunswick Council). The Act will remain in force until December 31, 1917, unless an agreement is meanwhile arrived at between the Government and the several municipalities for the constitution of a single authority to control all the city and suburban tramways.

Mr. A. T. Lambert, general manager and electrical engineer, Maidstone Corporation Tramways, was accorded a vote of thanks at the September meeting of the Council "for the great services he has rendered to the undertaking to bring it to its present satisfactory financial position." The Council also expressed the opinion that had not the war arisen the year's trading would have been free from loss. The report presented by the Tramways Committee showed that the deficit had fallen from £2,484 in 1910 to £450, although the charge for energy was 22 per cent. above the sum paid in 1914-15. The Council also expressed their thanks to Councillor D. T. J. Lile, the chairman of the committee, who in reply said it was a great satisfaction to know that the undertaking was on the way to becoming remunerative.

Mr. Louis Slattery, who for the past five and a half years has been traffic assistant to the chief officer of the London County Council Tramways, was on September 26 appointed general manager of West Ham Corporation Tramways. Mr. Slattery began his career as assistant to the general manager at Blackburn in 1891. In 1896 he became general manager to the Blackpool, St. Annes and Lytham Tramways Company, a position which he occupied for several years before being selected to manage the Oldham Corporation Tramways, where he served for six years. Thirty-one applications were received for the vacancy created at West Ham by the removal of Mr. Moffet to Belfast, and seven candidates were interviewed. Ultimately the number was reduced to two, namely, Mr. Slattery and Mr. W. Clough, general manager at Bury. The initial salary is £600 per annum.

Mr. J. S. D. Moffet, who on October 1 took over the general management of Belfast Corporation Tramways, was entertained to dinner at the Municipal and County Club, Whitehall, S.W., on September 15, by the Metropolitan Association of Electric Tramway Managers. Among those present were Messrs. W. C. Ullmann (East Ham), chairman of the Association, F. Schofield (Leyton), vice-chairman, Messrs. J. K. Bruce (London County Council), L. E. Harvey (Ilford), W. E. Hammond (M.E.T.), J. B. Mackinnon (L.U.T.), T. B. Goodyer (Croydon), hon. secretary, H. W. Littler (ex-chairman West Ham Corporation Tramways), H. E. Blain

Digitized by Google

(London General Omnibus Company), and W. T. Robson (Southampton). Letters expressing regret for inability to attend were received from Messrs. A. L. C. Fell and L. Slattery (London County Council), J. C. Williams (Erith), W. Murray (Walthamstow), and A. V. Mason (South Metropolitan).

Mr. James MacMahon, general manager of the Colombo Tramways and Lighting Company, Limited, died at Colombo on September 14.

WITH THE FORCES.

Sergeant J. Neary, who enlisted in the East Lancashire Regiment from Salford Corporation Tramways, has gained the Military Medal.

Corporal W. Harley, King's Royal Rifles, who has been awarded the Military Medal, was an employee on the Manchester Corporation Tramways.

Corporal J. W. Richardson, West Yorkshire Regiment, a member of the staff of York Corporation electricity works, has been awarded the Military Medal.

Quartermaster-Sergeant G. Kendall, R.F.A., who enlisted from the position of manager of Reading Corporation tramways parcels office, has been wounded in France.

Sergeant R. M. Bishop, who enlisted from the offices of Siemens Bros.' Dynamo Works, London, has been awarded the Military Medal for gallant conduct at Pozières.

Captain H. C. Sparks has received the French military award of the Croix de Guerre for the act of conspicuous gallantry performed by him on July 2, for which he had been awarded the D.S.O.

Mr. H. W. Leonard, who for the past six years has held an important position in the General Electric Company's publicity department, has recently joined the London Electrical Engineers.

Mr. J. M. Stephens, manager of the wiring supplies department of the British Thomson-Houston Company, has joined the Royal Flying Corps as Second Lieutenant, and will act as an assistant equipment officer.

Captain J. M. Donaldson, King's Royal Rifle Corps, who has been three times wounded since January, 1916, is an electrical engineer who was formerly with the British Thomson-Houston Company. He is now residing at Croydon.

Bombardier A. E. Ellis, R.F.A., who has been awarded the D.C.M. for repairing telephone wires in seventeen places under heavy shell fire, enlisted from the staff of the India-rubber, Gutta-percha, and Telegraph Works Company, Silvertown, London, in October, 1914.

Captain S. W. Carty, late of the electrical department of the Liverpool Corporation Tramways, has recently returned from the Soudan. He was in charge of the motor transport supply column of the force that operated against the Sultan of Darfur. He was promoted captain for his services, and thanked by the Sirdar.

TRAMWAY AND LIGHT RAILWAY NOTES.

BARROW-IN-FURNESS.

TRACK DOUBLING—TRAILER CAR PROJECT—GROWTH OF TRAFFIC.

Acceleration of the local tramway service has been effected since the completion of the doubling of the track in Abbey Road, and the Thermit welding of the old rails. In order to provide for the increased traffic since the outbreak of war, Mr. W. F. Bladon, the local manager, has secured two cars from another company, and he hopes to put two trailers into service. Plans have been prepared for an enlargement of the depot. Since the opening of the tramways in 1904 the number of cars has increased from a dozen to twenty-six. There are few towns where the conditions make it so difficult to secure regularity of service. The lines pass over two lifting bridges, and on the route there are seven level crossings.

BIRMINGHAM.

EXTENSION OF TIME FOR NEW TRAMWAYS—ANOTHER POWER FAILURE DUE TO INFERIOR COAL.

Birmingham Corporation have applied for an extension until September, 1917, of the periods limited by the Corporation's Light Railway Orders of 1912 and 1913 for the completion of the works authorised therein. For the fourth time during the past year there was an interruption of tramway traffic on September 19 on all the routes except a part of Aston and Erdington, which is worked from the Aston station. The cars were at a standstill between 10 a.m. and 11.30 a.m. Owing to the poor heating capability of much of the coal in use at the Summer Lane station, and the effect of the heavy rain on the outdoor stock, it was found to be impossible to maintain the full pressure of steam. To preserve the supply of energy to the munition works the tramway load was cut off.

BLACKPOOL.

LIFTING JACKS FOR CARS.

Blackpool Corporation Tramways Committee have purchased twelve jacks for use in lifting a car in the event of a pedestrian being run over and passing behind the lifeguard. The jacks will be housed at positions near the busiest centres.

BRADFORD.

THE COMPULSORY QUEUE—WOMEN CONDUCTORS—FREE RIDING.

In his annual report to the Tramways Committee, Mr. C. J. Spencer, the general manager, records that the Watch Committee had obtained the approval of the Board of Trade to regulations governing the access to and method of exit from tramcars at stopping places, and for controlling persons resorting thereto. The adoption of these regulations means that the police have full power to deal with persons failing to observe the queue system of loading tramcars. The gradients on tramway routes in the city caused anxious consideration before the Tramways Committee agreed in December last to employ women to act as conductors until sufficient male labour could again be obtained. At the end of the financial year on March 31 last 49 women were employed. Mr. Spencer states that the experience with them has been satisfactory, and that every praise is due to them for having by their pluck and patriotism assisted in a time of great emergency and stress. No women from the textile trades are accepted as conductors. Free conveyance was given on the Bradford cars during the past year to 443,230 persons, the value of the rides being £2,770. The participants were the military (including wounded convalescents), the Lord Mayor's Relief Committee, and the Belgian refugees.

BRISTOL.

EXTENSION OF THE OPTION TO PURCHASE THE TRAMWAYS.

In response to the application of the Tramways Option Committee the Board of Trade have again extended the period during which the Corporation of Bristol may exercise their option of purchase of the tramways company's undertaking. The extension is for one year, to October, 1917.

DARLINGTON.

SEATS FOR WOMEN CONDUCTORS.

After the trial of an experimental seat on the platform of one of the cars, Darlington Tramways Committee have decided to have others fixed. The women have stated that they feel a great strain in being called upon to stand for a long number of hours.

DUNDEE.

NEW METHOD OF RESTRICTING CAR LIGHTING—UNUSED RAILLESS TROLLEY CARS—ADDITIONAL POWER PLANT—TRACK RENEWALS.

As the result of visits that Mr. Fisher, the tramways manager, has paid to several English cities, he has brought to the attention of the military commander the system of shading and reducing the candle-power of the lights adopted on the Leeds tramcars, thus avoiding painting the windows. Provided that the light is subdued a little more, the authorities have agreed to the Leeds method being adopted in Dundee. Hitherto the windows of the cars have been obscured to within a few inches of the base. We observe from the annual report of the Tramways Committee that the department retains the two railless trolley cars that were used on the Clepington Road route, which was opened in September, 1912. The service was withdrawn in consequence of the disinclination of the Corporation to put the road surface in a suitable condition. The electricity committee have recommended that application be made for sanction to borrow £27,000 for the purpose of laying down additional plant, etc. The general manager has reported to the Tramways Committee that seven miles of single track will need renewal after the war, at a cost of about £30,000. Some portion of the work is urgent in character.

EDINBURGH.

THE TRAMWAYS PROBLEM—EMPLOYEES' WAR DISTINCTIONS.

The further report of Messrs. J. B. Hamilton, J. A. Brodie, and A. H. Campbell on the methods of traction that could be adopted for the tramways in view of the expiration of the company's lease was presented to the Edinburgh Corporation on October 4. The report recommends the overhead trolley system, which the consultants state could be running six hours after midnight on June 30, 1919, without the city having received any facilities from the company. For Princes Street the experts advise that overhead wires should be installed on the south side, where they would be largely hidden by trees. If after experience of that the citizens decide against it, the overhead can be taken down and the conduit introduced. In the event of the feared disagreement between the Tramways Company and the Corporation on the subject of repairs to the tramways, arbitration is likely to be sought. Sir Alex. Kennedy is mentioned as the arbitrator who would be appointed. Among the tramway company's employees three men have been awarded the D.C.M., all in different fields of war. One of the cases was that of a conductor who won the medal at Gallipoli, another of the recipients was a driver, and the third was a trackman. Five hundred of the 1,200 pre-war employees have joined the colours. Nearly thirty have lost their lives. The company is still continuing their policy of making an allowance to their men who entered the national services.

GLASGOW.

LIGHTING RESTRICTION RELAXED—THE COMMON GOOD FUND.

An improvement is being made in the method of darkening the tramcars at Glasgow, where the windows are obscured by colouring.

Digitized by Google

Drivers have mistaken the routes in suburban districts, and passengers have been injured through stepping off before the cars reach their destination. In consideration of the ease with which the entire illumination can be extinguished at the generating station, the authorities have allowed the cars to show more light. During the past financial year the tramways department, and, incidentally, the national war cause, received some advantage from the Common Good Fund of the Glasgow Corporation. Hitherto the department has stood in the position of building up the fund with grants from the surplus profits of the tramways. In the past twelve months the fund contributed £7,328 for the raising of the Tramways and other City Battalions for service in the war. At the Corporation's budget meeting, Treasurer McMulan, referring to the accounts of the Common Good, said that the previous year there was a deficit of £62,000. They only got some £12,000 or £13,000 from the tramways. This year the tramways had provided a surplus of £43,548 to the Common Good, still leaving the working of the Common Good for this year with a deficit of £10,078. The first duty of the Corporation—and he hoped the tramways would assist—was to pile up a strong Common Good, so that they might be in a position to help those who required help.

LEEDS.

TRIAL OF DIVIDED SKIRTS—BRADFORD-LEEDS THROUGH RUNNING.

At the instance of Leeds tramway management, divided skirts are being worn by a number of the women conductors. If the Tramways Committee are satisfied that the garment is more suitable than the ordinary skirt, it will be generally adopted. During the year ended March 31 the Leeds and Bradford through running cars carried 362,242 persons, an increase of 64,906, or nearly 22 per cent. The through route is becoming very popular, and with increased railway fares and various other restrictions, the increase is well understood.

MANCHESTER.

FARE PROSECUTION—WOMEN CONDUCTORS' DANGEROUS PRACTICES —EXTENSION OF TIME FOR NEW CONSTRUCTION.

In a recent prosecution of a young man on a charge of attempting to evade payment of his fare, the defence was that the conductor did not ask for the money. She called out, "Tickets, please," and defendant put out his hand with half-a-crown in it, but the conductor omitted to take the money. In imposing a fine of 20s., the Bench said if everyone had to be asked definitely for his fare the Corporation would have to have an enormous number of additional conductors. It was shown that the conductor had been among the passengers at least nine times. Notice of appeal was given. At an inquiry into the death of a woman conductor, the evidence showed that she leaned forward, holding on to the brass rail, to speak to a trolley girl who was standing on the small platform of a single-deck car, whereupon she was knocked into the roadway by a motor wagon. It was stated by the Corporation solicitor that there was no need for the guards to go on the rear platform. The women had been warned against swinging from one platform to another, and a notice had been posted warning them of the danger. Under the provisions of the Extension of Time Act, 1915, Manchester Tramways Committee are applying to the Board of Trade for a further extension of the period limited for the construction of the tramways and the compulsory purchase of lands authorised in Section 31 of Manchester Corporation Act, 1911.

NEWCASTLE-ON-TYNE.

PROPOSAL TO LINK UP WITH GATESHEAD—EMPLOYEES' ROLL OF HONOUR.

Newcastle City Council propose to obtain powers to enable their tramways to be carried across the High Level Bridge and linked up with the lines of the Gateshead Tramways Company. The matter has been discussed by the Tramways Committee with a deputation representing Gateshead Corporation. After considering the deputation's report, the latter authority have decided not to support the project until the Bill has been considered by the Council, and all proper provisions which they might consider necessary to safeguard the interests of Gateshead have been inserted therein. The city tramway employees have placed in their club a roll of honour in connection with the war. Over 200 out of 600 men voluntarily enlisted. The casualties up to the present are 11 killed, 8 missing, 36 wounded, and one man a prisoner of war. The roll is placed in the centre of a collection of war relics collected by the men on service. These come from the western front and from far-off Kut-el-Amara.

OLDHAM.

TICKET SIMPLIFICATION—OLDHAM-MANCHESTER PARCEL TRAFFIC— PASSENGER BARRIERS ON THE MANCHESTER ROUTE.

In place of fourteen different types of ticket formerly issued on the Grains Bar route at Oldham, Mr. P. Priestly, the general manager, has re-arranged some of the distances and fares, thus necessitating fewer tickets. Hitherto many passengers have left the cars at Moorside and walked up to Grains Bar rather than pay 1d. for the short journey. Concessions of ½d. on 3d., 2½d., and 2d. rides have been made in order to induce people to book through to Grains Bar. Hitherto a considerable amount of money has been collected by the tramways parcels department from persons sending packages to Manchester and other places. The Tramways Committee have decided that in future the collection of accounts shall not be undertaken. The car service between the town and the city is to be increased from a 15 to a 10 minutes' frequency, and the management at Manchester are to be asked to co-operate in erecting a barrier to regulate loading at Hollingwood.

ROCHDALE.

WIND SCREENS OR VESTIBULES?

The question of adopting either wind screens or vestibules for the protection of the motormen has been engaging the attention of Rochdale Tramways Committee. Mr. G. Webster, the general manager and engineer, has received replies from seventy-one municipal tramways undertakings to questions which he forwarded to them for the purpose of ascertaining which method was most favoured. At the invitation of the Tramways Committee representatives of the drivers are to discuss the matter with a sub-committee.

SALFORD.

REMOVAL OF CENTRE STANDARDS—IMPROVEMENTS ON RELAYING— ENERGY FROM FOUR SOURCES.

After a satisfactory experiment in the substitution of side for central standards on the line between the Height and Pendleton, Mr. W. G. Holford, the general manager at Salford, has obtained the consent of the Corporation to the similar conversion of other sections. The wide thoroughfare from the Crescent to Chapel Street is now being dealt with. With the great increase of motor and horse-driven vehicles, the presence of standards in the centre of a roadway is recognised as dangerous, especially during a fog and the restriction of lighting consequent on air raids. The Corporation tramways, which were opened in 1901, have now had 14½ miles of permanent way relaid, the work having began in 1908. It was continued until 1914, when the war broke out. In nearly all of the relaying, rails of the Sandberg specification were used, and it is anticipated that this will give a longer life than the rails previously used. The Thermit process was adopted for the welding of the new rails. Now that the Board of Trade has urged upon the owners of electricity undertakings the importance of linking up in the interests of national economy during the war, it is of interest to note that Salford Corporation Tramways obtain energy from four sources. In 1915-16 the energy used for haulage, lighting of cars, etc., comprised 9,761,335 units, of which Salford supplied 7,821,017, Manchester 1,218,060, Eccles 704,909, and the South Lancashire Tramways Company 17,349. Deducting 36,547 units recharged to Manchester, the Salford cars used 9,724,788 units. The average power expenses per car-mile totalled 2·172d., and the mileage was 5,421,896, giving an average consumption of 1·793 units per car-mile, an increase of ·126 units as against the previous year.

PATENT LIST.

Abstracted for "The Tramway and Railway World" from the Official Journal of Patents.

***** If the inventions have been communicated the names of the communicators are given below in italics.**

APPLICATIONS FOR LETTERS PATENT.

Electrical signalling systems (12,456)—F. G. Bell and W. C. Davey.
Trailer trucks (12,288)—A. W. Benson.
Fluid-pressure brake systems (12,353)—W. M. Cady and W. V. Turner.
Double automatic railway coupling (12,300)—W. Cook.
Controlling devices for coaster register mechanism for cars or trains (12,301)—F. B. Dehn (*Railway Improvement Company*).
Wheels for road vehicles (12,414)—Dunlop Rubber Company, Limited, and C. Macbeth.
Lifting jacks (12,345)—H. J. C. Forrester (*Hurlburt and others*).
Safety controlling gear for electrically-propelled vehicles (12,406)—F. Garrett and H. K. Pratt.
Life-guard for front of vehicles (12,438)—I. Pearson.
Paraffin vaporiser for motor car engines (12,374)—C. H. Richards.
Jacks and like lifting devices (12,185)—A. A. Scott.
Automatic air-brake systems (12,167)—Sprague Safety Control and Signal Corporation.
Regenerative braking (12,351)—T. H. Thomas and W. V. Turner.
Automatic train-control systems (12,352)—W. V. Turner.
Trolley poles for electric cars (12,316)—T. Warsop.
Pneumatic wheels or tires applicable as road wheels to vehicles (12,390)—W. Willoughby.
Dynamo-electric machines for combined electric lighting and ignition for motor vehicles (12,561)—B. Brooks and W. Holt.
Motor cars, motor lorries, etc. (12,467)—J. Heap.
Shape of holes for fixing chairs to sleepers (12,627)—W. E. Muntz.
Wheels for road vehicles (12,576)—C. E. Oliver.
Air brakes (12,489)—H. Pieper.

Digitized by Google

Mechanism for facilitating instruction of drivers of self-propelled vehicles (12,500)—J. G. Torr.
Signalling on railways (13,138)—J. D. Bexon.
Automatic emergency control of steam and brake on locomotive engines (12,943)—T. H. Brett.
Process of bedding rails on sleepers (13,149)—C. Rabut.
Load indicators and controllers for motor trucks (12,930)—F. J. Troll.
Fare ticket devices for omnibuses, etc. (13,376)—W. Aitken.
Electrical signalling (13,269)—L. W. Austin, L. Cohen, and G. O. Squier.
Signalling on trains and indicating position of trains (13,345)—D. C. Davies and M. Davies.

FOR HIGH-CLASS
CONDENSING PLANT
WRITE TO
THE MIRRLEES WATSON CO., LTD.,
SCOTLAND STREET, GLASGOW.

Clutches for motor vehicles (13,527)—T. A. Downton and T. H. Edwards.
Railway signal mechanism (13,445)—W. H. Dyson and N. B. Rabady.
High tension electric current collecting and transmitting or conducting devices (13,304)—Etablissements de Dion-Bouton Soc. Anon.
Traffic indicator (13,517)—S. T. Harris.
Motor vehicles (13,500)—P. F. Lajoinie and J. Maina.
Braking means for road vehicles (13,444)—E. Massis.
Wheels for road vehicles (13,252)—A. Ramsay.
Permanent way of tramways and railways (13,332)—C. Spreckley.
Petrol substitutes (13,469)—H. N. Tompkins.

Specifications Published.

1915.

Automatic couplings for railway cars (6,676)—Serguienko.
Railway signalling and train control (11,272)—Bound and Rowland.
Portable or self-laid tracks for road vehicles (15,292)—Pavesi and Tolotti.
Means for use upon motor cars and other vehicles to indicate the direction of turning (17,179)—Blake and Tipler.
Compressed air brakes (12,551)—Chapsal and Saillot.
Road wheels for motor vehicles (13,037)—Blake.
Driving axles or counter shafts for use on motor vehicles (14,687)—Humber, Ltd., and Burgess.
Mounting of the motor in power-driven vehicles (14,768)—Jern.
Construction of motor chassis (13,930)—Johnson.
Controllers for electrically driven vehicles (15,304)—Turner.
Apparatus for automatically stopping trains (7,527)—Radi.
Detachable rims for the wheels of motor road vehicles (12,227)—Baker.
Splash guards for the wheels of road vehicles (12,400)—Bather.
Tires for motor car wheels (12,464 and 12,469)—Crozier.
Systems of distribution for electrically operated railway trains (15,303)—Turner.

1916.

In the following list the numbers in italics are those that the specifications will finally bear and under which they will be indexed and abridged before acceptance and finally printed. The application numbers should, however, still be used for correspondence purposes.
Means for increasing the carrying capacity in cases of emergency of railway carriages, tramcars, etc. (2,376—*101,052*)—L. Jones-Powell.
Apparatus for indicating the speed of motor vehicles (5,086—*101,064*)—D. McNeill.
Railway rails and crossings for flangeless wheels (4,224—*101,119*)—W. J. Infield.
Tire for motor vehicles (2,181—*100,088*)—C. A. G. Deterding.
Electric car lighting equipments (3,559—*101,243*)—Albion Motor Car Company and T. B. Murray.
Lifting jacks (7,171—*101,272*)—W. J. Mellersh-Jackson.

Colonial and Foreign Tramways Traffic Returns.

NAME OF COMPANY.	1915. WEEKS ENDED. Sept. 4	Sept. 11	Sept. 18	Sept. 25		1916. WEEKS ENDED. Sept. 2	Sept. 9	Sept. 16	Sept. 23		AGGREGATE. Wks.	1916.	Increase or Decrease.
	£	£	£	£		£	£	£	£			£	£
Anglo-Argentine	49,780	49,469	47,626	50,319	...	47,933	52,818	51,992	...	...	39	1,926,886	− 4,000
Auckland	...	...	(28 days)	20.266	..	...	...	(28 days)	20,884	...	12	62,858	+ 563
Burma... ... ... Rs.	25,159	(4 weeks)	...	...	...	24,412	(4 weeks)	...	...	...	4	24,412	− 747
Calcutta ... ... Rs.	63,571	67,332	67,295	64,610	...	66,822	72,268	74,403	67,862	...	39	2,577,675	+120,145
Hong Kong ... ... $	...	...	...	...	...	...	...	...	...	...	37	491,805	+120,362
Madras ... ... Rs.	(2 weeks)	30,845	...	...	...	(2 weeks)	34,552	...	...	...	37	537,998	+ 38,241
Pernambuco ... ... $	2,900	2,902	2,880	2,785	...	3,149	3,437	3,181	3,145	...	38½	114,474	− 2,783

Companies Issuing Monthly Statements.

	1915. April.	May.	June.	July.	Aug.	Sept.	1916. April.	May.	June.	July.	Aug.	Sept.	Wks.	AGGREGATE. 1916.	+ or −.
	£	£	£	£	£	£	£	£	£	£	£	£		£	£
Ballarat & Bendigo ...	3,920	2,885	2,692	2,677	2,860	...	3,727	3,855	2,793	2,704	2,791	...	20	15,870	+ 836
Brazilian Traction Mins	6333460	6670110	6591940	6703000	6576000	...	6678000	7091000	6961000	7195000	7184000	...	35	54,329,000	+3,365,890
Brisbane ...	29,890	31,780	29,880	31,150	35,064	...	32,575	33,510	31,390	32,880	37,900	...	35	265 130	+ 20,416
British Columbia $	540,861	512,568	498,093	510,723	507,126	...	549,046	542,353	529,078	538,293	550,293	...	9	1,088,586	+ 70,737
Buenos Aires Pt. & C.	...	...	...	...	...	...	...	...	...	...	...	...	—	—	—
Buenos Ayres Lacroze	41,765	44,480	40,421	41,460	41,468	39,355	40,220	41,503	36,213	38,439	36,431	37,075	13	111,945	− 10,338
Cape Town	...	...	...	...	...	...	...	...	12,920	13,357	13,394	...	—	—	—
Carthagena & Herrerias	1,496	1,931	2,059	2,157	1,523	1,252	2,513	2,927	3,512	2,371	2,081	1,779	39	22,600	+ 7,020
Cordoba	13,609	14,494	14,059	14,375	14,159	...	14,053	14,868	14,129	14,263	13,852	...	22	71,165	+ 469
East India	1,864	2,119	2,194	2,231	2,266	2,054	2,116	2,161	2,283	2,220	2,522	2,523	9	5,045	+ 725
Kalgoorlie	2,841	3,269	2,707	2,775	...	...	2,553	2,921	2,500	2,521	...	...	31	17,458	− 1,496
La Plata	4,269	4,489	3,875	4,054	4,164	3,894	4,354	4,343	3,735	3,909	3,792	3,994	39	37,622	− 257
Lima	31,633	...	...	...	32,004	...	33,556	...	...	...	33,395	...	35	270,710	+ 12,959
Manaos ... Rs.	...	...	...	...	...	...	155,030	152,854	144,913	152,380	...	...	—	—	—
Manila...	...	...	...	23,750	...	...	...	...	...	33,700	...	...	31	887,739	+ 39,986
Melbourne	...	...	...	...	...	...	...	69,275	...	...	...	...	—	—	—
Mexico ... $	...	...	...	...	...	...	...	...	...	...	...	...	—	—	—
Monte Video	26,786	27,771	24,266	25,161	26,494	25,070	28,997	28,349	25,300	25,220	26,044	26,711	48	319 043	+ 15,626
Port Elizabeth ...	...	...	...	...	...	...	...	2,809	3,166	2,863	...	...	—	—	—
Peruvian	...	737,166	759,374	724,838	819,039	755,280	...	826,900	929,500	835,430	895,900	911,910	13	2,643,240	+ 344,083
Rangoon	4,964	4,887	4,997	4,629	4,510	4,445	4,849	4,589	4,205	4,357	4,253	4,137	39	41,328	− 2,001
Toronto ... $	795,816	795,262	787,558	773,013	762,627	...	883,209	903,924	884,491	867,789	889,241	...	35	7,092,229	+ 746,526
Winnipeg ... $	264,856	263,302	255,549	248,022	251,189	...	282,498	276,980	254,686	242,688	249,795	...	35	2,193,957	− 57,510

(Continued on page 292)

Digitized by Google

TRAFFIC RETURNS—*continued.*

Tramways and Omnibus Undertakings in the United Kingdom.

NAME OF COMPANY OR CORPORATION.	1915. WEEKS ENDED.					1916. WEEKS ENDED.					AGGREGATE.		
	Sept. 4	Sept. 11	Sept. 18	Sept. 25		Sept. 2	Sept. 9	Sept. 16	Sept. 23		Wks.	1916.	Increase or Decrease.
	£	£	£	£		£	£	£	£			£	£
Aberdare U.D. Council	341	343	342	343		412	407	408	408		25	9,770	+ 1,076
Aberdeen Corporation	1,927	1,869	1,901	1,673		1,983	2,252	2,041	1,854		16	31,932	+ 1,429
Accrington Corporation	556	633	592	617		591	663	598	624		25	14,854	+ 471
Ayr Corporation	407	442	558	340		638	575	474	376		19	10,273	+ 815
Bath Electric	*										—	—	—
Birkenhead Corporation	1,419	1,499	1,464	1,422		1,617	1,578	1,555	1,611		25½	39,309	+ 3,480
Birmingham Corporation	14,877	15,504	15,530	15,405		16,789	16,856	16,695	16,388		25	416,170	+ 63,072
Birmingham Corp. Motor Omnibuses	852	1,002	990	946		1,001	1,043	979	960		25	25,260	+ 3,030
Blackburn Corporation	1,238	1,364	1,503	1,563		1,304	1,323	1,417	1,375		25½	33,720	− 1,118
Blackpool and Fleetwood	1,976	2,145	1 607	1.304		2 352	2,247	1,631	1,268		38	36,452	+ 3,068
Blackpool Corporation	*										—	—	—
Bolton Corporation	2,760	3,423	2,774	2,678		2,977	3,407	2,837	2,963		26	74,950	+ 4,431
Bournemouth Corporation	2,652	2,570	2,509	2,168		3,109	2,998	2,618	2,432		26	64,533	+ 4,196
Bradford Corporation	6,653	6,862	6 689	6,468		8,136	7,045	7,497	6,572		25	177,495	+ 5,616
Brighton Corporation	1,405	1,497	1,386	1,278		1,703	1,695	1,562	1,386		25½	34,981	+ 3,274
Bristol	10,365	10,064	10,169	9,761		11,224	10,895	1,1026	10,516		38	83,221	+ 17,124
Burnley Corporation	1,653	1,909	1,743	1,576		1,819	2,009	1,850	1,738		26	45 187	+ 2,325
Burton-on-Trent Corporation	295	311	308	300		301	294	287	291		25	7,017	− 593
Bury Corporation	1,403	1,635	1,410	1,487		1,491	1,579	1,450	1,533		26½	37,822	+ 1,416
Cardiff Corporation	2,797	2.925	2 914	2 804		3.266	3.295	3,077	3,039		25	77,142	+ 6,251
Chatham and District	1,301	1,372	1,368	1,377		1,486	1,409	1,420	1,378		38	46,804	+ 1,924
Chesterfield Corporation	275	283	292	276		302	295	274	274		25	7.201	+ 245
Colne Corporation	275	312	358	255		293	317	340	278		—	—	—
Cork Electric	555	559	577	559		557	598	583	527		38	19,443	+ 158
Croydon Corporation	*										—	—	—
Derby Corporation	1,051	1,137	1,104	1,072		1,211	1,185	1,142	1,120		25½	29,345	+ 1,791
Dover Corporation	*										—	—	—
Dublin and Lucan	183	172	173	179		191	166	177	154		12	2,273	+ 177
Dublin United	6,257	6,561	6,644	6,469		6,831	6,739	6,802	6,269		38	229,496	− 3,184
Dundee City	1,410	1,443	1,466	1,370		1,457	1,493	1,512	1,386		18½	26,240	+ 726
East Ham Corporation	1,341	1,375	1,351	1,296		1,325	1,330	1,330	1,313		25½	33,848	+ 2
Exeter Corporation	425	433	427	408		478	472	454	439		25	10,449	+ 207
Gearless Motor 'Buses	*										—	—	—
Glasgow Corporation	22,530	22,947	23,117	22,277		23,552	23,809	24,085	23,450		16½	384,589	+ 27,294
Glasgow Subway	1,025	1,015	1,073	1,077		1,050	1,083	1,113	1,097		38	43,275	+ 3,904
Glossop (Urban Elec. Supply Co.)	123	146	150	150		152	153	151	150		39	5,399	+ 518
Halifax Corporation	2,383	2,476	2,507	2,213		2,702	2,545	2,412	2,191		24½	58,601	+ 840
Halifax Corp. Motor Omnibuses	55	56	53	50		52	53	52	51		24½	1,254	− 60
Hastings and District	1,375	1,517	1,389	1,273		1,646	1,734	1,552	1,329		38	41,047	+ 2,480
Huddersfield Corporation	2,734	3,535	2,687	2,674		3.015	3,569	2,849	2,805		25	76,044	+ 6,395
Hull Corporation	3,016	2,992	2,983	3,078		3,168	3,067	3,106	3,028		25	79,230	+ 1,307
Ilford U.D. Council	663	656	634			680	697	695			24	17,179	+ 850
Ilkeston Corporation	144	148	147			152	150	143			25	3,579	+ 164
Ipswich Corporation	594	671	615	587		601	560	553	514		25	14,106	− 677
Isle of Thanet	756	868	735	535		797	752	642	494		51	19.341	− 3,152
Kilmarnock Corporation	172	191	176	162		184	182	182	177		18½	3.364	+ 8
Lanarkshire	2,150	2,250	2,328	2,172		2,442	2,500	2,586	2,491		38	87,619	+ 13,294
Lancashire United	1,857	2,241	2,111	1,889		2,014	2,205	2,020	1,898		38	69,038	+ 2,482
Leeds City	9,101	9,377	9,394	9,084		10,534	10,075	9,823	9,990		26	252,664	+ 21,986
Leicester Corporation	*										—	—	—
Leith Corporation	785	826	787	795		933	913	914	856		18½	16,989	+ 2,014
Leyton U.D. Council	1,718	1,757	1,649	1,641		1,732	1,771	1,787	1,771		25	43,328	+ 617
Liverpool Corporation	13,913	14,069	14,206	13,978		14,964	14,662	14,367	14,219		38½	536,663	+ 25,959
Llandudno and Colwyn Bay	646	605	524	437		842	780	636	547		42½	16,114	+ 881
London County Council	*												
London General Omnibus	*										—	—	—
London United	*										—	—	—
Lowestoft Corporation	*										—	—	—
Maidstone Corporation	226	253	259	251		239	246	256	243		25	5,679	− 157
Manchester Corporation	18,229	18,770	18,442	18,408		19,468	19,099	18,596	18,501		25	481,406	+ 25,159
Metropolitan Electric Tramways	*										—	—	—
National Steam Car	*										—	—	—
Nelson Corporation			233	186				239	209		25½	5.564	+ 425
Newcastle-on-Tyne Corporation	6,531	6,635	6,541	6,523		6,515	6.373	7,004	7,027		25	168.059	+ 5,381
Newport (Mon.) Corporation	857	880	910	865		1,105	1,020	1,013	967		25	24.265	+ 2,263
New St. Helens and District	1,131	1,224	1,291	1,149		1,132	1,187	1,130	1,000		12	14.375	+ 290
Northampton Corporation	691	751	771	732		759	733	725	731		25	18.055	− 1,409
Nottingham Corporation	3,795	3,904	3,875	3,739		4.191	4,187	4,063	4,084		25	98,792	+ 2.797
Oldham Corporation	2,552	2,554	2,344	2,336		2.636	2,504	2,414	2,512		26	66,833	+ 3,937
Portsmouth Corporation		2,917	2,840				3,320	3,370			—	—	—
Preston Corporation	1,035	998	1,031	994		1,187	1,196	1,170	1,123		24½	27,623	+ 3,070
Provincial	2,508	2,762	2,594	2,420		2,885	2,894	2,951	2,547		51	118.884	+ 6,716
Reading Corporation	827	891	843	829		957	975	983	909		24½	21.672	+ 1,226
Rhondda Tramways	1,252	1,238	1,262	1,263		1,404	1,495	1,438	1,410		38	48,572	+ 4,068
Rochdale Corporation	1,808	1,963	1,764	1,768		1,980	1,908	1,799	1,791		25½	47,063	+ 1,655
Rotherham Corporation	1,193	1,238	1,207	1,189		1.678	1.657	1,682	1,789		25½	40,061	+ 9.949
Salford Corporation	5,423	5.667	5,557	5,283		5,489	5.607	5,370	5,611		24½	142,744	+ 7,175
Sheffield Corporation	9,164	9,519	9,329	9,373		10.702	10,599	10,612	10,752		26½	275,637	+ 43,263
Southampton Corporation	1,701	1,682	1,668	1,660		1,828	1,916	1,900	1,737		24½	42.262	+ 3.455
Southend-on-Sea Corporation	1,136	1,074	992	908		1,474	1,351	1,226	1,054		25	26,730	+ 2,878
South Metropolitan Tramways	*										—	—	—
South Shields Corporation	844	848	820	799		971	892	869	864		25½	21,628	+ 909
Sunderland Corporation	1,539	1,598	1,516	1,493		1,732	1.872	1,638	1 679		25	42.297	+ 3,002
Sunderland District	609	604	596	544		685	724	713	640		46	28.755	+ 1,988
Swindon Corporation	217	214	219	223		236	240	225	222		24½	5.199	+ 94
Torquay Tramways	890	786	771	721		958	983	950	815		38	23.328	+ 1,618
Tramways (M.E.T.) Omnibus Co.	*										—	—	—
Tyneside Tramways and Tramroads	652	661	667	594		709	713	709	654		12	8,649	+ 615
Wallasey Corporation	1,446	1,486	1,425	1,321		1,627	1,596	1,442	1,351		25½	37,013	+ 1,922
Walsall Corporation	766	811	828	801		876	838	819	848		39	31.404	+ 3,030
Walthamstow U.D. Council	912	986	960	913		1,091	1,158	1,161	1,110		25	24,837	+ 4,221
Warrington Corporation	463	467	479	461		520	515	507	506		25	12.352	+ 945
West Ham Corporation	3,184	3.245	3,149	3,114		3,152	3,184	3,268	3,243		24½	81.970	+ 2,345
Wigan Corporation	1,555	1,587	1,647	1,567		1,687	1,711	1,762	1,695		25	42,170	+ 3.562
Wolverhampton Corporation	*										—	—	—
Yorkshire (West Riding)	1,657	1,746	1,607	1,566		1,898	1,912	1,806	1.894		39	68,601	+ 6.429

*TRAFFIC RETURNS SUSPENDED.

Owing to the European war, the Government have taken over the railways of Great Britain as from August 4, 1914, and the issue of traffic returns has been suspended. Consequently the traffic returns of the electric railways which usually appear on this page cannot be given.

The Publication of the Traffic Returns of the Tramways marked with an asterisk in the above table have also been suspended during the war.

TRAMWAY DIRECTORIES.

A useful feature of this issue is the directory of electric railways and electric tramways which will be found among the advertising pages. This directory contains the names of the chief officials and the principal particulars relating to each undertaking.

THE TRAMWAY AND RAILWAY WORLD

can be obtained, post free, at the following rates:

For the United Kingdom—
Twenty-five Shillings per annum (including 64 issues, of which 12 are large illustrated numbers).

For Places Abroad—
Thirty Shillings per annum.

Tel. No.: 2948 Gerrard.
Telegraphic Address: "Tramigro," London.

Amberley House,
Norfolk St., W.C.

Digitized by Google

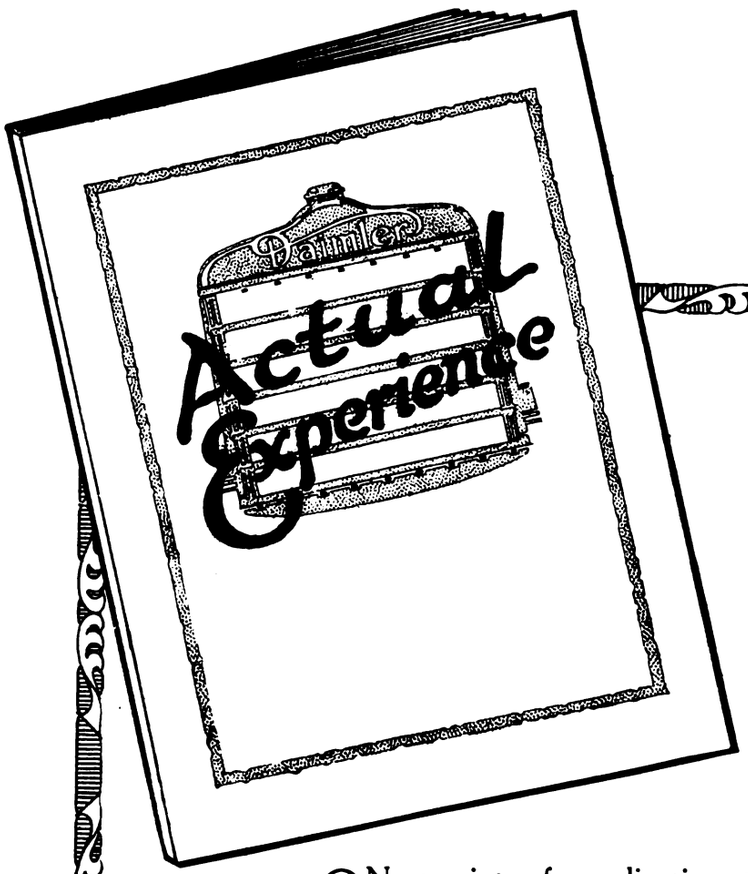

Get to know what others are doing in Motor Traction— write for this book to-day

ON receipt of application this book is forwarded to all users and prospective users of Motor Traction, free of all charge.

IT contains illuminating letters from actual users, and copious illustrations showing the adaptability of the Daimler 2 and 3-ton Lorry, built to War Office specifications, to every-day service.

IT is full of unsolicited statements bristling with facts.

Daimler

DEPOTS: London, Birmingham, Manchester, Cardiff.

The Daimler Company Ltd.
COVENTRY.

DEPOTS: Nottingham, Bristol, Leeds, Newcastle.

745

Digitized by Google

BRITISH **NAPIER** BUILT

BUSINESS VEHICLES

Railway Delays!

These are **Acute** now. Be Independent by Purchasing a

3½ TON **NAPIER** BUSINESS VEHICLE.

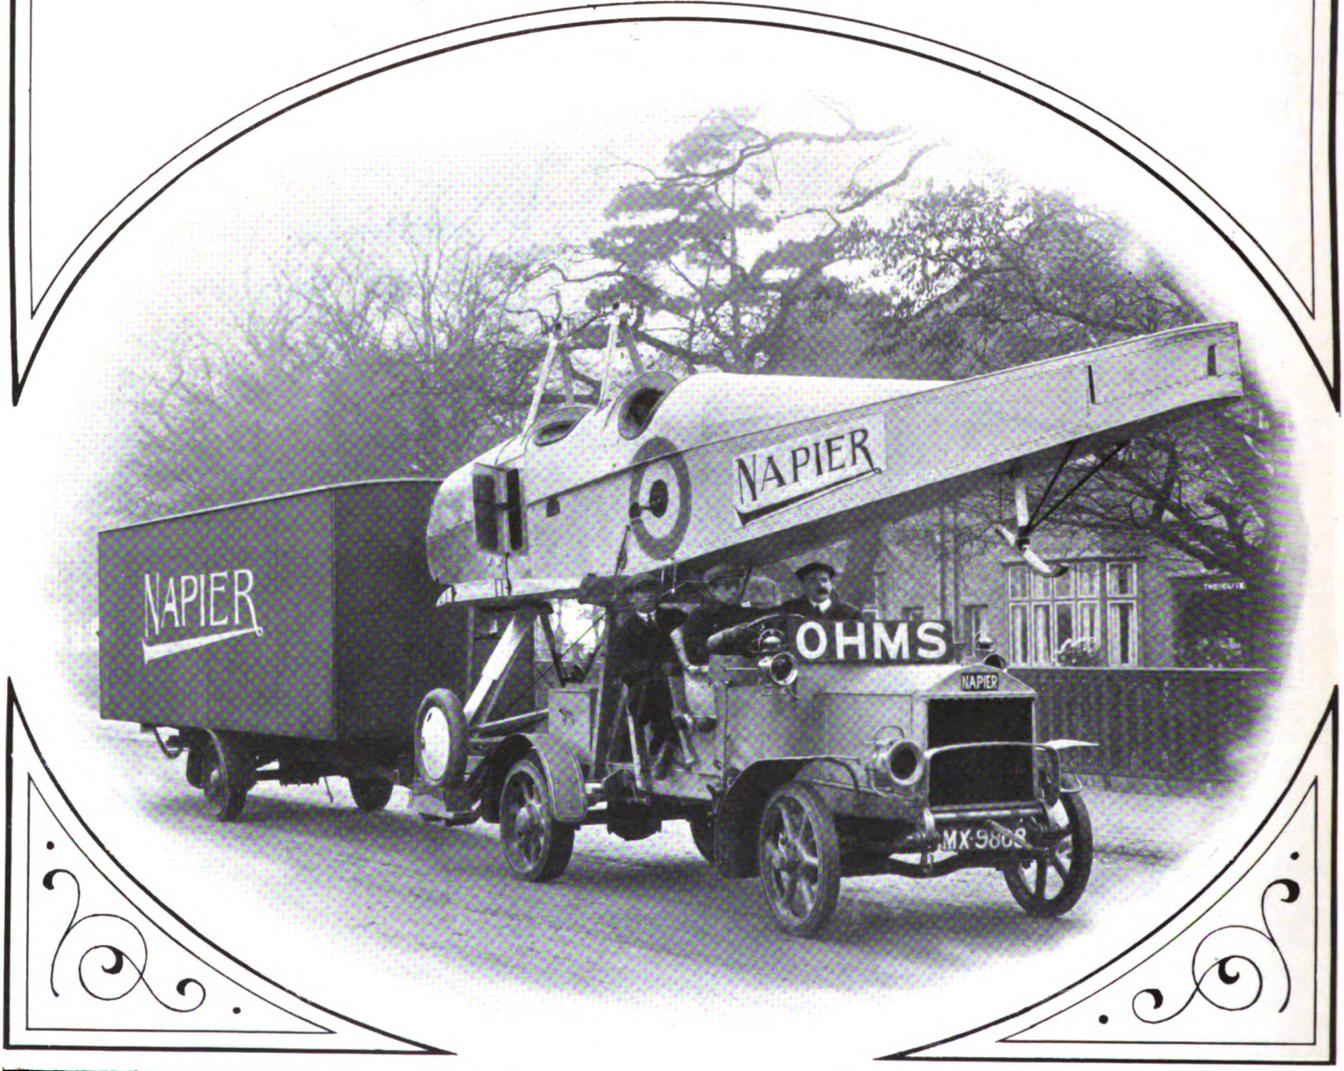

Full particulars from

WORKS:-
ACTON, LONDON, W.

D. NAPIER & SON, LTD.,
14, NEW BURLINGTON STREET, LONDON, W.

Digitized by Google

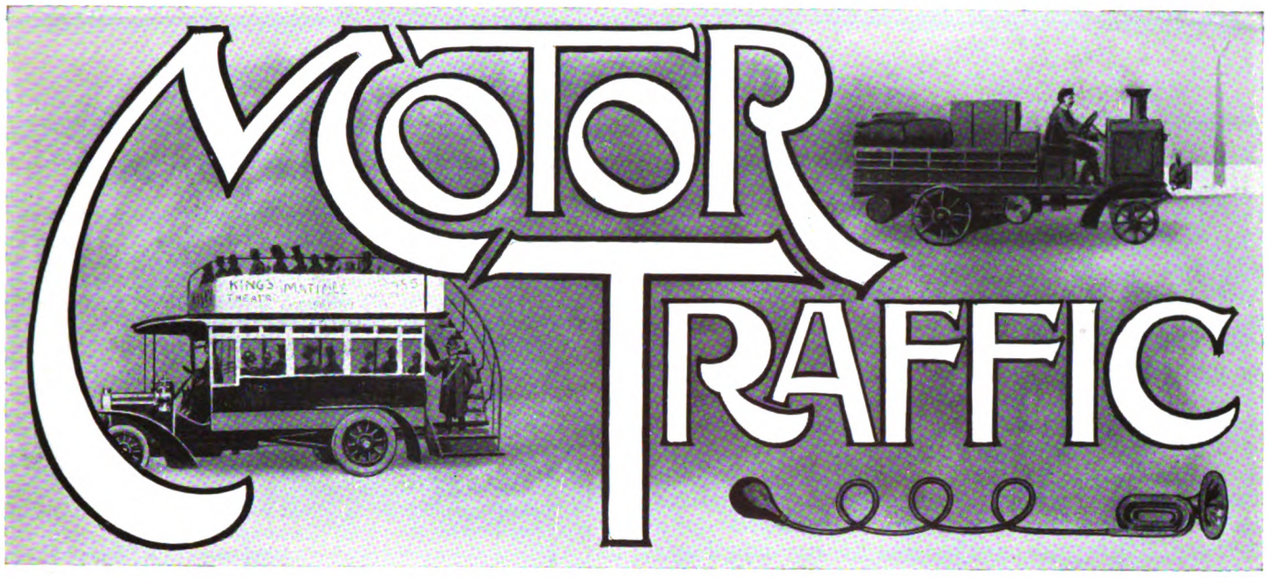

A day or two previous to the writing of these remarks news was received from the Petrol Control Committee to the effect that it was hoped, at the end of the present month, that the state of the petrol supplies would permit of larger allotments to the "civil population." This intimation, it should be added, contains the proviso "subject to Government requirements being fully met," but this qualification may be regarded as a matter of form, since it is hardly probable that the intimation would have been made had there been any serious element of uncertainty in the matter. Various rumours had been prevalent for a week or two before this authoritative announcement was made, and these rumours, strange to say, were neither confirmed nor denied officially. In point of fact, one was treated to the spectacle, so characteristic of Government departments, of individual officials—speaking unofficially—expressing opinions that were diametrically opposed. The hapless consumer of petrol was left to sift the grain from the chaff as best he could. Nor was this the end of his troubles. The extraordinary action by the authorities in regard to substitutes provided him with additional matter for reflection, and this puzzle still remains unsolved. The present position of the large consumer, therefore, is that he may, and very likely will, get more petrol after the end of the present month, but he does not know how much more, or whether he will definitely be permitted to eke it out with substitutes or not.

* * * * * *

The Petrol Control Committee may be a well-meaning organisation, but, judged by results, it is exceedingly difficult to speak of its work in terms of compliment. Although a purely emergency department, established for a certain specific purpose, with no hampering traditions, and composed largely of well-known business men, it has acquired in its brief spell of existence most of the vices that attach to the oldest of Government institutions. It is circumlocutory in its methods, inconsistent, and does not know its own mind, and affords a sufficiently instructive demonstration as to how pervasive is the official taint. No doubt it will be urged in the Committee's defence that it has been confronted by a formidable task, and has had very little time in which to do it, but it seems too often to have adopted the very methods that should be avoided in such conditions. It has discharged its duties with a deplorable lack of courage and grip, and more than once has justified the impression of utter indifference to public interests in the true and larger sense. As to the official point of view in general on the subject of substitutes, it is impossible for any reasonable person to understand what the difficulty is. There is nothing in the terms of the Petrol Committee's appointment to give it any authority at all over fuels other than "motor spirit," as the term has always been understood. Its real purpose is to conserve the supplies, and restrict the consumption of petrol, and it has no mandate of any kind to stop motor transport in any shape or form, apart from the consumption of that commodity. Nevertheless, the Government has proceeded on a much broader assumption, with ludicrous results. The prosecution of chars-a-bancs owners and the ridiculous intimation as regards substitutes are nothing more than vexatious and stupid interference with trade and industry, and are calculated to hinder, rather than help the successful prosecution of the war. These particular matters are not, of course, traceable to the Petrol Control Committee, but that body must take its share of the responsibility that attaches to officialdom in general for an attitude towards motor transport that is both inexplicable and deplorable.

Entanglements to a serious extent appear likely to result from the policy of drift that has come about in the reconsideration of the regulations affecting public passenger vehicles and other heavy motors. The latest departure is to be seen in the Local Government Board suggesting to the Brighton Corporation that they should lease the right of user by motor omnibuses of the roads within their jurisdiction. Seemingly the Board have not quoted any statutory basis upon which a lease can be effected, so we must conclude that the idea is for compounding any sums that could be charged for routes not used before March 1, 1914, under the Act passed a few months ago, for the purpose of reducing road wear during the period of the war. The suggestion on the part of the Whitehall authority provides in unexpected form a justification for one of the main arguments advanced by traction interests against the passing of the Local Government (Emergency Powers) Act, 1916. For the period of the war it establishes a rental for the use of streets that have been constructed for the public convenience. This course is looked upon as such a questionable proceeding in the case of tramway wayleaves that the charges are not embodied in a Bill, but are made the subject of an outside agreement as the condition upon which a local authority supports a company's application for powers. The results have not been altogether

Digitized by Google

MOTOR TRAFFIC.

satisfactory to the tramways, and it is not desirable that motor vehicles should be burdened with imposts other than any that may be provided after due consideration by Parliament. Before the war a practice had grown up of Parliamentary Committees fixing a charge of ⅞d. of a penny per car-mile for railless trolley cars, and a similar rate was imposed for motor omnibuses using the new western Middlesex outlet from London when that thoroughfare has been constructed. Under the Emergency Powers Act, local authorities are already seeking to secure payments far in excess of that sum; West Sussex, for example, is asking 3d. per mile. The suggestion that has been made to Brighton accompanied the Local Government Board's refusal to allow the Corporation to apply during the war for a Provisional Order to enable them to run omnibuses on any route, instead of applying for a renewal of the powers obtained a few years ago to run them on routes for which railless trolley powers have also been secured.

PATRIOTIC WORK AT BRADFORD.

TRAMWAY ROAD MOTORS AS AMBULANCES AND MUNITION WAGONS.

During the past year the Bradford Tramways department has equipped several of its petrol vehicles used in the parcels service for the accommodation of stretchers. Each van has a capacity for eight stretchers. The fittings are of such a character as to enable the vans to be quickly converted into ambulances, which have considerably facilitated the transportation of the wounded. This work is undertaken by the Local Wounded Transport Service Committee, which comprises members of the Bradford Automobile Club and of the National Motor Volunteers.

Another useful form of work undertaken by the department is the conveyance of material for a national munitions factory. In the parcel traffic section of his annual report Mr. C. J. Spencer mentions that a new Tilling-Stevens 3-ton petrol wagon, which was originally intended for overhead equipment work, was temporarily taken over by the parcel department on June 14, 1915, at a cost of £694, and was immediately placed on work for the munitions factory, and has been kept steadily at that work ever since. The remainder of the petrol lorries have been kept fully occupied in work for the education and health departments, in connection with the collection and distribution of food, and on occasions when the

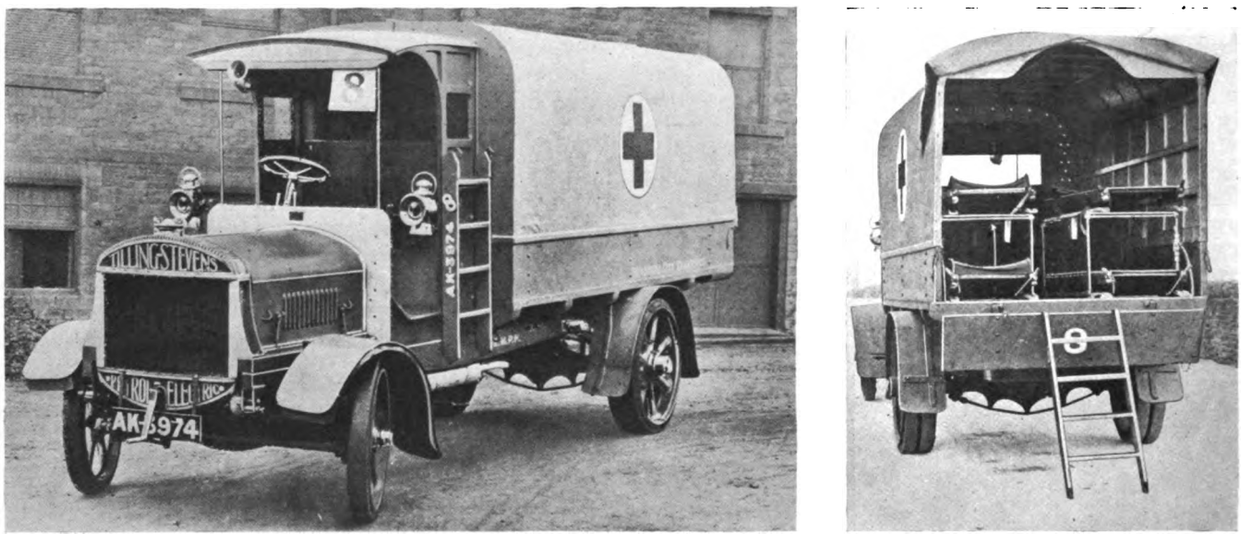

Bradford Corporation Tramway Parcels Van Fitted as an Ambulance.

Another reason that led to the larger application was the disputes that lately attended the Council's refusal to license a second company, which decision was upheld by the courts.

VOLUNTARY MOTOR TRANSPORT.

The Secretary of State for War has authorised the formation of a committee to deal with the question of the organisation of motor transport in the country on a voluntary basis in connection with the National Volunteers. The committee consists of Lieut.-General Sir E. C. Bethune (chairman), Director-General of the Territorial and Volunteer Forces; the Hon. Arthur Stanley, M.P., chairman of the Royal Automobile Club; Major-General Macintyre; Mr. Joynson-Hicks, M.P., chairman of the Automobile Association and Motor Union; Mr. Orde, secretary of the Royal A.C.; and Mr. Cooke, secretary of the A.A. and M.U.

The Hon. Arthur Stanley states that the work of the committee will be to co-ordinate with the objects of the Central Association V.T.C. the labours that have been voluntarily carried out during the war by the Royal Automobile Club and the Automobile Association. The R.A.C. and A.A. have been supplying the Quartermaster-General's Department with cars for the service of officers, transport, and other duties, and it is intended now to see how far this effort can be adopted for the Army Service Corps work and the Volunteer Force.

vehicles had been kept in the shed for repairs it has been very difficult to hire suitable vehicles to cover the work. Largely from the earnings of the motor wagons the income of the parcel department had increased £436, but the expenses had gone up £1,230, due to wages, repairs, and petrol. The parcel revenue had decreased £436, and the margin of surplus was so small as to raise the question of increasde rates. The department had done a large amount of work for the various charitable and patriotic committees in connection with the different funds inaugurated by the Lord Mayor and Lady Mayoress, for which no charge had been made, the cost incurred in this direction being approximately £150.

MOTOR CAR IMPORTS.

The annual statement of trade of the United Kingdom for 1915, issued by the Board of Trade on September 18, shows that in that year, at any rate, the import tax placed on motor cars did not have a great effect on the number imported. The tax, however, did not come into force until September 29. In the four years 1911–14 the number of complete cars imported ranged from 6,778 to 7,520. Up to September 29, 1915, the number was 12,476, and for the remaining three months 3,700. The United States sent 14,892, which is more than double the number supplied by that country in 1914. The chassis imported number just over 3,000, while before the war the number was nearly the same as for complete cars. Imported motor cycles increased from 2,559 in 1914 to 4,531.

Digitized by Google

MOTOR TRAFFIC.

MOTOR TRACTION IN THE ADVANCE.

How vast has been the aid rendered by motor vehicles and rail transport to the victorious advance against the German entrenchments during the month of September will perhaps never be known until the history of the war is written. An idea of the rough ground that ambulances and wagons are capable of traversing is given by the photograph reproduced on this page by the courtesy of the *Daily Sketch*. It is a riverside scene on the way to Verdun, where our Ally has made so gallant a stand. This track was followed to secure safety from shelling.

A glimpse of the activity in the rear that preceded and followed the capture of Combles at the end of September is afforded by a dispatch from the correspondent of the United Press of America. He writes :—" It was only when I reached the advanced artillery lines that I could grasp the methodical progress which has rendered irresistible the Allies' new tactics of advancing by heavy artillery only. The front artillery lines consisted of comparatively light batteries, rushed forward during the night over ground rendered impassable by shell holes to everything but foot soldiers.

" Back from these advanced lines were thousands more soldiers transforming what had been cassion roads into highways capable of sustaining huge automobile convoys, bringing up heavier munitions for heavier artillery that had supplanted the lighter guns.

" Behind these automobile-fed artillery lines was a third army of workmen steadily constructing railways which were bringing up artillery so gigantic, that not only it, but its munitions, were transportable only on specially constructed railways. These huge pieces were supplanting the more transportable automobile-fed pieces already pushed forward. This method marks the advance on the entire 40-kilometre Somme front."

To the foregoing a word must be added to refer to the irresistible sweep of the German trenches, fortified cellars, and machine gun nests that has been made by the British use of the caterpillar tractor sheathed in armour. A reference to the value of this tractor for the haulage of guns appeared in our issue of September 14, but their value as fighting units during the Somme advance came as a revelation to the world.

MOTOR VEHICLES FOR MUNICIPALITIES.

Bolton Council are purchasing a motor ambulance for their fire brigade.

Tynemouth Council are considering the advisability of purchasing a motor fire engine.

Burton-on-Trent Council have decided to consider the question of obtaining a motor fire engine.

Barnoldswick Urban Council have placed an order for a motor wagon for the collection of refuse.

Manfield Council have ordered a 2-ton battery wagon from the General Vehicle Company, at £1,070.

Barnsley Council have directed the fire brigade superintendent to prepare a report on the cost of supplying a motor fire engine.

Army Supply Motors en Route.

Bristol Council have agreed to purchase a third motor fire engine from Messrs. Dennis Bros., of Guildford, for £995. The other two 60 h.p. engines have been in use since July, 1914, and their cost was £905 each.

The Metropolitan Asylums Board have purchased a Garrett steam tractor and three 6-ton trailers, for use at Leavesden Asylum in the cartage of coal 3½ miles from King Langley's wharf. To meet the asylum's requirements 20 tons of coal have to be delivered daily, and the decision to use their own mechanical traction will effect a great saving.

Flaxton Rural Council have been recommended by their surveyor to purchase a 5-ton steam tractor and two tipping wagons. That officer estimates that the vehicles would effect an annual saving of £385, which in two years would equal the purchase price of the tractor and trailers. The Council have deferred coming to a decision for two months.

Order for 2,400 Peerless Trucks.—One of the Allied Governments has placed an order for 2,400 Peerless motor trucks, through Messrs. Gaston, Williams, and Wigmore, of New York. Delivery has already been begun and will continue at the rate of from 80 to 100 trucks a week.

Digitized by Google

MOTOR TRAFFIC.

MOTOR TRACTION FOR MUNICIPAL WORK.

FROM A REPORT BY MR. H. SHAWS, M.Inst.C.E.
(*Engineer and Surveyor of Ilford U.D.C.*)

In accordance with the instructions of the Ilford Urban Council Mr. H. Shaw, M.Inst.C.E., their engineer and surveyor, has presented to that authority a report dealing fully with the advantages and disadvantages of mechanical *versus* horse traction in order to enable the Council to form an opinion whether or not their work can be carried out to greater advantage by the substitution of horse labour by mechanical traction. He observes that it is essential the motors should be kept continually at work, and it is most important that loads up to the guaranteed capacity should always be carried, as it is only by carrying heavier loads than is done by horse labour that economy can be achieved.

In making inquiries from municipalities regarding their experiences of mechanical traction, many expressions of appreciation of such vehicles were received, and Mr. Shaw adds :—" It has also been found by private firms and haulage contractors, after many years of experience, that it is more profitable to work mechanical traction than horse work, and this alone, from a financial standpoint, is conclusive evidence of the superiority of motors in this respect from a contractor's point of view."

RUNNING COSTS.

In regard to the running costs of the four classes of vehicle there seems to be little difference. The electric vehicles in the first case are exceedingly dear ; with the steam, petrol, and petrol-electric vehicles taking second place, the running costs in the three last cases, so far as can be gathered, are slightly more. The electrical vehicle may have an advantage in this matter if the " all in " price of energy can be guaranteed not to exceed the current price of 1d. per unit delivered in the vehicle at the requisite voltage with a full unit.

Statements of running costs and comparisons between motors and horses are often misleading unless due consideration is given to local conditions. Again, some drivers will use 50 per cent. more coal, oil, &c., than others in doing the same amount of work, and the wear and tear as well as the work done will vary considerably according to the varying capabilities of the men employed. The method by which the machines are purchased should also be before you, in order that due weight be given to the capital charge. The figures obtained from other towns must not therefore be taken with any great amount of reliance as being applicable to this district, although they serve to give an idea of what the costs might be should the Council adopt mechanical traction.

It is clear from the published statistics that motor vehicles have been adopted to an unexpectedly satisfactory extent by local authorities for miscellaneous services, such as sweeping and watering of streets, the removal of refuse, haulage, &c., and the fact seems now to be clearly established that in services of this sort, in the great majority of districts, motors show a better economy than horse haulage, and this irrespective of the subsidiary advantages of being able to complete a given piece of work in a shorter time, with the consequent power of selecting the most convenient hours for any particular work and frequently duplicating the employment of a motor by providing alternative bodies for it.

INFORMATION SUPPLIED BY LOCAL AUTHORITIES.

The report proceeds to give the details derived from a large number of local authorities from which the following extracts are taken :—

Aldershot.— One 5-H.P. steam watering wagon, convertible for haulage. " Five tons carrying capacity. In the summer a 600-gallon tank is placed upon the chassis for watering purposes. In winter this is removed and the vehicle employed for collecting house refuse. The vehicle pays in both respects, while the cost for horses remains at 12s. 6d. per day, but at the old figure during the pre-war period of 7s. 6d. per day the vehicle would not show a satisfactory financial return. Efficiency is the main objective, and I think that has been attained."

Barrow-in-Furness.—One 30-35 H.P. (3½ tons) petrol watering wagon and tank. " Most serviceable. Cost about £750 complete. Rubber tires. Although not more economical than horses for street watering, is found to be more convenient. With regard to running costs, everything depends upon method of loading, length of journeys, and whether loads can be run each way. Life, about seven years. Life of tires, approximately some 10,000 miles for rear tires and perhaps slightly more for front tires. For general haulage there is no doubt the petrol-driven wagon is cheaper than team labour where distances covered are over one mile, but not where frequent starting and stopping and slow loading are necessary."

Bedfordshire County Council.—Petrol motor lorries. " Haulage of material over long distances, 3·93d. per ton-mile."

Birmingham.—Two steam wagons used for moving road stone. " Cost £580, including 1,000-gallons interchangeable water tank (£90). One by Messrs. Aveling and Porter ; one by Messrs. Fodens, Limited. Iron tires. Cost approximately 9d. per mile."

Blackpool.—" Although we have only had the electric vehicle since the last week in July, what it has accomplished in this period has convinced me that it will prove a great saving, as the work it can perform during an ordinary day of nine hours is really marvellous. It has already displaced six horse-drawn watering vans, whilst in connection with the washing of our Promenade it has released four men for other work, which is, of course, equal to saving of four wages for this class of work alone. Taking an average day of nine hours, the vehicle waters 48 miles of streets, using twenty-four loads or 18,000 gallons of salt water. The usefulness of the vehicle is not limited to the watering of streets, as it has accomplished good work in connection with the cleansing of sewers ; as with a flush of 750 gallons we are in many cases saved the trouble and expense of having to resort to dredging. The vehicle is also used for the washing of streets in conjunction with our motor sweeping machine. Only half the usual quantity of water is used, whilst the work is done better and quicker. This street sprinkler is equipped with a standard 3½-ton ' G.V. Electric ' chassis and an ' Ironclad ' battery. The battery is charged from the electric plant at the refuse destructor. The tank is removable, so that when the sprinkling season is over a van body may be put on and the vehicle used for dust collection or other purposes."

Bradford.—This corporation have a petrol lorry used for permanent way work (3-ton capacity), the running cost of which, including petrol, lubrication, tires maintenance, and depreciation, works out at 7·8d. per mile. Also a steam lorry, 4 tons 19 cwts. load capacity. No record has been kept of the running cost of this vehicle.

Bristol.—Petrol vans (sweeping machines) used for sweeping wood and pitching. Four cylinder, 10-12 H.P. Capacity for spraying water, 60 gallons. Cost, £638 each (cover for driver extra). Petrol per mile, 10 miles per gallon. Easy to handle and doing good work. Two 3-ton steam vans for general hauling purposes, principally long-distance work. Cost complete, £545 each. Makers, Yorkshire Commercial Motor Company. Three-ton wagon fitted with mechanically-operated tipping gear. Fuel, 1s. 8d. cwt. steam coal per mile. One gallon cylinder oil and one gallon engine oil per 50 miles. Machine complete with driver, fuel, etc., charged to works at rate of 25s. per day to cover all expenses and depreciation. The lorries and sweeping machines have been in use for six months, consequently the engineer is unable to give reliable information regarding maintenance and repairs.

Burton-upon-Trent.—One steam wagon carrying 4½-ton load. " Capital cost, £614. Used to convey clinker from refuse destructor to sewage farm six miles away ; in conjunction with its use a screening and elevating plant has been erected at a cost of £480, and the total annual working expenses, including repairs, amount to £490. Average cost of haulage only is about 6d. per ton-mile. Usual cost of haulage by horses is about 1s. per ton-mile."

Chelsea.—Sixteen 40-H.P. steam wagons. The experience of twenty years has shown that about 40-H.P. is required for an efficient municipal motor van, and a price of £550 is not excessive. Motor vans have been used in Chelsea for municipal purposes since 1900. In all cases the vehicles were purchased out of current revenue, and not by means of a loan. A Leyland vacuum tank has been hired from the makers since 1911 for cleaning out street gullies. Average annual cost of maintenance has diminished from over £60 in 1900 to £40 in 1906.

	1907-8	1913-14
Average total cost per annum for each motor dropped from ...	£254	to £194
Cost, less wages of driver, etc.	£95	,, £77
Average cost of collection of house refuse by horses and vans for six years, 1901-7	4s. 9¼d. per ton	
Average cost of collection of house refuse by motor for four years, 1910-14	4s. 6d.	,,
Cost of two motors used for removing house refuse during last three quarters of 1914 :—		
Motor No. 1—		
Dust collected, average	6 tons 3 cwts 1 qr. per day	
Cost (motor only)	8s. 0¾d.	,,
Motor No. 2—		
Dust collected, average	5 tons 8 cwts per day	
Cost (motor only)	7s. 5d.	,,

Chiswick.—Two steam vans used for all purposes. 850 gallons capacity water vans. Cost, £655 each, with special vacuum gulley-emptying apparatus. Maker, Yorkshire Commercial Motor Company. Impossible to give information as to running cost owing to short service, but approximate consumption of fuel is one cwt. of coke and one cwt. of coal per day on an average of 30 to 35 miles. In addition to body being used for above purposes, it has been provided with a patent vacuum emptying apparatus, a steam jet

Digitized by Google

MOTOR TRAFFIC.

creating the necessary vacuum, and this has been found fairly satisfactory. Council lets vehicles on hire—resulted in a fair return.

Denbigh.—One 5-ton tipping wagon with interchangeable iron tank (1,000 gallon capacity) to fit inside of body and fitted for street watering and sewer flushing (Foden—steam). "Used for street watering, sewer flushing, and haulage of macadam and other materials for road repairs. I do not think there would be any saving in the employment of these vehicles for collection of house refuse, etc.; they pay better in long runs than short ones."

Deptford.—Petrol motor-sweeping broom. The cost for one year's working from February 22, 1915, to February 21, 1916, is as follows—No. of days worked, 289; average mileage per day, 27·78; average consumption of petrol, 3·55 gallons per day and 7·83 miles per gallon; lubricating oil, one gallon to 175 miles; axle grease, 1 lb. to 41 miles. Cost of working the machine for the year stated, including depreciation at the rate of 12½ per cent., is £396, equivalent to 6/2·84d. per mile on roadway sweeping. The cost of the same work by horsed brooms would have been £655, or 10/5·7d. per mile.

Derby.—Steam lorry used for highway work and coal carrying. Cost, £565. Make, Fodens, Limited.

Ealing.—Two 25-H.P. (5 tons) steam wagons; trailer 3 tons. "For street watering and general haulage (unless gradients are very steep). I consider each lorry supersedes 3 to 3½ horse-drawn vehicles. Should roughly say that, including repairs, depreciation, driver's wages, fuel, etc., the costs amount to about £1 per day."

Folkestone.—Two 48–50 H.P. petrol vehicles. "I think I am safe in saying steam rather than petrol for refuse collecting, but petrol rather than steam for fetching and carrying road materials where long distances with good loads can be relied upon."

Glasgow.—Two 30-H.P. petrol hand-tipping (3 tons); several Laffly and Lacre motor sweepers. "While no economy can be claimed in the case of the refuse removal wagons, the street watering machines have proved highly serviceable and more economical than horse haulage. The vehicles are not equipped with interchangeable bodies. My committee has decided to introduce two electrically-propelled vehicles for collection of domestic refuse."

Hambledon.—One 40-H.P. 5-ton petrol (Dennis) side-tipping lorry.

RUNNING COSTS, JULY, 1914, TO JULY, 1915. MILEAGE, 11,184.

	£	s.	d.
Wages (driver and two mates)	220	0	0
Petrol (6 miles per gallon)	116	12	2
Oil and grease	15	19	3
Maintenance on a basis of 20s. per week	52	0	0
Insurance	16	0	0
Tires	73	16	0
Interest	36	0	0
Depreciation (15 per cent. on £660)	99	0	0
	£629	7	5

COMPARISON.

	£	s.	d.
Prices obtained for carting by contract	951	0	6
Cost of running motor	629	7	5
Saving	£321	13	1

Hammersmith.—One 32-H.P. (3½ ton) sheet steel tipping body, interchangeable with cylindrical tipping water tank body (750 gallons capacity). Used principally for scavenging and watering. "This has been engaged in collecting house refuse, but cost was greater than when horses were employed. We discontinued using it for this purpose, and now use it for general haulage work. I am of opinion that this will prove the most economical work."

Kent County Council.—Ten lorries for haulage purposes (J. and E. Hall, Limited, petrol). "In 1910 the County Council purchased two lorries, and this number was increased to ten. In pre-war days the average mileage travelled was approximately 13,500 miles per annum. Consumption of petrol varied from 4·3 to 4·5 miles per gallon, and average daily working cost from £1 7s. 7d. to £1 9s. 5d. The cost of these lorries originally was £780. Have not used interchangeable bodies. Cost of haulage of material per ton per mile is: Lorries about 6d., horsed vehicles 1s."

City of London.—Four 3-ton (7 yds. cubic) dust wagons, interchangeable with water bodies (700 gallons capacity). Thorneycroft steam. The Corporation has ordered six "J" type Thorneycroft petrol motors in place of above (one only supplied). "These wagons have a carrying capacity of refuse of three tons, and are fitted so as to be utilised for collection of refuse or street watering; for the latter purpose they are both efficient and economical, but not quite so economical for the collection of refuse."

Norwich.—Three wagons, 4, 5, and 6 tons respectively. Tipping bodies interchangeable with watering. (Yorkshire Commercial Motor, steam.) Used entirely for carting macadam, coal, coke, and soil, and in summer for watering suburban roads. When carting macadam, quick loading is ensured by employing an electric crane and grab bucket, and quick discharge by tipping; a certain amount of rough spreading is carried out as the wagon travels. Thus the wagons are made to show a satisfactory cost charge on such short haulages. Great care is taken that, so far as possible, the full tonnage is carried at each load.

RUNNING COSTS DURING YEAR ENDED JUNE 25, 1913.

STEAM WAGON "A" (4 TONS), 11 YEARS OLD.

Miles per load (average)	2·182
Cost per load (average)	8s. 6·315d.
Cost per load per mile	3s. 10·895d.
Cost per ton per mile	11·7d.
Depreciation at 10 per cent. included.	

STEAM WAGON "B" (5 TONS), 8 YEARS OLD.

Miles per load (average)	1·93
Cost per load (average)	7s. 7·365d.
Cost per load per mile	3s. 11·34d.
Cost per ton per mile	9·5d.
Depreciation at 10 per cent. included.	

STEAM WAGON "C" (6 TONS), 5 YEARS OLD.

Miles per load (average)	1·3
Cost per load (average)	4s. 2·277d.
Cost per load per mile	3s. 2·67d.
Cost per ton per mile	6·5d.
Depreciation at 10 per cent. included.	

Each Committee is charged 4s. per hour, which is slightly more than the actual cost of running. The hiring rate for horse in this town was 7s. 3d. per day. In this district, when watering, a van covers about 9½ miles per day at a cost this year of 12s. 6d. per horse and man. The gallons of water distributed are approximately 7,400. When scavenging, one horse cart and man collects about and tips 3½ loads of sweepings per day at a cost of 12s. 6d.

Paignton.—One 5-H.P. 5-ton wagon, tipping body, interchangeable with watering tank (Foden, steam). "Proved to be a great economy and convenience, especially for long journeys and in street watering."

Rochdale.—One 3½-ton (net) wagon. Clayton and Company, petrol. "It cost £700, and was put to work in an added area instead of adding four horses, stables, and vehicles. It has done well, and been in use five years, and we are now considering the matter of a further mechanical vehicle."

Sheffield.—The report gave a summary of the statement prepared by the Sheffield cleansing superintendent on the very successful results of a 22 weeks' trial of two Edison electric refuse vans as against horse vans, which was published in our issue of June 8.

VARIATIONS IN RUNNING COSTS.

			Cost of Motor Traction.	Cost of Horse Working.
Anglo-American Oil Co.	Steam	Haulage	5·78 per mile	
Anglo-Mexican Oil Co.	Steam	Haulage	1/2 per mile	
Bedfordshire C.C.	Petrol	Haulage	3·93 per ton mile	
Birmingham	Steam	Haulage	9d. per mile (approx.)	
Bradford	Petrol	Permanent Way Work	7·8d. per ton mile	
Bristol	Steam	Haulage	Charged to works at 25/- per day	
Burton-upon-Trent	Steam	Clinker conveying	6d. per ton mile	1/- per ton mile
Chelsea	Steam	Refuse collection	4/6 per ton	4/9¼ per ton
Deptford	Petrol	Sweeper	6/2·84 per mile	10/5·7 per mile
Ealing	Steam	Watering, haulage	£1 per day	
Hambledon	Petrol	Haulage	£629 7s. 5d.	£951 0s. 6d.
Kent C.C.	Petrol	Haulage	6d. per ton mile	1/- per ton mile
Kingston-upon-Thames	Steam	Watering	2d. to 3d. per mile saving over horses	
Leeds	Motor	Sweeper	7·1d. per mile	
Luton	Steam tractor	Haulage	4d. per ton mile	
Norwich	Steam	Haulage	11·7d. per ton mile, 4 ton	
			9·5d. per ton mile, 5 ton	
			6·5d. per ton mile, 6 ton	
Nottingham	Steam	Haulage	3½d. per ton mile	
Richmond	Steam	...	18/- per day, exclusive of loan and interest	
Sheffield	Electric	Refuse collection	5/0·8 per ton by day	7/0·4 per ton by day
			2/3·4 per ton by night	3/3·2 per ton by night
			4/0·1 per ton by day	3/8·6 per ton by day
			1/10·3 per ton by night	2/6·2 per ton by night
	Motor lorries	General	5·55d. per ton mile	
Southend	Steam	Watering, 1,000 gal. van	29/1 per day	
			1/1·6 per mile	
		630 gal. van	38/1 per day	
			1/- per mile	
Surrey C.C.	Petrol	Haulage	4d. per ton mile	

Digitized by Google

MOTOR TRAFFIC.

"The difference in figures may be caused by many reasons. Running costs, for instance, is a term which may be answered in a variety of ways; then there are the load factors (overloading and underloading), local and traffic conditions, wear and tear and repair items, amount of time in which the machines are standing idle or working, etc., etc.

"In order that you may have all available up-to-date information at your disposal, I quote other figures which have been compiled by an expert on mechanical traction, after full consideration being given to all makes of vehicles and varied conditions. The table, therefore, may be taken as a very fair guide in regard to running costs, and considered with the statements of other municipal authorities, and their explanatory notes and the manufacturers' estimates, a reasonable conclusion can be arrived at.

"For the petrol-electric vehicle, I have taken the running cost as above, as given by T. Tilling, Limited, who work motor lorries, mail vans, etc., with this type of vehicle. The contract prices for this year are higher than they have previously ever been, and it is hoped prices for horse labour will decline considerably when the present hostilities are ended. Against this the prices of fuel, oil, and tires of motor vehicles will also decrease, so that the ruling prices of the present time can be taken as fair comparisons.

HAULAGE WORK.—DAY WORK PRICES.

Journeys between 1 and 2 miles one way.
Horse labour, 12s. Average 5 journeys with a load of about 30 cwts. each journey. Total material, 7½ tons.
Petrol, steam, electric, or petrol-electric vehicles can all average 10 journeys with a load of about 3 tons each journey. Total material hauled, 30 tons.

	s.	d.	
At daily costs of—			
Petrol	33	2	
Steam	33	11	
Electric	33	0	(6·1d. per ton-mile).
Petrol-electric	30	10	(40 tons).
Result, day work rate—	s.	d.	
Horse labour	1	7·2	per ton.
Petrol vehicle	1	1·2	,,
Steam vehicle	1	1·5	,,
Electric vehicle	1	0·2	,,
Petrol-electric	0	9·2	,,

PIECE WORK.

Journeys average 2 miles cartage.
Horse labour, 1s. 4½d. per ton.

	s.	d.		
Result, piece work rate—				
Horse labour	1	4·5	per ton or 8·2d.	per ton-mile.
Petrol vehicle	1	1·2	,, 6·6d.	,,
Steam vehicle	1	1·5	,, 6·7d.	,,
Electric vehicle	1	0·2	,, 6·1d.	,,
Petrol-electric	0	9·2	,, 4·6d.	,,

NOTE.—In a paper read last month by a responsible official of the Sheffield Corporation it was stated:—"An advantage of motor transport as compared with horse haulage, is that the motors would serve a radius of 30 or 40 miles per day, as compared with 12 miles for horse haulage."

"In calculating rates of the motor vehicles, I have allowed the same cost for a two-mile journey as 1¾ miles or 1¼, and for a 3-ton load, whereas some of the 3-ton vehicles carry between 3 tons and 3 tons 17 cwts. In order to explain more fully the meaning of the first part of this statement, it seems advisable to point out that when on piecework as soon as a horse vehicle has gone over one mile the two-mile rate is paid. The same rate per mile has also been allowed for returning empty to fill up, as when full, also the extra distance rate. You will therefore see that, although a saving will be made of practically 3d. to 3½d. per ton in the cost of petrol or steam vehicles, and 4½d. per ton by an electric vehicle, and 7½d. per ton by a petrol-electric vehicle, it would really work out in practice at more than this."

RESTRICTION OF OMNIBUS ROUTES.

At a meeting of local authorities in West Sussex, it was resolved to ask for a contribution of 3d. per mile from owners of public motor vehicles who desire to run on routes beyond those used on or before March 1, 1914. The surveyor of Horsham Urban Council has reported that such a contribution would not suffice to meet the cost, while Steyning West Council considers it to be excessive.

Linlithgow District Committee have declined to sanction a new route for the chars-a-bancs of the Edinburgh Motor Company at Queensferry.

Aldershot and District Traction Company have been refused permission by Horsham Council to extend one of its routes from Cranleigh to Horsham. Authority to run has been granted by the authorities concerned to a new service from Guildford to Bramley.

WOMEN AS MOTOR-CAB DRIVERS.—Although many women are driving motor cabs ordered from private garages, numerous local authorities have refused to license them as drivers of cabs plying for hire. Leeds is the latest instance, but the Military Tribunal have sent a recommendation to the Watch Committee in favour of licenses being issued.

ALTERNATIVES TO TRAMWAYS.

QUESTION UNDER CONSIDERATION AT CHESTER.

Chester Corporation, on September 27, on the motion of Alderman J. Jones, chairman of the Tramways Committee, adopted the following recommendations presented by that committee:—"That the city surveyor prepare a report, with full particulars and estimates, of the work necessary to re-lay such portions of the tramway track as require to be renewed, giving in connection therewith full particulars of the work and expenditure which will be required to be incurred in respect of the streets and roads outside the tramway track to adapt them for modern traffic, assuming that the tramway track is taken up and abolished; and that after the preparation of this report the electrical engineer prepare a report containing full particulars and estimates of the work required to renew and bring up to date the tramway undertaking, and to adopt alternative methods of traction."

In reply to a question, the Mayor (Ald. J. Frost) stated that the Tramways Committee would have no power to carry out any scheme. The matter would have to be decided by the Council.

The tramways, which were opened in 1903, have a route length of 3·59 miles and a total length of track of 6·4 miles. For the year ended March 31 last the accounts showed a surplus of £1,485 18s. 3d. as against a surplus of £903 7s. 5d. for the previous year. The increased surplus was mainly accounted for by the reduction in the power expenses, which for 1914–15 cost £2,256, averaging 1·56d. per car mile, and this year £1,828, averaging 1·30d. per car mile. A reduction of the price per unit charged by the Electricity Committee made a difference of £241 in the total cost for the year, and in addition a sum of £100 was allowed to cover the overcharge in previous years. The energy is derived from a hydro-electric installation on the River Dee.

The chairman of the Tramways Committee, in presenting the accounts, described the increase of £73 in the traffic revenue as being very gratifying when it was considered that the car mileage for the year was 30,727 miles less. The overhead equipment and the rolling stock had been kept in an efficient state of repair. A sum of £438 had been expended on repairs to permanent way as against £310. Had it been possible to obtain materials, more would have been done in this respect during the past year, but unfortunately they could not find labour nor the materials at any reasonable price to go on with at the present time. The reserve fund now stood at £6,557 15s. 3d., which represented 8 per cent. of the total capital expenditure.

NAPIER FOR A BUSINESS FIRM.

The accompanying photograph illustrates a 3½-ton model Napier business vehicle recently delivered to Roneo, Limited, makers of office appliances, etc., of High Holborn, London, W.C. As is well known, Napier business vehicles are being taken by the Government,

and permission can only be obtained for the sale of vehicles to firms engaged on Government work. Messrs. Roneo, Limited, are at present engaged on urgent Government requirements, and they felt the necessity of an efficient road vehicle which, in the present difficulties of transport, would supplement railway collection and delivery.

Digitized by Google

MOTOR TRAFFIC.

BALANCED WINDOWS.

A Useful Contrivance for Rail and Road Cars.

A recent catalogue and leaflets issued by Beckett, Laycock and Watkinson, Limited, of Willesden, N.W., contain illustrations and descriptions of a number of useful inventions. These are all of proved merit, the utility of the contrivances having been demonstrated by the extensive use made of them by railway, tramway, road motor, and steamship undertakings. Now that tramway lines and roads are undergoing deterioration owing to the lack of labour and the difficulty of securing materials, the need for the accessories referred to has become pronounced. Especially is this so as regards motor cars and omnibuses.

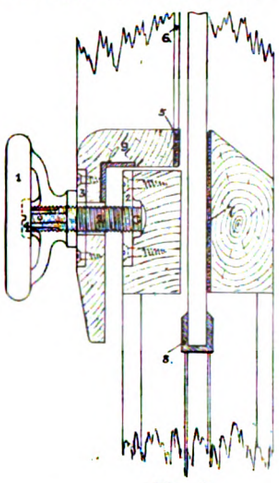

Fig. 1.

Fig. 2.

Locking System for Securing Window in Any Position.

The accompanying illustrations (Figs. 2 and 3) show closed and open windows to which the "Beclawat" balance has been applied. Fig. 1 is a sketch of the component parts of the tightening device for balanced sliding windows. This locking arrangement is operated by one or two turns of the handle, the effect being to place an even pressure completely round the glass in any position, thus eliminating rattle or noise due to the vibration set up by uneven rail or road surfaces. The device was first introduced for railway, tramway, and steamship traffic, and owing to its popularity the manufacturers were induced by various builders to bring out the fitting for motor vehicles. It has been widely adopted for motor cars and omnibuses, including vehicles operated by the Bath Electric Tramways Company and the Gateshead Tramways Company. The former company's conveyances are also fitted with the blinds manufactured by Beckett, Laycock and Watkinson, Limited, who have further supplied the Gateshead and other undertakings with ball-race runners for sliding doors.

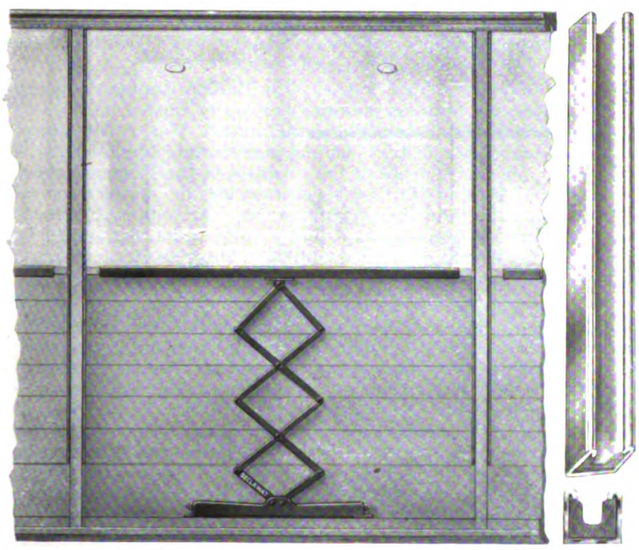

Fig. 3.—Each Balancer an Independent Unit.

Fig. 4.

One advantage of the balancer and window lift is that each window can be operated separately, thus obviating the use of expensive gearing. For doors and end windows the device can usually be arranged without cutting the woodwork. This is done by inserting it between the panels. When used for the top-deck windows of a tramcar, the springs are fitted a few inches from the car deck, so that the cleaning of the floor is not interfered with.

Another speciality, manufactured by Beckett, Laycock and Watkinson, Limited, and supplied by them to many motor body builders, is the "Beclawat" silent window channel. Among the uses to which this is applied is the prevention of rattling by windows and wind screens. An illustration of this fitting is given in Fig. 4. It consists of a special metal channel with a stout felt lining, which will not become detached or get out of place when fitted. It is very easy to fit, and may be let in flush or fastened direct on pillar.

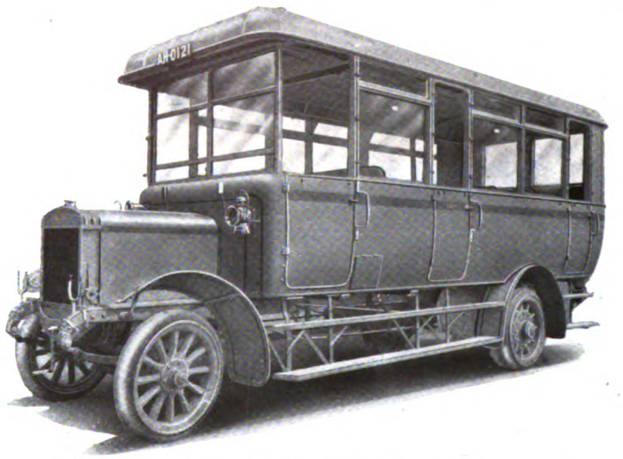

Fig. 5.—Omnibus Windows Fitted with Balancer.

COMMERCIAL VEHICLES OF GREAT BRITAIN.

The above headline is the title of an 84-page illustrated publication issued by the B. F. Goodrich Company, Limited, 117-123, Golden Lane, London, E.C., whose tires have achieved a high reputation. Illustrations, printing, and paper enhance the great value of the volume. The petrol, electric, and steam vehicles of 48 makers are dealt with, each machine and its specifications occupying a separate page. The idea is a unique one, and the manner in which it has been put into shape, despite the drawback of vehicle makers being engaged on Government work, is testimony to the spirit of enterprise that animates the B. F. Goodrich Company. On account of the war the firm have found it impossible to quote prices in this issue, but they hope to do so in a future volume. The present publication will, however, prove of great value to users and intending users of motor vehicles, for it enables them to institute a profitable comparison of the various types in order to decide which make of vehicle is likely to serve them best, and in which direction to look for further particulars. To broaden the basis of its appeal, and to bring it into closer harmony with its comprehensive purpose, the work includes the following articles, etc., dealing with the various aspects of band tire service:—(1) Weights of materials commonly hauled by commercial vehicles; (2) fundamental questions involved in changing from horse to motor delivery; (3) relation of tire equipment to cost of maintenance of commercial vehicles; (4) devices that make for commercial vehicle efficiency; (5) British standard rim diameters for solid tires for automobiles; (6 and 7) information concerning the Commercial Motor Users' Association; (8) traffic rules and regulations. There are also a list of Goodrich depots in Great Britain and Ireland, and post-cards (*a*) requesting catalogue from commercial vehicle manufacturers; (*b*) requesting Goodrich catalogue. Each chapter has its special value, but attention may be directed to three and four. So far as we are aware no publication has previously brought together illustrations and descriptions of mechanical aids for assisting loading, increasing carrying capacity, and expediting unloading.

Digitized by Google

MOTOR TRAFFIC.

MOTOR TRAFFIC NOTES.

RUBBER SUBSTITUTE.—Mr. John Flint, of Sydney, claims to have succeeded in producing an efficient substitute for rubber at 5d. to 6d. per lb.

A CHESTER SERVICE.—Wirral Council having granted a licence, the Crosville Motor Company have restarted their service from Chester to New Ferry.

PORTSMOUTH TRAMWAYS MOTOR VEHICLES.—The road motor machines in use by the Portsmouth Tramways Department comprise a tower wagon and a general purposes wagon.

SUGGESTED ROAD CHARGE FOR YORK OMNIBUSES.—York Tramways Committee have deferred the consideration of the Streets Committee's request to contribute towards the upkeep of the roads used by their omnibuses.

LONDON GENERAL OMNIBUS COMPANY'S EMPLOYEES.—Men employed in the engineering and traffic departments of the London General Omnibus Company have been granted increases in their pay. The minimum rate for drivers is now 7s. per day, and for conductors 6s.

A PARIS OMNIBUS SERVICE RESUMED.—On the main boulevard from the Madeleine to the Bastille, the Paris omnibus service has

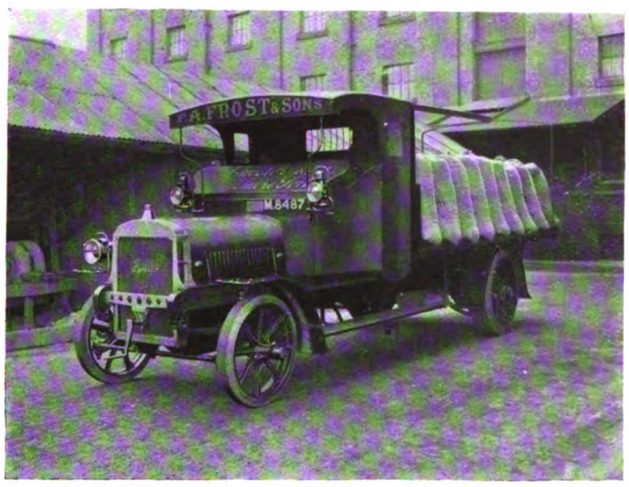

45-h.p. 4-Ton Halley Lorry Supplied to a Firm of Millers at Chester.

been resumed. The vehicles are new ones, based on war experience. When the old machines were called up they were refitted with meat and troop transportation bodies.

WAR OFFICE CONTRACTS.—Recent War Department contracts include driving chains supplied by the Coventry Chain Company, Spon End Works, Coventry, and by H. Renold, Limited, Manchester, and non-skid chains for motor vehicles by the Parsons Non-Skid Company, Limited, Store Street, London, W.C.

MUNITIONS MECHANICAL TRANSPORT DEPARTMENT.—It is stated that this department is likely to remove to new offices at the Constitutional Club, which has been taken over by the Government. Sir Albert Stanley, the managing director of the London Traffic Group, is the director-general of the department.

MOTOR OMNIBUSES TO TRANSPORT SURVEYORS.—On the occasion of the holding of the annual meeting of the North Eastern District of the Institution of Municipal and County Engineers at Wath-upon-Dearne on September 30, the visitors were conveyed in motor omnibuses to inspect new work at Wath Wood reservoirs.

YORK SUNDAY SERVICE DISCONTINUED.—Owing to the shortage of the cleaning and overhauling staff the Sunday running of the electric omnibuses at York is to be discontinued for the present. The Tramways Committee have agreed to extend to the omnibuses the halfpenny fares for scholars when going to and from school.

MOTOR LORRIES SUPPLEMENTING A RUSSIAN RAILWAY.—A message from Petrograd states that a complete service of motor cars has been started between Petrograd and Archangel to supplement the railway. The road, over 600 miles in length, has been newly constructed for the purpose. The cars, mostly heavy lorries, were supplied from the United States.

CHARGING BATTERY VEHICLES AT CAPE TOWN.—The rate for charging battery vehicles at the Cape Town electricity station is 1d. per unit nett for energy supplied between 11 p.m. and 8 a.m. At other hours the ordinary tariff is in force. In his annual report, Mr. W. F. Long, the city electrical engineer, anticipates a large increase in the employment of electric vehicles.

OMNIBUS SCHEME AT CAERPHILLY.—A committee of the Urban Council are considering a proposal to run motor omnibuses, as the company now operating the services have refused to contribute to the upkeep of the roads. Councillor Salathiel, who suggested the scheme, has stated that there might be a way to secure the vehicles required without having to obtain a Provisional Order.

ACCIDENTS DUE TO RESTRICTED LIGHTING.—At an inquiry into the death of a person who was killed at Southwark by a motor omnibus, the driver was asked by Dr. Waldo, the coroner, what could be done to prevent so many deaths from street accidents at night. The driver suggested that the public should be allowed to cross streets only at fixed points, to be denoted by red lamps.

CONVEYANCE OF MUNITION WORKERS.—At the request of the Ministry of Munitions a motor omnibus service has been started from Streatham Common to Woolwich, via Penge, Bromley, and Chislehurst. In reply to an objection raised by Chislehurst Council, the London General Omnibus Company have stated that the service follows the route laid by the Ministry of Munitions. Single deck vehicles are used.

WOMEN CASHIERS FOR THE L.G.O. COMPANY.—In consequence of many of their cashiers having been called to the colours, the London General Omnibus Company is replacing them with educated women. Advertisements have recently appeared asking such women, between the age of 25 and 35 years, to apply to the L.G.O.C. Training School, Milman's Street, Chelsea, S.W. There has been a large number of applications, and after a period of training the substitutes have taken up duty in various depots.

BATTERY VEHICLE WORKING COSTS.—The 3-ton battery tipping wagon and watering tank supplied to Ipswich Town Council by the General Vehicle Company, Limited, ran 6,154 miles during the year ended March 31 last, and conveyed 9,000 tons of material. The inclusive cost of working, with allowance for maintenance and depreciation, was £396 16s. 7d. Of electric energy 7,961 units were used at 1d. per unit. Mr. Mead, the borough engineer, described it as reliable, economical, and simple to drive.

C.A.V. CAR LIGHTING SYSTEM.—C. A. Vandervell & Co., Ltd., of Acton, W., have published an artistically-printed abridged catalogue of 20 pages. This illustrates and describes the dynamo car-lighting system, which is referred to as "simple, safe, and certain." It is installed on many omnibuses, motor cars, and the London County Council's trailer cars. Car illumination by electricity is pre-eminently associated with the name of C. A. Vandervell & Co., who give a guarantee against defects of manufacture. Two pages are devoted to C.A.V. electric horns and klaxon horns.

DUNLOP COMPANY'S NEW MILLS.—The Dunlop Rubber Company have acquired the business premises previously carried on by Tire Yarns, Limited, and Fabric Weavers, Limited, two of the largest mills in the Rochdale district, for the manufacture of cloth for the company. The transference of the premises to the Dunlop Rubber Company has been marked by a generous gift by the directors of the two companies and the present owners. As soon as the deeds had been signed it was suggested that a subscription list should be opened for the benefit of auxiliary military hospitals in the district, and in a few minutes the sum of £1,400 was subscribed.

MILITARY CLAIMS ON OXFORD OMNIBUS COMPANY'S STAFF.—On the ground that they were urgently required to maintain the motor omnibus services, absolute exemption from military service was applied for at Oxford for 26 employees of the Electric Tramways Company by Mr. A. H. Tyler, the general manager. One was the traffic superintendent. Mr. Tyler stated that but for the fact of the supply of petrol having been cut down nearly 50 per cent., and the consequent reduction in the number of omnibuses running, the company would be much more seriously embarrassed than it was. At present, owing to shortage of drivers, men were working overtime, and the inspectors frequently had to act as drivers. Regarding the night foreman in charge of the workshops, it was said that his duty was to superintend the repairs. The military representative asked if the manager could not undertake the work of the traffic superintendent, and Mr. Tyler replied, "Certainly not." Mr. H. Holmes, engineer, said they had applied to the Labour Bureau ever since the war began to get skilled men without success. All the men were exempted so long as they remained in their present occupation, except three (whose cases were adjourned for a month for the men to be examined by the Medical Board), and the night foreman was exempted for two months.

Digitized by Google

Registered Trade Mark

WORKS

675, Commercial Road
London, E.

which is now their . . .

ONLY ADDRESS

THERMIT LTD.

Entirely British

Owned and Managed

THERMIT LIMITED
675, Commercial Road
LONDON, E.

Telegrams:—
"FULMEN STEP LONDON"

Telephone:—EAST 4157

Digitized by Google

Telegrams:
"THOUGHTFUL, LONDON."

THE

Telephone
8186 LONDON WALL

LORAIN STEEL CO.

36-38, New Broad Street, London, E.C.

Awarded "GRAND PRIZE" at Panama-Pacific International Exposition, 1915.

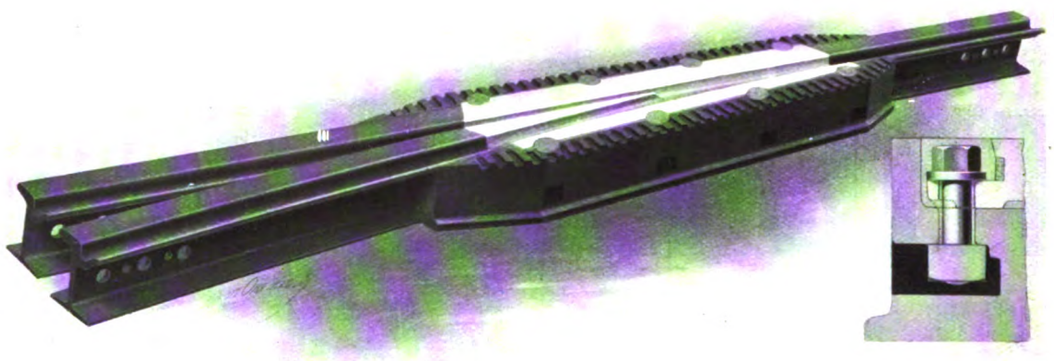

Ironbound "Guarantee" Construction with Manganese Steel Inserts fastened to machined bed with Heat Treated Chromium Steel Bolts run in with white metal and caulked.

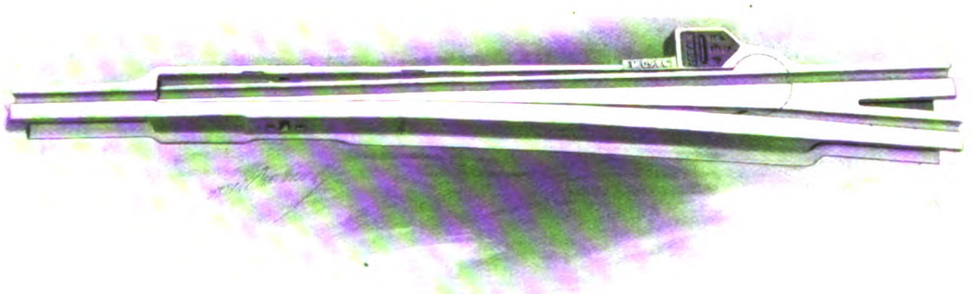

SOLID MANGANESE TADPOLE TONGUE SWITCH

Made with either grooved or plain Tongue.

Digitized by Google

The CROSSOVER

imposes a maximum Strain on your Car-Lighting LAMPS.

Even though speed may be reduced, bumps, jolts, jars and shocks cannot be avoided. The alternative is to use Lamps which are designed to resist the inevitable stress of traction conditions.

WOTAN

Drawn Wire

TRACTION TYPE LAMPS

combine the high efficiency of the Tungsten filament with greatest possible strength.

Glance at the accompanying illustration of the Lamp, and consider the strength of design. Note the short lengths of helical filament—the adequate method of support. No chance of neighbouring lengths of filament becoming short-circuited, no sharp bends.

Price Lists on Application:—

SIEMENS BROTHERS DYNAMO WORKS LIMITED, 38 & 39, Upper Thames Street, London, E.C.

Digitized by Google

Turbo-Alternators

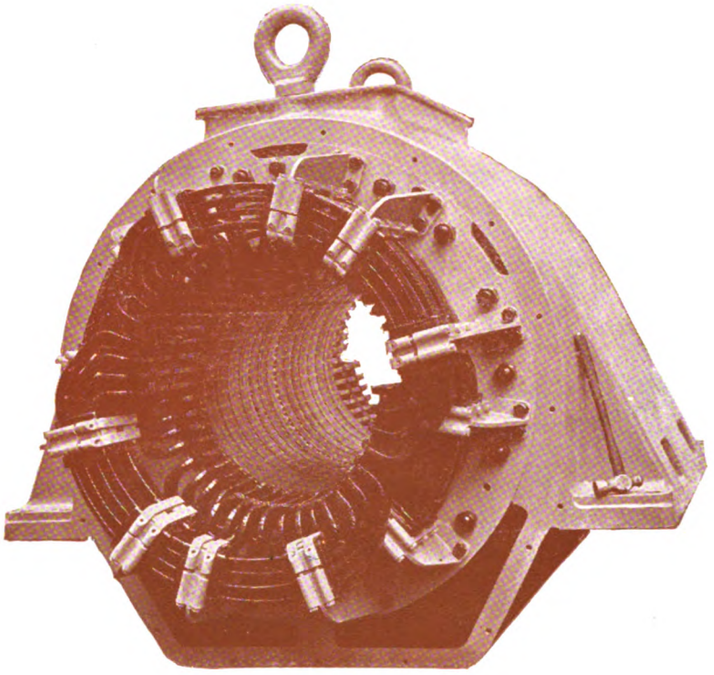

Soundness of Construction

THE world-wide reputation enjoyed by Dick, Kerr & Co., for the quality and reliability of their products, is due to soundness of construction, correct design, and skilled workmanship. Added to that—our very long and extensive experience in the design and manufacture of all classes of Electrical Plant, gives the purchaser confidence and assurance of successful operation.

DICK, KERR

& CO., LIMITED.

Head Office: ABCHURCH YARD, CANNON ST., LONDON, E.C.

Branch Offices: Manchester, Newcastle, Tokyo, Sydney, Johannesburg, Buenos Aires, Rio de Janeiro, and Milan.

Digitized by Google

Large D.C. Generators

for

Electric Lighting *and* Power Stations.

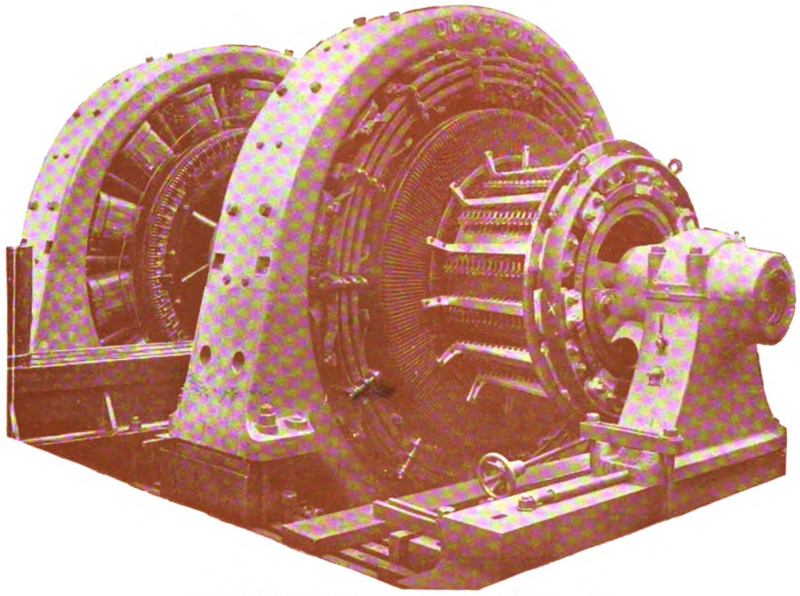

Two D.C. Compound Wound Interpole Generators
1000 K.W., 14/14 Poles, 300 R.P.M. 215/235 Volts.

D.K. Generators merit your consideration through the following features:—Skilled workmanship, strong mechanical construction, sound electrical design, subjected to thorough and exacting tests during the various stages of construction, efficient and economical in service.

DICK, KERR

& CO., LIMITED.

Head Office: ABCHURCH YARD, CANNON ST., LONDON, E.C.

Branch Offices: Manchester, Newcastle, Tokyo, Sydney, Johannesburg, Buenos Aires, Rio de Janeiro, and Milan.

Digitized by Google

Specify B.T.H. Direct Current Generators for your railway lighting and power supply, and be assured of negligible maintenance costs.

B T-H **Direct Current Generators**

are thoroughly reliable and will operate continuously at full rated load with low temperature rise.

By the use of commutating poles, heavy overloads can be carried without injury, and owing to skilful design, care exercised in selecting the material, high-class workmanship, severe inspection and tests before shipments, these Generators have become the standard for Quality.

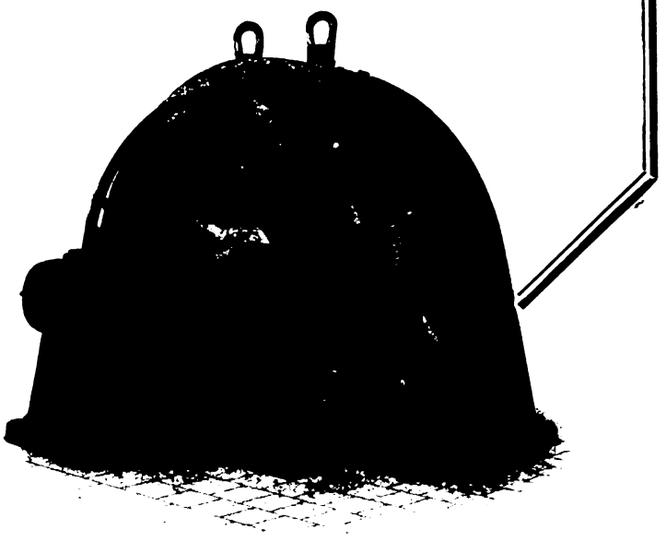

The British Thomson-Houston Co. Ltd.,

ELECTRICAL ENGINEERS & MANUFACTURERS

Head Office and Works: Rugby, England

FREDERICK SMITH AND COMPANY,

WIRE MANUFACTURERS

(Incorporated in the LONDON ELECTRIC WIRE CO. and SMITHS, Ltd.),

Contractors to British and Foreign Governments and Railway Companies.

Telegraphic Address: "ANACONDA, MANCHESTER."

COPPER WIRE

100 Per Cent. Conductivity.
ALL SIZES TO ·001.

Hard Drawn H.C. Copper Line Wire; Special Tinned Wire.

COPPER TROLLEY WIRE

Specially Prepared and Tested; Half-Mile and Mile Lengths.

BRONZE TROLLEY WIRE

HIGH STRAIN. Unequalled for Durability Combined with Conductivity.

SILICIUM BRONZE WIRE

("COG WHEEL BRAND"), C QUALITY, for TELEPHONE LINES, &c.

PHOSPHOR BRONZE SPRING WIRE.

ALUMINIUM WIRE AND STRIP FOR ALL ELECTRICAL PURPOSES.

Anaconda Works, Salford, MANCHESTER.

Digitized by Google

The STANDARD INSULATING VARNISHES & COMPOUNDS

are STILL THE BEST for retaining perfect insulation in the windings of Traction Motors, and all other Electrical Machinery.

Their periodical use entirely prevents the deleterious penetration of moisture, oils, acids, etc., to delicate parts, and cuts out all chances of breakdown due to faulty insulation with its accompanying costly delay and heavy repair bills.

STANDARD INSULATING VARNISHES are used *regularly* by the principal TRAMWAY COMPANIES in the U.K., by the leading Electrical Manufacturing Firms, Lighting and Power Stations, etc.—in which fact can be discerned ample proof of their *practical utility*.

Catalogue and Expert Advice from
PINCHIN, JOHNSON & CO., Ltd.,
26 Bevis Marks, London, E.C.

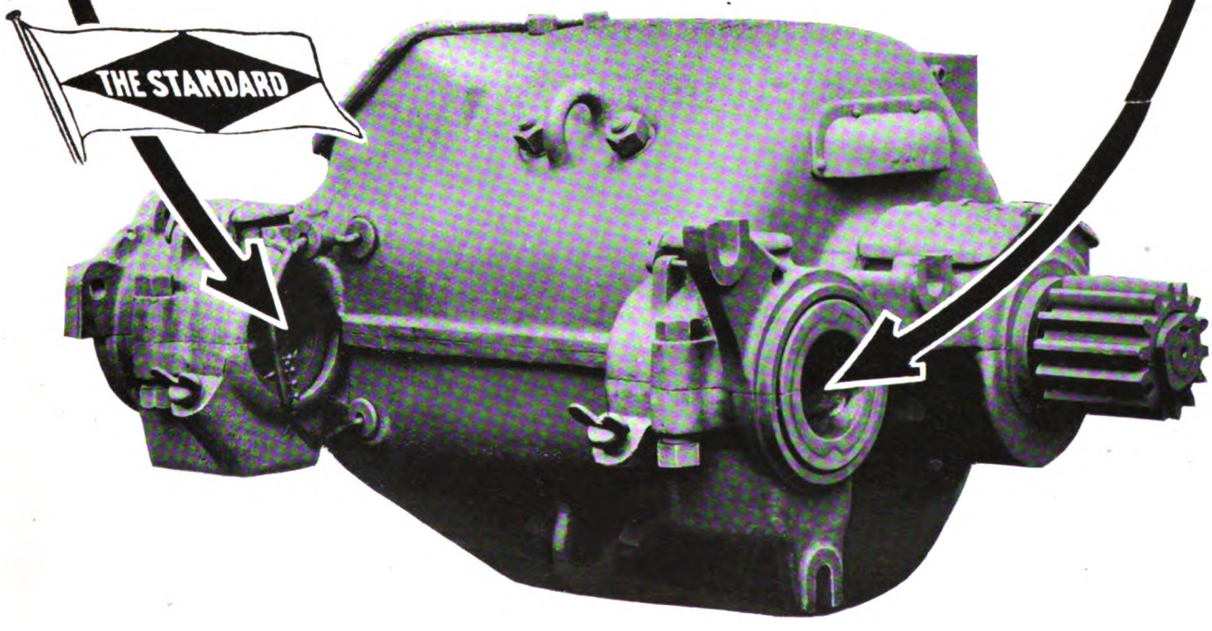

Digitized by Google

HADFIELDS LTD

WORKMEN EMPLOYED OVER 6000 — HECLA & EAST HECLA WORKS SHEFFIELD, ENGLAND. — WORKS AREA 110 ACRES

Hadfield's Patent 'Hecla' Point

Made of Hadfield's Patent 'ERA' Manganese Steel.

The only Point on the Market with a perfect and continuous Bearing for the full length of the Tongue.

SOLID. NO PIN. NO TROUBLE.

Bearing Surface at Heel End.
Actual width of effective bearing area in this design only 1¾ in. around pin.



The area of the bearing surface where the heel of the tongue rests has been increased to the utmost limit consistent with utility.

The tongue can be renewed, or adjusted for wear, in a few minutes without interfering with the paving.

The patent mechanism for moving the tongue is acknowledged to be unique for its simplicity and originality of design.

Solid Bearing throughout.

Hadfield's are Specialists in Designing & Constructing Complete Lay-Outs and Junctions of every description.

SOLE MAKERS OF

HADFIELD'S PATENT **ERA** MANGANESE STEEL

THE SUPREME TRAMWAY POINTS, CROSSINGS

MATERIAL FOR SPECIAL TRACK-WORK ETC.

Digitized by Google

CONTENTS

	Page
London and North Western Railway Electrification (Illus.)	335
The Woods-Gilbert Rail Planer and Grinder (Illus.)	342
The Zürich Tramways	343
Editorial Comments—The Overhead Electric System	344
Halfpenny Fares	344
Rail Traction in the War	345
Trade after the War	346
Summer Time Act: Lives Saved	346
Utilisation of Tramways for Goods Traffic	347
Department of Commercial Intelligence	347
Charing Cross Bridge and South Eastern Railway Improvements	348
London Underground and L.G.O.C. Operating Department Efficiency Meetings	348
The Corrosion of Trolley Wire (Illus.)	349
Edinburgh Tramway Proposals	350
London County Council Tramways	351
Regulations Relating to the Tramway Department	351
London General Omnibus Company Safety Campaign	354
Women Drivers and Conductors	354
Improved Destination Lamps (Illus.)	354
Omnibus Traffic in Worcestershire	354
Russian Tramways Laid on Ice	355
Newcastle Tramways War Service	355
Raid Warnings and Car Services	355
Purchase of Steel for Tramways	355
Financial Reports and Meetings	356
Contracts and Orders	358
Personal	359
Tramway and Light Railway Notes	361
Patent List	363
MOTOR TRAFFIC SECTION	367
Progress of the Battery Vehicle	368
Straker Machines for the Russian Government (Illus.)	369
French Army Transport	369
Northampton Tramways Parcel Van (Illus.)	370
Thornycroft Chassis in Peace and War (Illus.)	370
Institution of Automobile Engineers	371, 374
Petrol Allowances	373
Motor Vehicles for Municipalities	373
Motor Traffic Notes	374
Provincial Omnibus Owners and Excess Profits Duty	374

Traffic Returns 363-364

Directories of Electric Tramways and Railways .... xxiii-xxx

Municipal Tramways xxiii-xxiv
Company Tramways xxiv-xxvi
Particulars of Track and Equipment xxvii-xxx
Buyer's Guide xvi-xx
Index to Advertisements xiii

WE ARE ADDING ALL THE TIME TO OUR LIST OF TRAMWAYS WHICH USE

TOOL STEEL GEARS and PINIONS

but most of our orders are now from systems which have used T. S. material for some time. Experience is better than statements, and to-day we offer records and not promises

SCHOLEY & CO. LIMITED
56, Victoria Street
WESTMINSTER **LONDON, S.W.**

Digitized by Google

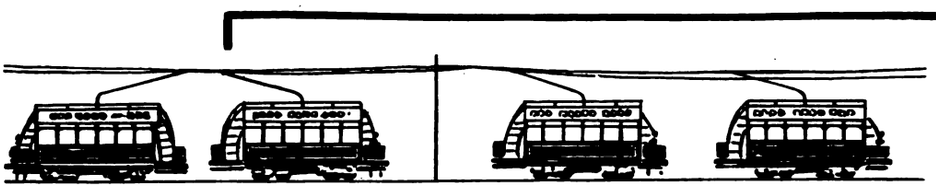



On the tramway or the railroad,

in the power station or the workshop, SKEFKO SKF Ball Bearings hold first place for efficiency, economy and length of service.

SKEFKO.SKF

PATENTED NOV. 9 IN ENGLAND

SELF-ALIGNING DOUBLE ROW **BALL BEARINGS**

are so designed that they are entirely unaffected by conditions under which other types invariably fail. They automatically counteract all forms of shaft flexure, thus reducing friction to the lowest possible point, and ensuring smooth running all the time.

Write for free illustrated catalogue to:—

THE SKEFKO BALL BEARING CO. LTD.

Head Office and Works - LUTON, ENGLAND.

London Office - - - - - - 28, Victoria Street, S.W.

Glasgow Office - - - - - - - 45, Bothwell Street.

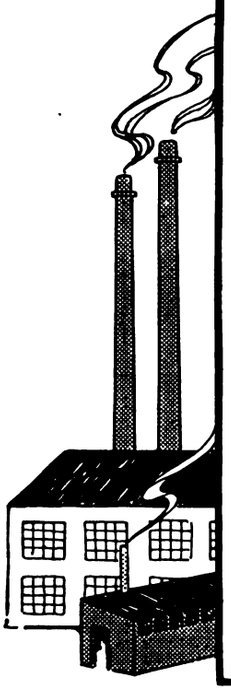



FLOWER BRAND.

[redacted]

MAGNOLIA METAL

THE D. H. STOLL COMPANY, INC.
MANUFACTURERS OF PRESSES, SHEARS, DIES AND SPECIAL SHEET METAL WORKING MACHINERY.

Buffalo, N.Y., April 7, 1914

Gentlemen:—We have used your metal for the past few years in all our Power Presses and Shears, both large and small, with the most satisfactory results.

This applies both to the equipment, which we have manufactured here for our own use, and the many carloads shipped to some of the largest manufacturers in both the United States, Canada and abroad, in which was the entire plant equipment for many large plants.

As above stated, we have used this metal in both large and small machines and some machines running as high as 60 to 70 tons for heavy sheet metal drawing work.

Yours very truly,
THE D. H. STOLL COMPANY.

MAGNOLIA ANTI-FRICTION METAL COMPANY OF GREAT BRITAIN, LTD.

Tel. No.: City 6596. *49, Queen Victoria Street, LONDON, E.C.* Teleg.: "Magnolior, London."

Tel. No.: 254-01. **LA MAGNOLIA,** *21, Rue de Petrograd, PARIS.* Teleg.: "Metamagne, Paris."

Digitized by Google

INDEX TO ADVERTISEMENTS.

	PAGE
Albion Motor Car Co. Ltd., Scotstoun, Glasgow ...	129
Allen, Edgar, & Co., Ltd., Sheffield	146
André Sleigh & Anglo Ltd., London, W.C. ...	136
Auto-Ticket Printing Co., Ltd., Liverpool	136
Avon India Rubber Co., Ltd., Melksham	125
Baker, John, & Co. (Rotherham) Ltd., Rotherham	xxii
Beckett, Laycock & Watkinson, Ltd., Willesden ...	xx
Bell Punch & Printing Co., Ltd., London, E.C. ...	132
Brill Company, J. G., London, E.C.	xxxv
Britannia Lamp & Accessories Co., Ltd., London, E.C.	—
British Hele-Shaw Patent Clutch Co., Ltd., Oldham	xxxiii
British Insulated & Helsby Cables, Ltd., Prescot...	xxxi
British Thomson-Houston Co., Ltd., Rugby ...	viii
British Westinghouse Electric & Manufacturing Co., Ltd., Manchester	xix
Brockhouse, J., & Co., Ltd., West Bromwich ...	147
Byles, William & Sons, Ltd., Bradford	xviii
Clayton & Co. (Huddersfield), Ltd., Huddersfield...	129
Cleveland Metal Co., Stockton-on-Tees	—
Coan, R. W., 219, Goswell Road, London, E.C. ...	xvi
Commercial Cars, Ltd., Luton	138
Courtenay, J. W., Ltd., London, W.C.	143
Coventry Chain Co., Ltd., Coventry	134
Daimler Co., Ltd., Coventry	365
Dennis Bros., Guildford	124
Dick, Kerr & Co., Ltd., London, E.C. ... vi, vii,	148
Docker Brothers, Ltd., London, E.C.	132
Dunlop Rubber Co., Ltd.. Aston Cross, Birmingham	137
Edison Swan Electric Co., Ltd., Ponders End ...	xxi
Electro-Mechanical Brake Co. Ltd., West Bromwich	xxxviii
Equipment & Engineering Co., London ... xxxii,	xxxvi
Fodens, Ltd., Sandbach	140
General Electric Co., Ltd., London, E.C.	i
General Seating Co., Ltd., London, E.C.	ii
General Vehicle Co., Ltd., London, W.C.	—
Glasgow Numerical Ticket Printing Co., Glasgow...	133
Glyco Metal Co., Ltd., South Parade, Manchester ...	—
Goodyear Tyre and Rubber Co., Ltd., London, W.C.	139
Green, Geo. W., & Co. (Feltham), Ltd., Feltham ...	xiv
Grover & Co., Ltd., Carpenters Road, London, E....	133
Hadfields, Ltd., Sheffield	x
Halley's Industrial Motors, Ltd., Glasgow	126
Henley's Telegraph Works Co., Ltd., London	xix, 141
Herbert Frood Co. Ltd., Chapel-en-le-Frith ...	133
Hurst, Nelson & Co., Ltd., Motherwell	xxxvii
International Truck and Car Co., Ltd., London ...	—
Johnson & Phillips, Ltd., London, S.E. ...	xxxviii

	PAGE
Lacre Motor Car Co., 78, York Road, London ...	131
Leyland Motors (1914), Ltd., Leyland	127
"L'Industrie des Tramways et Chemins de Fer," Paris	xiv
London General Omnibus Co. Ltd., Broadway, Westminster, S.W.	134
Lorain Steel Co., London, E.C.	iv
Macintosh, Chas. & Co., Ltd., Manchester	xxxiv
Magnolia Anti-Friction Metal Co., London, E.C. ...	xii
Maudslay Motor Co., Ltd., 4, Parkside, Coventry ...	126
Mirrlees Watson Co., Ltd., Glasgow	362
"Motor Traction," 20, Tudor Street, London, E.C.	xvi
Napier, D., and Son, London, W.	366
Oriental Tube Co., Ltd., West Bromwich	—
Pease & Partners, Ltd., Middlesbrough	xxii
Peckham Truck & Engineering Co., Ltd., London...	xv
Pinchin, Johnson & Co., Ltd., London, E.C. ...	ix
R.E.T. Construction Co., Ltd., London, E.C. ...	xiv
Scholey & Co., Ltd., London, E.C.	xi
Scottish Commercial Cars Co., Ltd., Glasgow ...	—
Shepherd's Parging Block Co., Milkstone, Rochdale	xiii
Shrewsbury & Challiner Tyre Co., Ltd., Manchester	128
Siemens Bros. Dynamo Works, Ltd., London, S.W.	v
Skefko Ball Bearing Co., Ltd., Luton	xii
Smith, Frederick, & Co., Ltd., Salford	viii
Spencer-Moulton & Co. Ld., Deansgate, Manchester	130
Standard Underground Cable Co., London, E.C. ...	xvi
Stewarts & Lloyds, 41, Oswald Street, Glasgow ...	147
Straker & Squire, Ltd., London, S.E.	136
Thermit, Ltd., London, E.C.	iii
Thornycroft, John I. & Co., London, S.W.	135
Tilling-Stevens, Ltd., 26, Victoria Street, S.W. ...	123
Titan-Trackwork Co., Ltd., Sheffield	xv
"Tramway and Railway World"	xviii, 144
Tramway Supplies, Ltd., Leeds	147
Tudor Accumulator Co., Ltd., London, S.W. ...	134
Tyne Metal Co., Ltd., Newcastle-upon-Tyne ...	147
Underground Electric Railways Co., Ltd., London	—
United Electric Car Company, Preston, Lancs. ...	xxxiii
Walter Scott, Ltd., Leeds Steel Works, Leeds ...	145
Ward, Thos., Limited, Albion Works, Sheffield ...	—
Waygood-Otis, Ltd., London, S.E.	xvi
White Motors and Accessories, Ltd., London, S.W.	xvii
Williamson, Alfred, Ashton-under-Lyne	xiv
Wilson Rolling Shutter Co. (1914) Ltd., London, S.W.	—
Wood-Milne, Ltd., Preston	142
Vandervell, C. A. & Co. Ltd. London, W.	135
Zenith Carburetter Co., London, W.	133

Digitized by Google

R.E.T.

RAILLESS ELECTRIC TRACTION for passengers and freight.

Rubber Tyres. No Rails.

Also Battery Driven Vehicles and MOTOR LORRIES of all kinds.

The
R.E.T. CONSTRUCTION CO. LTD.
Balm Road, Hunslet, LEEDS

TRACTION SUPPLIES

SECTION INSULATORS
FROGS & CROSSINGS

Q-FEL

IN STOCK
At Pre-War Prices.

GEO. W. GREEN & CO., (FELTHAM) LTD.

——Q-FEL WORKS,——
FELTHAM, MIDDLESEX.
Tel.: "CUFEL, FELTHAM."

ALFRED WILLIAMSON

TRAMWAY & RAILWAY TICKET PRINTER,
ASHTON-UNDER-LYNE.

THE 'WILLIAMSON' REGISTERING TICKET BELL PUNCH

TICKETS & PUNCHES
Supplied on the Very Best Terms.

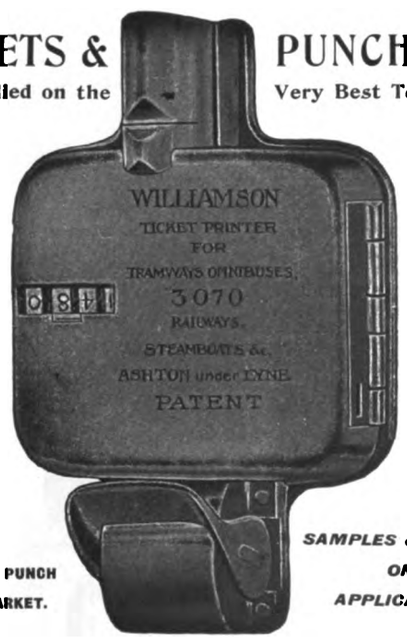

ESTABLISHED 1835.

Telephone: 320 Ashton-under-Lyne.

THE STRONGEST PUNCH ON THE MARKET.

SAMPLES & PRICES ON APPLICATION.

PUNCHES ON SALE OR HIRE.

L'INDUSTRIE DES TRAMWAYS et CHEMINS DE FER.

Monthly Publication (Illustrated).
Technical. Administrative. Commercial.
Subscriptions 20 fr. (16s.) per annum.

For Advertising rates and other information, application should be made to

The Manager,
L'INDUSTRIE DES TRAMWAYS ET CHEMINS DE FER,
15, rue de Madrid, PARIS.

Digitized by Google

ALL TYPES OF TRAMWAY POINTS

Made of
"TITAN"
MANGANESE STEEL

TITAN TRACKWORK CO.
Rutland Works, Rutland Road, SHEFFIELD LTD.

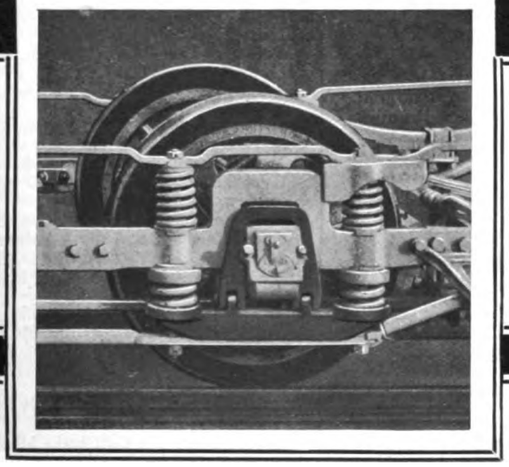

THE
PECKHAM
PENDULUM GEAR

THE
PECKHAM
TRUCK AND ENGINEERING CO. LTD.
28, BUDGE ROW, CANNON ST., LONDON, E.C.

Telegrams: TRUXENPECK, CANNON, LONDON
Telephone: CITY 3294

The Automobile and the Ox Cart both "get there," but what a *difference* in *service* and *satisfaction*.

Likewise there's a vast difference in the *service* and *satisfaction* rendered by the *PECKHAM Pendulum Gear* and the imitations of it that have been and are being offered as "just as good." *Beware of those imitations;* get the *genuine*.

In use on over *35 TRAMWAYS* in this country.

Digitized by Google

WIRE & RODS

COPPER
BRASS
COPPER CLAD
PHOSPHOR BRONZE
SILICON BRONZE
TROLLEY WIRE

Standard Underground Cable Co.
DOCK HOUSE, BILLITER ST., LONDON

Telegrams: KRANKASES, ISLING-LONDON. Telephones: 4879 CENTRAL, 3846 CITY.

ALUMINIUM CASTINGS

COAN CASTS CLEAN CRANK CASES

MADE AND REPAIRED.

FOR ALL TRADES.
LARGE AND SMALL.
PURE AND HARDENED

Inquiries invited. Estimates given.

Contractor to Admiralty and War Office.

R. W. COAN, THE ALUMINIUM FOUNDRY,
219 Coswell Road, London, E.C.

ESTABLISHED 1833

WAYGOOD-OTIS, LTD.

Lift Makers — To H.M. The King.

By Appointment

WAYGOOD-OTIS LIFTS

of all kinds and for all purposes.

FALMOUTH ROAD, LONDON, S.E.

MOTOR TRACTION DEALING WITH MOTOR VEHICLES for BUSINESS PURPOSES

GIVES

Practical information and reliable data regarding all types of Motor Vehicles for the transport of passengers or goods, municipal purposes, etc.

Every Wednesday. *One Penny.*
Specimen Copy Post Free.
ILIFFE & SONS Ltd., 20, Tudor St., London, E.C.

BUYER'S GUIDE

The Names of Advertisers whose announcements appear in consecutive issues of THE TRAMWAY AND RAILWAY WORLD are inserted free of charge, under such headings as may be desired.

ACCUMULATORS, ELECTRICAL.
Edison Accumulators, Ltd., London.
Tudor Accumulator Co., London, S.W.

ADVERTISING, TRAMWAY AND RAILWAY.
J. W. Courtenay, Ltd., London.

AIR BRAKES. (See Brakes.)

ALUMINIUM.
British Aluminium Co., Ltd., London, E.C.

AMMETERS. (See Voltmeters.)

ANCHOR CHAIRS.
Blackwell & Co., London.

ANGLE IRON BUFFERS.
Brill Company, J. G., London, S.W.

ANTI-FRICTION METAL.
Magnolia Anti-Friction Metal Co., Ltd., E.C.

AUTOMATIC BRAKE ADJUSTERS. (See Brake Adjusters.)

AXLE BOXES.
Brill Company, J. G , London, E.C.
Peckham Truck and Eng. Co., London, S.W.

AXLES AND TYRES.
Anger Mfg. & Supply Co., Ltd., Preston, Lancs.
Baker, John, & Co., Rotherham.
Equipment & Engineering Co., London, W.C.

BALL BEARINGS.
Skefko Ball Bearing Co., Ltd., Luton.

BATTERIES, STORAGE. (See Accumulators.)

BEARINGS.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
Skefko Ball Bearing Co., Ltd., Luton.
Watlington & Co., Ltd., London, E.C.

BELLS AND GONGS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Watlington & Co., Ltd., London, E.C.

BLINDS AND CURTAINS.
Beckett, Laycock & Watkinson, Ltd., London.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.

BOILERS.
Babcock & Wilcox, Ltd., London, E.C.

BOLTS.
Allen, Edgar & Co., Ltd., Sheffield.
Bayliss, Jones, & Bayliss, Wolverhampton.
Brockhouse, J., & Co., Ltd., West Bromwich.
Hadfields, Ltd., Sheffield.
Peckham Truck and Eng. Co., London, S.W.
"The Coventry" Repetition Co., Coventry.
Titan Trackwork Co., Ltd., Nottingham.

BOND PAINTS.
Ruberoid Co., Ltd., London, E.C.

BOXES, JOURNAL.
Anger Mfg. & Supply Co., Ltd., Preston, Lancs.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
Watlington & Co., Ltd., London, E.C.

BRACKETS AND CROSS ARMS. (See Poles.)

BRAKE ADJUSTERS.
Anger Mfg. & Supply Co., Ltd., Preston, Lancs.

BRAKES, CAR.
Brill Company, J. G., London, E.C.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Electric Co.
Dick, Kerr, & Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peacock Brake Co., London, E.C.
Peckham Truck and Eng. Co., London, S.W.

BRAKE HANDLES.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peacock Brake Co., London, E.C.
United Electric Car Co., Ltd., Preston.

BRAKE SHOES.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
Hadfields, Ltd., Sheffield.
Hurst, Nelson & Co., Ltd., Motherwell.
Peacock Brake Co., London, E.C.
Peckham Truck and Eng. Co., London, S.W.
Tyne Metal Co., Ltd., Newcastle-on-Tyne.
United Electric Car Co., Ltd., Preston.

BROOMS, TRACK.
Brush Elec. Engineering Co., Ltd.
Hurst, Nelson & Co., Ltd., Motherwell.
Watlington & Co., Ltd., London, E.C.

BRUSHES, DYNAMO AND MOTOR.
British Westinghouse Co., Ltd., London.
Electric Construction Co., Ltd., London.
Watlington & Co., Ltd., London, E.C.

CABLES, ELECTRIC TRAMWAY AND LIGHTING.
British Aluminium Co., Ltd., London, E.C.
British Westinghouse Co., Ltd., London.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.
Henley's Telegraph Works Co., Ltd., London
Macintosh & Co., Ltd., Chas., London, E.C.

CABLE PULLEYS.
Tyne Metal Co., Ltd., Newcastle-on-Tyne.

CABLE TRAMWAYS.
Dick, Kerr & Co., Ltd., London, E.C.

CARBON BRUSHES. (See Dynamo & Motor Brushes.)

CARBURETTORS.
Green, Geo. W., & Co., Ltd., Feltham.

CAR CURTAINS.
Beckett, Laycock & Watkinson, Ltd., London.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.

CAR JACKS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.
Watlington & Co., Ltd., London, E.C.

CAR ROOF COVERINGS
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

CAR SEATS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
United Electric Car Co., Ltd., Preston, Lancs.

CAR STEPS. (See Movable Car Steps.)

CAR STOVES.
Brill Company, J. G., London, E.C.

CAR TRIMMINGS.
Brill Company, J. G., London, E.C.
General Seating Co., Ltd., London, E.C.

CARS, TRAMWAY.
Brill Company, J. G., London, E.C.
Dick, Kerr & Co., Ltd., London.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

CAR TRUCKS.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
United Electric Car Co., Preston.

CASTINGS.
Allen, Edgar & Co., Ltd., Sheffield.
Hadfields, Ltd., Sheffield.
Hurst, Nelson & Co., Ltd., Motherwell.
Stewarts & Lloyds, Glasgow.
Titan Trackwork Co., Ltd., Nottingham.

CHAINS.
Coventry Chain Co., Ltd., Coventry.

CHARS-A-BANCS.
Commercial Cars, Ltd., Luton.
Clayton & Co. Huddersfield, Ltd., Huddersfield.

CIRCUIT BREAKERS.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd
Electric Construction Co., Ltd., London.
Watlington & Co., Ltd., London, E.C.

COLOURS. (See Paint.)

COMMERCIAL MOTORS.
Clayton & Co. Huddersfield, Ltd., Huddersfield.

COMMERCIAL VEHICLES.
Commercial Cars, Ltd., Luton.

COMMUTATORS & COMMUTATOR SEGMENTS.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

Digitized by Google

JACKS FOR TRAMCARS & MOTOR VEHICLES

ALL MODELS DELIVERED FROM STOCK

"Barrett" Ball and Cone Bearing Screw Jacks
Capacity - 10 Tons £4 15 0 each

The provision of Jacks

At an inquest on a child who rolled off the tray of a lifeguard on a Blackpool tramcar and was fatally injured, the jury suggested that the Corporation should "provide some better means of securing jacks to raise cars in case of accident."

Vide—THE TRAMWAY AND RAILWAY WORLD, August 19, 1916.

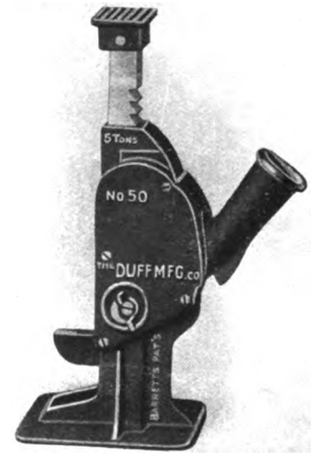

"Barrett" Automatic Lowering Jack
Capacity - 5 Tons £2 5 0 each

SOLE BRITISH AGENTS

White Motors and Accessories, Limited,

Concanon Works, Concanon Road, Acre Lane, Brixton,
(Close to Lambeth Town Hall)

Telephones: 565 & 566 Brixton
Telegrams: Yenisean, London

LONDON, S.W.

Cables: Yenwalt, London

DIRECTORY OF MANUFACTURERS OF AND DEALERS IN SUPPLIES (*continued*).

CONDENSING PLANT.
Belliss & Morcom, Ltd., Birmingham.
Mirrlees Watson Co., Ltd., Glasgow.

CONDUITS.
Doulton & Co., London.

CONTROLLER FINGERS.
Anger Mfg. & Supply Co., Ltd., Preston, Lancs.
Equipment & Engineering Co., London, W.C.

CONTROLLERS, ELECTRIC CAR.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Dick, Kerr, & Co., Ltd., London.

CONVERTIBLE CARS.
Brill Company, J. G., London, E.C
Hurst, Nelson & Co., Ltd., Motherwell.

CONVEYING AND ELEVATING MACHINERY.
Allen, Edgar, & Co., Ltd., Sheffield.
Hadfields, Ltd., Sheffield.

CROSSINGS. (See Points and Crossings).

CRUCIBLES.
Doulton & Co., Ltd., London

DESTINATION INDICATORS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.

DESTINATION SCREENS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.

DESTINATION SIGNS.
Brill Company, J. G., London, E C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.

DOG SPIKES.
Bayliss, Jones & Bayliss, Ltd., Wolverhampt'n

DROP FORGINGS.
Smethwick Stamping Co., Smethwick.

DYNAMOS.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Dick, Kerr & Co., Ltd., London.

ECONOMISERS.
Green, E., & Son, Ltd., Wakefield.

ELECTRIC BRAKES.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Electric Co., Ltd., Manchester.

ELECTRIC CABLES.
Henley's Telegraph Works Co., Ltd., London.
Macintosh & Co., Ltd., Chas., London, E.C.

ELECTRIC HEATERS.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.
Watlington & Co., Ltd., London, E.C.

ELECTRIC LAMPS.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.
Watlington & Co., Ltd., London, E.C.

ELECTRIC TRAMWAY SUPPLIES.
Allen, Edgar, & Co., Ltd., Sheffield.
Brill Company, J. G., London, E.C.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Co., Ltd., London.
Consolidated Accessories Co., London.
Dick, Kerr, & Co., Ltd., London.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.
Hadfields, Ltd., Sheffield.
Henley's Telegraph Works Co., Ltd., London.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
Titan Trackwork Co., Ltd., Nottingham.
United Electric Car Co., Ltd., Preston, Lancs.
Watlington & Co., Ltd., London, E.C.

ELECTRIC TRAMWAYS.
Allen, Edgar, & Co., Ltd., Sheffield.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Dick, Kerr, & Co., Ltd., London.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

ELECTRICAL ACCESSORIES.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.

ENGINES.
Belliss & Morcom, Ltd., Birmingham.

FANS, ELECTRIC
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.

FARE REGISTERS.
Bell Punch & Printing Co., Ltd., London.
Brill Company, J. G., London, E.C.

FENCES AND GATES.
Bayliss, Jones, & Bayliss, London, E.C.

FENDERS, TRAMCAR.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

FISHBOLTS.
Allen, Edgar, & Co., Ltd., Sheffield.
Bayliss, Jones & Bayliss, Ltd., Wolverhampt'n

FISHBOLTS AND PLATES.
Anger Mfg. & Supply Co., Ltd., Preston, Lancs.

FOLDING GATES.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.

FORGINGS.
Baker, John, & Co., Rotherham.
Brill Company, J. G., London, E.C.
Brockhouse, J., & Co., Ltd., West Bromwich.
Hurst, Nelson & Co., Ltd., Motherwell.
Smethwick Stamping Co., Smethwick.

FUEL ECONOMISERS
Green, E., & Son, Ltd., Wakefield.

GEAR CASES.
British Thomson-Houston Co., Ltd., Rugby.
Equipment & Engineering Co., London, W.C.
Peckham Truck and Eng. Co., London, S.W.
Watlington & Co., Ltd., London, E.C.

GEARS.
British Thomson-Houston Co., Ltd., Rugby.
Hadfields, Ltd., Sheffield.
Scholey and Co., Ltd., London, E.C.
Watlington & Co., Ltd., London, E.C.

GEARS AND PINIONS.
British Thomson-Houston Co., Ltd., Rugby.
Equipment & Engineering Co., London, W.C.
Peckham Truck and Eng Co., London, S.W.
Watlington & Co., Ltd., London, E.C.

GEAR WHEELS.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

GENERATORS. (See Dynamos.)

GLASSWARE.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.

GRINDING MACHINES.
Equipment & Engineering Co., London, W.C.

GRINDING MACHINES, CAR WHEEL.
Thermit, Ltd., London, E.C.
Watlington & Co., Ltd., London, E.C.

GUARD WIRE.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

Digitized by Google

JUST PUBLISHED

256 Pages 8vo.
Price, 10/6 net. Post free, 11/-

Income Tax

IN RELATION TO

LOCAL AUTHORITIES

BY

F. OGDEN WHITELEY, F.S.A.A.
City Treasurer of Bradford, and

WILLIAM WHITTINGHAM
City Treasurer's Office, Bradford.

THIS work deals exhaustively with the assessment to Income Tax and Excess Profits Duty of the Trading Undertakings of Local Authorities. Specimen Returns are set out, shewing the application of the Rules and Schemes agreed with the Inland Revenue Department, and the methods of arriving at the "set-off" against the Rating Fund Interest.

WILLIAM BYLES & SONS, Ltd.
Publishers, BRADFORD

RAILWAY ELECTRIFICATION

Tramway & Railway World Descriptions.

(TWO SHILLINGS EACH, postage prepaid.)

NORTH EASTERN RAILWAY ELECTRIFICATION:
Shilton-Newport Mineral Branch.
(Issue of June 8, 1916.)

A full description of this important and, in some respects, unprecedented undertaking. The description is supplemented by 35 photographs and drawings, including a map, profile of gradients, and diagrams of tests.

20 Pages, 13½ in. ×9 in., with 16 Drawings and 20 Photographic Illustrations.

NORFOLK AND WESTERN ELECTRIFICATION.
High Tension on the Bluefields Section.
(Issue of July 8, 1915.)

A comprehensive description of an important electrification scheme carried out by one of the leading American railways. Single-phase transmission has been employed with three-phase motors.

24 Pages, 13½ in. ×9 in., with Map, 7 Drawings, and 20 Photographic Illustrations.

TRAMWAY AND RAILWAY WORLD OFFICES
Amberley House, Norfolk Street, London, W.C.

DIRECTORY OF MANUFACTURERS OF AND DEALERS IN TRAMWAY AND RAILWAY SUPPLIES (*continued*).

GUARDS.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.

HEADLIGHTS.
Brill Company, J. G., London, E.C.
Watlington & Co., Ltd., London, E.C.

HEATERS, ELECTRIC.
Watlington & Co., Ltd., London, E.C.

HYDRAULIC PRESSES.
Hadfields, Ltd., Sheffield.

IGNITION LEADS (FOR MOTOR CARS).
Henley's Telegraph Works Co., Ltd., London.

INDICATORS.
Brill Company, J. G., London, E.C.
Consolidated Accessories Co., London.
Equipment & Engineering Co., London, W.C
General Seating Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

INSTRUMENTS.
Edison & Swan United Electric Light Co.

INSULATING MATERIAL.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

INSULATING VARNISHES.
Equipment & Engineering Co., London, W.C.

INSULATORS, TRAMWAY.
Blackwell, R. W., & Co., Ltd., London, E.C.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Co., Ltd., London.
Consolidated Accessories Co., London.
Doulton & Co., Ltd., London.
Equipment & Engineering Co., London, W.C.
Henley's Telegraph Works Co., Ltd., London.
Watlington & Co., Ltd., London, E.C.

IRONWORK FOR CAR BODIES.
Brockhouse, J., & Co., Ltd., West Bromwich.

JACKS.
Equipment & Engineering Co , London, W.C.
White Motors and Accessories, Ltd.

JAPANS.
Kearsley & Co., Ripon.

JOINT BOXES.
Henley's Telegraph Works Co., Ltd., London.

JOINT PLATES.
Allen, Edgar, & Co., Ltd., Sheffield.
Hadfields, Ltd., Sheffield.

JOINTS, RAIL.
Allen, Edgar, & Co., Ltd., Sheffield.
Thermit, Limited, London, E.C.

JOURNAL BOXES.
Brill Company, J. G., London, S.W.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
United Electric Car Co., Ltd., Preston, Lancs.

JOURNAL BOX PACKING.
Beckett, Laycock & Watkinson, Ltd., London.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.
Peckham Truck and Eng. Co., London, S.W.

LAMPS, ELECTRIC.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Electric Construction Co., Ltd., London.
Watlington & Co., Ltd., London, E.C.

LEATHERS (UPHOLSTERY).
General Seating Co., Ltd., London, E.C.

LIFE GUARDS.
Hurst, Nelson & Co., Ltd., Motherwell.

LIFTING JACKS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Glasgow.

LIGHTNING ARRESTERS.
Blackwell, R. W., & Co., Ltd., London, E.C.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

LINCRUSTA WALTON.
General Seating Co., Ltd., London, E.C.

LINE MATERIAL, ELECTRIC TRAMWAY
British Thomson-Houston Co., Ltd., Rugby.
Clough, Smith, & Co., Ltd., London, E.C.
Consolidated Accessories Co., London.
Dick, Kerr, & Co., Ltd., London.
Electro-Mechanical Brake Co., West Brom.
Equipment & Engineering Co., London, W.C.
Henley's Telegraph Works Co., Ltd., London.
Tramway Supplies, Ltd., Leeds.
Watlington & Co., Ltd., London, E.C.

LOCK WASHERS (Palnut Patent).
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

LOCOMOTIVES.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Co., Ltd., London.
Dick, Kerr, & Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.

LORRIES.
Clayton & Co. Huddersfield, Ltd., Huddersf'ld.
Commercial Cars, Ltd., Luton.

LUBRICANTS.
Wakefield, C. C., & Co., London, E.C.

METALS
Magnolia Anti-Friction Metal Co. of Great Britain, Ltd., London, E.C.

MILLBOARDS—"PANELLIUM."
General Seating Co., Ltd., London, E.C.

MOTOR OMNIBUSES.
Clayton & Co. Huddersfield, Ltd., Huddersf'ld.
Commercial Cars, Ltd., Luton.

MOTOR TRUCKS (See Trucks).

MOTOR VANS.
Clayton & Co Huddersfield, Ltd., Huddersf'ld.
Commercial Cars, Ltd., Luton.

MOTOR VEHICLES.
Clayton & Co Huddersfield, Ltd., Huddersf'ld.
Commercial Cars, Ltd., Luton.

MOVABLE CAR STEPS.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.

MUNICIPAL VEHICLES.
Clayton & Co. Huddersfield, Ltd., Huddersf'ld.
Commercial Cars, Ltd., Luton.

OILS.
Wakefield, C. C., & Co., London, E.C.

OILSKINS.
Ailsa Oilskin and Rubber Co., Dalry.

OVERHEAD TROLLEY EQUIPMENT. (See Line Mat'l.

OVERHEAD LINE MATERIAL.
British Thomson-Houston Co., Ltd., Rugby.
Green, Geo. W., & Co , Ltd., Feltham.
Watlington & Co., Ltd., London, E.C.

OVERHEAD LINE TOOLS.
M. & G. Truck & Engineering Co., Ltd.
Watlington & Co., Ltd., London, E.C.

PAINT.
Kearsley, Robert, & Co., Ltd., Ripon, Yorks.

PAINTS, INSULATING.
Ruberoid Co., Ltd., London, E.C.

PANELS, ALUMINIUM.
British Aluminium Co., Ltd., London, E.C

PANELS, MAHOGANY, etc.
Brill Company, J. G., London, S.W.

PANELS, 3 PLY, etc.
General Seating Co., Ltd., London, E.C.

PERMANENT WAY TOOLS.
Allen, Edgar, & Co., Ltd., Sheffield.

POINTS AND CROSSINGS.
Allen, Edgar, & Co., Ltd., Sheffield.
Dick, Kerr, & Co., Ltd., London.
Hadfields, Ltd., Sheffield.
Lorain Steel Company, London.
Titan Trackwork Co., Ltd., Sheffield.

POINT CONTROLLERS.
Clay & Atkinson, Bradford.
Equipment & Engineering Co., London, W.C.

POLES, METAL.
Clough, Smith, & Co., Ltd., London, E.C.
Dick, Kerr, & Co., Ltd., London.
Equipment & Engineering Co., London, W.C.
Peckham Truck and Eng. Co., London, S.W.
Stewarts & Lloyds, Ltd., Glasgow.
Watlington & Co., Ltd., London, E.C.

PORTABLE RAILWAYS.
Hurst, Nelson & Co., Ltd., Motherwell.

PRESSES, HYDRAULIC.
Youngs, Ryland St. Works, Birmingham.

PUBLIC SERVICE VEHICLES.
Clayton & Co Huddersfield, Ltd., Huddersf'ld.

PULLEY BLOCKS.
Youngs, Ryland St. Works, Birmingham.

PULLEYS, CABLE.
Dick, Kerr, & Co., Ltd., London.
Hadfields, Ltd., Sheffield.
Tyne Metal Co., Ltd., Newcastle-on-Tyne.

PULLEYS, SHAFTING, COUPLINGS, etc.
Allen, Edgar, & Co., Ltd., Sheffield.
Brown Bayley's Steel Works, Ltd., Sheffield.
Hadfields, Ltd., Sheffield.

PUNCHES, TICKET.
Auto-Ticket Printing Co., Ltd., Liverpool.
Bell Punch & Printing Co., Ltd., London.
Ticket Punch & Register Co., Ltd., London.
Williamson, Alfred, Ashton-under-Lyne.

RAIL BENDERS.
Equipment & Engineering Co., London, W.C.
Hadfields, Ltd., Sheffield.

(Continued on page xx.)

Digitized by Google



Westinghouse Improved Magnetic Brake for Electric Tramcars

The modern Westinghouse Magnetic Brake is the outcome of the unequalled experience of the Westinghouse Company in the manufacture of traction brakes for all descriptions of Railway and Tramcar services.

It has been designed to suit all conditions of tramway traffic, especially those which exist in city streets, where it is absolutely essential that cars should be controlled by a brake of the most powerful and reliable description. It is instantaneous in action and its power can be easily regulated by the driver for ordinary stopping, coasting or slowing down, as well as for the sudden stops required in emergencies. Being simultaneously a track, wheel and axle brake, it is capable of exercising the maximum desirable braking power. Even when, in cases of emergency, it becomes necessary to put the brake full on suddenly while the car is travelling at a high speed, the consequent rapid retardation is smooth and there is an entire absence of jerking. The short stops effected by it, while causing no discomfort to passengers, allow the drivers to run cars safely through congested traffic at higher speeds and with minimum headway.

Westinghouse
Manchester

The British Westinghouse Electric and Mfg. Co., Ltd.,
Trafford Park, Manchester.

Henley's Solid Rubber Cables

Also known as "Cab Tyre" Sheathed." ***Patent 3996/11.***

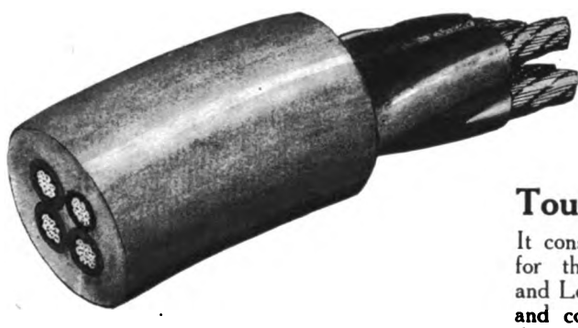

HENLEY'S tough, resilient, SOLID Rubber Cables will resist destructive action over periods covered by several replacements of cables having other forms of protection.

THE sheathing used on these Cables is that referred to in the Wiring Rules of the Institution of Electrical Engineers, Seventh Edition, March, 1916, page 14, Section 65, as

Tough Rubber Compound Protection

It consists of tough, resilient, *solid* rubber of the type used for the tyres of heavy motor vehicles, such as 'Buses and Lorries. We are manufacturers of Solid Band Tyres, and consequently know the type of Rubber Compound that will withstand the greatest amount of rough usage.

Therefore we can recommend our Solid Rubber Protection for Trailing Cables in Collieries, Wharves, Docks, Shipbuilding Yards, Manufactories, Railway Sheds and Tunnels, and all situations in which a wear-resisting sheathing is necessary; and for general wiring in Chemical Works, Breweries, Bleach and Dye Works, &c.

ASK FOR A SAMPLE.

W. T. HENLEY'S TELEGRAPH WORKS CO., LTD.,
Blomfield Street, London, E.C.

Digitized by Google

DIRECTORY OF MANUFACTURERS OF AND DEALERS IN SUPPLIES (*continued*).

RAIL BONDS.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

RAIL CLEANERS.
Brill Company, J. G., London, E.C.
Consolidated Accessories Co., London.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Watlington & Co., Ltd., London, E.C.

RAIL GRINDERS.
Consolidated Accessories Co., London, E.C.
Equipment & Engineering Co., London, W.C.
Thermit, Ltd., London, E.C.

RAIL JOINTS.
Bayliss, Jones & Bayliss, Ltd., Wolverhampton
Continuous Rail Joint Co., Ltd., London, E.C.
Hadfields, Ltd., Sheffield.
Thermit, Limited, London, E.C.

RAILLESS ELECTRIC SYSTEMS.
R.E.T. Construction Company, London, E.C.
Watlington & Co., Ltd., London, E.C.

RAIL LIFTERS
Equipment & Engineering Co., London, E.C.

RAIL PLANES.
Thermit, Ltd., London, E.C.

RAILS, TURNOUTS, CURVES, etc.
Allen, Edgar, & Co., Ltd., Sheffield.
Dick, Kerr, & Co., Ltd., London.
Hadfields, Ltd., Sheffield.
Lorain Steel Company, London.
M. & G. Truck & Engineering Co., Ltd.
Titan Trackwork Co., Ltd., Sheffield.
Walter Scott, Ltd., Leeds.

RAILWAY AND TRAMWAY MOTORS, ELECTRIC.
Brill Company, J. G., London, S.W.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Co., Ltd., London.
Dick, Kerr, & Co., Ltd., London.
Electric Construction Co., Ltd., London.

RAILWAY STORES.
General Seating Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co, London, S.W.

RATTAN.
Brill Company, J. G., London, E.C.
General Seating Co., Ltd., London, E.C.

ROLLER BEARINGS.
Hurst, Nelson & Co., Ltd., Motherwell.

SANDING DEVICES.
Equipment & Engineering Co, London, W.C.
Taylor, John, Liverpool.

SAND BOXES.
Brill Company, J. G., London, S.W.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

SEATS AND SEATING MATERIALS.
Brill Company, J. G, London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.

SIDE GUARDS.
Equipment & Engineering Co., London, W.C.

SIMPLEX TACKS.
Equipment & Engineering Co., London, W.C.

SLACK ADJUSTERS.
Peckham Truck and Eng. Co., London, S.W.

SLEEPING BERTHS.
Beckett, Laycock & Watkinson, Ltd., London.
General Seating Co., Ltd., London, E.C.

SNOW PLOWS.
Brill Company, J. G., London, S.W.
Hurst, Nelson & Co., Ltd., Motherwell.

SPRINGS.
Allen, Edgar, & Co., Ltd., Sheffield.
Brill Company, J. G., London, E.C.
Hadfields, Ltd., Sheffield.
Hurst, Nelson & Co., Ltd., Motherwell.
M. & G. Truck & Engineering Co., Ltd.
United Electric Car Co., Ltd., Preston, Lancs.

SPRINGS (LAMINATED AND SPIRAL.)
Brockhouse, J., & Co., Ltd., West Bromwich.

SPRINGS (UPHOLSTERY, etc.).
General Seating Co., Ltd., London, E.C.

SPRINKLING CARS.
Brill Company, J. G., London, S.W.
Hurst, Nelson & Co., Ltd., Motherwell,
M. & G. Truck & Engineering Co., Ltd.
United Electric Car Co., Ltd., Preston, Lancs.

STEAM TURBINES.
Belliss & Morcom, Ltd., Birmingham.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Dick, Kerr, & Co., Ltd., London.

STEEL.
Allen, Edgar, & Co., Ltd., Sheffield.
Baker, John, & Co., Rotherham.

STEEL FORGINGS.
Allen, Edgar, & Co., Ltd., Sheffield.
Baker, John, & Co., Rotherham.
Brill Company, J. G., London, E.C.
Brockhouse, J., & Co., Ltd., West Bromwich.
Hadfields, Ltd., Sheffield.

STEEL STRUCTURAL WORK.
Allen, Edgar, & Co., Ltd., Sheffield.

STEPS. (See Movable Car Steps.)

STONEBREAKERS.
Allen, Edgar, & Co., Ltd., Sheffield.
Hadfields, Ltd., Sheffield.

STRAIN WIRE
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

SWEEPERS.
Brill Company, J. G., London, S.W.
Hurst, Nelson & Co., Ltd., Motherwell.

SWITCHBOARDS AND GEAR.
British Thomson-Houston Co., Rugby.
British Westinghouse Co., London.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.
Tramway Supplies, Ltd., Leeds.

SWITCHES, ELECTRICAL.
British Thomson-Houston Co., Ltd., Rugby.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.
Watlington & Co., Ltd., London, E.C.

TANK AND GIRDER WORK.
Allen, Edgar, & Co., Ltd., Sheffield.

THIRD-RAIL INSULATORS.
Doulton & Co., Ltd., London.
Watlington & Co., Ltd., London, E.C.

THREE-PLY VENEER.
Equipment & Engineering Co., London, W.C.

TICKET PUNCHES. (See Punches).

TIME INDICATORS.
General Seating Co., Ltd., London, E.C.

TIRES.
Allen, Edgar, & Co., Ltd., Sheffield.
Baker, John, & Co., Rotherham.
British Griffin Co., Ltd., London, E.C.
Equipment & Engineering Co., London, W.C.
Hadfields, Ltd., Sheffield.
Macintosh & Co., Ltd., Chas., London, E.C.
Peckham Truck and Eng. Co., London, S.W.

TOP COVERS.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

TOWER WAGONS.
Clayton & Co. Huddersfield, Ltd., Huddersfield.
Commercial Cars, Ltd., Luton.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

TRACK BRAKES.
Brill Company, J. G., London, S.W.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co, London, S.W.

TRACK SANDERS.
Brill Company, J. G., London, S.W.
Hurst, Nelson & Co., Ltd., Motherwell.

TRACK TOOLS AND APPLIANCES.
Allen, Edgar, & Co., Ltd., Sheffield.
Watlington & Co., Ltd., London, E.C.

TROLLEY CORD.
Anger Mfg. & Supply Co., Ltd., Preston, Lancs.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

TROLLEY HANGERS.
British Westinghouse Co., Ltd., London.
Consolidated Accessories Co., London.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

TROLLEY STANDARD EARTHING DEVICE.
Consolidated Accessories Co., London.

TROLLEY TENSION INDICATOR.
Consolidated Accessories Co., London.

TROLLEY WHEELS AND HEADS
British Aluminium Co., Ltd., London, E.C.
British Thomson-Houston Co., Ltd., Rugby.
Tramway Supplies, Ltd., Leeds.
Watlington & Co., Ltd., London, E.C.

TROLLEY WIRE.
Equipment & Engineering Co., London, W.C.
Frederick Smith & Co., Salford, Manchester.
Watlington & Co., Ltd., London, E.C.

TRUCK BRAKES.
Brill Company, J. G., London, E.C.
Peckham Truck & Eng. Co., London, S.W.

TRUCKS, CAR.
Brill Company, J. G., London, S.W.
Dick, Kerr, & Co., Ltd., London.
Hurst, Nelson & Co., Ltd., Motherwell.
Lorain Steel Company, London.
Peckham Truck and Eng. Co., London, S.W.
United Electric Car Co., Preston.

VARNISHES.
Pinchin, Johnson, & Co., Ltd., London, E.C.

WELDED JOINTS.
Thermit, Limited, London, E.C.

WHEELS AND AXLES.
Allen, Edgar, & Co., Ltd., Sheffield.
Baker, John, & Co., Rotherham.
Brill Company, J. G., London, S.W.
British Griffin Co., Ltd., London.
Equipment & Engineering Co., London, W.C.
Hadfields, Ltd., Sheffield.
Hurst, Nelson & Co., Ltd., Motherwell.

WHEELS WITH WROT IRON CENTRES.
Baker, John, & Co., Rotherham.
Hurst, Nelson & Co., Ltd., Motherwell.

WHITE METAL FOR BEARINGS.
Magnolia Anti-Friction Metal Co., London.

WIRE, COPPER.
Henley's Telegraph Works Co., Ltd., London.
Smith, Frederick, & Co., Salford, Manchester.
Watlington & Co., Ltd., London, E.C.

WIRE ROPES.
Watlington & Co., Ltd., London, E.C.

BECLAWAT

(Reg. Trade Mark).

Balanced Frameless Window

The window illustrated is a plain polished plate running in our Silent Window Channel and operated by Window Balance.

Weatherproof.
. No Rattling .

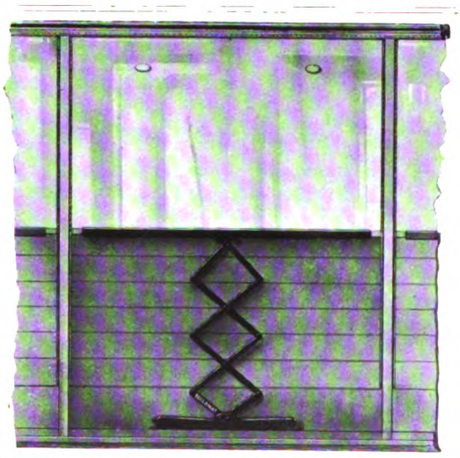

BECKETT, LAYCOCK & WATKINSON, Ltd.

Patentees and Manufacturers,

—AGENTS ALL— OVER THE WORLD.

Willesden, LONDON, N.W.

Tel. No. 1558 Willesden.

Tel. Add. "BECLAWAT"

Digitized by Google

STRONG & ECONOMICAL.

VIBRATION-RESISTING.

Designed & made to stand vibration

THIS IS A SPECIAL FEATURE OF

THE

ROYAL

EDISWAN

DRAWN WIRE TRACTION LAMPS

HAVE SHORT RIGID FILAMENTS AND EVERY LAMP IS SEPARATELY AND RIGIDLY TESTED BEFORE BEING ALLOWED TO LEAVE THE WORKS

Will you favour us with your enquiries regarding "Traction" Lamps for any "Vibration Area?"

THE
EDISON SWAN ELECTRIC CO. LTD.
PONDERS END, MIDDLESEX
'Phone - 520 ENFIELD

FULLY LICENSED UNDER BRITISH PATENTS NOS:- 21513/06 - 27712/03 AND OTHERS.

Digitized by Google

JOHN BAKER & CO.

(ROTHERHAM), LTD.

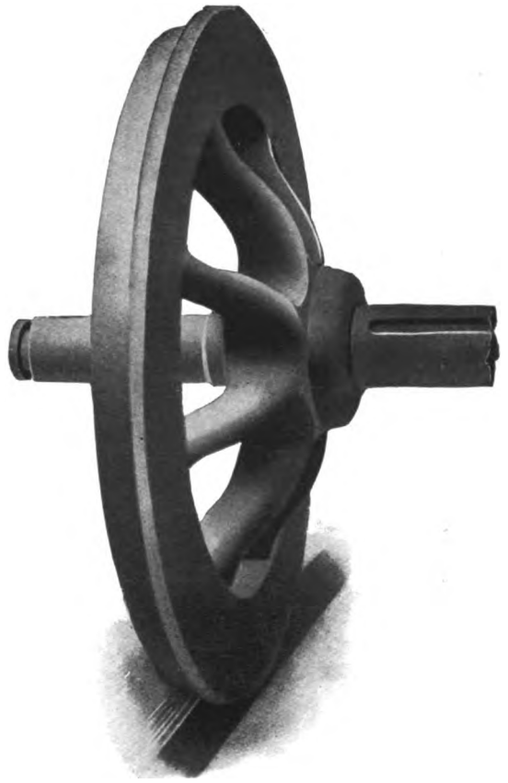

Brinsworth Iron & Wheel Works, ROTHERHAM
Kilnhurst Steel Works, near SHEFFIELD.

WHEELS WITH WROUGHT-IRON CENTRES.

AXLES TO BRITISH STANDARD SPECIFICATION FOR ORDINARY SERVICE.

Special (T) Brand Axles
— for Heavy Service. —

If you are troubled with Axle Breakages, try our Special Steel.

Tyres of Chrome Steel for High Mileage Results.

PEASE & PARTNERS, LTD.

WORKS:

TEES IRONWORKS, MIDDLESBRO'.

LICENSEES

OF THE

STEEL BACK

BRAKE BLOCK

FOR

RAILWAYS AND TRAMWAYS.

SOLE ENGLISH AGENTS:

ALFRED INGRAM & CO., Queen Annes Chambers, Westminster.

Digitized by Google

DIRECTORIES OF ELECTRIC TRAMWAYS

IN THE UNITED KINGDOM.

NAMES OF PRINCIPAL OFFICERS,

POSTAL ADDRESS, TELEGRAPHIC ADDRESS, AND TELEPHONE NUMBERS.

MUNICIPAL TRAMWAYS, pp. xxiii-xxiv. COMPANY TRAMWAYS, pp. xxiv-xxvi. PARTICULARS OF TRACK AND EQUIPMENT, pp. xxvii-xxx.

TRAMWAY ASSOCIATIONS, p. xxvi.

Aberdare Urban District Tramways, Gadlys Estate, Aberdare. [T.A., Tramways, Aberdare: T.N., 17.] *Gen. Manager and Elec. Engineer*, A. J. Abraham; *Traffic Supt.*, H. King; *Chairman Try. Com.*, Coun. E. Stonelake.

Aberdeen Corporation Tramways, Municipal Buildings, Union Street, Aberdeen. [T.A., Trams, Aberdeen; T.N. 826.] *Gen. Manager and Eng.*, R. S. Pilcher; *Per. Way Eng.*, J. Gordon (*Burgh Surveyor*); *Chairman Try. Com.*, Coun. Robertson.

Accrington Corporation Tramways, Market Hall, Accrington. [T.A., Trams, Accrington; T.N., 2212.] *Gen. Manager and Eng.*, H. Pilling; *Per. Way Eng.*, W. J. Newton; *Chairman Try. Com.*, Ald. T. E. Higham; *Vice-Chairman*, Coun. Morley.

Ashton-under-Lyne Corporation Tramways, Tramway Depot, Mossley Road, Ashton. [T.A., Tramways, Ashton; T.N., 325.] *Gen. Manager*, Ernest Holt; *Elec. Eng.*, N. Appelbee; *Chairman Try. Com.*, Ald. R. S. Oldham; *Vice-Chairman*, Ald. Waterhouse.

Ayr Corporation Tramways, Town Building, Ayr. [T.A., Trams, Ayr; T.N., 123.] *Gen. Manager and Eng.*, William Grant; *Burgh Elec. Eng.*, R. Marshall; *Per. Way Eng.*, John Young; *Rolling Stock Supt.*, Alf. Somerville; *Convener Try. Com.*, Coun. J. R. Learmont; *Vice-Chairman*, Bailie Murray.

Bacup Corporation Tramways.—Town Hall, Bacup, Lancs. [Lines leased to and worked by Rochdale Corporation.] *Town Clerk*, J. Entwistle; *Boro' Eng.*, W. H. Elce; *Chairman Try. Com.*, Ald. Sir H. Maden; *Vice-Chairman*, Coun. J. H. Lord (Mayor).

Barking Town Urban District Tramways, East Street, Barking. [T.N., 156 East Ham.] *Eng. and Manager*, W. Holmes; *Acting Engineer and Manager*, W. E. Kidner; *Chairman Try. Com.*, Coun. D. Gordon.

Barton-upon-Irwell District Council Light Railways, Barton-upon-Irwell.

[Line leased to and worked by the Lancashire United Tramways Co., *q.v.*]

Batley Corporation Tramways, Batley, Yorks. *Engineer*, S. D. Jones; *Chairman Try. Com.*, Coun. J. W. Turner; *Vice-Chairman*, Coun. F. W. H. Auty.

[Lines leased to and worked by the Yorkshire (Woollen District) Electric Tramways, Ltd., *q.v.*]

Belfast City Tramways, Tramways Office, Sandy Row, Belfast. [T.A., Nance, Tramway, Belfast; T.N., 2444.] *Gen. Manager*, J. S. D. Moffet; *Traffic Manager*, R. McMaster; *City Elec. Eng.*, T. W. Bloxam; *Per. Way Eng.*, E. S. Pinkerton; *Chief Eng.*, A. A. Blackburn; *Chairman Try. Com.*, Coun. J. McCaughey; *Vice-Chairman*, Coun. J. Warwick.

Bexley Urban District Council Tramways, Car Sheds, Bexleyheath, Kent. [T.A., Stokes, Tramways, Bexleyheath; T.N., 79.] *Gen. Manager and Elec. Eng.*, H. P. Stokes; *Rolling Stock Supt.*, A. Williams; *Chairman Try. Com.*, Coun. E. T. Coote; *Vice-Chairman*, Coun. E. F. Reid.

Birkenhead Corporation Tramways, Laird Street, Birkenhead. [T.A., Tramways Manager, Birkenhead; T.N., 1110.] *Gen. Manager*, C. Clarke; *Borough Sur. and Eng.*, C. Brownridge; *Rolling Stock Supt.*, R. Chadwick; *Chairman Try. Com.*, Coun. H. Halsall; *Vice-Chairman*, Coun. R. Frame.

Birmingham Corporation Tramways, The Council House, Congreve Street, Birmingham. [T.A., Trams, Birmingham; T.N., Central 7,000.] *Gen. Manager*, A. Baker; *City Elec. Eng.*, R. A. Chattock; *Traffic Supt.*, J. McDonnell; *Per. Way Eng.*, C. E. S. Bill; *Rolling Stock Supt.*, R. H. Dickinson; *Chairman Try. Com.*, Coun. H. Barrow, J.P.; *Vice-Chairman*, Coun. A. G. Ellaway.

Blackburn Corporation Tramways, Tramways Office, Blackburn. [T.A., Tramways, Blackburn; T.N., 547.] *General Manager*, J. H. Cowell; *Elec. Eng.*, P. P. Wheelwright; *Traffic Manager*, E. Greek; *Car Shed Supt.*, H. W. Seymour; *Chairman Try. Com.*, Ald. W. Thompson; *Vice-Chairman*, Coun. C. Higham.

Blackpool Corporation Tramways, West Caroline Street, Blackpool. [T.N., 67.] *Gen. Manager*, C. Furness; *Traffic Supt.*, C. J. Baker; *Resident Eng.*, F. Field; *Chairman Try. Com.*, Ald. J. Brodie, J.P.; *Vice-Chairman*, Ald. R. Holt (Mayor).

Bolton Corporation Tramways, Bradshawgate, Bolton. [T.A., Manager, Tramways, Bolton; T.N., 490.] *General Manager*, J. Barnard; *Elec. Eng.*, W. J. H. Wood; *Per. Way Eng.*, E. Ll. Morgan; *Rolling Stock Supt.*, C. Beech; *Chairman Try. Com.*, Ald. J. Miles; *Vice-Chairman*, Coun. P. Higson.

Bootle Corporation Tramways, Electricity Works, Pine Grove, Bootle. [T.N., 424.] *Elec. Eng.*, T. D. Clothier; *Chairman Try. Com.*, Ald. Booth; *Vice-Chairman*, Coun. Pennington.

[Lines worked by Liverpool Corporation Tramways.]

Bournemouth Corporation Tramways, Tramways Offices, Lansdowne Crescent, Bournemouth [T.A., Tramways, Bournemouth; T.N., 1701.] *General Manager*, I. Bulfin; *Chief Assistant & Elec. Eng.*, H. Vickers; *Traffic Supt.*, R. O. Baldwin; *Chairman Try. Com.*, Coun. Bell; *Vice-Chairman*, Coun. McCabe.

Bradford Corporation Tramways, Central Office, 7, Hall Ings, Bradford. [T.A., Tramways, Bradford; T.N., 2381 and 2882.] *Gen. Manager*, C. J. Spencer; *Asst. Elec. Eng.*, J. W. Dawson; *Traffic Supt.*, T. Stirk; *City Elec. Eng.*, T. Roles; *Chairman Try. Com.*, Coun. Enoch Priestley; *Vice-Chairman*, Coun. J. Lund.

Brighton Corporation Tramways, Lewes Road, Brighton. [T.A., Tramways, Brighton; T.N., 353 P.O.] *Eng. & Manager*, William Marsh; *Traffic Supt.*, W. N. Brooks; *Rolling Stock Supt.*, W. Orchard; *Per. Way Eng.*, F. N. Hudson; *Chairman Try. Com.*, Coun. Martin.

Burnley Corporation Tramways, Queen's Gate, Burnley. [T.N., 46.] *Gen. Manager*, Henry Mozley; *Boro. Elec. Eng.*, J. E. Starkie; *Boro. Surveyor*, G. H. Pickles; *Chairman Try. Com.*, Coun. E. Heap; *Vice-Chairman*, Coun. Irving.

Burton-on-Trent Corporation Tramways, Guild Street, Burton-on-Trent. [T.N., 202.] *Manager*, A. B. Slater; *Engineer*, T. Hall; *Chairman Try. Com.*, Ald. J. S. Rowland (Mayor); *Vice-Chairman*, Ald. T. E. Lowe.

Bury Corporation Tramways, Market Place, Bury. [T.N., 26.] *Gen. Manager*, William Clough; *Boro. Elec. Eng.*, S. J. Watson; *Chairman Try. Com.*, Ald. T. S. Collinge; *Vice-Chairman*, Coun. Hargreaves.

Cardiff Corporation Tramways, Central Offices, The Hayes, Cardiff. [T.A., Tramways, Cardiff; T.N., 1211, 1240, 1350, and 977.] *Gen. Manager and Elec. Eng.*, A. Ellis; *Deputy Manager*, C. G. M. New; *Traffic Manager*, H. David; *Per. Way Eng.*, W. Harpur; *Rolling Stock Supt.*, Jas. Preston; *Chairman Try. Com.*, Ald. Sir J. W. Courtis, J.P.; *Vice-Chairman*, Coun. A. J. A. Stone.

Chester Corporation Tramways, Station Road, Chester. [T.N., 166.] *Traffic Supt.*, W. H. Ellis; *Elec. Eng.*, S. E. Britton; *Per. Way Eng.*, W. M. Jones; *Chairman Try. Com.*, Ald. J. Jones; *Vice-Chairman*, Coun. A. S. Dutton.

Chesterfield Corporation Tramways, Chatsworth Road, Chesterfield. [T.A., Tramways, Chesterfield; T.N., 78.] *Gen. Manager and Elec. Eng.*, R. L. Acland; *Traffic Manager*, F. Root; *Per. Way Eng.*, C. E. Crossley; *Chairman Try. Com.*, Ald. E. Shentall (Mayor); *Vice-Chairman*, Coun. Woodhead.

Colchester Corporation Tramways, Magdalen Street, Colchester. [T.A., Tramways, Colchester; T.N., 92.] *Gen. Manager and Engineer*, R. C. Bullough; *Chairman Try. Com.*, Coun. A. M. Jarmin; *Vice-Chairman*, Coun. J. T. Bailey.

Colne Corporation Tramways, Colne, Lancashire. *General Manager and Engineer*, T. G. Richardson; *Chairman Try. Com.*, Coun. R. Knight (Mayor).

Coventry Corporation Tramways, Priestley's Bridge, Coventry. [T.A., Tramways, Coventry; T.N., 1014.] *Engineer and General Manager*, T. R. Whitehead; *Assistant Engineer*, W. M. Milnes; *Chairman* Coun. C. V. Pugh; *Vice-Chairman*, Coun. H. W. Wale.

Croydon Corporation Tramways, Tramways Office, Thornton Heath, Surrey. [T.A., Tramways, Croydon; T.N., 406, Croydon.] *Tramways Manager*, T. B. Goodyer; *Chairman Try. Com.*, Ald. G. J. Allen; *Vice-Chairman*, Coun. A. A. Thomson.

Darlington Corporation Tramways, Haughton Road, Darlington. [T.A., Tramways, Darlington; T.N., 2435.] *General Manager and Elec. Eng.*, J. R. P. Lunn; *Traffic Supt.*, J. Fraser; *Chairman Try. Com.*, Ald. C. W. Starmer.

Dartford Urban District Council Tramways, Dartford. *Chairman Try. Com.*, Coun. R. Bennett; *Vice-Chairman*, Coun. J. B. Walton.

[Leased. See Dartford Tramways in list of Tramway Companies.]

Darwen Corporation Tramways, Lorne Street, Darwen. [T.N., 104.] *Gen. Manager and Eng.*, F. J. S. Hosken; *Boro. Elec. Eng.*, C. H. Garnett; *Chairman Try. Com.*, Ald. Jas. Tomlinson.

Derby Corporation Tramways, 4, Victoria Street, Derby. [T.N., 410.] *Gen. Manager*, F. Harding; *Elec. Eng.*, T. P. Wilmshurst; *Per. Way Eng.*, J. Ward; *Chairman Try. Com.*, Coun. J. Dean.

Doncaster Corporation Tramways, Grey Friar's Road, Doncaster. [T.A., Rayner, Doncaster, T.N., 43.] *Manager & Elec. Eng.*, E. S. Rayner; *Chairman Try. Com.*, Coun. P. Stirling (Mayor); *Vice-Chairman*, Coun. Balmforth.

Dover Corporation Tramways, Town Hall, Dover. [T.A., Trams, Dover; T.N., 294.] *Gen. Manager*, E. Carden; *Per. Way Eng.*, W. C. Hawke (Boro. Surveyor); *Chairman Try. Com.*, Coun. Barwick; *Vice-Chairman*, Coun. Norman.

Dundee Corporation Tramways, Town House Buildings, Dundee. [T.N., 1340]; *Gen. Manager and Eng.*, Peter Fisher; *Elec. Eng.*, H. Richardson; *City Eng.*, J. Thomson; *Chairman Try. Com.*, Coun. G. A. Johnston.

East Ham (County Borough of) Corporation Tramways, Nelson Street, East Ham. [T.N., 611 and 100, East Ham.] *Gen. Manager and Elec. Eng.*, W. C. Ullmann; *Chairman Try. Com.*, Ald. M. Oakes.

Eccles Corporation Tramways, Eccles. *Elec. Eng.*, H. W. Angus; *Per. Way Eng.*, T. S. Picton; *Chairman Try. Com.*, Ald. W. J. Nuttall, J.P.; *Vice-Chairman*, Coun. Alexander.

[Lines worked by Salford Corporation.]

Erith Urban District Council Tramways, Tramway Depôt, Walnut Tree Road, Erith. [T.A., Tramways, Erith; T.N., 36.] *Gen. Manager and Elec. Engineer*, J. C. Williams; *Chairman Try. Com.*, Coun. G. C. Humphreys.

Exeter Corporation Tramways, Paris Street, Exeter. *Manager*, H. C. Bartlett; *Elec. Eng.* H. D. Munro; *Per. Way Eng.*, T. Moulding; *Chairman Try. Com.*, Ald. H. B. Varwell; *Vice-Chairman*, Coun. F. G. Towill.

Farnworth Urban District Council Tramways, Albert Road, Farnworth. *Chairman Try. Com.*, Coun. S. C. Steele; *Vice-Chairman*, Coun. Stanley.

[Lines leased to the South Lancashire Tramways Co.]

Glasgow Corporation Tramways, 46, Bath Street, Glasgow. [T.A., Trams, Glasgow; T.N., 1040, Douglas.] *Gen. Manager*, J. Dalrymple; *Traffic Supt.*, L. Mackinnon; *Chief Eng.*, J. Ferguson; *Elec. Eng.*, E. T. Goslin; *Sec.*, J. N. Wilson; *Chairman Try. Com.*, Coun. Montgomery; *Vice-Chairman*, Bailie Kelly.

Gloucester Corporation Light Railway, Bristol Road Depôt, Gloucester. [T.A., Tramways, Gloucester; T.N. 155.] *Gen. Manager and Elec. Eng.*, F. H. Corson; *Chairman Try. Com.*, Coun. J. O. Roberts; *Vice-Chairman*, Coun. C. J. Ramstedt.

Great Yarmouth Corporation Tramways, Caister Road, Great Yarmouth. [T.N. 265.] *Gen. Manager*, F. L. Turner; *Elec. Eng.*, Gordon Bryant *Per. Way. Eng.*, J. W. Cockrill (Borough Surveyor); *Chairman Try. Com.*, Coun. J. T. C. Salmon.

Halifax Corporation Tramways, Skircoat Road, Halifax. [T.N., 36 and 382.] *Traffic Manager*, Jas. D. Caird; *Try. Eng.*, J. W. Galloway; *Per. Way Eng.*, J. Lord (Boro. Eng.); *Chairman Try. Com.*, Ald. C. F. Spencer; *Vice-Chairman*, Ald. A. Fawcett.

Haslingden Corporation Tramways, John Street, Haslingden. *Gen. Manager and Elec. Eng.*, Barnes Kay; *Per. Way Eng.*, J. S. Green (Borough Surveyor); *Chairman Try. Com.*, Coun. Waddington; *Vice-Chairman*, Coun. Haworth.

Herne Bay Pier Tramway (owned and worked by Herne Bay U.D.C.), Herne Bay. [T.N., 22.] *Res. Eng. and Manager*, H. C. Dufton.

Heywood Corporation Tramways, Heywood, Lancs. [T.N., 47.] *Gen. Manager*, D. H. Davies; *Per. Wa Eng.*, J. B. Nuttall; *Chairman Try. Com.*, Coun. J. Ashworth; *Vice-Chairman*, Ald. T. Popple, J.P.

Huddersfield Corporation Tramways, Northumberland Street, Huddersfield. [T.N., 698 and 398.] *Gen. Manager & Elec. Eng.*, R. H. Wilkinson; *Assist. Engineer*, A. P. Quilliam; *Traffic Supt.*, T. Hartley; *Borough Eng.*, K. F. Campbell; *Chairman Try. Com.*, Coun. E. H. Sellers; *Vice-Chairman*, Coun. T. Canby.

Hull Corporation Tramways, Alfred Gelder Street, Hull. [T.N., 444, Corporation.] *Manager*, Wm. J. McCombe; *Try. Elec. Eng.*, J. Wilkinson [T.N. 443, Corporation]; *Per. Way Eng.*, F. W. Bricknell (*City Engineer*) [T.N. 943, Corporation]; *Chairman Try. Com.*, Coun. W. Wheatley; *Vice-Chairman*, Coun. Hakes.

Ilford Urban District Council Tramways, Ley Street, Ilford. [T.N., 684.] *Manager and Engineer*, L. E. Harvey; *Chairman Try. Com.*, Coun. W. J. T. Cullis; *Vice-Chairman*, Coun. Owen Waters.

Ilkeston Corporation Tramways, Park Road, Ilkeston. [T.A., Bellamy Ilkeston: T.N., 26.] *Manager and Elec. Eng.*, L. C. F. Bellamy; *Chairman Try. Com.*, Coun. J. E. Bestwick; *Vice-Chairman*, Coun. Kane.

Ipswich Corporation Tramways, Constantine Road, Ipswich. [T.A., Ayton, Tramways, Ipswich; T.N., 354.] *Gen. Manager and Elec. Eng.*, Frank Ayton; *Traffic Supt.*, A. Butler; *Rolling Stock Supt.*, W. A. Fairhead; *Chairman Try. Com.*, Coun. E. C. Ransome; *Vice-Chairman*, W. P. Burton.

Kearsley Urban District Council Tramways, Council Office, Kearsley, Farnworth, S.O. *Clerk U. D. C.*, H. Martin.

[Lines leased to and worked by the South Lancashire Tramways Co.]

Keighley Corporation Tramways, South Street, Keighley. [T.A., Tramways, Keighley; T.N., 17.] *Gen. Manager and Elec. Eng.*, H. Webber; *Chairman Try. Com.*, Coun. A. Smith.

Kilmarnock Corporation Tramways Electricity Works, Kilmarnock. [T.N., 95.] *Elec. Eng. and Manager*, W. C. Bexon; *Consulting Engineers*, Kennedy and Jenkin; *Convener Try. Com.*, Bailie Jones.

Digitized by Google

ELECTRIC TRAMWAYS IN THE UNITED KINGDOM.

Kirkcaldy Corporation Tramways, Electricity Works Victoria Road, Kirkcaldy. [T.A., Tramways, Kirkcaldy. T,N., 124, 174, and 175.] *Manager & Elec. Eng.*, O. F. Francis; *Traffic Manager*, Jas. Fisher; *Chairman Try. Com.*, Coun. G. Fergusson.

Lancaster Corporation Tramways, Electricity Works, Lancaster. [T.A., Milnes, Tramways, Lancaster; T.N., 1, L.] *Gen. Manager & Elec. Eng.*, G. C. Milnes; *Traffic Manager*, W. T. Charlton; *Chairman Try. Com.*, Coun. T. Wilkinson.

Leeds City Tramways, Swinegate, Leeds. [T.A., Tramways, Leeds; T.N., 1230; *General Manager*, J. B. Hamilton; *Traffic Supt.*, A. Daggett; *Elec. Eng.*, John Burbridge; *Highways and Per. Way Eng.*, R. B. Holt; *Car Works Supt.*, G. E. Watmough; *Chairman Try. Com.*, Ald. R. A. Smithson; *Vice-Chairman*, Ald. H. Brown.

Leicester Corporation Tramways, 20 and 22, Humberstone Gate, Leicester. [T.N., 2177.] *Manager & Sec.*, A. F. Lucas; *Boro. & Try. Eng.*, E. G. Mawbey; *Boro. Elec. Eng.*, T. R. Smith; *Cons. Engs.*, Kincaid, Waller & Manville; *Chairman Try. Com.*, Ald. S. Flint, J.P.; *Vice-Chairman*, Ald. G. Banton, J.P.

Leith Corporation Tramways, 165, Leith Walk, Leith. [T.N., 415.] *Gen. Manager*, F. A. Fitzpayne; *Per. Way Eng.*, J. R. Findlay (*Burgh Eng.*); *Chairman Try. Com.*, Judge Hall.

Leyton District Council Tramways, Car Depot, Lea Bridge Road, Leyton, E. [T.A., Tramways, Leyton; T.N., 17 Walthamstow.] *Manager*, F. Schofield; *Elec. Eng.*, F. Harman Lewis; *Per. Way Eng.*, E. H. Essex; *Chairman Try. Com.*, Coun. J. A. Hennah.

Lincoln Corporation Tramways, Brayford Side North, Lincoln. [T.A., Stanley Clegg, Lincoln; T.N., 109]. *General Manager and Elec. Eng.*, Stanley Clegg; *Chairman Try. Com.*, Ald. W. S. White; *Vice-Chairman*, Coun. M. A. Ashley.

Liverpool Corporation Tramways, 24, Hatton Garden, Liverpool. [T.A., Tramways, Liverpool; T.N., 6054 and 7701, Central.] *General Manager*, C. W. Mallins; *Per. Way Eng.*, J. A. Brodie (*City Engineer*); *City Electrical Engineer*, Harold Dickinson; *Rolling Stock Supt.*, T. Ridyard; *Chairman Try. Com.*, Coun. E. Russell Taylor; *Vice-Chairman*, Ald. F. Smith, J.P.

London County Council Tramways, 62, Finsbury Pavement, London, E.C. [T.A., Lotram Ave., London; T.N., 3321, 3322, and 3323 London Wall.] *Chief Officer*, A. L. C. Fell; *Deputy Chief Officer*, J. K. Bruce; *Traffic Assist.*, ————; *Rolling Stock Supt.*, W. E. Ireland; *Per. Way Eng.*, J. Welling; *Chairman Highways Com.*, G. H. Hume; *Vice-Chairman*, T. Prestige.

Lowestoft Corporation Tramways, Norwich Road, Lowestoft. [T.N., 87.] *Gen. Manager*, H. H. Saunders; *Elec. Eng.*, W. R. May; *Chairman Try. Com.*, Coun. F. Spashett.

Maidstone Corporation Tramways, Tramway Offices, Tonbridge Road, Maidstone. [T.A., Lambert, Tramways, Maidstone; T.N., 448] *Gen. Manager and Elec. Eng.*, A. T. Lambert; *Chairman Try. Com.*, Coun. D. T. J. Lyle; *Vice-Chairman*, Coun. Green.

Manchester Corporation Tramways, 55, Piccadilly, Manchester. [T.A., Tramways, Manchester; T.N., 7800 City.] *Gen. Manager*, J. M. McElroy; *Traffic Sup.*, J. T. Oakes; *Elec. Eng.*, J. J. McMahon; *Chief Civil Eng.*, H. Mattinson; *Rolling Stock Supt.*, G. R. Blackburn; *Chairman Try. Com.*, Ald. J. Bowes; *Vice-Chairman*, Ald. A. W. Chapman.

Middlesex County Council Light Railways, Middlesex Guildhall, Westminster, London, S.W. *County Eng.*, H. T. Wakelam, M.I.C.E.; *Chairman of Light Railways Com.*, County Ald. H. Burt; *Vice-Chairman*, County Coun. F. Goodyear.

Middleton Corporation Tramways, *Consulting Engs.*, Lacey, Sillar, and Leigh; *Chairman Try. Com.*, Ald. W. Wood, J.P. (Mayor); *Vice-Chairman*, Ald. Bentley, J.P.
[Worked by Manchester Corporation Tramways.]

Nelson Corporation Light Railways, Charles Street, Nelson. [T.N., 115.] *Manager and Elec. Eng.*, G. F. Nayler; *Per. Way Eng.*, W. Shackleton; *Chairman Try. Com.*, Coun. W. F. Cooke.

Newcastle-upon-Tyne Corporation Tramways, Manors, Newcastle. [T.A., Traction, Newcastle; T.N., 913 and 914 Central.] *Gen. Manager & Engineer*, Ernest Hatton; *Traffic Supt.*, T. Chalder; *Per. Way Eng.*, W. J. Steele; *Chairman Try. Com.*, Coun. R. Mayne; *Vice-Chairman*, Coun. A. M. Sutherland.

Newport (Mon.) Corporation Tramways, Town Hall, Newport, Mon. [T.A., Dynamo, Newport, Mon.; T.N., 990 L., Nat.] *Gen. Manager*, N. J. Young; *Boro. Elec. and Per. Way Eng.*, A. Nichols Moore; *Chairman Try. Com.*, Coun. J. Moxon; *Vice-Chairman*, Ald. F. Phillips.

Northampton Corporation Tramways, St. James', Northampton. [T.N., 279 & 280.] *Gen. Manager and Elec. Eng.*, J. F. Cameron; *Chairman Try. Com.*, Coun. T. D. Lewis; *Vice-Chairman*, Coun. W. Beale.

Nottingham Corporation Tramways, Beastmarket Hill, Nottingham. [Tramways, Nottingham; T.N., 225.] *General Manager & Elec. Eng.*, John Aldworth; *Traffic Supt.*, H. Morley; *Per. Way Eng.*, Arthur Brown (*City Eng.*); *Rolling Stock Supt.*, W. Boot; *Chairman Try. Com.*, Coun. R. H. Swain, J.P.; *Vice-Chairman*, Ald. F. R. Radford, J.P.

Oldham Corporation Tramways, Wallshaw Depot, Oldham. [T.A., Tramways, Oldham; T.N., 1495.] *Gen. Manager & Eng.*, P. Priestly; *Traffic Supt.*, J. Brierley; *Chairman Try. Com.*, Ald. F. G. Isherwood; *Vice-Chairman*, Coun. F. Elliot.

Perth Corporation Tramways, 128, High Street, Perth. [T.N., 226 & 101.] *Tramways Manager*, W. G. Snell; *Elec. & Tramways Eng.*, John Lambert; *Per. Way Eng.*, R. McKillop (*Burgh Surv.*); *Chairman Try. Com.*, Coun. Calderwood.

Plymouth Corporation Tramways, 15, Ebrington Street, Plymouth. [T.N. 518, Plymouth.] *General Manager*, C. R. Everson; *Elec. Eng.*, E. J. Okell; *Chairman Try. Com.*, Ald. S. H. Phillips, J.P.; *Vice-Chairman*, Coun. J. Moon.

Pontypridd Urban District Tramways, Generating Station, Treforest, Pontypridd. [T.N. 33.] *Gen. Manager and Elec. Eng.*, J. E. Teasdel; *Traffic Inspector*, W. May; *Per. Way Eng.*, W. E. Lowe (*Surveyor*); *Chairman Try. Com.*, Coun. M. L. Jones.

Portsmouth Corporation Tramways, Town Hall, Portsmouth. [T.N., 110 Corporation.] *Gen. Manager*, W. R. Spaven; *Elec. and Per. Way Eng., and Rolling Stock Supt.*, V. G. Lironi; *Traffic Supt.*, W. Munford; *Chairman Try. Com.*, Coun. J. Timpson; *Vice-Chairman*, Ald. R. Payne.

Preston Corporation Tramways, Holmrook Road, Preston. [T.A., Corporation Tramways, Preston; T.N., 273.] *Gen. Manager and Elec. Eng.*, J. F. Simpson: *Traffic Supt.*, C. H. Manning; *Chairman, Try. Com.*, Ald. J. Ormrod; *Vice-Chairman*, Coun. T. Parkinson.

Radcliffe Urban District Council Tramways, Council Offices, Radcliffe, Lancs. *Res. Eng.*, H. Wilkinson; *Per. Way Eng.*, W. L. Rothwell; *Clerk*, S. Mills; *Chairman Try. Com.*, Coun. Walker Allen, J.P.
[These tramways are worked as part of the Bury system.]

Rawtenstall Corporation Tramways, Bacup Road, Rawtenstall. [T.N., 81 and 85.] *Gen. Manager and Elec. Eng.*, C. L. E. Stewart; *Chairman Try. Com.*, Ald. H. Coupe, J.P.; *Vice-Chairman*, Coun. J. W. Stansfield.

Reading Corporation Tramways, Mill Lane, Reading. [T.A., Tramways Manager, Reading; T.N., 330.] *Gen. Manager & Elec. Eng.*, G. F. Craven; *Chairman Try. Com.*, Ald. C. G. Field, J.P. (Deputy Mayor).

Rochdale Corporation Tramways, Mellor Street, Rochdale. [T.A., Tramways, Rochdale; T.N., 48.] *Gen. Manager & Eng.*, G. Webster; *Traffic Manager*, R. Bentley; *Per. Way Eng.*, S. S. Platt; *Rolling Stock Supt.*, E. Sidgwick; *Chairman Try. Com.*, Ald. Taylor.

Rotherham Corporation Tramways, Rawmarsh Road, Rotherham. [T.A., Cross, Rotherham; T.N., 138, 152, and 241.] *General Manager & Elec. Eng.*, E. Cross; *Deputy Elec. Eng.*, J. R. Lilleker; *Traffic Superintendent*, H. Jagger; *Per. Way Eng.*, T. P. Collinge; *Rolling Stock Supt.*, C. A. Walker; *Chairman Try. Com.*, Ald. D. L. Winter; *Vice-Chairman*, Coun. T. Reeves.

St. Helens Corporation Tramways, Town Hall, St. Helens, Lancs. *Chairman Try. Com.*, ————; *Vice-Chairman*, Coun. W. N. Pilkington.
[Lines worked by the New St. Helens and District Tramways Co.]

Salford Corporation Tramways, 32, Blackfriars Street, Salford. [T.A., Tramways, Salford; T.N., 5367 and 5368 Central.] *Gen. Manager*, Geo. W. Holford; *Elec. Eng.*, J. A. Robertson; *Traffic Supt.*, J. W. Blakemore; *Per. Way Supt.*, E. B. Martin; *Rolling Stock Supt.*, R. Chadwick; *Chairman Try. Com.*, Ald. H. Linsley, J.P.; *Vice-Chairman*, Coun. W. H. Barrett.

Sheffield Corporation Tramways, 8, Division Street, Sheffield. [T.A., Tramways, Sheffield; T.N., 4600.] *General Manager*, A. R. Fearnley; *Traffic Supt.*, A. Handford; *Per. Way Eng.*, W. J. Hadfield; *Rolling Stock Supt.*, J. Smith; *Chairman Try. Com.*, Ald. Sir W. Clegg, J.P.; *Vice-Chairman*, Coun. A. T. Bescoby, J.P.

Shipley Urban District Tramway, Dockfield, Shipley. [T.A., Electricity Works, Shipley; T.N., 190.] *Elec. Eng.*, Wm Redman; *Chairman Try. Com.*, H. Pitts.
[Lines leased to Bradford Corporation.]

Southampton Corporation Tramways, 161, Above Bar, Southampton. [T.A., Tramways, Southampton; T.N., 301.] *Gen. Manager*, W. T. Robson; *Boro. Elec. Engineer*, H. F. Street; *Traffic Manager*, C. G. Simpson; *Chairman Try. Com.*, Ald. F. A. Dunsford, J.P.

Southend-on-Sea Corporation Tramways, London Road, Southend-on-Sea. [T.N., 96.] *Gen. Manager and Elec. Eng.*, R. Birkett; *Traffic Manager*, J. Daniells,; *Per. Way Eng.*, E. J. Elford (*Boro. Surveyor*); *Rolling Stock Supt.*, J. Dobson; *Chairman Try. Com.*, Ald. A. Martin.

Southend Pier Electric Railway, (owned and worked by Southend-on-Sea Corporation), [T.A., Piermaster, Southend; T.N., 91.] Southend-on-Sea. *Elec. Eng.*, C. R. Norton; *Piermaster*, Capt. N. E. Hucker; *Chairman*, Coun. H. Dowsett.

Southport Corporation Tramway, 44, Chapel Street, Southport. [T.N., 116.] *Gen. Manager*, T. J. Kendrew; *Boro' Elec. Eng.*, A. S. Black; *Chairman Try. Com.*, Ald. Griffiths, J.P.; *Vice-Chairman*, Coun. Clayton.

South Shields Corporation Tramways, Dean Road, South Shields. [T.A., Tramways, South Shields; T.N., 157.] *Gen. Manager & Elec. Eng.*, J. C. Whiteley; *Boro. Elec. Eng.*, H. S. Ellis; *Chairman Try. Com.*, Ald. W. G. Wylie; *Vice-Chairman*, Ald. J. W. Henderson.

Stalybridge Hyde, Mossley, and Dukinfield Tramways and Electricity Board, Waterloo Road, Stalybridge. [T.N., 311.] *Commercial Manager*, F. Schofield; *Chief Eng.*, R. Blackmore; *Chairman Try. Com.*, Ald. R. Wood; *Vice-Chairman*, Coun. S. C. Homer.

Stockport Corporation Tramways, Mersey Square, Stockport. [T.N., 232 and 237.] *Manager*, A. T. Eardley; *Elec. Eng.*, R. Lomax; *Chairman Try. Com.*, Ald. Chas. Sharples; *Vice-Chairman*, Ald. W. E. Hamnett.

Sunderland Corporation Tramways, Tramway Offices, Monkwearmouth, Sunderland. [T.A., Trys. Manager, Sunderland; T.N., 948.] *Gen. Manager and Elec. Eng.*, A. R. Dayson; *Chairman Try. Com.*, Coun. G. New, J.P.; *Vice-Chairman*, Coun. W. Walker, J.P.

Swindon Corporation Tramways, Electricity Works, Swindon. [T.A., Tramways, Swindon; T.N., 4.] *Manager*, T. Medcalf; *Elec. Eng.*, A. Dimmack; *Consulting Engs.*, Lacey, Sillar, & Leigh; *Chairman Try. Com.*, Coun. A. D. Richards; *Vice-Chairman*, Coun. A. Bull.

Wallasey Corporation Tramways, Seaview Road, Wallasey. [T.A., Tramways, Liscard; T.N., 1431, Liscard.] *General Manager*, R. R. Greene; *Elec. Eng.*, J. H Crowther; *Per. Way Eng.*, W. H. Travers; *Chairman Try. Com.*, Coun. F. E. Howse; *Vice-Chairman*, Coun. H. W. Griffin.

Walsall Corporation Tramway, St. Paul's Buildings, The Bridge, Walsall. [T.A., Tramways, Walsall; T.N., 238 & 559.] *Gen. Manager*, R. L. Horsfield; *Elec. Eng.*, H. A. Howie; *Per. Way Eng.*, J. Taylor (*Boro. Surveyor*); *Chairman, Try. Com.*, Ald. J. Cope; *Vice-Chairman*, Ald. J. Williams.

Walthamstow Urban District Council Tramways, Chingford Road, Walthamstow, [T.A., Tramways, Walthamstow; T.N., 20.] *Tramways Manager*, W. Murray; *Elec. Eng.*, G. R. Spurr (Priory Avenue, Walthamstow); *Per. Way Eng.*, G. W. Holmes; *Chairman Trys. Com.*, Coun. Clarke; *Vice-Chairman*, Coun. R. J. Bishop.

Warrington Corporation Tramways, Mersey Street, Warrington. [T.N., 196] *Gen. Manager*, J. Telfer; *Elec. Eng.*, F. V. L. Mathias; *Chairman Try. Com.*, Coun. Dr. G. W. Joseph; *Vice-Chairman*, Coun. J. Wilkinson.

West Bromwich Corporation Tramway, Electricity Works, West Bromwich. [T.N., 100.] *Boro. Eng.*, A. D. Greatorex; *Boro. Elec. Eng.*, W. A. Jackson; *Chairman Try. Com.*, Ald. A. G. Turley, J.P. (Mayor); *Vice-Chairman*, Coun. G. Garratt.
[These tramways are leased to the South Staffs. (Lessee) Co., Ltd.]

West Ham Corporation Tramways, Greengate Street, Plaistow, London, E. [T.A., Trameurs, Plais., London; T.N., 868 East.] *General Manager*, L. Slattery; *Boro' Elec. Eng.*, J. W. Beauchamp; *Chairman Try. Com.*, Coun. Kensett.

West Hartlepool Corporation Tramways, Cleveland Road, West Hartlepool. [T.N., 6078.] *Gen. Manager & Eng.*, Chas. Burgess; *Chairman Try. Com.*, Ald. Martin; *Vice-Chairman*, Coun. Charlton.

Wigan Corporation Tramways, Market Place, Wigan; [T.N., 226.] *Gen. Manager*, F. Buckley; *Per. Way Eng.*, A. T. Gooseman; *Chairman Try. Com.*, Ald. R. T. Fletcher; *Vice-Chairman*, Coun. J. Walkden.

Wolverhampton Corporation Tramways, Municipal Tramway Offices, Cleveland Road, Wolverhampton. [T.N., 324.] *Gen. Manager and Engineer*, C. O. Silvers; *Boro. Elec. Eng.*, S. T. Allen; *Per. Way Eng.*, George Green; *Chairman Try. Com.*, Ald. Sir C. T. Mander, Bart., J.P.; *Vice-Chairman*, Ald. S. Craddock, J.P.

York Corporation Tramways, 8, Clifford Street, York. [T.N., 302]. *Gen. Manager and Elec. Eng.*, J. W. Hame; *Traffic Supt.*, J. W. Horton; *Per. Way Eng.*, F. W. Spurr (City Surveyor); *Chairman Try. Com.*, Ald. S. W. Meyer; *Vice-Chairman*, Coun. W. H. Sessions.

COMPANY TRAMWAYS.

Aberdeen Suburban Tramways Company, 15, Golden Square, Aberdeen. [T.A., Judicial, Aberdeen; T.N., 447.] *Manager & Per. Way Eng.*, A. Wilkie; *Sec.*, G. Duncan; *Chairman*, James Mearns; *Directors*, W. Jackson, Dr. Christie, Jas. Sellar.

Airdrie and Coatbridge Tramways Company, Tramway Depôt, Main Street, Coatbridge [T.N., 105], and Electrical Federation Offices, Kingsway, London, W.C. *Gen. Manager*, A. Robertson; *Sec.*, P. N. Gray; *Chairman*, W. L. Madgen; *Directors*, H. S. Day, A. C. Miles, G. J. Somerville.

Barnsley and District Electric Traction Company, Ltd., Car Depot, Sheffield Road, Barnsley. [T.A., Tramways, Barnsley; T.N., 159.] *Acting Manager*, W. E. Nicoll; *Acting Sec.*, P. N. Gray; *Chairman*, E. Garcke; *Directors*, Col. Sir Thomas Pilkington, Bart., E. A. Paris.

Barrow-in-Furness Tramways, Salthouse Road Depot, Barrow, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Barrow; T.N., 125.] *Manager*, W. F. Bladon; *Sec.*, F. J. Cursons; *Acting Sec.*, J. S. Bowker; *Chairman*, H. S. Day; *Directors*, J. V. Kitchener, E. R. Soames.

Bath Electric Tramways Company, Ltd., Walcot Street, Bath, and 119-125, Finsbury Pavement, London, E.C. [T.A., Trams, Bath; T.N., 1214.] *Gen. Manager and Eng.*, W. E. Hardy; *Traffic Supt.*, E. Seckington; *Sec.*, H. J. Almond; *Chairman*, Hon. Sir J. Sivewright, K.C.M.G.; *Directors*, H. F. Clutterbuck, E. H. R. Trenow, A. A. C. Swinton, E. Callaird.

Bessbrook and Newry Tramway Company, Bessbrook, Co. Armagh. [T.A., Tramways, Bessbrook.] *Manager*, Robert Caven; *Elec. Eng.*, J. L. D. Meares; *Chairman*, J. N. Richardson; *Directors*, C. H. Richardson, R. T. Scott, T. W. Richardson, T. McGreggor Greer.

Birmingham District Power and Traction Company, Power Station, Downing Street, Smethwick, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Power Station, Smethwick; T.N., 65 Smethwiek.] *Gen. Manager*, W. G. Bond; *Secretary*, B. Kingsford; *Chairman*, C. Shirreff Hilton; *Directors*, J. A. Lycett, W. L. Madgen, S. R. Blundstone, R. J. Howley.

Digitized by Google

ELECTRIC TRAMWAYS IN THE UNITED KINGDOM.

Blackpool and Fleetwood Tramroad Company, Ltd., Bispham, near Blackpool. [T.A., Cameron, Blackpool; T.N., 121.] *General Manager and Secretary*, J. Cameron; *Elec. Eng.*, A. Cameron; *Chairman*, John Greenwood; *Directors*, R. H. Prestwich, R. B. Barningham, R. S. Boddington, G. Richardson, G. Readman.

Blackpool and Fylde Light Railway Company, 5, Clifton Street, Blackpool. (No appointment of engineer or officials yet made.) *Secretary*, R. Bibby; *Chairman*, John Greenwood; *Directors*, T. Fisher, J.P., John Platt, J.P., W. Hardman, J.P., R. H. Mabbott.

Blackpool, St. Anne's, and Lytham Tramways Company, Ltd., Squires Gate, and 80, Birley Street, Blackpool. [T.N., 327 and 22.] *Gen. Manager and Elec. Eng.*, H. W. Laing; *Traffic Manager*, G. W. Wood; *Rolling Stock Supt.*, J. Partington; *Secretary*, Chas. E. Riding; *Chairman*, G. Nicholson; *Directors*, T. M. Smith, T. Preston.

Bray and Enniskerry Railway Company, 52, Westland Row, Dublin. *Sec.*, M. F. Keogh; *Chairman*, A. Killingley; *Director*, F. M'Crea.

Brighton Beach Electric Railway, Madeira Road, Brighton. [T.A., Volk, Brighton; T.N., 14 P.O.] *Manager and Eng.*, Magnus Volk; *Traffic Superintendent*, H. Sheppard; *Per. Way Eng.*, J. Barker; *Secretary*, A. Volk; *Chairman*, Magnus Volk; *Directors*, M. H. Volk, B. W. Symonds, A. Volk.

Bristol Tramways and Carriage Company, Ltd., Clare Street House, Bristol. [T.A., Cab, Bristol; T.N., 74 & 3074 Nat.] *Manager*, Chas. Challenger; *Assist. Manager*, S. E. Smith; *Electrical Engineer*, W. H. Munton; *Permanent Way Engineer*, G. T. C. Edwards; *Secretary*, H. F. Cooper; *Chairman*, Sir G. White, Bart.; *Directors*, W. G. Verdon Smith (*Managing*), S. White, J.P., J. H. Howell, J.P., G. Stanley White.

British Electric Traction Company, Ltd., Electrical Federation Offices, Kingsway, London, W.C. E. Garcke (*chairman*); *Directors*, C. Shirreff B. Hilton, W. L. Madgen, Sir Charles Ollivant, A. Shepherd, G. T. Symons, C. G. Tegetmeier, P. D. Tuckett; *Joint Managers*, C. H. Dade and R. J. Howley; *Acting Secretary*, T. Bower; *Accountant*, C. Walmsley.

This company is interested in the following tramways, particulars of which are given under their respective names:

Airdrie & Coatbridge.
Barnsley & District.
Barrow-in-Furness.
Birmingham & District Power & Traction Co.:
Birmingham & Midland
Dudley, Stourbridge, & District.
South Staffordshire.
Wolverhampton Dist.
Devonport & District.
Gateshead & District.
General Elec. Tramways.
Gravesend & Northfleet.
Greenock & Port Glasgow.
Jarrow & District.
Kidderminster & District.
Merthyr.
Middleton.
Oldham, Ashton, & Hyde.
Peterborough.
Potteries.
Rothesay.
Sheerness & District.
South Metropolitan.
Southport.
Swansea.
Taunton.
Tynemouth & District.
Weston-super-Mare & District.
Worcester.
Wrexham & District.
Yorkshire (Woollen Dist.)

Burton and Ashby Light Railways, Power Station, Swadlincote, nr. Burton-on-Trent. [T.A., Toulmin, Swadlincote; T.N., 1.] *Manager and Eng.*, Jas. Toulmin; *Secretary*, A. L. Charles; *Chairman*, G. Murray Smith.

[The line is owned and worked by the Midland Railway Company.]

Camborne and Redruth Tramways, Elec. Works, Carn Brea, R.S.O., Cornwall. [T.N., 3, Camborne.] (Owned by Urban Elec. Supply Co.) *Manager and Eng.*, L. A. Hards; *Sec.*, C. H. Jones; *Chairman*, P. D. Tuckett; *Directors*, E. Charrington, H. B. Grotian, Douglas Owen.

Carlisle Tramways Company, Ltd., City of, Depot and Offices, London Road, Carlisle. [T.A., Tramways, Carlisle; T.N., 0180.] *Engineer and Manager*, R. L. McCulloch.

Chatham and District Light Railways Company, Luton Road, Chatham, and 83, Cannon Street, London, E.C. [T.A., Tramways, Chatham; T.N., 51.] *General Manager*, W. Jensen; *Assist. Manager*, A. J. Bousfield; *Traffic Manager*, ——————; *Secretary*, A. Clements; *Chairman*, A. R. Monks; *Directors*, H. C. Levis, J. F. Nauheim, W. B. H. Martindale.

Cheltenham and District Light Railway Company, Cheltenham. [T.N., 341.] *Directors*, A. H. Beatty (*Chairman*), W. Shearer, H. L. Williams, A. S. Guinness, H. J. McCormick; *Sec.*, Wm. C. Bryden, C. A., 66, Queen Street, London, E.C.; *Local Eng. and Manager*, Henry J. McCormick, St. George's Road, Cheltenham.

Clontarf and Hill of Howth Tramroad Company, 39, Dame Street, Dublin. [T.A., c/o Railways, Dublin; T.N., 917.] *Secretary*, J. P. Chapman; *Chairman*, W. L. Murphy; *Directors*, E. Anderson, J. J. Dudley.

Cork Electric Tramways and Lighting Company, Ltd., Albert Street, Cork. [T.A., Tramways, Cork; T.N., 78 and 535.] *Manager and Engineer*, H. H. Nalder; *Traffic Manager*, H. G. Whiting; *Per. Way Engineer*, H. Mack; *Secretary*, A. Clements; *Chairman*, A. R. Monks; *Directors*, E. Anderson, W. M. Murphy, Capt. W. Martindale, H. C. Levis.

Dartford Urban District Council Light Railways. Car Depot, Priory Road, Dartford. [T.N., 31 Dartford.] (Leased to and worked by Balfour, Beatty, & Co., Ltd., 66, Queen Street, London, E.C.) *Acting Manager*, F. A. Kincaid Fergusson.

Devonport and District Tramways Company, Electrical Federation Offices, London, W.C. [T.A., Head Office, Devonport c/o Tramway, London; T.N., Head Office, Holborn 2686. *Manager and Eng.*, George Cardwell; *Secretary*, S. M. Wright; *Acting Sec.*, P. N. Gray; *Chairman*, C. S. B. Hilton; *Directors*, J. S. Raworth, E. R. Soames, C. G. Tegetmeier, R. J. Sutcliffe.

[The Company's undertaking has been sold to Plymouth Corporation.]

Dewsbury, Batley, and Birstall Tramways Company, Ltd., Electrical Federation Offices, Kingsway, London, W.C.

[Lines worked by Yorkshire (Woollen District) Electric Tramways, Ltd., *q.v.*]

Dewsbury and Ossett Corporation and Soothill Nether Urban District Council Tramways, (Lessees: The National Elec. Construction Co., Ltd., 3, Laurence Pountney Hill, London, E.C.) [T.A., Overhauled, London; T.N., 5329 and 5330 Bank.] *Manager*, W. MacGibbon.

Douglas—Ramsey. (The Manx Elec. Rly. Company), 1, Strathallan Crescent, Douglas. (See Manx Electric Railway Company).

Douglas Southern Electric Tramways, Ltd., Marine Drive, Douglas, Isle of Man, and 24, Brazennose Street, Manchester. [T.A., Traffic, Douglas.] *Manager and Eng.*, R. Orton; *Sec.*, J. E. Sharples; *Chairman*, T. J. Hutchinson; *Directors*, I. E. Winslow, E. A. Hopkins.

Dublin and Lucan Electric Railway Company, 15, Conyngham Road, Dublin. [T.A., Lucan Tramway, Dublin; T.N. 2282 and 4006 Dublin, and 5 Lucan.] *Manager, Elec. Eng., and Sec.*, D. McDowall Grosart, J.P.; *Chairman*, J. W. Hill, J.P.; *Directors*, E. Anderson, A. B. Coyle, J.P., G. N. Murphy.

Dublin United Tramways Company (1896), Ltd., 9, Upper Sackville Street, Dublin. [T.A., Tramways, Dublin; T.N., 58 and 59.] *Gen. Manager*, G. Marshall Harriss; *Elec. Eng.*, R. Tanham; *Con. Eng.*, H. F. Parshall; *Per. Way Eng.*, P. F. O'Sullivan; *Secretary*, W. McHugh; *Chairman*, W. M. Murphy, J.P.; *Directors*, W. F. Cotton, J.P., J. Mooney, Rt. Hon. L. A. Waldron, P.C.

Dudley, Stourbridge and District Electric Traction Company, Ltd. (Section of The Birmingham and Midland Tramways Joint Committee), Power Station, Downing Street, Smethwick, Brierley Hill, Staffs., and Electrical Federation Offices, Kingsway, London, W.C. [T.N., 65 Smethwick.] *General Manager*, W. G. Bond; *Secretary*, E. H. Woodhall; *Chairman*, S. R. Blundstone; *Directors*, J. A. Lycett, R. J. Howley.

Dumbarton Burgh and County Tramways Company, Tramway Depot, Dumbarton, and 23, Rutland Street, Edinburgh. [T.A., Tramways, Dumbarton; T.N., 119.] *Gen. Manager and Elec. Eng.*, J. P. McMahon; *Secretary*, A. Dishart; *Chairman*, G. Balfour; *Directors*, K. Sanderson, K. A. Scott Moncrieff.

Dundee, Broughty Ferry & District Tramways Company, Milton, Monifieth, N.B. [T.N., 24 Monifieth.] *Gen. Manager & Engineer*, Daniel Fisher; *Secretary*, E. Cowan; *Chairman*, George Balfour; *Directors*, Edward Cowan, David Hynd.

Dunfermline and District Tramways Company, Tramway Depot, Cowdenbeath, Fife, and 8, New Row, Dunfermline. *Manager and Engineer*, J. H. Shepherd; *Secretary*, G. A. Nicolson; *Cons. Engs.*, Hawtayne & Zeden; *Directors*, Wm. Low, G. Balfour (*managing*), K. Sanderson, D. Hynd.

Falkirk & District Tramways Company, Larbert Road, Larbert, Stirlingshire. [T.A., Tramways Co., Falkirk; T.N., 154 Falkirk.] *Gen. Manager and Engineer*, D. Hays; *Chairman*, G. M. Brown; *Directors*, A. W. Tait, R. Hunter, G. Balfour, C. D. Geddes.

Felixstowe Pier Railway. Felixstowe. (The Coast Development Corporation, Ltd.) *Elec. Eng.*, E. A. Lambert.

Gateshead and District Tramways Company, Tramway Depôt, Sunderland Road, Gateshead, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramway Depôt, Gateshead; T.N., 125 & 408 Gateshead.] *General Manager*, William Morrison; *Secretary*, H. W. Davis; *Chairman*, H. S. Day; *Directors*, H. A. Stagg, C. R. Greene, Judge L. A. Atherley-Jones, K.C.

Giant's Causeway and Portrush Electric Tramway Company, Portrush. *Manager & Sec.*, W. McCurdy; *Elec. Eng.*, W. A. Traill; *Chairman*, F. J. S. Moore; *Directors*, C. M'D. Stuart, W. A. Traill.

Glossop Tramways, Electricity Works, Glossop (owned by the Urban Electric Supply Co.) [T.N., 31, Glossop.] *Manager and Res. Eng.*, C. E. Knowles; *Rolling Stock Supt.*, A. W. Bullough; *Secretary*, C. H. Jones; *Chairman*, P. D. Tuckett; *Directors*, E. Charrington, F. E. Gripper, H. B. Grotrian, D. Owen.

Gosport and Fareham Tramways, Tramways and Lighting Office, Gosport, Hants., and Moorgate Station Chambers, London, E.C. [T.A., Tramways, Gosport; T.N., 3, Post Office, Gosport.] *Eng. and Manager*, J. Fereday Glenn; *Sec.*, J. Barber Glenn; *Chairman*, A. Beattie, J.P., D.L.; *Directors*, J. Barber Glenn (*managing*), S. Hern.

Gravesend & Northfleet Electric Tramways, Ltd., Tramway Depot, Northfleet, Kent, and Electrical Federation Offices, Kingsway, London, W.C. [T.N., 958, Gravesend.] *Manager*, J. R. Groves; *Sec.*, H. C. Walter; *Chairman*, W. L. Madgen; *Directors*, P. N. Gray, W. S. Wreathall.

Great Crosby Tramways, 31, James Street, Liverpool.

[This tramway is worked by the Liverpool Overhead Railway Company.]

Great Grimsby Street Tramway Co., Southampton House, Cleethorpes, and Moorgate Station Chambers, London, E.C. [T.A., Blanco, Cleethorpes; T.N., 16.] *Manager and Eng.*, H. L. White; *Elec. Eng.*, H. O. White; *Managing Director and Secretary*, J. B. Glenn; *Chairman*, A. Beattie, J.P., D.L.; *Director*, S. Hern.

Greenock and Port Glasgow Tramways Company, Ladyburn, Greenock, and Electrical Federation Offices, Kingsway, London, W.C. [T.A. Tramways, Greenock; T.N., 562]. *Manager*, A. Robertson; *Secretary*, P. N. Gray; *Chairman*, W. L. Madgen; *Directors*, G. J. Somerville, A. C. Miles, H. S. Day.

Guernsey Railway Company, Ltd., Hougue-à-la-Perre, Guernsey. *Manager and Elec. Eng.*, Arthur G. Bird; *Sec.*, J. de Mouilpied; *Chairman*, G. F. Peek; *Directors*, W. D. Murdoch, E. Valied, J. B. Collings, Q. Le Pelley.

Hampshire Light Railway (Electric) Company, Ltd., Moorgate Station Chambers, London, E.C. *Secretary*, J. B. Glenn; *Chairman*, A. Beattie, J.P.; *Directors*, J. Barber Glenn (*managing*), S. Hern.

[This company works the Portsdown and Horndean Light Railway.]

Hastings Tramways Company, Ltd., Beaufort Road, Silverhill, St. Leonards-on-Sea, and 1, Queen Victoria Street, London, E.C. [T.A., Tramways, Hastings, and Enshrine, London; T.N., 90 Hastings, and 3465, City]. *General Manager and Elec. Eng.*, W. Vincent Edwards; *Secretary*, W. R. Elston; *Cons. Engs.*, Kincaid, Waller, Manville, and Dawsen; *Chairman*, G. Kitchen; *Directors*, E. C. Morgan, J. C. Williamson, Dr. Moody.

Imperial Tramways Company, Ltd., Clare Street House, Bristol. *Secretary*, W. G. Verdon Smith; *Manager*, F. Freshwater; *Chairman*, Sir George White, Bart.; *Directors*, H. C. Godfray, J. H. Howell, S. White.

Isle of Thanet Electric Tramways and Lighting Company, Ltd., St. Peter's, Kent, and Moorgate Station Chambers, London, E.C. [T.A., Tramways, St. Peters, Kent; T.N., 29 Broadstairs]. *Gen. Manager and Elec. Eng.*, J. A. Forde; *Traffic Supt.*, ——————; *Secretary*, J. Barber Glenn; *Chairman*, A. R. Monks; *Directors*, Lord Arthur Butler, W. M. Murphy, H. Brown.

Jarrow and District Electric Traction Company, Ltd., Electrical Federation Offices, Kingsway, London, W.C. [T.A., Jarrow, c/o Tramway, London; T.N., 2686 Holborn.] *Traffic Manager*, G. McClelland; *Secretary*, C. W. Francis; *Acting Sec.*, H. A. Stagg; *Chairman*, G. J. Somerville; *Directors*, W. Morrison (*managing*), H. S. Day.

Kidderminster & District Electric Lighting and Traction Co., Ltd., Kidderminster and Electrical Federation Offices, Kingsway, London, W.C. [T.N., 108]. *General Manager*, W. G. Bond, *Secretary*, B. Kingsford; *Chairman*, E. Garcke; *Directors*, J. A. Lycett, H. S. Day, W. L. Madgen.

Kinver Tramway, Kinver, and Electrical Federation Offices, Kingsway, London, W.C., *q.v.*, Dudley, Stourbridge, and District Elec. Traction Co., Ltd.

Lanarkshire Tramways Company, Edinburgh Road, Motherwell, N.B., and 83, Cannon Street, London, E.C. [T.A., Tramways, Motherwell; T.N., 64.] *Gen. Manager and Eng.*, G. F. Moller; *Elec. Eng.*, E. H. Glennie; *Per. Way Eng.*, R. Foster; *Traffic Supt.*, J. L. White; *Sec.*, A. Clements; *Chairman*, A. R. Monks; *Directors*, Sir B. Cunard, H. C. Levis, W. H. Whaite, G. Franklin, J. F. Nauheim.

Lancashire United Tramways Limited, Atherton, Lancs. [T.A., Tramways, Atherton; T.N., 36, Atherton.] *Gen. Manager and Engineer*, E. H. Edwardes; *Secretary*, H. P. Conibear; *Chairman*, Hon. A. Stanley, M.P.; *Directors*, J. M. Henderson, M.P., R. Watson, J.P., A. Adam, J. S. Austen.

Liverpool and Prescot Light Railway.—This line, which with the St. Helens Tramways forms the connecting link between the City of Liverpool and South Lancashire Tramways, is owned and worked by the Lancashire United Tramways, Ltd.

Liverpool Overhead Railway Company, 31, James Street, Liverpool. [T.A., Motor, Liverpool; T.N., 5463 Central.] *Gen. Manager and Eng.*, E. J. Neachell; *Secretary*, W. H. Alexander; *Chairman*, H. C. Woodward; *Directors*, J. E. Anderson, G. D. Killey J. U. Hodgson, M. H. Maxwell.

Llandudno and Colwyn Bay Electric Railway, Limited, Tramway Depôt, Rhôs-on-Sea, Colwyn Bay, and Basildon House, Moorgate Street, London, E.C. *Gen. Manager*, Alex. G. Balfour; *Secretary*, A. W. R. Lovering; *Directors*, G. Balfour, A. W. Tait, T. Stoker.

Llanelly and District Electric Lighting and Traction Company, Ltd., Llanelly, and 66, Queen Street, London, E.C. *Engineer and Manager*, J. E. Stewart; *Secretary*, G. D. Prince; *Chairman*, A. R. Holland; *Directors*, A. V. Anderson, M. A. Edwards, A. H. Beatty.

London United Tramways Ltd., Electric Railway House, Broadway, Westminster, London, S.W. [T.N., 6800, Victoria.] *Managing Director*, J. Devonshire; *Secretary*, A. L. Barber; *Gen. Manager and Eng.*, A. H. Pott; *Chairman*, W. M. Acworth; *Directors*, Rt. Hon. Viscount Knutsford, Sir A. H. Stanley, F. V. Schuster.

Luton Corporation Tramways (leased to and worked by Balfour, Beatty & Co., Ltd., 22a, College Hill, London, E.C.), Tramway Offices, Park Street, Luton. [T.N., 230.] *Engineer and Manager*, A. E. Wray.

Mansfield & District Light Railway Co., Sutton Road, Mansfield. [T.A., Cars, Mansfield, T.N., 107.] *Gen. Manager and Sec.*, Stanley Dudman, *Chairman*, A. R. Holland; *Directors*, W. J. Chadburn, A. H. Beatty, G. Balfour.

Digitized by Google

ELECTRIC TRAMWAYS IN THE UNITED KINGDOM.

Manx Electric Railway Company, Ltd., 1, Strathallan Crescent, Douglas, Isle of Man, and 3, Finch Lane, London, E.C. [T.A., Electric, Douglas, Man.; T.N., 61.] *Gen. Manager & Eng.*, F. Edmondson; *Secretary*, C. A. Huni; *Chairman*, Col. Sir A. Griffith Boscawen; *Directors*, Sir W. H. Vaudrey, B. E. Greenwell, E. Remnant.

Merthyr Electric Traction and Lighting Company, Ltd., 53, Pontmorlais Circus, Merthyr, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramway Company, Merthyr; T.N., 0180, Merthyr Tydfil.] *Managing Eng.*, L. W. Dixon; *Secretary*, S. J. Clements; *Chairman*, G. J. Somerville; *Directors*, C. G. Tegetmeier, W. L. Madgen, E. R. Soames.

Metropolitan Electric Tramways, Limited, Electric Railway House, Broadway, Westminster, London, S.W. [T.A., Metrolito, London; T.N., 6800, Victoria.] Manor House Offices, Seven Sisters Road, N. [T.A., Lentiscus, London; T.N., 77 Tottenham.] *Gen. Manager and Eng.*, A. H. Pott; *Traffic Manager*, W. E. Hammond; *Secretary*, A. L. Barber; *Chairman*, E. Garcke; *Directors*, Sir E. Spencer, W. L. Madgen, C. G. Tegetmeier, J. Devonshire (*Managing Director*).

Mexborough and Swinton Tramways Company, Electricity Works, Rawmarsh, Yorks. [T.N., 266], and 3, Laurence Pountney Hill, Cannon Street, London, E.C. *Manager and Eng.*, G. H. Browne; *Cons. Elec. Eng.*, F. E. Stanley; *Commercial Manager*, Wm. T. Mitchell; *Traffic Supt.*, M. McLeod; *Secretary*, L. D. H. Jacobs; *Chairman*, L. B. Schlesinger; *Director (Managing)*, W. B. Cownie, C.A.

Middlesbro, Stockton, and Thornaby Electric Tramway, Bridge Road, Stockton-on-Tees, and Clare Street House, Bristol. [T.A., Tramways, Stockton; T.N., 129.] *Manager*, F. Freshwater; *Secretary*, W. G. Verdon Smith; *Chairman*, Sir Geo. White, Bart.; *Directors*, H. C. Godfray, S. White, H. C. Doggett.

Middleton Electric Traction Company, Ltd., Hiltonfold Lane, Middleton, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramway Depot, Middleton; T.N., 37 Middleton.] *Gen. Manager*, W. F. Endean; *Secretary*, G. R. Oliphant; *Acting Secretary*, J. S. Bowker; *Chairman*, Lord Vaux of Harrowden; *Directors*, J. V. Kitchener, W. S. Wreathall.

Morecambe Tramways Company, Heysham Road, Morecambe, and 62, Market Street, Lancaster. [T.N. 1, Morecambe, and 71, Lancaster.] *Secretary and Manager*, G. H. Petty; *Chairman*, W. H. Pickles; *Directors*, J. Stott, S. Wright, O. Carr.

Musselburgh and District Electric Light and Traction Co., Ltd., High St., Musselburgh, N.B. [T.A., Tramways, Musselburgh; T.N., 115.] (Registered Office, 3, Laurence Pountney Hill, London, E.C. [T.N., 5329 and 5330, Bank.]) *Manager*, E. J. Walsh; *Resident Engineer*, E. J. Walsh; *Traffic Inspector*, W. Mittell; *Secretary*, L. D. H. Jacobs; *Chairman*, L. B. Schlesinger; *Directors*, B. Burnham, J. Anderson, W. B. Cownie, R. Watson.

New General Traction Company, Ltd., 8, Crosby Square, London, E.C. *Managing Director*, E. A. Hopkins; *Secretary*, J. G. Mills; *Chief Engineer*, I. E. Winslow; *Chairman*, Baron E. B. d'Erlanger.
[This company controls the Norwich and the Douglas Southern Electric Tramways Companies.]

New St. Helens and District Tramways Company, Ltd., Atherton, Lancs. [T.A., Tramways, Atherton; T.N., 36 Atherton.] *Engineer and Manager*, C. D. Stanley; *Secretary*, H. P. Conibear; *Chairman*, Hon. Arthur Stanley, M.P.; *Directors*, J. Hunter, J.P., H. Martin, J.P., J. M. Henderson, M.P., J. S. Austen, and E. H. Edwardes (*Managing*).

North Shields Tramway Company owned and worked by Tynemouth and District Elec. Trac. Co. *q.v.*

Norwich Electric Tramway Company, 5, Orford Hill, Norwich, and 8, Crosby Square, London, E.C. [T.A., Tramways, Norwich; T.N., 475.] *Manager and Engineer*, F. W. Ketley; *Consulting Eng.*, I. E. Winslow; *Sec.*, J. G. Mills; *Directors*, E. A. Hopkins, Hon. A. G. Brand, F. FitzGerald, G. M. Chamberlin, and C. Pakeman.

Nottinghamshire and Derbyshire Tramways Company, Tramway Depot, Langley Mill, Derbyshire, and 66, Queen Street, London, E.C. [T.A., Tramways, Langley Mill; T.N., 53, Langley Mill.] *Manager*, C. R. Walker; *Secretary*, Wm. C. Bryden; *Directors*, A. R. Holland, A. H. Beatty, A. V. Anderson, and M. A. Edwards.

Oldham, Ashton and Hyde Electric Tramway, Ltd., Tramway Depot, Denton, Lancs., and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Denton; T.N., 265 Ashton.] *Supt.*, A. Anderson; *Secretary*, F. J. Cursons; *Acting Secretary*, J. S. Bowker; *Chairman*, E. Garcke; *Directors*, Judge L. A. Atherley Jones, K.C., W. S. Wreathall, J. V. Kitchener (*Managing Director.*)

Paisley District Tramways Company, Tramway Depôt, Paisley, and 88, Cannon Street, London, E.C. [T.N., 218 Paisley.] *Gen. Manager and Elec. Eng.*, Fred Coutts; *Traffic Supt.*, E. Jeffs; *Secretary*, A. Clements; *Con. Eng.*, H. F. Parshall; *Chairman*, O. H. Smith; *Directors*, Lord Arthur Butler, D. Johnston Smith, John Young.

Peterborough Electric Traction Company, Ltd., Lincoln Road, Peterborough, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Peterborough; T.N., 224.] *Gen. Manager*, T. G. Clabburn; *Secretary*, S. M. Wright; *Actiug Sec.*, P. N. Gray; *Chairman*, Lord Vaux of Harrowden; *Directors*, E. A. Paris, R. J. Howley.

Plymouth, Stonehouse and Devonport Tramways Co., 16, Edgcumbe Street, Stonehouse, Devon, and Moorgate Station Chambers, London, E.C. [T.N. 53.] *Manager*, G. H. Moreton; *Elec. Eng.*, J. Graham Pearce; *Sec.*, J. Barber Glenn; *Chairman*, Andrew Beattie, J.P., D.L.; *Directors*, S. Hern, J. B. Glenn (*Managing*).

Portsdown and Horndean Light Railway, Cosham, Hants.; Tramways and Lighting Office, Gosport, Hants., and Moorgate Station Chambers, London, E.C. [T.A., Tramways, Gosport; T.N., 3, Post Office, Gosport.] *Engineer and Manager*, J. Fereday Glenn; *Secretary*, J. Barber Glenn; *Chairman*, A. Beattie, J.P., D.L.; *Directors*, J. Barber Glenn (*Managing*), S. Hern.

Potteries Electric Traction Company, Tramway Depôt, Stoke-on-Trent, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Stoke-on-Trent; T.N., 141.] *Gen. Manager and Eng.*, W. Thom; *Power and Rolling Stock Supt.*, F. J. Chapple; *Traffic Manager*, F. Hatch; *Secretary*, B. Kingsford; *Chairman*, R. J. Howley; *Directors*, F. W. Chanter, S. Mear, J. V. Kitchener.

Rhondda Tramways Company, Ltd., Tramway Depot, Porth, Rhondda, and Laurence Pountney Hill, Cannon Street, London, E.C. [T.A., Tramways, Porth; T.N., 118.] *Manager and Engineer*, H. Holliday; *Secretary*, L. D. H. Jacobs; *Chairman*, L. B. Schlesinger; *Directors*, J. C. Saunders, W. B. Cownie, J. T. Jervis, H. T. Barnett.

Rothesay Tramways Company, Ltd., Point House, Rothesay, and Electrical Federation Offices, Kingsway, London, W.C. *Manager*, A. Robertson; *Sec.*, P. N. Gray; *Chairman*, A. C. Miles; *Directors*, W. L. Madgen, H. S. Day.

Ryde Pier Company, Ryde, Isle of Wight. *Manager*, W. D. Stanney; *Elec. Eng.*, C. Harrison; *Chairman*, G. E. Mears.

Scarborough Tramways Company, Scalby Road, Scarborough. [T.A., Electric Tramways, Scarborough; T.N., 294.] *Gen. Manager and Elec. Eng.*, J. V. Moinet; *Chairman*, F. E. Gripper; *Directors*, V. Fowler, M. T. Whittaker, J. C. Wigham.

Sheerness and District Electric Power and Traction Company, Ltd., Electricity Works, Sheerness East, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Sheerness; T.N.,45.] *Manager & Eng.*, A. Charlton; *Sec.*, H. A. Stagg; *Chairman*, G. J. Somerville; *Directors*, R. J. Howley, E. R. Soames.

Snaefell Mountain Railway (See Manx Electric Railway Company).

South Metropolitan Electric Tramways and Lighting Company, Ltd., 114, Church Street, Croydon, 30, High Street, Sutton, and Electric Railway House, Broadway, Westminster, London, S.W. [T.N., 804 Croydon, 14 Sutton and 6800, Victoria.] *Gen. Manager and Engineer*, A. V. Mason; *Secretary*, W. M. Wright; *Chairman*, C. G. Tegetmeier; *Directors*, J. Devonshire (*managing*), E. Garcke, A. L. Barber.

Southport Pier Co., Ltd., Southport. [T.A., Pier, Southport; T.N., 174.] *Manager*, A. T. Faiers; *Chairman*, A. Skinner; *Directors*, J. R. Haworth, S. J. Fane, G. Duckworth, J. Duckworth.

Southport Tramways Company, Ltd., The Depôt, Churchtown, Southport, and Electrical Federation Offices, Kingsway, London, W.C. *Manager*, J. Lloyd; *Secretary*, H. A. Stagg; *Chairman*, C. S. Hilton; *Directors*, J. S. Raworth, Lord Vaux of Harrowden, J. V. Kitchener, G. R. Hulme.

South Staffordshire Tramways (Lessee) Company, Ltd., Electrical Federation Offices, Kingsway, London, W.C. [T.N., 65 Smethwick.] *General Manager*, W. G. Bond; *Secretary*, E. H. Woodhall; *Chairman*, W. S. Schuster; *Directors*, J. A. Lycett, S. R. Blundstone, R. J. Howley, B. Kingsford.

Sunderland District Electric Tramways. Ltd., Fence Houses, co. Durham. [T.A., Trams, Philadelphia, Shiney Row; T.N., 21, Houghton-le-Spring.] *Resident Manager and Engineer*, G. Stratton; *Traffic Manager*, E. A. Pearman; *Secretary*, H. J. Almond; *Directors*, H. R. Hogg, Hon. R. Parker, R. Tayler, A. Counter, C. Eves.

Sutton and Howth Electric Tramway Company (owned by the Great Northern Railway, Ireland), Sutton, county Dublin, and Amiens Street Station, Dublin. [T.A., Railroad, Dublin; T.N., 171, Dublin. and 16 Sutton.] *Gen. Manager*, John Bagwell; *Elec. Eng.*, A. W. Whieldon; *Chief Eng.* F. A. Campion; *Locomotive Eng.*, G. T. Glover; *Sec.*, T. Morrison; *Chairman*, F. Vernon; *Directors*, W. P. Cairnes (*Deputy Chairman*), W. B. Carson, H. S. Guinness, J. T. Reade, Capt. W. L. A. Goulding, Lt.-Col. J. C. W. Madden, R. A. Gradwell, J. Milne Barbour, T. F. Cooke, W. H. B. Moorhead, Lt.-Col. H. Plews, G. S. Clark.

Swansea Improvements and Tramways Company, 2, Rutland St., Swansea, and Electrical Federation Offices. Kingsway, London, W.C. [T.A., Tramway, Swansea; T.N., 268 Swansea.] *Gen. Manager*, D. James; *Elec. Eng.*, A. Johnston; *Secretary*, S. J. Clements; *Chairman*, C. G. Tegetmeier; *Directors*, G. J. Somerville, S. E. Garcke, E. R. Soames.

Taunton Electric Traction Company, Ltd., East Reach, Taunton, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Taunton, c/o "Tramways," London.] *Manager*, B. H. Griffith; *Acting Manager*, L. Marshall; *Secretary*, S. M. Wright; *Acting Sec.*, P. N. Gray; *Chairman*, G. J. Somerville; *Directors*, E. Garcke.

Torquay Tramways Co., Ltd., St. Marychurch Road, Torquay. [T.A., Carsheds, Torquay; T.N., 167 Torquay.] *Registered Office*, 3, Laurence Pountney Hill, Cannon Street, E.C. *Manager and Eng.*, H. J. Nisbett; *Secretary*, L. D. H. Jacobs; *Managing Director*, W. B. Cownie.

Trafford Park Company (Tramways), Trafford Park, Manchester. [T.A., Developing, Manchester; T.N., 61, Trafford Park.] *Secretary*, C. A. Grundy; *Chairman*, Marshall Stevens; *Directors*, Sir J. Lyons, H. McNiel, J. H. Balfour Browne, K.C.
[Lines worked by the Manchester and Salford Corporations.]

Tynemouth and District Electric Traction Company, Limited, John Street, Cullercoats, Northumberland, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tram Co., Cullercoats; T.N., 17 Whitley.] *Gen. Manager*, H. J. Smith *Sec.*, C. W. Francis; *Acting Sec.*, H. A. Stagg; *Chairman*, H. S. Day; *Directors*, J. H. Robinson, J. B. Williamson, R. J. Howley, Geo. J. Somerville.

Tyneside Tramways and Tramroad Company, Ltd., Neptune Bank, Wallsend. [T.A., Tramways, Wallsend; T.N., 84.] *Secretary & Res. Manager*, J. C. Little; *Elec. Eng.*, F. H. Briggs; *Cons. Eng.*, W. McLellan; *Chairman*, J. T. Merz; *Directors*, Lord Armstrong, J. H. Armstrong, G. E. Henderson, S. Hunter.

Wakefield and District Light Railway Company, Belle Isle, Wakefield.
[This company has been amalgamated with the Yorkshire (West Riding) Electric Tramways Co., Ltd.]

Walton-on-the-Naze Pier Tramway (Coast Development Corporation, Ltd.), The Pier, Walton-on-the-Naze. [T.A., Electricity Works, Walton-on-Naze.] *Eng.*, E. A. Lambert, A.M.I.E.E.

Wemyss and District Tramways Company, Ltd., Car Depot, Aberhill, Methill, N.B. [T.A., Tramways, Methill; T.N., 88 Leven.] *Gen. Manager*, W. T. Dawson; *Sec.*, J. O. Shepherd; *Chairman*, G. Balfour; *Directors*, W. Shepherd, G. Balfour, J. H. Guild.

Weston-super-Mare and District Electric Supply Co., Ltd., Locking Road, Weston-super-Mare, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Weston-s.-Mare; T.N., 79 & 181.] *Manager and Elec. Eng.*, G. Charlton; *Sec.*, H. A. Stagg; *Chairman*, G. J. Somerville; *Directors*, C. G. Tegetmeier, E. R. Soames.

Wolverhampton District Electric Tramways, Limited, Tramway Depot, Bilston, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Bilston; T.N., 56, Bilston.] *General Manager*, W. G. Bond; *Sec.*, E. H. Woodhall; *Chairman*, S. R. Blundstone; *Directors*, J. A. Lycett, R. J. Howley, B. Kingsford.

Worcester Electric Traction Company, Ltd., St. John's, Worcester, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Worcester; T.N., 81.] *Engineering Manager*, R. Simpson; *Secretary*, C. W. Francis; *Acting Sec.*, H. A. Stagg; *Chairman*, H. S. Day; *Directors*, J. A. Lycett, B. Kingsford, W. S. Wreathall.

Wrexham and District Transport Co., Ltd., 6, Lord Street, Wrexham, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Wrexham; T.N., 182, Wrexham.] *Manager*, A. A. Hawkins; *Sec.*, J. R. Oliphant; *Acting Sec.*, J. S. Bowker; *Chairman*, J. V. Kitchener; *Directors*, G. J Somerville, W. S. Wreathall.

Yorkshire (West Riding) Electric Tramways Co., Ltd., Belle Isle, Wakefield. [T.A., England, Belle Isle, Wakefield; T.N., 213.] *Gen. Manager and Sec.*, H. England: *Elec. Engs.*, C. J. Jewell and E. A. Wood; *Traffic Supt.*, W. J. McDonald; *Chairman*, Sir Herbert S. Leon, Bart.; *Directors*, B. Newgass, G. E. Leon, E. Remnant, W. Murray.

Yorkshire (Woollen District) Electric Tramways, Limited, Frost Hill, Liversedge, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Heckmondwike; T.N., 8 Heckmondwike.] *Secretary*, P. N. Gray; *Chairman*, E. Garcke; *Directors*, Sir Thos. Pilkington, E. A. Paris (*managing*).

TRAMWAY ASSOCIATIONS.

MUNICIPAL TRAMWAYS ASSOCIATION.

President:
PETER FISHER
(General Manager, Dundee Corporation Tramways).

Vice-President:
HENRY MOZLEY
(General Manager, Burnley Corporation Tramways).

Hon. Secretary and Treasurer:
C. J. SPENCER
(General Manager, Bradford Corporation Tramways), 7, Hall Ings, Bradford.

TRAMWAYS AND LIGHT RAILWAYS ASSOCIATION.

President:
The Rt. Hon. VISCOUNT CHILSTON.

Chairman:
The Hon. ARTHUR STANLEY, M.P.

Vice-Chairman:
HARRY ENGLAND.

Hon. Solicitor: W. MORRIS, Junr.
Hon. Auditor: A. W. CHAMBERS, A.S.A.A.

Secretary:
A. DE TURCKHEIM.

Offices: Caxton House, Westminster, London, S.W
Telephone No. 2110 Victoria.

Digitized by Google

LIST OF ELECTRIC TRAMWAYS & RAILWAYS.

PARTICULARS OF TRACK AND EQUIPMENT.

TRAMWAYS, pp. xxvii-xxx. RAILWAYS, p. xxx.

Location of Line and Name of Operating Company.	Date of Opening of First Section.	Length of Route.	Total length of Track.	Gauge.	Weight and Type of Rail.	Maximum Gradient.	Sharpest Curve.	No of Motor Cars.	No of Dynamos	No. of Engines	Type of Engines	Total Capacity Traction, kw.	Principal Contractors for Electrical Equipment.
TRAMWAYS.				ft. in.	lbs.	1 in	ft. rad.						
Aberdare Urban District Trys. ..	Oct., 1913	2·9	3·3	3 6	96 G	13	45	14	2	2	V.Cp.C.	400	Lanc. Dynamo Co.
Aberdeen Corporation	Dec., 1899	14·4	27·75	4 8½	96 G	13	42·5	83	*14	14	V.Cp.C.	4,610	British T-H. Macartney & Co.
Aberdeen Suburban Trys. Co. ..	June, 1905	5	5	4 8½	95 G	28	90	9	..	..	..	..	J. G. White & Co. Brush Co.
Accrington Corporation	Aug., 1907	7·53	10·53	4 0	95 G	14	..	32	*8	8	..	1,888	Brush Co.
Airdrie & Coatbridge Tramway Co.	Feb., 1904	3·63	4·94	4 8½	94 G	14	210	15	..	..	..	..	Brush Co.
Ashton-under-Lyne Corporation ..	Aug., 1902	7	8·15	4 7¾	96 G	10	40	25	5	5	..	400	Dick, Kerr, & Co. Siemens Bros.
Ayr Corporation	Sept., 1901	6	7·612	4 8½	90 G	21	45	24	*8	8	..	400	British T-H.
Bacup Corporation	1910	1·50	2	4 8½	103 G	9	40	..	..	..	..	..	
Barking Town Urban District ..	Dec., 1903	2·6	3·125	4 8½	100 G	25	44	9	4	3	V.Cp.C.	200	Blackwell & Co.
Barnsley & Dist. Elec. Traction Co.	Nov., 1902	3·06	4·25	4 8½	97 G	10	60	13	*	..	..	..	J. G. White & Co. Brush Co.
Barrow-in-Furness	Feb., 1904	6·9	10·32	4 0	90 G	13	50	24	*8	..	..	..	Brush Co. Dick, Kerr, & Co.
Bath Electric Tramways, Ltd. ..	Jan., 1904	14·7	19·3	4 8½	95 G	10·7	38	40	4	4	H.T.Cp.	675	Westinghouse
Batley Corporation	Aug., 1903	6·536	10·47	4 8½	104 G	9	40	15	6	4	H. Cp.	240	B. I. W. Co. British Elc.Cr.Co
Belfast City	Dec., 1905	49·65	98·54	4 8½	105 G	15	35	291	3	3	Tri.Exp.	3,000	J. G. White & Co. Westinghouse
Bessbrook—Newry (1)	Oct., 1885	3	3	3 0	41 V	80	55	2 M 2 T	2	1	Hyd.Turb.	..	Mather & Platt
Bessbrook and Newry Try. Co.													
Bexley Urban District	Oct., 1903	5·25	6·5	4 8½	90 G	14	40	21	3	3	V. Cp.	600	Dick, Kerr, & Co.
Birkenhead Corporation	Feb., 1901	13·8	24·09	4 8½	100 G	13½	40	65	6	6	V. Cp.	..	Blackwell & Co. British T-H.
Birmingham Corporation	Jan., 1904	65·56	114·55	3 6	105 G	13	40	586	..	..	..	1,475	Dick, Kerr, & Co.
Birmingham and Midland Trys. Co.	Nov, 1904	10·32	16·45	3 6	85 & 94 G	15	31	62	6	6	Cp.	..	Brush Co.
Blackburn Corporation	March, 1899	14·67	24·75	4 0	92 G	15	30	61	*4	4	V.Cp.C.	..	British T-H. Blackwell & Co.
Blackpool Corporation	Oct., 1885	14·75	21·38	4 8½	96 G	20	36	84	5	..	Turb.	3,250	Elwell-Parker British T-H.
Blackpool & Fleetwood Tramrd. Co.	July, 1898	7·9	15	4 8½	70 V 98 G	26	80	41	5	5	V. Cp.	600	Mather & Platt D.K.&Co.-B.T-H.
Blackpool and Fylde Light Ry. Co.	Under cons.	14	14·5	4 8½	..	..	..	..	..	..	..	..	
Blackpool—St. Anne's & Lytham ..	May, 1903	7·47	14·03	4 8½	92 G	22	35	40	..	..	..	..	British T-H.
Bolton Corporation	Nov., 1899	26	47·21	4 8½	90G	14	35	112	*12	12	V.Cp.C.	3,800	Dick, Kerr, & Co. Blackwell & Co.
Bootle Corporation	May, 1900	4·125	7·75	4 8½	95 G	20	40	55	*8	8	..	4,000	Blackwell & Co.
Bournemouth Corporation	July, 1902	21·66	31·75	3 6	100 G 66 slot	10	40	91	5	4	V. Cp.	1,200	J. G. White & Co.
Bradford Corporation	July, 1898	59	108·75	4 0	102 G	9·8	40	‡272	11	11	V.Cp.C.	..	Westinghouse Blackwell & Co.
Bray and Enniskerry Railway Co.	Under cons.	3·25	5	3 6	..	..	..	..	..	..	..	..	
Brighton Corporation	Nov., 1901	9·48	17·18	3 6	105 B.S. No. 4	9	40	53	5	5	Turb.	1,000	Macartney & Co. Westinghouse Blackwell & Co.
Brighton Beach (1)	Aug., 1883	1·75	2	2 8½	35 V	100	80	9	2	..	..	..	Siemens Bros.
Bristol—Bristol Trys. Co.	Oct., 1895	31	57·5	4 8½	92½ G	10	30	232	6	4	V.Cp.C.	..	British T-H. and Blackwell & Co.
Burnley Corporation	Dec., 1901	12·50	22·16	4 0	102 & 107 G	9·8	35	67	*8	6	H.Cp.C.	1,500	British T-H.
Burton and Ashby Light Railway..	July, 1906	10·2	12·3	3 6	90 G	11	51	20	2	2	Diesel	330	Dick, Kerr & Co. Brush Co.
Burton-on-Trent Corporation ..	Aug., 1903	6·67	9·75	3 6	90 & 100 G	11·7	40	20	3	3	V. Cp.	400	Dick, Kerr, & Co. Blackwell & Co.
Bury Corporation	June, 1903	22·5	34·42	4 8½	102¾ G	12	40	54	6	6	..	1,500	Westinghouse
Camborne and Redruth	Nov., 1902	3·75	4	3 6	83 G	15	40	8	7	7	Cp.	1,525	Dick, Kerr, & Co. British T-H.
Cardiff Corporation	May, 1902	17·25	31·82	4 8½	100 G	23	35	130	9	9	V.Cp.C&T	2,200	British T-H. Dick, Kerr, & Co.
Carlisle, City of, Elec. Try. Co. ..	June, 1900	7·25	8·5	3 6	83 G	14	23	12	..	..	..	..	D.K.& Co.-B.T-H.
Cavehill & Whitewell Try. Co...	Feb., 1906	3·29	4·31	4 9	105 G	31	75	10	..	..	..	..	J. G. White & Co.
Chatham & District Light Rly. Co.	June, 1902	14·98	26	3 6	92½ & 105 G	9	35	50	5	4	H. Cp.	675	British T-H. Co. Brush Co.
Cheltenham and District ..	Aug., 1901	10·22	12·25	3 6	80 & 90 G	8·9	37	20	2	2	V.Cp.	..	Westinghouse
Chester Corporation..	April, 1903	3·59	6·4	3 6	94 & 100 G	23	40	18	*7	6 1	V. Cp. C. V.Tri.ExC	240	Blackwell & Co. British T-H.
Chesterfield Corporation	Dec., 1904	3·6	5·1	4 8½	96 & 101 G	20	40	17	4	4	V.Cp.C.	800	Milnes & Co. Westinghouse Brush
Clontarf and Hill of Howth ..	July, 1900	5·5	6·5	5 3	90 & 60 G	13	34	12	..	..	..	..	W.M. Murphy& Co.
Colchester Corporation	July, 1904	6	7·94	3 6	95 G	12	43	18	8	8	V. Cp.	1,140	Dick, Kerr & Co. J. G. White & Co.
Colne Corporation Tramways ..	Nov., 1903	5·2	6·7	4 0	102 G	13	60	13	*	..	..	..	Blackwell & B.T-H. Glover & Co.
Cork Elec. Try. & Lighting Co. ..	Dec., 1898	10	15	2 11½	83 G	14	26	35	*9	9	H.Cp.C.	570	British T-H. Blackwell & Co.
Coventry Corporation Tramways..	Dec., 1895	12·88	15·81	3 6	65 G 81 G	16	35	51	5	3	H.&V.Cp.	1,500	Westinghouse Blackwell & Co.
Croydon Corporation	Sept., 1901	11·87	19·12	4 8½	96·5 G	16	40	75	*13	13	..	2,000	British T-H. Co.
Darlington Corporation	June, 1904	4·875	8·88	3 6	90 G	14	52·8	18	1	..	..	250	Westinghouse

* Current from combined lighting and traction station. (1) Third rail system. † Includes 1·25 miles railless trolley line. ‡ Includes 20 railless cars.
M—Motor Cars. T—Trail Cars.

Digitized by Google

ELECTRIC TRAMWAYS & RAILWAYS.—Particulars of Track and Equipment.

Location of Line and Name of Operating Company.	Date of Opening of First Section.	Length of Route.	Total Length of Track.	Gauge.	Weight and Type of Rail.	Maximum Gradient.	Sharpest Curve.	No. of Motor Cars	No. of Dynamos	No. of Engines	Type of Engines.	Total Capacity Traction, kw.	Principal Contractors for Electrical Equipment.
TRAMWAYS—*continued.*				ft. in.	lbs.	1 in	ft. rad.						
Dartford U. D. C.	Feb., 1906	6·5	8·5	4 8½	100 G	12	35	12	4	..	..	..	British I. W.
Darwen Corporation	Oct., 1900	4·36	7·16	4 0	95 G	9	35	19	*4	4	H. Cp.	..	British T-H.
Derby and Ashbourne	..	14·5	..	4 8½									
Derby Corporation	July, 1904	13	22·06	4 0	95 G	14	46	50	3	3	Turb.	..	J. G. White & Co. Brush & B.T-H.
Devonport Corporation	June, 1901	..	7	3 6	97 G	10	50	12	..	..	..	..	Blackwell & Co.
Doncaster Corporation	June, 1902	8·25	12·52	4 8½	94 G	16	45	32	8	8	..	1,000	Blackwell & Co.
Dover Corporation	Sept., 1897	4·75	7	3 6	87 & 90 G	10	44	24	*2	2	H.CC.	..	D. K. & B. T-H
Douglas—Port Soderick .. Douglas Southern Elec. Trys. Co.	Aug., 1896	3·25	3·75	4 8½	65 V	12	45	8 M 8 T	2	2	H. Cp.	200	Westinghouse British T-H.
Dublin & Lucan Elec. Railway Co.	March, 1900	6·5	7	3 6	50 V	20	27	9 M 5 T	2	2	H. Cp. C.	240	Dick, Kerr, & Co.
Dublin United Tramways Co.	May, 1896	49·8	95·26	5 3	105 G	12·3	22	365	8	8	Cp & Tur	5,500	Dick, Kerr, & Co. Blackwell & Co. British T-H.
Dudley and Stourbridge Trys. British Electric Traction Co.	July, 1899	22·88	30·97	3 6	90 G	11	50	59	4	4	H. Cp.	..	British T-H. Blackwell & Co.
Dumbarton	Feb., 1907	13	17	4 7¾	90 & 96	14	60	30	3	3	..	..	Dick, Kerr, & Co.
Dundalk	Under cons.	6	6·25	3 6	97 G	10	50	12					White & B.T-H.
Dundee, Broughty Ferry, and District	Dec., 1905	4·125	7·25	4 8½	90 G	16·5	30½	14	3	3	V. Cp. C.	..	J. G. White & Co. British T-H. Co.
Dundee Corporation	July, 1900	16·3	30·25	4 8½	90 & 100 G	10	35	76	5	5	..	..	Blackwell & Co.
Dunfermline (Fife Try. & Power Co.)	Nov., 1909	14·6	17·4	..	90 G	10	25	28	..	..	..	..	British T-H.
East Ham Corporation	June, 1901	7·58	14·20	4 8½	90 & 105 G	25	40	45	*5	5	H. Cp.	750	Dick, Kerr, & Co.
Eccles Corporation	May, 1902	5	7·75	4 8½	100 G	..	..	..	..	..	..	..	
Edinburgh and District	June, 1910	1·25	1·5	4 8½	100 G	21	54	4	..	..	..	..	Dick, Kerr, & Co.
Erith Urban District Council	Aug., 1905	4·7	8·4	4 8½	100 G	17	40	17	3	5	..	..	Brush Co. Westinghouse Co.
Exeter Corporation	April, 1905	4·875	7	3 6	90 G	11·5	35	24	*4	4	H. Cp.	..	Dick, Kerr, & Co.
Falkirk and District	Oct. 1905	7·81	10·5	4 0	90 G.	11·3	48	18	*	..	..	..	Bruce-Peebles British T-H.
Farnworth Urban District	Jan., 1902	4·33	7·16	4 8½	98 G	29	36	..	..	..	..	..	
Felixstowe Pier	Aug., 1905	0·5	0·5	3 6	36	..	..	3	..	..	..	..	
Gateshead and District	May, 1901	12·38	20·02	4 8½	90 G	8	35	55	*	..	..	..	Dick, Kerr, & Co. Blackwell & Co.
Giant's Causeway Elec. Try. Co.	Sept., 1883	8	9	3 0	42 V 75 G	24	30	5 M 21 T	2	2	Hyd. Turb.	..	Siemens Bros. British T-H.
Glasgow Corporation	Oct., 1898	99·26	198·13	4 7¾	110 G	11·93	30¾	857	8	8	V. Cp. & T	21,700	British T-H. Westinghouse
Glossop Urban District	Aug., 1903	4·56	5·6	4 8½	90 G	13	40	8	4	4	V. Cp.	200	British T-H.
Gloucester Corporation Light Rly.	May, 1904	9	15	3 6	90 G	25	40	30	*2	2	Cp.	750	Brush Co. Dick, Kerr, & Co.
Gosport & Fareham Trys. Co.	Jan., 1906	7·5	11·5	4 7¾	96 G	16	37½	22	3	3	V. Cp. C.	750	Dick, Kerr, & Co.
Gravesend and Northfleet	Aug., 1902	6·5	9	4 8½	87 G	11	45	18	*				Brush Co.
Great Crosby	June, 1900	2·5	2·5	4 8½	92½ G	..	40	14	*7	7	H. & V. Cp.	160	Dick, Kerr, & Co. Blackwell & Co.
Great Grimsby	Dec., 1901	6	11	4 8½	90 G	15	26	32 M 6 T	3	3	..	400	Dick, Kerr, & Co.
Greenock and Port Glasgow	Oct., 1901	7·425	14·05	4 7¾	90 G	11	60	42	*	..	..	..	
Guernsey Railway Co.	Nov., 1892	3	3	4 8½	74 V 84 G	60	60	9 M 8 T	2	1	H. & V. Cp.	160	Siemens Bros. British T-H.
Halifax Corporation	June, 1898	37·53	55·5	3 6	95½ G	9·5	38·6	101	*7	7	H. & V. Cp. & T.	3,000	Electric Cons. Co. British T-H.
Hampshire Light Railway (Elec.) Co.	March, 1903	6	9	4 8½	..	..	..	10	*	..	..	..	
Haslingden Corporation	July, 1908	3	3	4 0	100 G	10	30	..	..	..	..	45	Dick, Kerr, & Co.
Hastings and District	July, 1905	19·33	34	3 6	90 G	8	30	65	6	6	V. Cp.	2,100	Dick, Kerr, & Co.
Herne Bay Pier (1)	March, 1899	·75	·75	3 0	60	..	..	3	1	1	Gas	50	British T-H.
Heywood Corporation	Dec., 1905	4·25	4·25	4 8½	90 G	17	..	..	1	1	..	300	Blackwell & Co. B.I. & H.C. Co.
Houghton-le-Spring (See Sunderland Dist. Elec. Trys.)													
Huddersfield Corporation	Feb., 1901	34·50	56	4 7¾	98 G	11	35	106	4	4	V. Cp. C.	2,200	British T-H.
Hull Corporation	July, 1899	13·46	30·5	4 8½	94 G	20	30	180	7	7	V. Cp. C.	2,560	British T-H. Westinghouse
Ilford Urban District	Mar., 1903	7·42	12·62	4 8½	95 G	13	33·3	28	*7	7	..	1,600	British T-H.
Ilkeston Corporation	May, 1903	3·8	4·3	3 6	90 G	12	28	13	..	..	..	..	Dick, Kerr, & Co.
Ipswich Corporation	Nov., 1903	10·8	14·87	3 6	90 G	11·5	40	36	*10	10	Enclos'd	1,175	Dick, Kerr, & Co. Westinghouse
Isle of Man— Manx Elc. Rly. Co. Douglas to Ramsey	July, 1893	18	35·75	3 0	62½ V	24	90	34 M 29 T	8	9	H. Cp.	1,300	Mather & Platt
Manx Elc. Rly. Co. Snaefell Mountain	Aug., 1895	4·5	9·5	3 6	56 V	12	90	6	5	4	H. Cp.	390	
Isle of Thanet Trys. & Ltg. Co.	April, 1901	11	20·67	3 6	90 & 100 G	11	38	59	*6	6	3 V. Cp. 3 H. Cp.	800	British T-H. Blackwell & Co.
Jarrow and District	Nov., 1906	2·54	3·42	4 8½	95 G	12·5	50	10	..	..	..	..	Brush Co. B.I. & H.C. Co.
Kearsley Urban District	Jan., 1902	1·75	1·75	4 8½	95 G	20	..	..	..	..	..	..	Westinghouse
Keighley Corporation	Oct., 1904	3·5	6·11	4 0	95 G	25	60	12	*4	4	V.	200	Blackwell & Co. Brush & B.T-H.
Kidderminster—Stourport British Electric Traction Co.	May, 1898	4·6	4·87	3 6	75 G	14	45	13	*5	5	Stm Turb.	..	Brush Elc. Eg. Co.
Kilmarnock Corporation	Dec., 1904	4·18	5·5	4 8½	90 G	24	45	14	*3	3	..	250	Blackwell & Co.
King's Norton & Northfield U. D.	May, 1904	5·25	8·25	3 6	105 G	15 & 21	100 & 145	..	..	..	..	..	Blackwell & Co.
Kinver	April, 1901	4·25	6	3 6	63 & 90 G	..	..	6					
Kirkcaldy Corporation	Feb., 1903	6·11	8·56	3 6	100 G	11	40	26	*10	6	Cp. H.T.	2,290	British T-H. Co.
Lanarkshire Tramway Co.	July, 1903	28·431	43·120	4 7¾	96 & 101 G	9·4	37	76	4	4	3 H. Cp. 1 V. Cp.	825	British T-H. Co.
Lancashire United Tramways Co.	Oct., 1902	39	54	4 8½	90 G	15	50	82	*8	8	V. Cp. C & T	7,000	B. I. W. Co.
Lancaster Corporation	Jan., 1903	4	4·81	4 8½	90 G	8	30	12	4	4	V. Cp.	200	Greenwood & Batley, Ltd.
Leamington & Warwick Elec. T. Co.	July, 1905	3·04	6·1	3 6	65 G	12	47	12	3	3	Cp.	..	Brush Co.
Leeds City	Aug., 1897	69·02	114·62	4 8½	105 & 111 G	8·4	32	345	5 3	5 3	H. Cp. C. Stm. Tur	6,150	Elec. Con. Co. Greenwood & Batley, British T-H. Blackwell & Co.

* Current from combined lighting and traction station. (1) Third Rail system. M—Motor Cars. T—Trail Cars.

Digitized by Google

ELECTRIC TRAMWAYS & RAILWAYS.—Particulars of Track and Equipment.

Location of Line and Name of Operating Company.	Date of Opening of First Section.	Length of Route.	Total length of Track.	Gauge.	Weight and Type of Rail.	Maximum Gradient.	Sharpest Curve.	No. of Motor Cars.	No. of Dynamos	No. of Engines.	Type of Engines.	Total Capacity Traction, kw.	Principal Contractors for Electrical Equipment
TRAMWAYS—*continued.*				ft. in.	lbs.	1 in	ft. rad.						
Leicester Corporation	May, 1904	20·25	38	4 8½	100 G	16	35	160	7	7	V.Cp.C&T	9,250	Dick, Kerr, & Co. / Blackwell & Co.
Leith Corporation	Aug., 1905	9·08	17·9	4 8½	106·7 G	19	54	37	*11	11	..	1,600	Brush & B.T-H.
Leyton Urban District	Dec., 1906	8·95	17·694	4 8½	105 & 111 G	24	45	60	*4	4	Cp.T.E&T	2,040	..
Lincoln Corporation (1)	Nov., 1905	1·75	2·96	4 8½	100 G	..	36	8	*9	9	..	120	Blackwell & Co.
Liverpool Corporation	Nov., 1898	70	127	4 8½	95, 123 & 134 G	13	30	599	*42	42	Trip.Ex.	44,600	British T-H. / Dick, Kerr, & Co. / Westinghouse
Liverpool Overh'd Ry. (Trol.Ln.Ex.)	June, 1900	2·5	2·5	4 8½	92½ G	Nil	40	14	7	7	H.&V.Cp.	160	Dick, Kerr, & Co.
Llandudno and Colwyn Bay ..	Oct., 1907	8·37	13·60	3 6	90 G	11·5	45	18	*	..	..	..	Bruce-Peebles.
Llanelly and District	July, 1911	6·25	6·75	4 8½	90 G	11·2	60	12	*2	2	Trip.Ex.	..	British T-H.
London County Council (2) ..	May, 1903	148·56	287·35	4 8½	105 G	10·6	45	172 SM / 150 T	8	8	V. Cp. C. Turbine	43,000	Dick, Kerr, & Co. / Westinghouse
London United Tramways Co. ..	April, 1901	55·25	102·45	4 8½	92½ & 100 G	18	28	339	7	5	V. Cp.	3,500	British T-H. / Westinghouse. / Blackwell & Co.
Lowestoft Corporation	July, 1903	4·75	5·07	3 6	100 G	27	36	19	*5	5	Cp.	..	Blackwell & Co.
Luton Corporation Tramways (Leased to J. G. White & Co., Ltd.) ..	Feb., 1908	5·25	6·25	4 8½	95 G	11	35	12	*1	1	..	..	J. G. White & Co. / British T-H.
Maidstone Corporation	July, 1904	5·5	7·04	3 6½	96 G	9	35	19	3	3	..	750	Dick, Kerr & Co.
Manchester Corporation	June, 1901	120·05	244	4 8½	105 G	14·9	35	685	*22	22	Turb'nes	45,300	British T-H. / Dick, Kerr, & Co.
Mansfield and District Co. ..	July, 1905	10	12·25	4 8½	90 G	17	50	24	*3	3	..	..	
Merthyr	April, 1901	3·69	4·81	3 6	96 G	11	66	16	*4	4	H.S.V.	..	D. K. & B. T-H
Metropolitan Electric Trys., Ltd.	July, 1904	56·25	112·5	4 8½	100 G	12	40	312	5	5	1 Stm. Tur	..	British T-H. / Brush Co.
Mexborough & Swinton Trys. Co.	Feb., 1907	7·75	10·75	4 8½	90 G	8·5	55	20	4	4	Turb.	700	Brush & B.T-H.
Middlesbro', Stockton, & Thornaby Electric Tramways Co.	July, 1898	10·5	15·825	3 6	92½ G	17	35	60	3	4	H.&V.Cp.	900	British T-H. / Blackwell & Co.
Middlesex County Council.. ..	Aug., 1904	25·5	51	4 8½	..	..	..	..	..	..	..	..	
Middleton Corporation	March, 1902	2·5	5	4 8½	..	..	..	..	..	..	..	..	
Middleton, Electric Traction Co. ..	March, 1902	8·5	10·53	4 8½	90 G	15	49½	28	3	3	..	500	Glover & Co.
Morecambe	Jan., 1912	1·20	..	4 8½	96 G	18	..	4	..	..	..	..	
Musselburgh and District ..	Dec., 1904	6·5	8·125	4 8½	90 G	34	45	16	4	3	..	400	B. T-H. Co., Nat. Elec. Cons. Co.
Nelson Corporation	Feb., 1903	2·74	3·86	4 0	106 G	11	41	11	*4	4	..	400	Blackwell & Co. / British T-H. Co. / Brush Co.
New St. Helens & District Trys. Co.	July, 1899	18	20	4 8½	95 G	13	35	36	*4	4	V. Cp. C.	..	Westinghouse / British T-H.
Newcastle Corporation	Dec., 1901	32·75	62·875	4 8½	101 G	11	37	220 M / 2 T	6	6	V. Cp. Trip. Ex. & Turb.	11,000	Westinghouse / British T-H.
Newport (Mon.) Corporation ..	April, 1903	7·5	14·35	4 8½	98 G	10·5	40	44	5	5	V. Cp.	1,750	Westinghouse
Northampton Corporation	July, 1904	6·5	11·16	3 6	90 & 96 G	18	50	33	4	4	V.C.C.&T	1,020	Dick, Kerr, & Co. / Brush Co.
North Shields Tramways Co. ..	March, 1901	..	7·75	3 6	90 G	10	36	22					
North Staff. Trys. (*vide* Potteries)													
Norwich Electric Tramways Co. ..	July, 1900	14·5	19·25	3 6	65½ & 90 G	12·6	38	42	6	5	H.TCp&T	1,000	Westinghouse / Blackwell & Co.
Nottingham Corporation	Jan., 1901	21·5	41·5	4 8½	107 G	11·5	40	155	*3	3	..	..	British T-H. / Dick, Kerr, & Co.
Nottinghamshire & Derbyshire Tramways Co.	Aug., 1913	12·8	16·10	4 8½	G	..	..	24	*	..	..	..	British T-H.
Oldham, Ashton & Hyde Trys. Co.	June, 1899	9·12	11·75	4 8½	97 G	11	28	46	*3	3	V. Cp. C.	..	British T-H.
Oldham Corporation	Dec., 1900	24	37	4 8½	100 & 105 G	10·5	40	109	*4	4	..	2,220	Dick, Kerr, & Co.
Paisley & District Tramways Co.	June, 1904	18·25	32·50	4 7½	90 G	10	34	60	..	..	..	..	British T-H.
Perth Corporation	Oct., 1905	4·846	6·75	3 6	90 G	16	25	12	5	5	Cp.	500	Blackwell & Co.
Peterborough Elec. Traction Co...	Jan., 1903	5·33	6·71	3 6	94 G	31	35	14	..	..	..	..	Blackwell & Co. / Dick, Kerr, & Co.
Plymouth Corporation	Sept., 1899	7·75	15	3 6	92 G	9	35	42	3	3	V. Cp.	..	Elec. Cons. Co. / Westinghouse
Plymouth, Stonehouse, and Devonport	Nov., 1901	1·5	3·62	3 6	84 G	11	34	15	..	..	..	..	Blackwell & Co. / Dick, Kerr, & Co.
Pontypridd Urban District ..	March, 1905	5·5	8·6	3 6	96 & 100 G	10	27·6	26	4	5	V.C.Cp.	450	B.I.W. & B.T-H. / Blackwell & Co.
Portmadoc & South Snowdon Rly.	Under cons.	13·25	15	1 11½	41	28	200	6	..	..	..	..	
Portsdown & Horndean Tramway	March, 1903	6	7·5	4 7¾	96 G	16	40	16	2	2	Oil	200	Dick, Kerr, & Co. / Brush Co.
Portsmouth Corporation	Sept., 1901	17·65	34·63	4 7¾	96 & 100 G	17	35	100	5	4	V.& H.Cp.	2,075	Macartney & Co. / Dick, Kerr, & Co.
Potteries Electric Traction Co. ..	May, 1899	31·67	41·48	4 0	87, 90, 100, & 110 G	11	45	110	8	8	H.Cp. / V.Cp.	2,275	Dick, Kerr, & Co. / Blackwell & B.T-H.
Preston Corporation..	June, 1904	10·54	17·2	4 8½	B.S.S. No. 2	16	28	39	2	2	H. Cp.	600	Dick, Kerr, & Co.
Radcliffe Urban District ..	April, 1905	5	6·5	4 8½	100 G	15	40	..	*4	4	V. Cp.	600	Mather & Platt
Rawtenstall Corporation	May, 1909	12	15·9	4 0	100 G	15	38	24	*3	3	..	850	Westinghouse
Reading Corporation	July, 1903	7·44	13·175	4 0	96 G	16	35	36	4	4	V. Cp.	400	Blackwell & Co. / Dick, Kerr, & Co. / Westinghouse
Rhondda Tramways Co.	July, 1908	21	28·75	3 6	95 G	9	38½	54	7	4	Trip.Ex.	1,230	British T-H. / Brush
Rochdale Corporation	May, 1902	19·58 (A)	22·74 (A)	4 8½	103½ G	11·7	30	69	*	..	..	..	British T-H. / Dick, Kerr, & Co. / Brush Co.
Rotherham Corporation	Jan., 1903	10	12	4 8½	100 G	9·5	45	36	*6	6	H.S.Cp.	1,485	Dick, Kerr, & Co.
Rothesay	June, 1902	4·81	9·68	3 6	94 G / 77 G	24	34	20	3	3	V. & Oil	350	Dick, Kerr, & Co.
Ryde Pier, Isle of Wight Ryde Pier Co. (3) ..	March, 1886	·5	1	4 8½	30 & 34 V	..	..	4	2	2	Gas	..	Westinghouse / Siemens Bros.
Salford Corporation	Oct., 1901	41·90	75·79	4 8½	103 G	20	42·5	220	*7	7	C. & Turb.	3,000	Westinghouse / Mather & Platt
Scarborough Tramways Co. ..	May 1904	5	7·75	3 6	90 G	10·5	35	22	2	2	Stm. Turb.	..	Brush & B.T-H.
Sheerness and District	April, 1903	2·5	2·704	3 6	94 G	43	40	8	6	5	V.Cp.C.	100	Siemens & Halske / Brush Co.
Sheffield Corporation	Sept., 1899	40	77·84	4 8½	110 & 120	9·5	35	339	..	..	..	..	British T-H

* Current from combined lighting and traction station. (1) G.B. surface contact system. (2) Mainly Conduit system, but there are now several Trolley lines.
Besides the electric lines the London County Council has also 4·45 route miles of horse tramways. (3) Third rail system. (A) Not including 17·1 miles track leased.
M—Motor Cars. T—Trail Cars.

Digitized by Google

ELECTRIC TRAMWAYS (contd.).	Date of Opening of First Section.	Length of Route.	Total Length of Track.	Gauge.	Weight and Type of Rail	Maximum Gradient.	Sharpest Curve.	No. of Motor Cars.	No. of Dynamos	No. of Engines	Type of Engines.	Total Capacity Traction, KW.	Principal Contractors for Electrical Equipment.
				ft. in.	lbs.	1 in	ft. rad.						
Shipley Urban District	May, 1902	6	10	4 0	98 G	15	..	..	6	6	Turbine	1,800	British T-H.
Soothill Nether U.D.C. & Dewsbury & Ossett Corporations	Nov., 1908	3·125	4·45	4 8½	90 G	13	50	8	*	..	..	..	Nat. Elec. Cons. Co.
Southampton Corporation	Jan., 1899	10·25	18·75	4 8½	{96 G&105 B.S.No.4}	13	40	73	6	6	H.Cp.C.	1,000	Westinghouse
Southend Corporation	July, 1901	7·01	13·52	3 6	90 G	18	48	42	*6	7	V.Cp.	2,075	British T-H.
Southend Pier (1) Southend Corp.	Aug., 1890	1·25	1·25	3 6	60 G	Lev.	..	28	..	..	..	..	British T-H.
South Metropolitan Elec. Try. Co.	Feb., 1906	13·09	26	4 8½	95 G	16	42	51	*8	6	Stm Tbs	1,650	{Dick, Kerr & Co. Brush Co.
Southport Corporation (5)	July, 1900	13·5	10·75	4 8½	87 & 90 G	25	45	30	*3	3	H. Cp.	600	Dick, Kerr, & Co.
Southport Electric Tramway Co.	July, 1901	8·17	12·52	4 8½	87 G	Nil	40	21	*				
Southport Pier	1905	..	·75	4 0	..	..	..	1 M 2 T	..	..	..	..	Westinghouse
South Shields Corporation	March, 1906	5·7	10·25	4 8½	95 G	15	35	40	2	2	V.Cp.C.	1,100	Dick, Kerr & Co.
South Staffordshire	Jan., 1893	16·90	26·87	3 6	97 & 90 G	17	46	46	3	3	C.H.Cp.	..	{Blackwell & Co. E. C. C.
Stalybridge, Hyde, Mossley, and Dukinfield	May, 1904	21·186	27·75	4 8½	99 G	9	27½	59	8	..	Turb.	1,000	Dick, Kerr, & Co.
Stockport Corporation	Aug., 1901	16	27·62	4 8½	96 G	10·8	35	50	*5	5	Cp.	1,000	Dick, Kerr, & Co.
Sunderland Corporation	Aug., 1900	10·92	20·35	4 8½	96 G	12	36	70	*	..	..	936	Dick, Kerr, & Co.
Sunderland District Electric Trys.	June, 1905	14·27	15·97	4 8½	90 G	11	40	33	*	..	..	..	British T-H.
Sutton & Howth (G.N.R., Ireland)	June, 1901	5·3	6	5 3	72 B	16·7	300	11	3	3	V.Cp.	500	{British T-H. Westinghouse
Swansea Tramways Company	June, 1900	13·02	20·38	4 8½	84 & 86 G	14	45	75	3	3	H.Cp.C.	620	British T-H.
Swindon Corporation	Sept., 1904	3·7	4·4	3 6	105 G	14	37	12	5	4	..	600	Dick, Kerr & Co.
Taunton Electric Traction Co.	Aug., 1901	1·66	2	3 6	90 G	25	35	6	*	..	..	..	Blackwell & Co.
Torquay Tramways	April, 1907	9·76	17·04	3 6	90 G	10	31	33	*	..	..	..	British T-H.
Trafford Park Estates, Ltd. (Trys.)	July, 1903	2·5	2·75	4 8½	100 G	Nil	35	..	..	..	..	..	
Tynemouth and District	March, 1901	4·21	7·83	3 6	90 G	10	30	21	*3	3	..	..	Blackwell & B.T-H.
Tyneside Tramways & Tramroads Co.	Sept., 1902	10·97	16·23	4 8½	95 G	10	40	24	*				
Wallasey Corporation	March, 1902	12	20	4 8½	98 G	11	40	67	*1	1	Turbine	1,000	Blackwell & Co.
Walsall Corporation	Jan., 1904	13·5	19·5	3 6	90 & 92 G	18·5	32	39	*7	7	V.& Tur.	2,490	British T-H.
Walthamstow U.D.C. Light Rly.	June, 1905	9·14	12·53	4 8½	100 G	18	40	38	*15	12	{Gas & Turb's}	1,560	Westinghouse
Walton-on-Naze Pier	Aug., 1898	·5	·5	3 6	36 V	..	..	3	3	2	..	100	{Blackwell & Co.
Warrington Corporation	April, 1902	6·5	9·6	4 8½	90 G	27	50	21	*6	6	V.C.	500	British T-H.
Wemyss and District	Aug., 1906	7·5	13	3 6	{95 & 97 G}	18	85	17	3	3	2 V.Cp.	..	BrucePeebles&Co
West Bromwich Corporation	Dec., 1902	7	12·5	3 6	98 G	20	49	29	8	8	Turb'nes	750	{Dick, Kerr, & Co. B. I. W. Co.
West Ham Corporation	Feb., 1904	16·8	30·0	4 8½	100 G	18	40	118	*3	3	V.C.Cp.	1,500	Brush & B.T-H.
West Hartlepool Corporation	May, 1896	6·72	8.3	3 6	87 & 90 G	15	35	25	*	..	..	..	{Elec. Cons. Co. Dick Kerr & Co.
Weston-super-Mare	May, 1902	2·92	3·53	4 8½	90 G	25	40	12	5	4	Cp. & T.	..	{Blackwell & Co. British T-H. Brush Co.
Wigan Corporation	Jan., 1901	30·9	45·42	{3 6 4 8½}	105 G	12	45	73	*8	8	..	740	Blackwell & Co.
Wolverhampton Corporation (3)	April, 1902	13·5	22	3 6	91 G	15	37·5	52	*10	10	{H.&V.C. & Turb's}	2,900	{British T-H. Electric Cons. Co.
Wolverhampton District	Oct., 1900	15·51	22·72	3 6	90 G	20	40	30	*4	..	..	..	{B.I.W. & B.T-H. Westinghouse
Worcester Electric Traction Co.	Feb., 1904	5·86	8·58	3 6	94 G	13	45	15	*3	3	..	..	{Brush Co. Dick, Kerr, & Co.
Wrexham and District	April, 1903	4·44	6·16	3 6	96 G	9·11	50	10	*6	..	..	..	British T-H.
Yarmouth Corporation	June, 1902	10	14·4	3 6	90 & 95 G	27	48	35	3	3	Comp.	..	{Brush Co. B.I.W. Co.
York Corporation	Jan., 1910	6	9·9	3 6	100	18	40	3 M. 4 T.	*8	8	V.C.	..	{Dick, Kerr, & Co. Brush & B.T-H.
Yorkshire (West Riding)	Aug., 1904	24·69	40·382	4 8½	96 G	15·5	40	69	9	6	..	1,800	Dick Kerr & Co.
Yorkshire Woollen District	Feb., 1903	22·25	36	4 8½	{94 & 100 G}	8	30	69	*	..	..	..	{Brush Co. Dick, Kerr, & Co.
RAILWAYS.													
LONDON AND VICINITY:													
Central London Rly. Co. (1)	July, 1900	6·5	13	4 8½	100 V	30	..	68 M. 172 T.	6	6	H.Cp.C.	..	British T-H
City & South London Rly. Co. (1	Dec., 1890	7·25	14·75	4 8½	{60 V 80 V}	30	120	53 L. 142 T.	(a)	..	..	..	{Mather & Platt. Elec. Cons. Co.
East London Railway (2)	April, 1913	5·75	11·5	4 8½	90 B	..	..	(c)	..	..	..	..	British T-H.
Gt. Northern & City Rly. Co. (2)	Feb., 1904	3·5	7·75	4 8½	85 V	52	660	35 M 45 T	6	..	..	..	British T-H.
Great Western Railway (Hammersmith and City line.)	Nov., 1906	4·9	10·5	4 8½	97½ B	60	400	40 M. 80 T.	10	10	V.Cp.	..	{British T-H. Elec. Con. Co.
London & North Western Rly. (Euston-Watford line in progress) (2)	May, 1914	41·5	80	4 8½	..	..	..	..	..	..	Turbine	..	{Siemens Works Westinghouse
London & South Western Rly.	Nov., 1915	47	150	4 8½	..	..	168	84	..	..	Turbine	..	{Dick, Kerr & Co. British T-H. Westinghouse
London, Brighton, and South Coast Railway (4) (Extensions in progress)	Dec., 1909	22	70	4 8½	..	..	..	16 M. 8 T.	*(d)	..	..	..	{British T-H. Blackwell & Co.
London Electric Railway Co.: Baker St. & Waterloo Ry. (2)	March, 1906	7	14·0	4 8½	90 B	60	330	86 M. 72 T.	(a)	..	..	..	{Westinghouse British T-H.
Charing Cross—Hampstead Railway (2)	June, 1907	8	16·5	4 8½	90 B	33	330	60 M. 90 T.	(a)	..	..	..	{Westinghouse British T-H.
Great Northern, Piccadilly & Brompton Rly. (2)	Dec., 1906	9·25	18·5	4 8½	90 B	33	330	72 M. 144 T.	(a)	..	..	..	{Westinghouse British T-H.
Metropolitan Railway (2)	Jan., 1905	26	59	4 8½	86 B	44	363	86 M. 172 T.	4	4	Turbine	..	{Westinghouse British T-H.
Metropolitan District Railway (and running powers) (2)	July, 1905	41	80·46	4 8½	86 B	40	330	284 M. 236 T.	(a)	..	Turbine	..	{British T-H. Westinghouse
Waterloo and City Rly. (1)	Aug., 1898	1·5	3	4 8½	87 B	30	321	17 M. 12 T.	6	6	V. C.	..	{Siemens Bros. Dick, Kerr & Co.
PROVINCES:													
Lancashire and Yorkshire (2) (Extensions in progress)	March, 1904	43	85	4 8½	86 B	85	840	88 M. 52 T.	6	5	{1 V.C. 4 H.C.}	..	Dick, Kerr, & Co.
Liverpool Overhead Rly. Co. (1)	March, 1893	6·5	13·05	4 8½	60 V	40	429	46 M 7 T	7	7	{H.Cp. V.Cp.}	..	{Electric Cons. Co. Dick, Kerr, & Co.
Mersey Railway (1)	April, 1903	4·5	9	4 8½	86 B	27	528	24 M. 87 T.	5	5	V.Cp.	..	Westinghouse
Midland Rly.—Morecambe and Heysham Branch (4)	June, 1908	9·75	19·5	4 8½	..	..	..	3 M. 6 T.	4	4	Gas.	..	{Westinghouse Siemens Bros.
North Eastern Railway (1)	March, 1904	..	..	4 8½	90 B	..	..	..	(b)	..	..	..	British T-H. Co.

*Power from combined lighting and power station. (1) Third rail system. (2) Third and fourth rails system. (3) Lorain surface contact system. (4) Single phase.
(5) Not including 9 miles owned but leased. (a) Power supplied by Chelsea Power Station (80,000 H.P.) (b) Power purchased from the Newcastle-upon-Tyne Electric Supply Company, Limited. (c) Rolling stock supplied by Metropolitan Railway. (d) Power supplied by London Electric Supply Corporation.
M—Motor Cars. T—Trail Cars.

Digitized by Google

PRESCOT INSULATORS

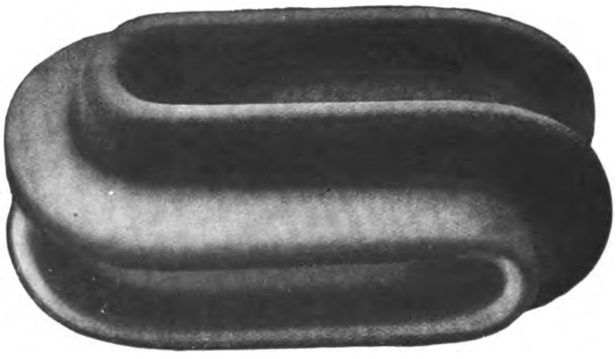

Regd. No. 639667/14.

These Insulators are insulators all through and do not depend on the attractive green glaze for their insulating qualities.

They are designed to maintain their alignment when erected, and their mechanical and electrical factors of safety are high.

The following are particulars of the sizes stocked:

	D 4411	D 4412
Working Load	500 lbs.	2,500 lbs.
Breaking Load	2,000 lbs.	10,000 lbs.
Flash over Voltage (dry)	20,000 A.C.	30,000 A.C.
Flash over Voltage (wet)	2,000 A.C.	10,000 A.C.

BRITISH INSULATED & HELSBY CABLES

LIMITED

CABLEMAKERS & ELECTRICAL ENGINEERS
PRESCOT, LANCASHIRE, and HELSBY, nr. WARRINGTON

Home Branches in : London, Manchester, Glasgow, Birmingham, Newcastle, Cardiff, Dublin, Belfast, and Leeds.

Overseas Branches in : Melbourne, Johannesburg, and Calcutta.

Agencies in : Amsterdam, Bombay, Buenos Ayres, Christiania, Hong Kong, Rangoon, Shanghai, Singapore, and Lisbon.

Digitized by Google

PHONO-ELECTRIC

UNDER SHOT AND SHELL

TOUGHNESS

is required in Trolley Wire to enable it to withstand the strains due to heavy service. In this case it had to withstand the exceptional strain of street fighting. The toughness of **Phono-Electric** carried it successfully through all.

O'Connell Bridge in Dublin after the Bombardment.

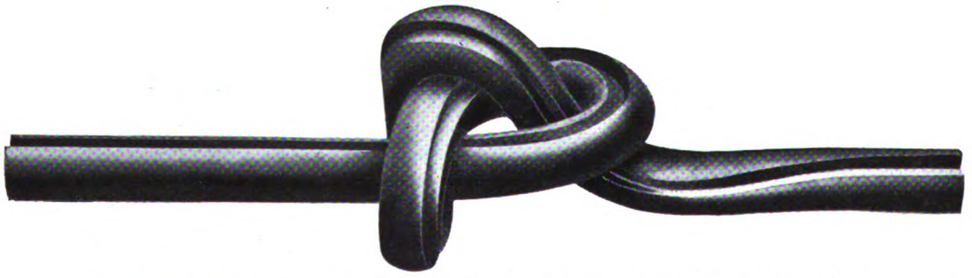

Booklet giving full particulars of tests and other data

THE EQUIPMENT & ENGINEERING CO.

2 & 3, Norfolk Street, Strand

LONDON, W.C.

Telephone City 1088 (2 lines)

Telegrams Kharparts, Estrand, London

Digitized by Google

The United Electric Car Co. Ltd.

Telegrams "Prescar, Preston." **WORKS: PRESTON, ENGLAND** Telephone No. — 219. —

MANUFACTURERS of Carbodies and Trucks for Steam and Electric Railways, Street Tramways and Light Railways; also of bodies for Motor Buses, Petrol Rail Motor Cars and Railless Electric Traction Cars.

SPECIALITIES: Preston Flexible Axle Truck, Preston Patent Destination Indicator, "Triumph" Reversible Seat, "Leatheroid," "Duroid," and Cotton Duck Blinds.

SPARE PARTS for both Carbodies and Trucks supplied.

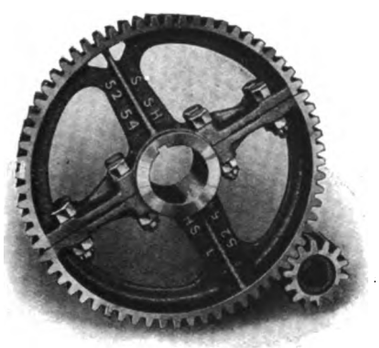

"HELE-SHAW."

BEST QUALITY MATERIAL.

ACCURATE WORKMANSHIP.

TEETH MACHINE-CUT FROM SOLID.

TURNED BOLTS FOR SPLIT WHEELS.

We manufacture the finest

GEAR WHEELS AND PINIONS FOR ELECTRIC TRAMWAYS, RAILWAYS, etc.

ALL TYPES STOCKED SUCH AS

B.T.H., DICK-KERR, WESTINGHOUSE, BRUSH, etc.

CONTRACTS EXECUTED FOR L.C.C., MANCHESTER, LEEDS, SALFORD, SHEFFIELD, etc.

These Gears are made on specially designed Machines of our own manufacture, and our PRICES are unbeatable when QUALITY is taken into consideration. Send for further particulars to the Manufacturers:

B H-S

The Mark of Excellence

The British Hele-Shaw Patent Clutch Co. Ltd.

Telephone: 1133
Telegrams: "Prehension, Oldham." **Suthers Street, OLDHAM, England**

Digitized by Google

MACINTOSH
CABLES

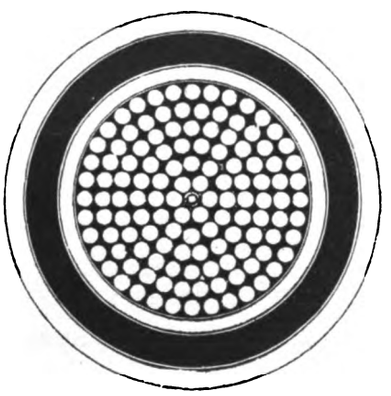

Section of positive feeder cable now being supplied and installed for the London and South Western Railway suburban electrification.

CHAS. MACINTOSH & CO., LTD.,

Electrical Engineers & Cable Manufacturers.

Works:
MANCHESTER,
DERBY,
LIVERPOOL.

London Office:
22-23, JEWIN STREET, E.C.

Digitized by Google

THE Tramway & Railway World
WITH MOTOR TRAFFIC SECTION

Founded 1892. LONDON, NOVEMBER 9, 1916. VOL. XL.

LONDON & NORTH WESTERN RAILWAY ELECTRIFICATION.

EQUIPMENT OF THE BROAD STREET TO RICHMOND ROUTE.

On October 1 last electric trains began running between Broad Street terminus in the city of London and Richmond. This marks the opening of the third instalment of the great scheme of suburban electric traction which the London and North Western Railway Company are developing. Electric working began on the first section to be dealt with—namely, the West London and the West London extension railways from Willesden to Earl's Court, a distance of 3¾ miles—on May 1, 1914. The second stage was reached on January 31, 1915, when the extension of the Baker Street and Waterloo Railway from Paddington to Queen's Park, Willesden, a distance of 1½ miles, was opened for traffic. The tube railway trains since then have run to Willesden Junction from Queen's Park on the new electric tracks of the London and North Western Company. The latest development is of much greater length, the distance from Broad Street *via* Willesden being about 16 miles.

We have on previous occasions given a description of the general scheme which the North Western Company have in hand. Additional details are now available, and a general conspectus may now be taken. The scheme, it may be recalled, includes the construction of a new double track railway from Chalk Farm to Watford alongside the existing main line, a branch line at Watford, the extension of the Baker Street and Waterloo Railway to Willesden so as to put the North Western Company's suburban lines into direct connection with the underground railways of London, and the electrification of the following steam lines:—North London, Hampstead Junction, Willesden to Earl's Court, Willesden to Kew Bridge and Gunnersbury, and main line tracks between Euston and Chalk Farm. The total route length is 41½ miles, representing nearly 100 miles of single track. The accompanying map shows how the lines of communication radiate from Willesden Junction. All the work is now far

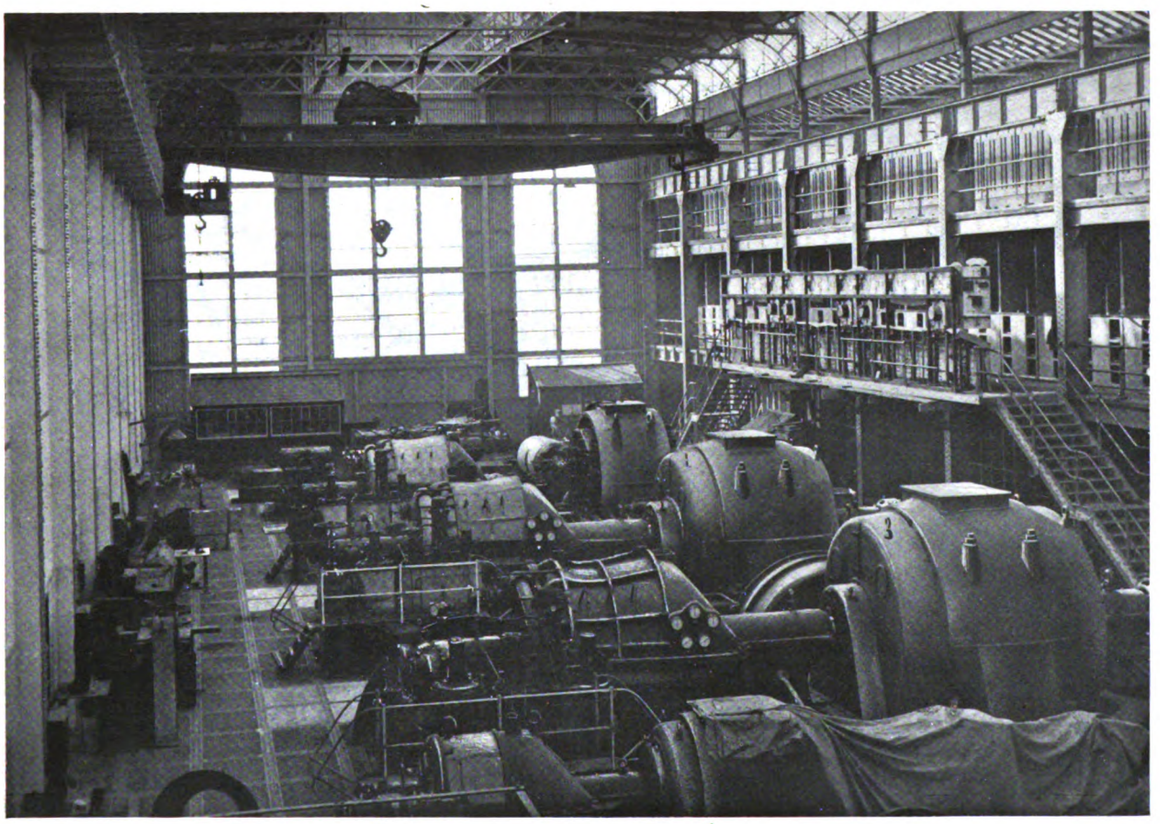

London and North Western Power Station at Stonebridge Park.

Digitized by Google

advanced. It should be noted that the part of the route from Gunnersbury to Richmond is a London and South Western Company's line already electrified.

The beginning of electric working from Broad Street and Euston over the new tracks between Chalk Farm and Willesden is delayed, as owing to war conditions the tunnels (nearly a mile long) under Primrose Hill are not yet completed. Meanwhile the Hampstead loop is being used for the electric trains. Heavy work has also been required at Chalk Farm where a complication of junction lines occurs. New bridge and retaining wall works on a large scale have been necessary. The new works, including tracks at three different levels, have been required in order to provide for the frequent electric train services from and to Euston and Broad Street and in order that the main line steam trains should not be interfered with. A new station has been erected at Kensal Green, and several existing stations have been reconstructed.

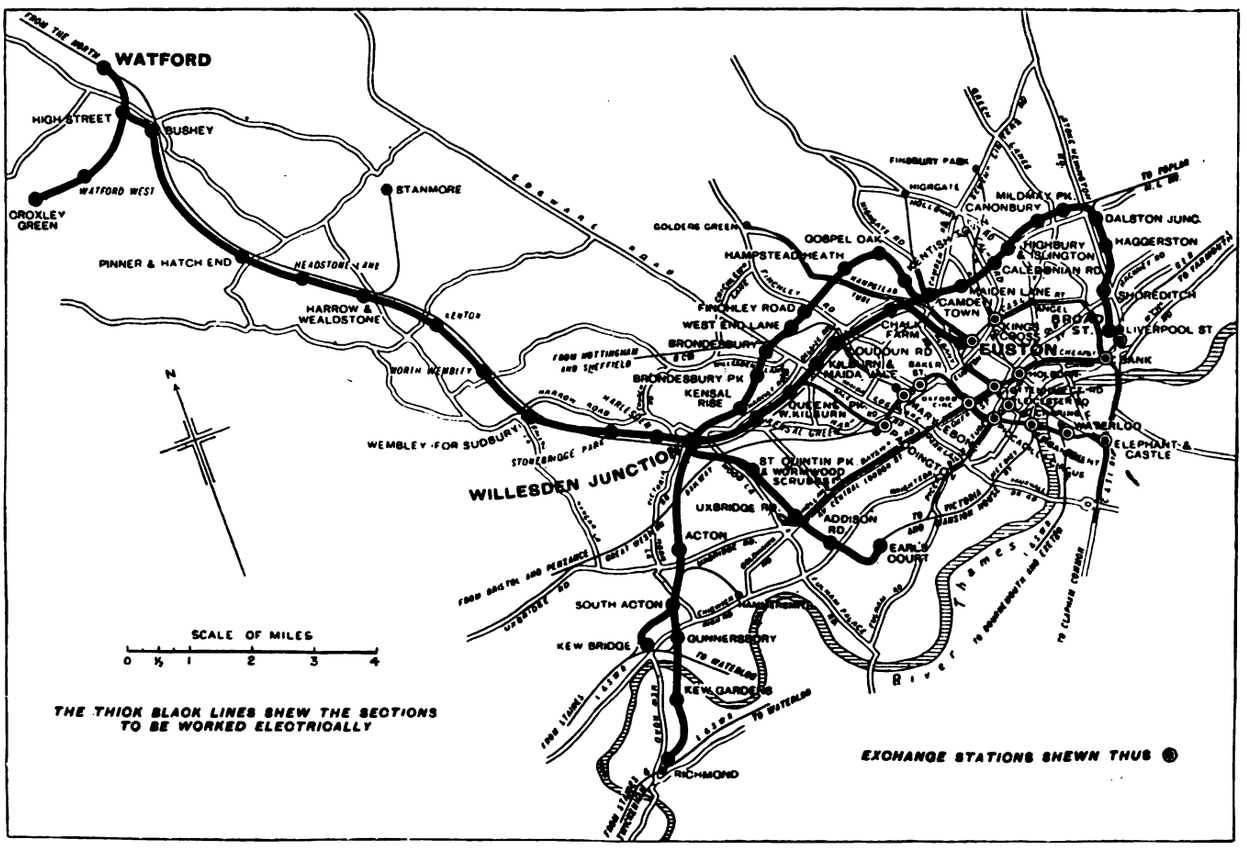

Outline Map of Electric Lines of London and North Western Railway in London and Suburbs.

To indicate the Chalk Farm arrangements more clearly, it may be said that the down electric line from Euston is carried in tunnel from a point south of the old Primrose Hill tunnels under all the existing lines to Loudoun Road. The up electric line passes through a tunnel from Loudoun Road to the junction at Chalk Farm with the existing up slow line. The up fast line is carried over the slow lines on a fly-over bridge. An underground junction is provided with the electrified North London Railway at a point north of the junction of the new electric lines with the existing slow steam tracks.

The Power Station.

The railway company have provided a large power station at Stonebridge Park, about a mile to the west of Willesden Junction and approximately at the geographical centre of the electric lines, though no doubt the centre of load, when all are working, will be a little further east. The power station follows usually accepted designs. Repair shops for the electric rolling stock have been erected adjacent to the power house. The building is of brick, with a steel framing, and boiler house and turbine house are placed side by side. The former, with a central firing floor and overhead coal bunkers, contains 20 Babcock & Wilcox boilers, equipped with drop link automatic stokers and coal weighing machines. Each boiler is designed to evaporate 25,000 lb. of water per hour and to supply steam at 200 lb. pressure superheated 200 deg. Fahr. The gases discharge through Green economisers, and the two chimneys are each 240 ft. high, with an internal diameter of 14 ft.

Coal is delivered in wagons from adjacent sidings to two elevated coal roads, the wagons discharging their contents into hoppers underneath, which feed two tray conveyors, these in turn delivering the fuel into two bucket conveyors which pass up the end of the building and over the boiler-house bunkers, returning at practically the same level, as the ashes are removed by a separate pneumatic discharge plant in the basement delivering to two outside storage bins. A portion of the fuel discharged from the elevated coal roads can be stacked by means of an electric jib crane, provision being made for storing about 20,000 tons outside. The water required for the plant is obtained from two artesian wells, with compressed air lifts; this water is delivered to a large reservoir, over part of which a battery of eight wooden cooling towers has been erected. The same water is used for boiler-feed purposes after being passed through a softening plant.

The turbine room contains five 5,000-kw. Westinghouse-Siemens three-phase turbo-alternators delivering current at 11,000 volts and 25 cycles. An auxiliary low-voltage set is installed for driving auxiliary machinery and for lighting purposes; this consists of a tandem set, including a 500-kw. 440-volt alternator

Digitized by Google

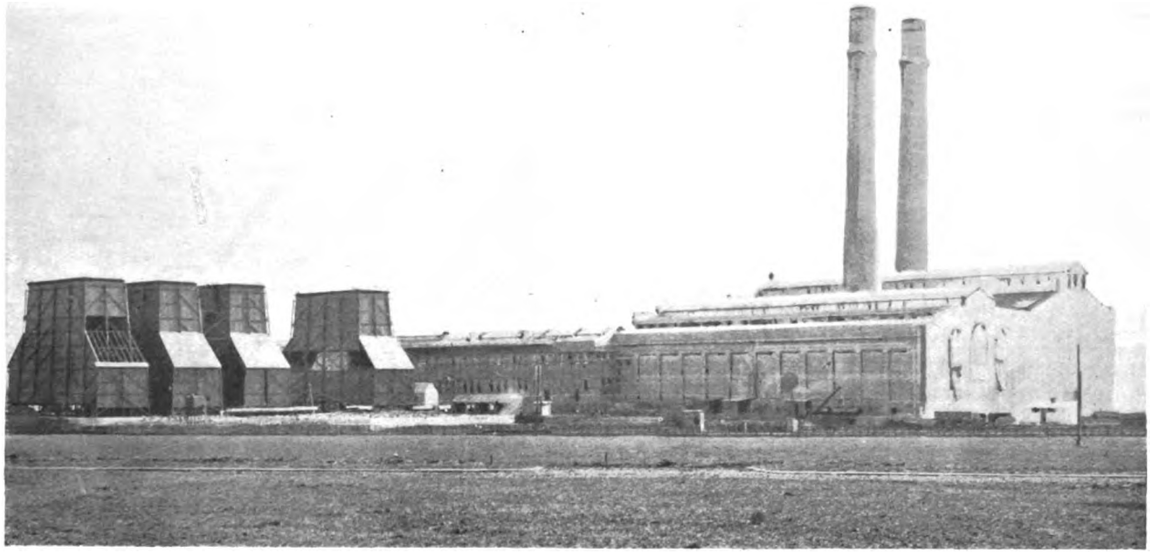

Power Station and Cooling Towers at Stonebridge Park.

and exciter, and a 120-KW. 220-volt direct-current machine. In the ordinary way the auxiliary a.c. station motors will be supplied through transformers from the main bus-bars, but when the large units are shut down the small set can be utilised, or for supplying through step-up transformers to the sub-stations.

THE SUB-STATIONS.

There are eleven sub-stations situated at Stonebridge Park, Bushey, Headstone Lane, Kenton, Willesden, Queen's Park, West End Lane, Dalston, Broad Street, Acton, and Chalk Farm. A standard equipment is provided, consisting in most cases of three rotary converters, of either 750 or 1,000-KW. capacity, nine single-phase static transformers of the Berry oil-cooled type, a storage battery and automatic reversible booster of the Entz type. The Chalk Farm sub-station is the old gas engine power station reconstructed; this plant has for some years supplied energy for lighting purposes to Euston Station, for which service three rotary converters are now employed, while for traction purposes three large rotary converters are being installed. The small generating unit at the main power station can be used to supply the current for lighting

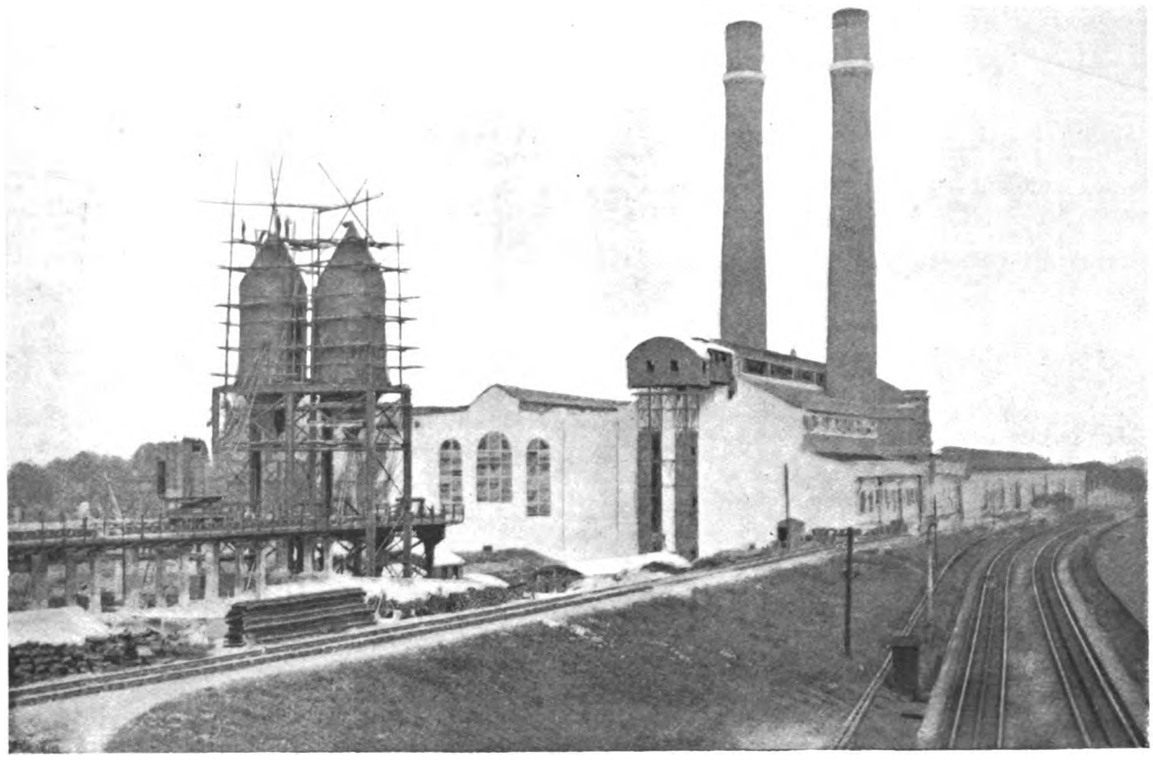

Ash Receiver and South-West Face of Power Station at Stonebridge Park.

Digitized by Google

through this sub-station when the main units are shut down and the electric trains not running. The rotary converter equipment, including in all six 1,000-KW. and twenty-five 750-KW. rotary converters of the self-synchronising type, has been supplied by the British Thomson-Houston Company, who also supplied the main high tension switchgear at the power house.

The sub-station switchgear, both h.t. and l.t., has been provided by the British Westinghouse Company, with the exception of the booster and battery panels, which were supplied under Messrs. Bruce Peebles' contract and made by Messrs. Whipp and Bourne. The batteries are of Tudor Accumulator make, and the boosters supplied by Bruce Peebles and Company.

The high tension feeder cables, which are of the three-core, paper-insulated, lead-covered, and armoured type, were supplied by the British Insulated and Helsby Cables, Limited. The low tension feeder and jumper cables have been supplied by Messrs. W. T. Henleys Telegraph Works, Limited, and are mostly paper-insulated bitumen-sheathed cables. In some cases rubber-insulated bitumen-sheathed cables are used.

volts pressure, to supply the collecting shoes on the trains; a negative rail is provided between the running rails, and the latter may be used for track circuiting and automatic signalling. The conductor rails, of

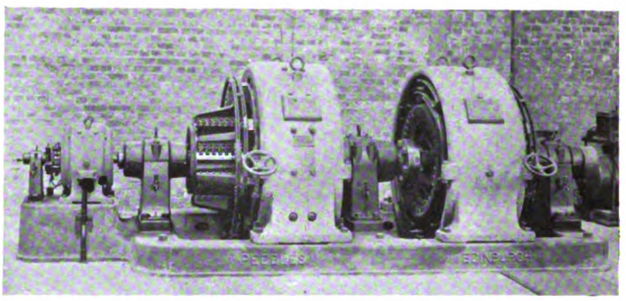

Battery Booster Set.

special low carbon steel, having about 6½ times the specific resistance of copper, weigh 105 lb. per yard, and are mounted on Doulton porcelain insulators, attached to the sleepers by malleable iron clips, while special

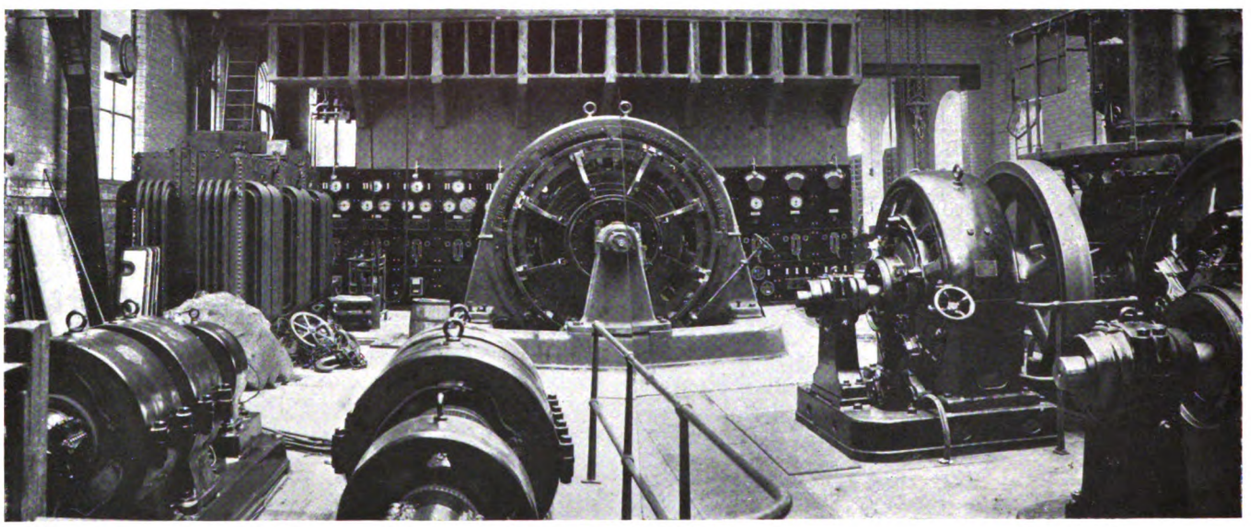

Chalk Farm Sub-station During Reconstruction and Before Removal of Gas Engines.

Track Equipment.

The electrical equipment of the tracks naturally conforms to that of the various connecting electric railways over which running powers are exercised. Outside positive conductor rails are employed, at about 600

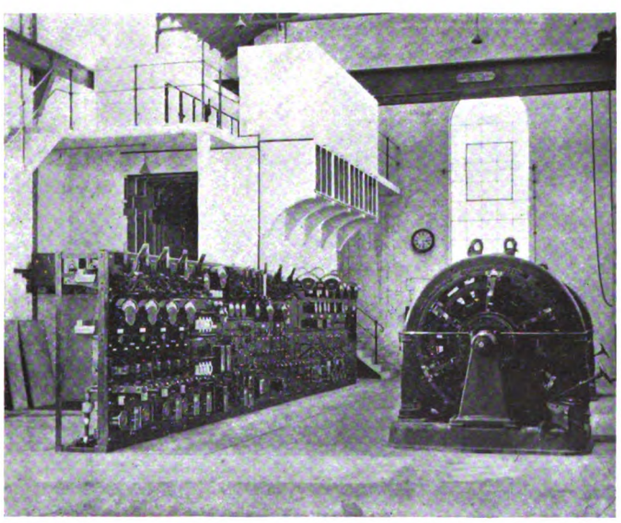

Interior of Acton Sub-station.

anchor insulators are provided at intervals to prevent creeping of the rails. Each rail joint is bonded by four flexible strip bonds having a copper area of 1·4 sq. in.

The trailing ramps are of cast iron, and the leading ramps on through lines are of forged steel, and in some cases, as on sidings, of special cast steel. The jumper cables are laid solid in bitumenised-fibre troughing, and fitted with the Cortez-Leigh patent sealing terminal.

Rolling Stock.

The standard rolling stock comprises three-coach and six-coach trains, each three-coach train consisting of a motor coach, a trailer, and a driving trailer, with control on the multiple unit system. The electrical equipment of the first four trains (described in our issue of January 14, 1915) is by Siemens Brothers Dynamo Works, Limited, and for the remaining trains by the Oerlikon Company. The first four trains used on the Willesden-Earl's Court section were supplied by the Metropolitan Carriage, Wagon and Finance Company, and had Siemens equipments; the Metropolitan Carriage Company is also building the new standard motor coaches, while trailer and driving trailer coaches are being constructed at the London and North Western Railway Carriage Works at Wolverton. Each motor car is fitted with four motors of 260 H.P. each.

It will be noted from the drawings that both cross and longitudinal seats are used, and that the doors

Digitized by Google

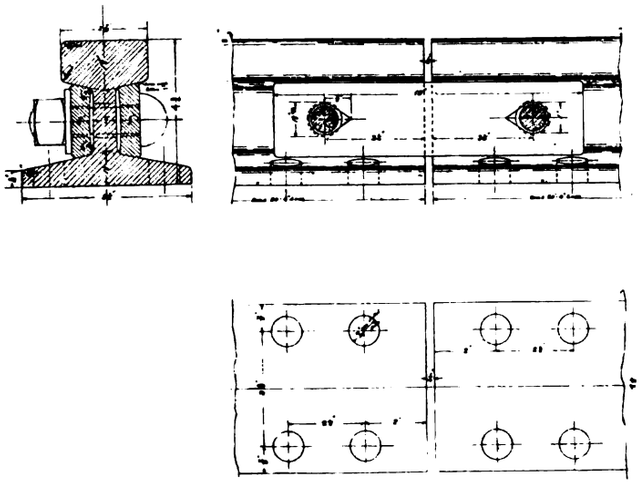

Detail of Conductor Rail.

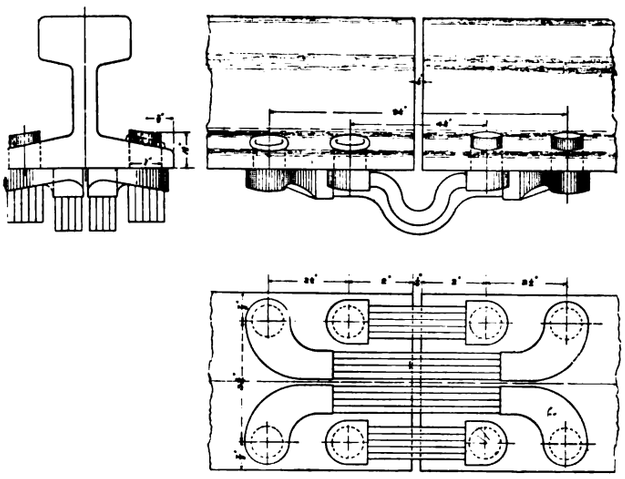

Detail of Conductor Rail Bond.

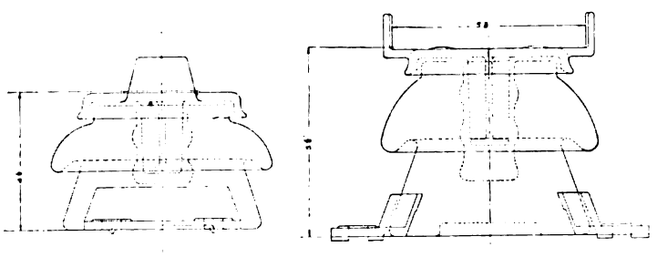

Negative. Positive.

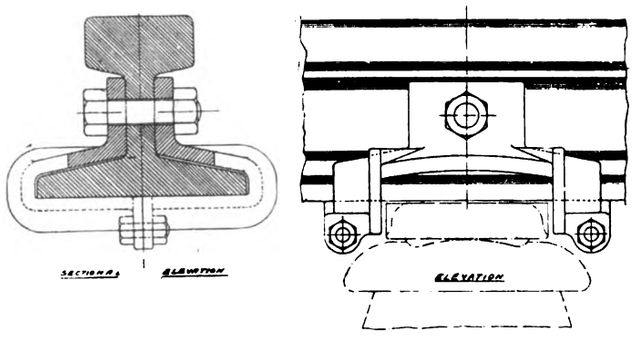



Conductor Rail Insulator.

Conductor Rail Clip for Anchor Insulator.



Cortez-Leigh Terminals.

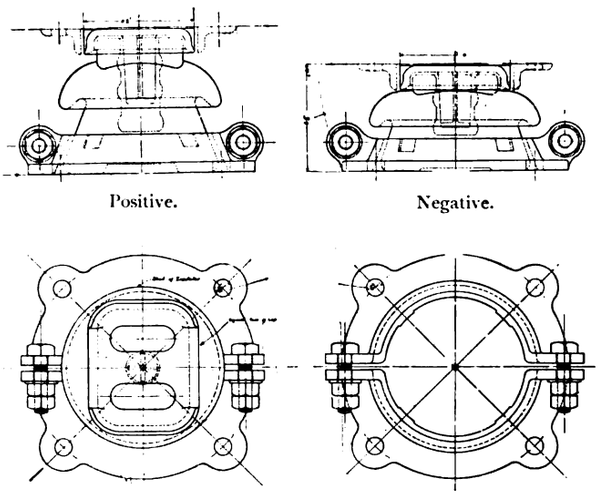

Positive. Negative.

Plan of Top. Plan of Negative Clamping Ring.

Conductor Rail Anchor Insulators.

London and North Western Railway Electrification.

Digitized by Google

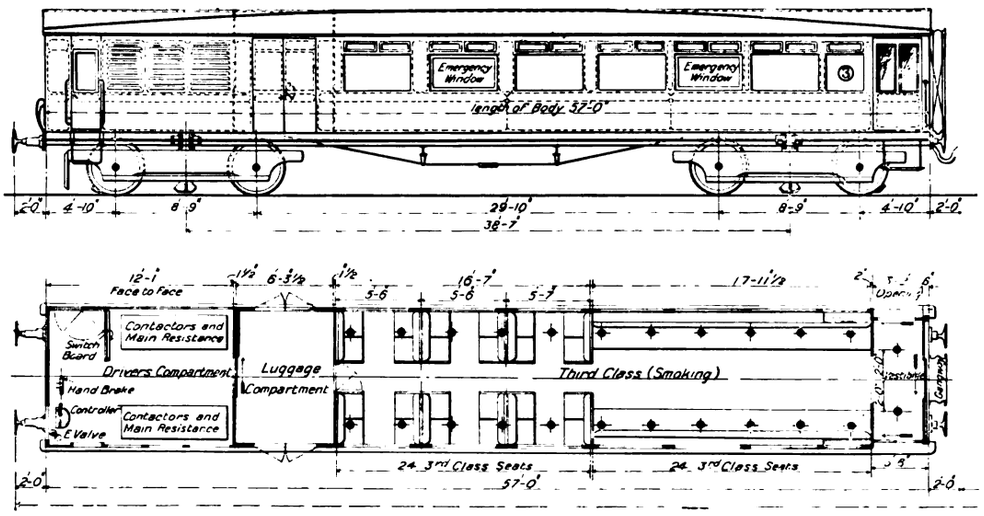

Elevation and Plan of Motor Car.

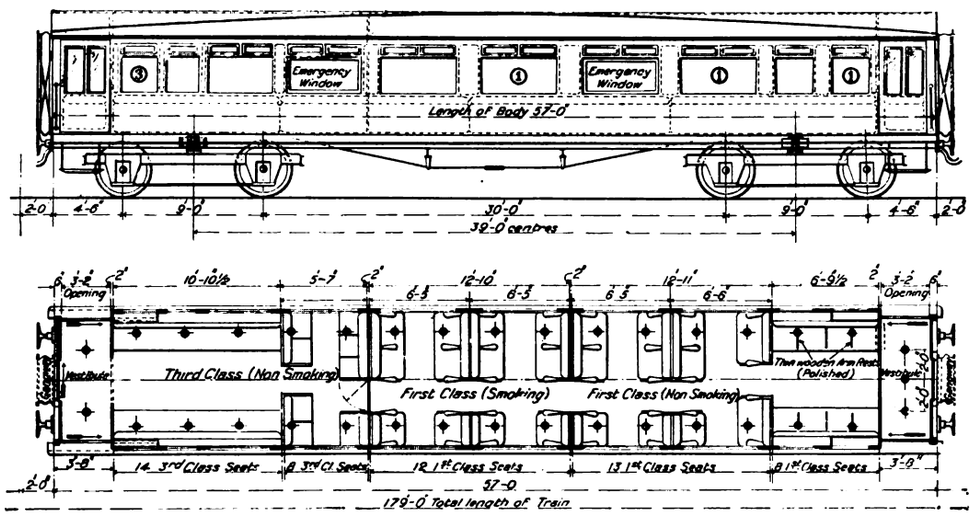

Elevation and Plan of Trailer Car (Middle Car of Three-Car Train).

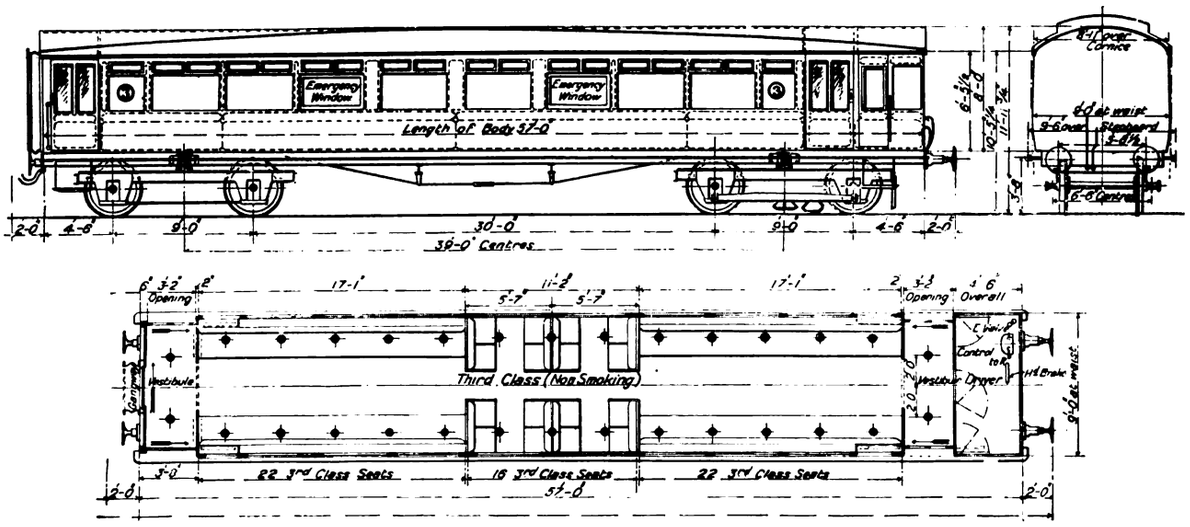

Elevation and Plan of Driving Trailer Car.

Three-Car Electric Train—London and North Western Railway.

Digitized by Google

are at the ends. Two emergency windows on each side of the car give an additional means of exit in case of fire. The exterior of the body is covered with steel panelling, and the wood of the roof is treated so as to be non-inflammable. The floor is laid on corrugated troughing. The body length of each car is 57 ft., and the bogie wheel-bases and the distances between centres are :—Motor cars, 8 ft. 9 in. and 38 ft. 7 in.; trailers and driving trailers, 9 ft. and 39 ft. The seating accommodation is :—Motor car, 48 ; trailer car, 55 ; driving trailer car, 60 ; total, 163.

The special joint stock for working on the Bakerloo-Watford services is being built by the Metropolitan Carriage, Wagon and Finance Company, and will have equipments made by the British Thomson-Houston Company. There are four 250 H.P. motors on each motor coach. As the platform level on the Bakerloo tube is lower than that at the main line stations, the special joint rolling stock, which will have to work over both systems, is a compromise between the London and North Western standard and the Bakerloo standard, so that passengers on this stock will step up to the platforms on the L. & N.W. line and down to the platforms on the Baker Street and Waterloo line.

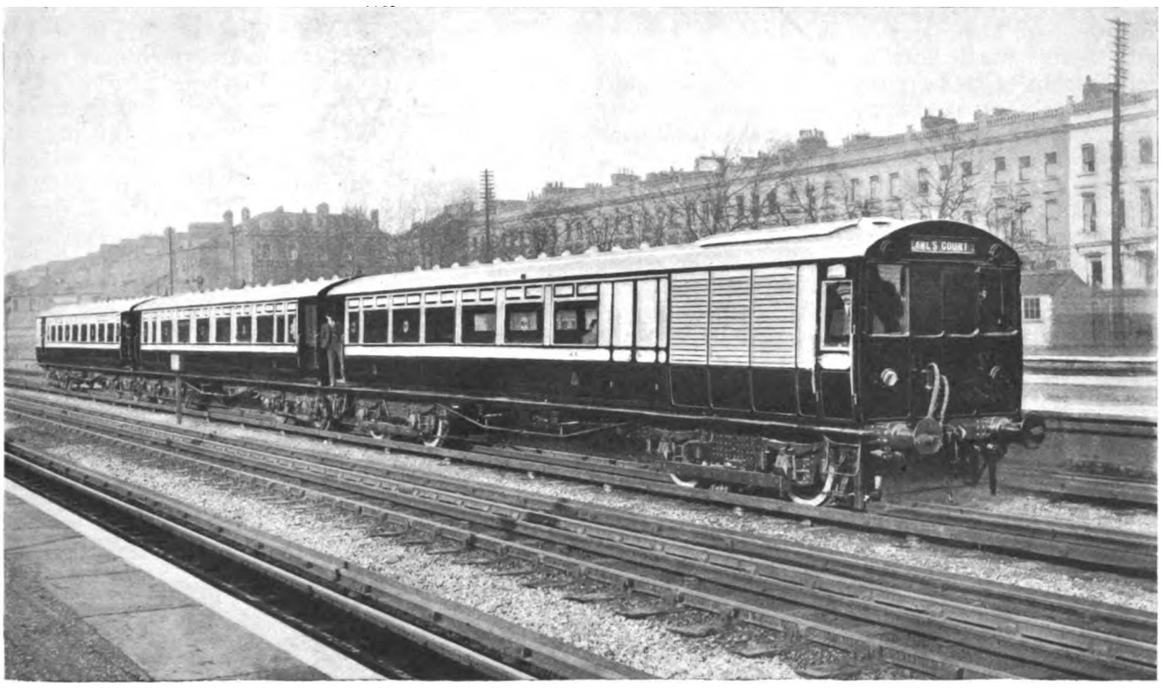

Three-Car Electric Train—London and North Western Railway.

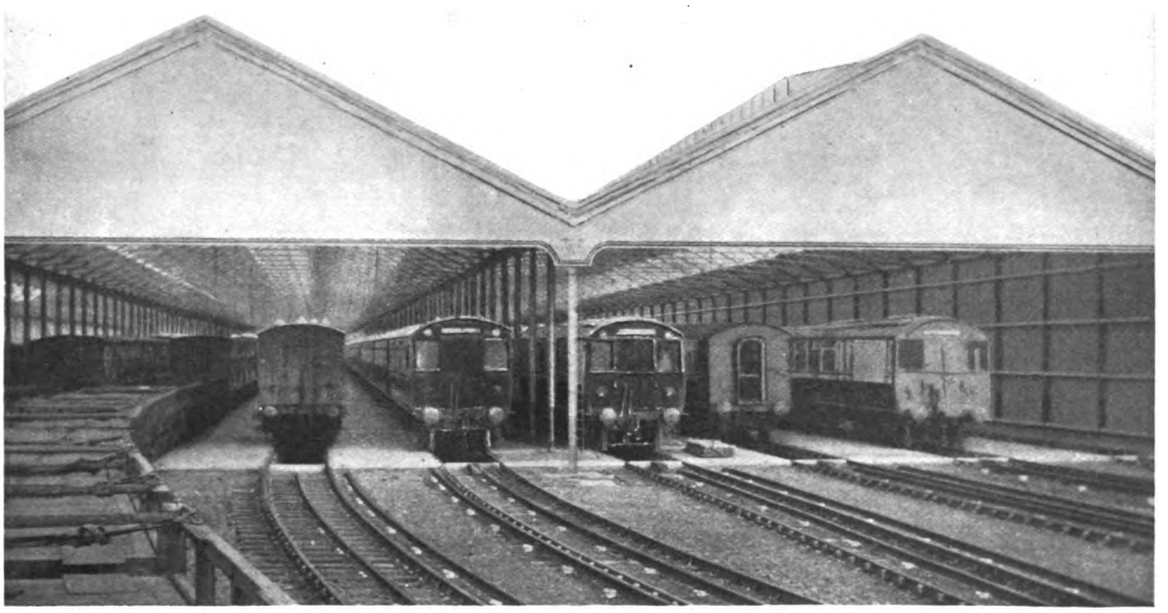

Electric Trains in Watford Car Shed—London and North Western Railway.

In connection with the preparation of this article, we wish to express our indebtedness to Lieut.-Col. F. A. C. Leigh (T.D.), R.E., chief electrical engineer to the London and North Western Railway, who is responsible for the whole electrification scheme.

Digitized by Google

THE WOODS-GILBERT RAIL PLANER AND GRINDER.

Its Work at Bexley.

In our issue of October 12 a short notice was given of the Woods-Gilbert rail planing and grinding machine; and since then we have been favoured, as the lawyers say, with better particulars of this very interesting and useful means of track repair. In view of the part that these machines are likely to play in tramway maintenance in the near future, we have no hesitation in again reverting to the subject. As mentioned in the previous notice, one of the machines has been in operation on the Bexley tramways for some time, and Mr. H. P. Stokes, the electrical and tramway engineer of Bexley Urban District Council, who has thus had a good opportunity of watching the work of the machine and the value of its performance, is exceedingly well satisfied with the result. An illustration accompanying our earlier notice showed the apparatus being used as a rail grinder, and we now reproduce a photograph showing one of the machines at work deepening the groove of worn rails.

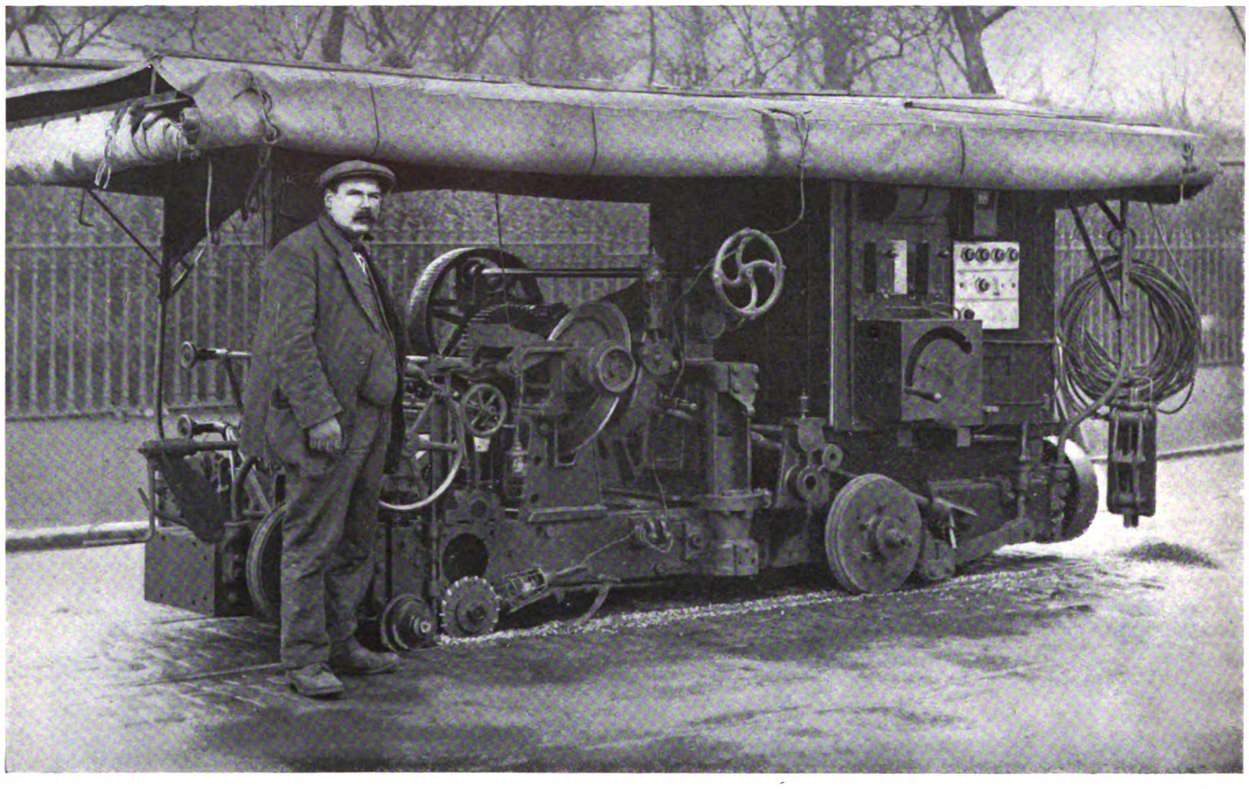

Woods-Gilbert Rail Machine at Work Deepening Groove of Worn Rail.

The machine in use on the Bexley tramways is the latest type of machine constructed by the Woods-Gilbert Rail Planer Company, and is thoroughly well designed so as readily and consistently to eliminate corrugations from rails regardless of vertical or lateral rail distortion and difference in elevation of the rails.

The machine is constructed of what might be termed the power unit and the working unit. The former is a substantially-built truck carrying a 60-H.P. motor connected with friction clutches, countershafts, etc., so as to provide an extremely mobile and flexible power unit. Current for the motor is obtained from the overhead trolley wires, and the motor is capable of propelling the machine to the point at which work is required at a speed up to 20 miles per hour in either direction.

The main power truck is mounted upon four track wheels provided with substantial bearings and springs, each pair of wheels being connected to the motor by silent chain drive. This provides the fast travelling gear. The motor, which is provided with an extended shaft, is also fitted with a large diameter belt pulley driving through a countershaft on to a pair of friction cones controlled by hand levers which may be operated from either side of the machine. From these cone wheels the drive is transmitted through worm gearing which propels the machine slowly during working operation, at the same time driving the working unit, i.e., grinding head or milling head as the case may be. The friction cones are very substantial in design, and provide both forward and reverse travel, giving perfect sweetness of action without any abnormal strain on the machine.

The power unit is further provided with four heavy road wheels for the purpose of side-tracking the machine, namely, removing it entirely from the tramway track on to the side of the road to allow tramway traffic to proceed. This is operated by chain drive on to massive spindles, which, on being rotated, bring the road wheels into contact with the road, taking the entire weight of the machine from the tramway track. When this operation is completed, the operating clutch is thrown over in the opposite direction, and the machine at once commences to side-track. The whole operation is capable of being performed in one minute. The machine can be side-tracked in either direction.

The working unit, which is either the grinding head or milling head as the case may be, is connected with the power unit by means of a pair of connecting links and a massive cantilever, pivoted so as to provide the necessary lift for removing the working unit entirely clear of the rail for fast travelling.

When the machine is travelling fast the interconnected links between the two units are locked together so that neither truck moves out of relation

Digitized by Google

to the other. The working unit is divided into two halves, each of which is dovetailed into each other with a trunnion pin, so as to allow each side of the carriage to deal independently with the rail on which it is at work. By this means both vertical and lateral inequalities of the rail are automatically dealt with. The grinding wheels also have hand-operated vertical and lateral adjustments.

Resting upon rails to be dressed, and supporting thereon each of the two sections of the divided fore carriage, are four sets of multiple rollers. Each set has seven rollers fixed in staggered position, and by this means all possibility of reiterating the corrugated surface of the rail during the grinding operation is eliminated. The two individual halves of the truck provide substantial weight, so as to give an effective cut to the abrasive wheels.

Each rail can be treated independently or both together, the method of drive in each case being entirely free and independent of the other, and allowing all possible variations and adjustments which may be required. The milling head, which is attached for the purpose of deepening the grooves, cutting down projecting guard lip or other remodelling work on the rails, is operated in a similar manner to the grinding head. An indicator is provided in order that the depth of the cut and the dressing tool may be accurately regulated. This indicator is also provided in order that variations in the width of the track may be observed and lateral adjustments in the dressing tools effected accordingly. It is sometimes found desirable when milling rails, when the rail is loose and shows a tendency to vibrate, to increase the weight upon the rail in order effectively to carry out the work. This is readily provided for by operating the cantilever which, when depressed at its outer end, will by reason of the links between it and the carriage sections, cause additional pressure to be exerted upon the working carriage in addition to its own weight.

In the case of the grinding carriage, suspension chains are provided instead of links, as it is not necessary to exert the pressure above referred to when grinding.

It will be seen that the main features of this machine are :—

- The provision of a separate working carriage built in two sections providing for universal adjustments. Each half of this carriage being driven independently, the utmost efficiency is obtained.
- The method of connecting the working unit to the power unit provides ready means of lifting and locking into fixed position both carriages, so as to enable it to proceed rapidly to other points where work is required to be performed.
- The ingenious method provided for side-tracking the machine enables it to work with the least possible loss of time under all conditions of traffic.

The capacity of the machine when surface grinding is approximately 12,000 lineal feet of single track per month ; for milling work approximately 9,000 lineal feet of single track per month. The work is usually carried out at night, so as to afford no interruption to traffic conditions. The machine will operate on a 4 ft. 8½ in. gauge, and can be adapted for other gauges.

The machine has now been in operation on the Bexley Council Tramways for approximately two months. There is still some work to be accomplished, after which a large contract is to be carried out at Bolton.

As mentioned in a previous issue, the company owning the patents for the Woods-Gilbert machine originated in Australia, and it has carried out very extensive contracts in Melbourne, Sydney, Brisbane, and Adelaide, whilst work has already been completed or is now in progress on the Oldham, Ashton and Hyde, Isle of Thanet, Cardiff, Wigan, and Bexley Tramways, other large contracts already being in hand.

Mr. J. W. Eunson, the chief engineer of the company, is at present in this country supervising the putting to work of new machines. The London address of the company is 2 and 3, Norfolk Street, Strand, W.C.

THE ZÜRICH TRAMWAYS.

The twentieth report of Zürich Municipal Tramway system, dealing with the period January-December, 1915, shows that war taking place across the adjacent frontier exercises almost as great an influence on the industrial concerns of a neutral neighbour as it would if State boundaries counted for nothing. Not only has the Zürich tramway system suffered from this cause in regard to loss of traffic, but the expenses have also been increased owing to workers being called up to maintain the armed neutrality of their State. Both substitutes and men must still be paid whole or part wages, the outlay on the regular employees thus called up representing an expenditure of not less than 1·77 centimes per car kilometre. The total route mileage of the tramways is only 39 kilometres (24 miles), and the total track length 84¾ kilometres (51 miles), so that the system is not very large in comparison with the careful completeness of the organisation shown by the report throughout all its aspects. One interesting feature of the system consists of the electric point shifters, 29 in number ; of these 23 are fitted in cast-iron boxes under street level, and six in small street boxes above ground. The maintenance of these during the year cost frs. 1,817 (£75). The number of employes amounts to 886, and, as is the case with many of the continental tramway undertakings, the material welfare of the staff is closely considered by the provision not only of suitable working conditions, but also in the building of excellent blocks of flats and houses where they can live in comfort at a cheap rate, whilst the enterprise itself brings in a small return on the capital outlay over the sinking fund payments.

The car kilometres run during the year amounted to 9,299,380 ; total passengers carried were 35,451,080, so that the passengers per kilometre were 3·81, which shows a considerable reduction on the previous year's working. Total traffic receipts were 4,135,190 francs, or 11·66 centimes per passenger and 44·47 centimes per car kilometre. Gross receipts amounted to 4,217,001 francs. The rolling stock at the end of the year included 218 motor and 63 trail cars ; current consumption averaged ·823 KW. hour per car kilometre, and total consumption for the year 7,054,180 KW. hours, the cost per car kilometre for current averaging 8·2 centimes. Current is obtained from the municipal electricity works.

Working expenses rose to 83·49 per cent. of the receipts, as compared with 82·87 per cent. during the previous year, this increase being almost entirely owing to the extra cost of labour and part wages paid to members of the staff called up to the colours.

Per car kilometre the figures are :—Gross receipts, 11·89 centimes ; working expenses, 10·75 ; but as the sinking fund payments amount to 2·11 centimes in addition, the present exceptional conditions of working entail a debit balance, even irrespective of pension fund contribution or special reserves for amortisation of old capital. There seems no doubt, however, that conditions will revert to normal on the termination of the war, so as to show the same steady progress as was made in previous years.

Digitized by Google

THE
Tramway and Railway World

FOUNDED IN 1892 AND PUBLISHED BY
THE TRAMWAY AND RAILWAY WORLD PUBLISHING COMPANY, LIMITED,
AMBERLEY HOUSE, NORFOLK STREET, LONDON, W.C.

SUBSCRIPTION:

THE TRAMWAY AND RAILWAY WORLD can be obtained, post free, at the following rates:

FOR THE UNITED KINGDOM—Twenty-five Shillings per annum.

THE ANNUAL SUBSCRIPTION INCLUDES 64 ISSUES, OF WHICH 12 ARE ILLUSTRATED NUMBERS.

FOR ALL PLACES ABROAD—Thirty Shillings per annum.

Single Copies—One Shilling (Postage, 2 pence—Abroad, 5 pence).

THE EDITORIAL AND PUBLISHING OFFICES OF
THE TRAMWAY AND RAILWAY WORLD
ARE AT AMBERLEY HOUSE, NORFOLK STREET,
LONDON, W.C.

Telephone No.: GERRARD *2948.*
Telegraphic Address: "TRAMIGRO, ESTRAND, LONDON."

LONDON, NOVEMBER 9, 1916.

The Overhead Electric System.

The whirligig of time brings about changes, and this is true of the overhead wire system of electric traction as of many other things. The remark is suggested by two recent items of information in regard to Melbourne. One is that the Ministry of Munitions have allowed arrangements to be made to accelerate the delivery of electric plant for the electrification of the Melbourne Suburban Railways. These lines, it may be recalled, are to be equipped on the overhead wire system, high-tension direct current being used. The other point is that Melbourne City Council have asked the Victorian Government in case it is decided to electrify the cable tramways, to provide for placing the electrical equipment underground. That means the conduit system. In Edinburgh, where the comparative merits of various forms of traction are now much discussed, many people take the same view. Now in the history of electric tramways, but for a few exceptional cases, the trolley wire method has almost from the first had it all its own way. In the case of electric railways, however, the third-rail conductor, corresponding roughly to the tramway conduit conductor, was for years the only method in use. The perfectly good reasons for the diversity of practice in the two cases are well known. Of late, however, we have had many electric railways equipped with overhead wires, and this where single-phase alternating current or direct current is employed. If Melbourne adopts the conduit system for the tramways, it will possess the same peculiar feature as is to be seen in South London —namely, tramways on the conduit system and railways using the overhead wire. Till within recent years the arrangement in most places was just the reverse. We had trolley-wire tramways and third-rail conductor railways. The overhead wire will, it may safely be prophesied, be retained for tramways generally, and as railway electrification extends further afield the aerial conductor will be increasingly used on railways.

Halfpenny Fares.

An interesting aspect of the question of halfpenny fares has arisen in the eastern outskirts of the metropolis. In consequence of motor omnibus competition the revenues of a number of the smaller tramway undertakings showed a serious falling off before the war, and the financial position became somewhat alarming. In the earlier days of the war that position did not improve much, and a strong movement arose among the local authorities concerned for the abolition of halfpenny fares. In some instances such abolition was determined upon. Then the Councils of Leyton, Ilford, East Ham and West Ham perceived that if the minimum fare was to be raised to a penny, it would be necessary to get London County Council to adopt the same course so far as through cars were concerned, there being mutual through running between the systems. A conference was to have been held with the London County Council, but owing to the summer recess it was put off, and now it appears that it may never be held. Some of the Councils, finding that their tramway receipts have much improved lately, now propose to continue the halfpenny fares. In any event it would have been very difficult to have persuaded the County Council to make the minimum fare a penny, because to be consistent that course would have also to be adopted over the whole of the tramways in the county of London, and there is a strong element in the County Council opposed to such a course, despite the poor financial

Digitized by Google

position of their huge undertaking. On the other hand, it would be a very questionable policy for the eastern Councils to drop the halfpenny fare question altogether. After the war omnibus competition will no doubt come into full swing again. The omnibus company will probably get some of their vehicles back from the Continent. In any case they will then be in a position to build rapidly as many vehicles as they wish. The abnormal passenger traffic in munition workers will fall away. All the local authorities concerned, including the County Council, should look to the future and be prepared for peace conditions which may involve trade depression. While it may be inadvisable to abolish halfpenny fares, there is much to be said in favour of a reduction in the length of the halfpenny stages. When these minimum fares were established years ago, the idea was to give about half a mile for a halfpenny. The stage has since been lengthened, till now it is often nearly a mile. A reversion to the rule of not more than half a mile for a halfpenny would probably have a considerable effect in increasing revenue. It has the merit also of being easily carried out and of being easily abandoned if found undesirable. Certainly none of these tramway undertakings are in such a financial position that they can afford to neglect any means of improving it.

Rail Traction in the War.

Surprise was expressed in the President's address at the Municipal Tramways Conference that, beyond the call for the transport of munition workers at home, the Government had not invoked the assistance of electric traction undertakings. The blame for the shortcoming may be attributed to both parties. By the nature of their work military directors are called upon to make provision for contingencies, but in the early stage of the present conflict their efforts in that direction have not in some respects proved adequate. The most notable inadequacy related to the provision of guns of various types and ammunition. To make good these deficiencies the whole engineering talent of the nation has now been successfully applied, and in that work a number of tramway undertakings have shared. The knowledge of what has had to be done to make good the shortage of munitions ought to have suggested the more extensive use of light railways, not only during the period of trench warfare but during the advance of the past four months in particular. No doubt it is due to the existence of national service in France that our ally has utilised light railways to an extent that far and away surpasses our efforts in those directions. Invaluable as road motor vehicles are, periods arise in war just as in ordinary traffic when the rail conveyance must be resorted to if due regard is to be paid to speedy and economical working, apart from the cost of road maintenance and the use for that purpose of labour that might be employed in other directions. In the three theatres of war in which our troops are employed in the East the nature of the terrain has enforced the use of light railways, in the construction and working of which the special companies of men enlisted from British and Colonial railways have found use for their activities. In France their duty until now has mainly related to the working and repair of existing French steam railways. The shortcoming has been at the War Office, where until the Minister of Munitions took up the vacant Secretaryship of State, and appointed his munitions deputy to a new post as inspector-general of transportation, nobody was charged with the study of means of transit in general. As was only to be expected, Sir Eric Geddes's activities have since been transferred to the staff of the British Commander-in-Chief in France. Another encouraging sign is that he has been accompanied by Mr. Maybury, the engineer and manager of the Road Board, whose enterprise has found scope during the past four years in many parts of the country. The ex-deputy general manager of the North Eastern Railway brings to his duties as inspector-general of transportation a knowledge of railway work ranging from a steam tramway in India and the speedy methods of construction on Canadian railways to electric traction on the North Eastern Railway.

A Light to be Carried with Cattle.—Attention was directed in our issue of October 7 to the danger placed in the way of all forms of road traffic through animals being allowed to be driven at night without anything to indicate their presence. On October 18 the Home Secretary issued an order under the Defence of the Realm Act, to come into operation on the 22nd inst., under which a lamp showing a white light to the front and rear must be carried at the rear of the animal, herd, or drove. If there are more than twenty cattle or more than 100 sheep, lambs, goats, kids, or swine, a second lamp must be provided to be carried in front.

Digitized by Google

TRADE AFTER THE WAR.

The Government still lag far behind public opinion as regards the carrying out of the resolutions of the Paris Conference. It is true, unfortunately, that the end of the war is not in sight, but unless the Government show more resolution than they usually do the war will come to an end before this country is prepared for the situation that will then arise. It has to be remembered that not only have the Government to settle their own detailed scheme of procedure, but after it has been provisionally settled conference with the Allies should follow, so that there may be as little clashing as possible between the trade policies of the allied countries. Compromise and modification may be necessary all round. That will take more time. But so far as is known the Government are not pushing ahead in the matter; they are simply awaiting the reports of the various committees which they have set up. Evidently they do not anticipate making any speedy move, for in the middle of October the Board of Trade appointed still another Committee—this time to deal with the non-ferrous metal trades. A few public announcements were made in the earlier part of October. Let us see what they amount to.

Mr. Bonar Law stated in reply to a question in the House of Commons that the expert Committees appointed to advise the Board of Trade as to the steps to be taken to secure the possession of various important trades after the war had made considerable progress with their investigations. He also referred to the well-known fact that a General Committee had been set up under the chairmanship of Lord Balfour of Burleigh to report on British commercial policy after the war. It had been arranged that the conference of technical delegates to consider the laws relating to industrial property should meet at an early date. The question of introducing legislation to prevent the dumping of German goods had not yet been considered. The pious hope was added that Lord Balfour's Committee anticipated being able to report within a moderate space of time.

To those who appreciate the importance of prompt action this statement is not very encouraging. What is wanted is an assurance that the Government are taking effective steps to induce the Committees to expedite their work, and not unnecessarily to broaden their inquiries. Some steps towards the general end in view can be taken without legislation, among which is the improvement of administrative machinery. One step of the kind lately accomplished is the combination of the Commercial Intelligence Branch of the Exhibitions Branch of the Board of Trade in a new and enlarged Commercial Intelligence Department.

Lord Balfour's General Committee are moving, however, and they are evidently utilising the expert Committees already referred to. It is reported that the former, in pursuance of their object to advise the Government as to the best method of carrying out the Paris Conference resolutions, asked the Iron and Steel Committee for observations and suggestions. The Iron and Steel Committee thereupon sent in a memorandum on the problem how to restore to the iron and steel industries of the country the position they have temporarily lost by reason of their conversion into instruments for the manufacture of munitions of war. The Iron and Steel Committee recommended the prohibition of all imports of iron and steel manufactures from enemy countries during the period of reconstruction, and considered that the Government should urge the adoption of a similar policy on the Dominions and other parts of the Empire. All the ores and minerals necessary for the manufacture are to be admitted free, but only in their natural and unworked state; and these raw materials, whenever produced in the Empire, should be prevented from entering enemy countries. It was further recommended that British ships should be prevented from carrying raw materials or manufactured iron and steel from neutral ports to enemy countries or to neutral ports for ultimate despatch to those countries. The Committee also suggested the setting up of a body representing the industries concerned, which should have power to issue licences in exceptional cases.

These things give an idea of movement, slow, perhaps, but still in the right direction. But what is to be inferred from the fact that at this time of day on October 20 to be precise—the Board of Trade appointed another Committee? This body is to consider the position after the war, especially in relation to international competition, of the non-ferrous metal trades, and to report what measures are necessary to safeguard that position. Sir Gerard Muntz is the chairman. It is now a long time since the other Board of Trade Committees on various industries were appointed. Why was this one not appointed sooner, and is it expected so to speed up its proceedings that it will be able to report about the same time as the others? Again, as on some previous occasions, arises the danger of overlapping and waste of effort. For some months there has been in existence a Committee appointed by the Advisory Council on the organisation and development of scientific and industrial research dealing with metallurgy, and the section of it relating to the non-ferrous metals has Sir G. Muntz as a member. Of course scientific and industrial research can be kept distinct from purely trade questions, but unless care is taken, and a proper delimitation agreed on between the two Committees, there may be serious overlapping. To the observer the whole business of endless Committees seems a hopeless tangle. The straightening out, co-ordination, and general scheme for definite action—if they are to be achieved at all—should apparently rest on the one hand with the Advisory Council so far as scientific research is concerned, and with Lord Balfour's Committee in respect to trade questions. The conclusions reached by each of these should then be co-ordinated and one great scheme evolved. Who is to carry out that last step is not clear. The politicians composing the Cabinet clearly are unfitted for the task. Delegates from the Advisory Council and Lord Balfour's Committee would probably constitute the best body. The final struggle will be to get the Government to adopt the scheme and take definite and vigorous action.

SUMMER TIME ACT: LIVES SAVED.

The Summer Time Act Committee (Mr. J. W. Wilson, M.P., chairman) have already held some preliminary meetings, as the result of which much statistical information has been compiled. When this has been collated the evidence of experts will be recorded.

At inquests held on three persons who had been killed in the streets by motor vehicles, the Westminster coroner said, on October 27, that on turning to his records he had discovered a very interesting fact with reference to the Summer Time Act. From May 15 to October 1 of the present year he only held 26 inquests on the bodies of persons killed by vehicles, while there were 57 for the corresponding period of last year.

One hundred and one fewer accidents were recorded in the City of London during the quarter ended September 25. The total number of accidents was 220, as compared with 321 in the corresponding period of last year. Fatalities numbered three as against four. The accidents are allocated as follows:—Tramcars, 3; motor cars, 58; motor omnibuses, 34; motor cycles, 5; ordinary cycles, 18; horse drawn vehicles, 102.

Digitized by Google

UTILISATION OF TRAMWAYS FOR GOODS TRAFFIC.

To the Editor of The Tramway and Railway World.

Sir,—In the discussion on "Utilisation of Tramways for Goods Traffic"—a paper which I have read with much interest—Mr. Hamilton says, "I suggest that tramway undertakers who are considering this question or may have to consider it in the near future, ought to see that their powers are brought into line with what I think will be found the necessary practice." The only addition I should suggest to such a practical statement is, that undertakers, whether company or municipal, should meet and discuss what further powers are necessary, and instead of any one undertaker taking the burden upon himself alone in any application to Parliament, he should be assisted by the industry, not only to frame model clauses dealing with the question, but with the strongest evidence obtainable to support them.

I think the paper and the discussion that followed show that so far as municipal minds are interested, the carriage of goods by tramways would be of advantage and also possible, but that as yet there were many defects, largely legislative, which would have to be amended before success could be secured.

The authors do not state whether they are in agreement with the late Mr. Bellamy when they quote him as saying this business has been ignored under company control; if they are, I would like to suggest that company-owned concerns had long ago arrived at conclusions somewhat similar to those put forward at the conference. It would appear, therefore, that municipal undertakings have not advanced in this direction beyond what was known in the eighties. A very bold attempt was made to deal with this traffic in South Staffordshire, and a tramway was built between Wolverton and Stony Stratford to carry every description of goods traffic as well as passengers. This tramway not only dealt with station-to-station traffic but also cartage and delivery, which was much more complicated, and it was only the financial side of the question which, after two years' working, led to the discontinuance thereof. This was mainly due to the rates then in force and the ungenerous attitude of the railway company.

The attempts at Leeds, Huddersfield, Burnley, and other towns only touch the fringe of the business and in no way solve the problem. I hope some more light will be thrown upon the subject in Mr. Hamilton's promised report.

Absence of co-ordination and unity in interests common to all appear very marked in municipal undertakings. Company managers and directors are as white as those who control municipal industries; both have interests in common, and the petty jealousies that exist are neither creditable nor conducive to the interests of the industry.

Municipal authorities and companies may have differences; so have Corporations when they try to annex one another; so have railway companies. Yet there is only one municipal association and one railway association. Where then is the necessity for two tramways associations?

Every tramway should have the power to carry goods. We know that many (including light railways) have not, some having failed to obtain them in consequence of the opposition of municipal authorities. Others failed owing to the opposition of railway companies who, quoting precedents obtained by the municipal authority, added their true objection, viz., competition.

Now, such unfortunate conditions would not exist if the personal element disappeared and the interests of the industry predominated. If the carriage of goods is to be a source of revenue to a tramway undertaking as well as a public advantage, it should be exercised to its utmost, and combined action should be taken to secure it by model clauses to be embodied in the model bill. It will be seen how important this is, because each tramway which is receiving goods from another tramway must have similar powers, and that is why I took my text at the commencement from the Gospel according to Hamilton.

I think the general consensus of opinion is that goods can be dealt with by tramways; to what extent is a matter of experience.

The first people to tackle are the railway companies, who should be required to give the same facilities for collection and delivery of goods as are afforded to every cartage contractor using either horse, steam, or petrol; power to make sidings to railway depots and goods yards should be made compulsory in default of an agreement being entered into.

Secondly, a tramway should, for purposes of goods traffic, be deemed to be a railway. The result of being brought into the definition of a railway, with a railway connection, is so obvious from the financial point of view that I need not labour it.

Thirdly, a revised schedule of rates, the existing schedules being unsuitable. I am in favour of no schedule. Protection in this respect is probably necessary when you are dependent on a statutory monopoly, but a public highway is open to all and sundry, and thus a healthy competition is induced for the benefit of all.

The power to make sidings into any depot or warehouse other than those belonging to the undertaker does not exist under the general law. The authors are quite correct and Mr. Mozley is wrong. That the undertakers should have this power is obvious. Mr. Edwards in his paper says that generally to make these sidings would not pay. He may be right; no one would put them in if the traffic did not justify the expenditure, but there must undoubtedly be many cases where they would pay and be most useful.

It may be of interest to mention that I have in one or two cases obtained these general powers in the Special Act.

The regulations as regards trailers must be altered. It is difficult to appreciate why an electric motor on rails should not draw trailers, when it is done everywhere on roads to-day by steam or petrol.

I conclude by expressing the hope that in the welfare of an industry in which we are all concerned—many of us a life's interest—all will recognise the folly of a house being divided against itself.

I am, sir,
Yours faithfully,
Stephen Sellon.

36, Victoria Street, London, S.W.
26th October, 1916.

DEPARTMENT OF COMMERCIAL INTELLIGENCE.

The Board of Trade announce that with a view to improving the organisation for assisting British trade by collecting commercial information, the President of the Board of Trade has decided to amalgamate the Commercial Intelligence branch and the Exhibitions branch of the Board, and has appointed Sir William Clark, K.C.S.I., C.M.G., to be comptroller-general of the combined department, which will be known as the Department of Commercial Intelligence. Mr. T. Worthington, who has retired from the post of director of the Commercial Intelligence branch under the age limit, will assist the department in a consultative capacity as commercial adviser.

Digitized by Google

CHARING CROSS BRIDGE AND SOUTH EASTERN RAILWAY IMPROVEMENTS.

By A. J. Lawson, M.Inst.C.E.

The removal of the present railway bridge and the construction of a great roadway and bridge for vehicular and passenger traffic at Charing Cross has been for several years an obvious improvement to be seriously undertaken at the first favourable opportunity. The series of articles by Mr. John Burns, Sir Aston Webb, and Mr. Blomfield, which have lately appeared in the *Observer*, are therefore opportune, but the sketch plan of the suggested works is most decidedly open to many objections, especially the proposed site for the new station and the too-far eastward swing of the line of the bridge and the new road on the Surrey side of the river.

It is hardly to be expected that the South Western Railway Company, which is now carrying out at very great cost the much-needed scheme of reconstruction of its terminal station at Waterloo, will consent to the "blanketing" (to use a well-known yachting expression) of their new station by a new South Eastern station, and its wider lines of approach across Waterloo Road and York Road. The mere attempt to do so would lead to a very strenuous and costly fight in the Parliamentary Committee-rooms, the expense of which, if saved, would go far towards paying for a great part of the needed improvement in the immediate neighbourhood of the termini of both railways.

The proposed South Eastern terminus would, besides, be approached by a "bottle neck" inlet and outlet which would seriously obstruct the working of the railway, similar to that which has retarded for half a century the proper development of the South Western, and has been so very costly to partially overcome. Nor is such an approach at all necessary while the opposition of the South Western Company can be wholly overcome by a simple plan which would cost the South Eastern Railway a much less capital expenditure.

Any large scale map of the district will show that the property on the eastern side of Waterloo Road from the New Cut to Stamford Street is of a poor class and of smaller value than the property which is set apart on the sketch map that appeared in the *Observer* for the proposed station. Moreover, the South Eastern Railway now passes through this property, so that it would only require the erection of a terminal station with suitable facade and entrances in Waterloo Road, and the construction of the necessary lines and platforms to make the site available within a fraction of the time that would be required to clear and build the riverside site to which, as already stated, access would only be possible by a narrow bottle neck approach over Waterloo Road and York Road in front of the South Western Railway Station approaches and buildings.

By the adoption of the Waterloo Road site not only would the approaches to both stations be open and unobstructed, but the present and any future unsightly viaducts over the Waterloo and York Roads could be entirely dispensed with. A finer approach would be given to the new river bridge, the road to which would start from between the two new railway stations, and thus give more space for the proposed triangular Place ("Marne Place" shall we call it) between Waterloo Bridge Road, the "Somme Bridge" Road, and the river. *J'offre ces noms sericusement.*

While retaining St. Martin's Church spire as a central point at the northern end the line of the bridge would be swung slightly to the west at the southern end, and the space which would otherwise be reserved for the railway "bottle neck" would go into the roadway and leave more room on the eastern side for useful occupation as well as architectural embellishment. The space proposed for the railway adjacent to the new south side embankment would be reserved for Government and Municipal buildings, which would give scope for all the budding presidents of the R.I.B.A. for years to come. Meantime we must reserve for engineers the design and arrangement of inside utilitarian arrangements of stations and warehouses, while leaving, not unwillingly, the outside ornamentation to architects.

LONDON UNDERGROUND AND L.G.O.C. OPERATING DEPARTMENT EFFICIENCY MEETINGS.

The Camera and the Cinema in the Operation of Transit Companies.

The first operating department efficiency meeting for the season of 1916-17 was held on Monday, October 30, in the L.G.O.C. Training School, Milman's Street, Chelsea, S.W., Mr. H. E. Blain, the operating manager, presiding over an audience of about 200 officials connected with the Underground Railways, the London General Omnibus Company, and the tramway undertakings connected with the London and Suburban group, those present including Messrs. Murray Griffith (director), W. E. Mandelick (secretary), A. R. Cooper (engineer), F. V. McMahon (superintendent of power), W. E. Blake (superintendent of the line), S. J. Webb (passenger agent), of the Underground Railways; Messrs. G. J. Shave (engineer), J. F. Thomas (general superintendent), L.G.O.C.; Messrs. W. E. Hammond (Metropolitan Electric Tramways), A. V. Mason and W. E. Wright (South Metropolitan Tramways), and J. B. Mackinnon (London United Tramways).

An address on "The Camera and the Cinema in the Operation of Transit Companies" was given by Captain A. Rosier, superintendent of training and employment, L.G.O.C., who contrasted the haphazard and inefficient training in operation in the horse vehicle days with the scientific and practical instruction which was now being given to all those dealing with passenger transit. The effect of this training was clearly shown by the remarkable reductions constantly taking place in the number of accidents, notwithstanding the present abnormal difficulties in connection with street lighting, etc.

The use of the camera and the cinema in this instruction was very prominent in the organisation of that school, and a large number of slides and films were exhibited, including the following:—

Sections of the original educational film and slides used in the first lectures to omnibus drivers and conductors, a railway film showing a trip on the District Railway, a series of slides showing some important accidents, slides showing the advertisements and legends used in the L.G.O.C. "safety first" campaign, one of the latest "safety first" films from America, portraying accidents on the street railways of New York, and the new L.G.O.C. "safety" film intended for exhibition at cinema halls.

Miscellaneous views were shown, including:—A war film of the Naval Brigade in Belgium, in which the L.G.O.C. omnibuses were very conspicuous; a review of the L.G.O.C. special constabulary, film showing two of the T.C.T. outings for the dependants of employees at the front, slides of views taken in connection with Omnibus Service No. 107, showing how the camera might be used to bring beauty spots in and around London before the public notice; with a number of photographic slides of the leading officers of the combined companies.

The evening was an exceedingly interesting one, and the thanks of the audience to the lecturer were voiced by Messrs. Murray Griffith, director; W. E. Blake, superintendent of the line; and J. P. Thomas, general superintendent, L.G.O.C. The next efficiency meeting will deal with the subject of social welfare.

Melbourne Suburban Railways Electrification.—As the result of a visit of a representative of the Victorian Railway Commissioners to London the Ministry of Munitions have enabled arrangements to be made to accelerate the delivery of electrical plant. It is hoped the Sandringham-Essendon service will be opened in January.

Queues to be Formed.—It was announced at the last meeting of Huddersfield Corporation, by Councillor E. H. Sellers, chairman of the Tramways Committee, that the department were going to try to adopt the queue system in the hope of doing away with the crowding in boarding cars. A similar resolve has been arrived at by Halifax Tramways management.

Digitized by Google

THE CORROSION OF TROLLEY WIRE.

A Microscopical Investigation.

By James Scott.

The serious consequences which are always likely to follow the snapping of corroded copper trolley wire make the investigation of the causes of such defects advisable, and this can best be accomplished with the assistance of the microscope. Although the defect is well known, the procedure is not at all obvious.

The British Electrical Federation, Limited, have very kindly supplied me with a foot length of spoilt single wire of No. o size, i.e., about ⅜ in. in diameter. While a small area of it still retains its natural reddish colour and lustre, the greater part of it is distinctly black. By running the fingers along it, one can detect the difference between the unattacked and the damaged metal, the former feeling smooth and the latter raspy. The reasons for these variations will be explained in the following remarks.

It should be borne in mind that all metals tend to oxidise during exposure or industrial use. Copper appears to be exceptionally immune as a rule to such a process, owing to its resistant nature. It will not oxidise in perfectly dry air (unless other agencies operate on it), and will then retain its characteristic brightness, softness, and ductility indefinitely. But in moist air the liability to oxidation is prevalent, although the rate of occurrence is slow unless it is assisted in some way. Practically the only kind of corrosion to which copper wire is susceptible during use as tramway trolley wire is that of oxidation, owing to the combination of oxygen derived from the atmosphere with the metal. But the electrical current actually hastens the development of this kind of deterioration.

strong sunlight, alternating with rain, is capable of affecting the wire in a similar, if less noticeable, manner. The positive electricity of the live wire induces the formation of oxide. It is believed that normal oxidation is occasioned by the direct action of positively charged atmospherical ions, quite apart from the subject of electrical traction. That being the case, it is easy to understand that the disadvantages would be increased while a current was passing through the wire.

Increase of cuprous ions, resulting in the presence of more cuprous oxide, is due to the actual combination of the positive electricity with the copper particles. During artificial electrolysis, where the current passes through electrodes which have a fluid salt in contact between them, electricity leaves the cathode and deposits the metal on the outside of it. Only the electricity can depart, not the metal which was combined with it in ionic form.

Although it is an electrolytical reaction which occurs in live trolley wire, it is not so easy to understand the routine, but it is probable that damp air acts as an electrolyte, and the current frequently escapes through it, causing the mysterious flashes, and deposits remodelled particles of the metal in their pure state. We will suppose that the current is playing through a partly spoilt portion of the wire. During what may be called normal conditions of dampness and current the increase of black oxide would continue, but excess of vapour allied with changes in the current spur on the reactions, with the result that some of the oxide is changed back into copper; while the electricity itself escapes away from the wire. It seems to me that the lower and upper halves of the partly oxidised wire form temporary anodes and cathodes respectively. These suggestions would explain the existence of actual fine, bright, copper ridges, observable among the blackened surface pieces, along the sides, where the flanges of the trolley wheel rubbed against them.

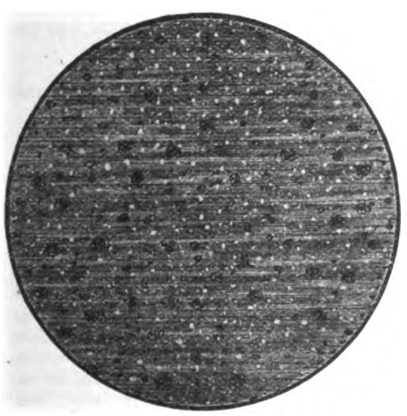

Fig. 1—Slightly Dulled by the Beginning of Corrosion.

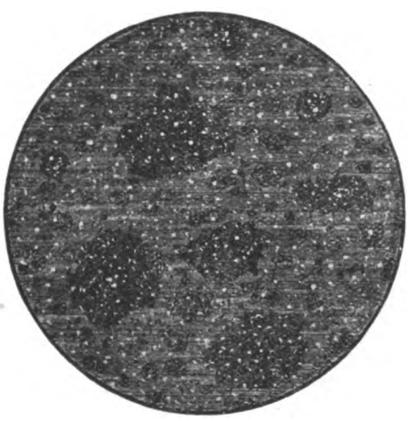

Fig. 2—Oxidation Well Advanced.

Fig. 3—Entirely Coated with a scaly layer of Black Oxide.

Portions of about ¾in. of Copper Trolley Wire.

It must be explained that there are two oxides of copper, namely, the cuprous (Cu_2O.) and the cupric (Cu.O.). The first contains less oxygen than the second, and has to precede it in formation, although this fact is not always very obvious. Cuprous oxide is brownish-red (to the naked eye), whereas cupric oxide is black. The rate of change from one to the other condition is often very rapid. The cuprous oxide may be regarded as temporary and the cupric oxide as permanent. In the case of trolley wire, the conjunction of dampness and the electric current are the main factors in such a course of events. The one helps the other, since neither alone could be mischievous to a great extent.

All electrolytical reactions cause oxidations, or reductions, if the contemporary conditions are favourable, as is the case when moisture is constantly present.

When copper is heated, with free access of air, the oxygen of the air combines with it to produce cuprous oxide. It has to be heated to redness, however, to quickly yield cuprous oxide or black scales. Now the electric current, as readers know, strongly heats the wire. While this may not be powerful enough to correspond with high temperatures from furnace or flame, it could very well cause gradually the same effects as those otherwise due to rapid heating. You may boil a pint of water completely away in a short time, or, contrarily, it may be left exposed to the air for several days and evaporate slowly. The final result is the same in both cases. We ought therefore to expect that continual repetition of electrical heat would be equivalent to shorter durations of higher temperatures.

All the influences—moisture, heat, oxygen, electricity, and metal—help one another in this respect. If the copper, polished brightly, is heated in a smokeless flame it becomes crimson, then violet, blue, and grey. By quenching it in water the greyness is changed to brownish-red. All these states are variations in the cuprous oxidation, to which no definite names can be given. Very

Of course a great deal of the success or otherwise of a trolley wire of the kind under attention depends on the quality of the copper. The very best copper is likely to contain traces of impurities. It is not always the fault of the manufacturer, since the elimination of such substances is not easy. However, speaking in a general sense, the only impurity likely to be found in new, high-grade copper is cuprous oxide, but here we have the actual starting point of the trouble which ends in the blackening and destruction of large quantities of trolley wire.

The cuprous oxide—which, when separate in more noticeable amount, is brownish-red—exists in the copper as very tiny isolated globules of a sky blue tint, the reflection of the light being, no doubt, responsible for this appearance. These increase in number, group together, and darken. It is not necessary that the copper shall be thus affected to corrode badly, but the rate of spoliation is quicker when such cuprous oxide is present. Quite pure copper will suffer from the procedure mentioned in the earlier remarks, but at a slower rate.

Sulphuric acid, derived from the oxidation of sulphurous smoke, etc., is abundant in moist air, but is too weak to seriously attack copper trolley wire. To make copper sulphate—known as bluestone—the metal has to be boiled in sulphuric acid. In continuously moist air copper can absorb carbon dioxide, and thereby get coated with a green film of copper carbonate. But the oxidation, or blackening, is the commonest form of corrosion and the most damaging. This carbonate corrosion is more likely to attack passive copper, which is simply exposed and not worked upon. Microscopical examination helps us to follow the changes brought about in the structure of copper by oxidation. The fresh metal is tough, ductile, and smooth, disclosing faint striations which reflect the light. An area which is dulled by commencing oxidation shows small scattered dark patches, and very tiny, scattered globules,

Digitized by Google

both of these being cuprous oxide, as in No. 1. A still denser portion presents an accumulation of the preceding features, as in No. 2, while a wholly black surface reveals compactly disposed angular granules, as in No. 3.

Copper crystallises in the forms of octahedra and rhombic dodecahedra. New metal may be regarded as a substance in which such crystals have welded or fused together homogeneously; yet there must be points of weakness between these undetectable parts. It is evident that the tiny globules of cuprous oxide first appear, coalesce together into larger masses, which meantime change, either partly or wholly, into cupric oxide, between which the remaining cuprous oxide continues to appear. Increase in the dimensions of the particles causes them to join one another, while some get squeezed up beyond the general surface by internal pressure from newly corroding pieces. Complete amalgamation is prevented, and there continues interstices through which oxygen and moisture can pass in and out. Finally, the flaky copper becomes wholly black, hard, and brittle, and liable to fracture very easily.

EDINBURGH TRAMWAY PROPOSALS.

Edinburgh Tramways Committee have now made public the whole of the report prepared by the three consultants upon the tramway system of the city, and the methods of traction which, relative to the whole of the future of the undertaking, might be adopted for the city. The consultants are Mr. J. A. Brodie, city engineer, Liverpool, Mr. J. B. Hamilton, general manager, Leeds Corporation Tramways, and Mr. A. H. Campbell, city engineer, Edinburgh. The report extends to 59 pages. Outlines of the experts' recommendations, 14 in number, have appeared in our columns from time to time.

The report is published in a substantial volume of 60 pages (13 in. × 8½ in.), in which the important question of the future of Edinburgh tramways is considered with great detail and evident care.

Summarising their report, the experts state:—

(1) That it is not advisable to continue the cable tramway system for the city or for any part of the city after the expiry of the lease in 1919.

(2) That "it is practicable to arrange for a system of traction other than the cable being installed so as to be operated on the expiry of the present lease."

NOTE.—Recommendations (1) and (2) are necessarily subject to war conditions.

(3) That, subject to note preceding, the only alternative system of traction which can be made available at June, 1919, and which we can confidently advise, is the electric overhead system.

(4) That, independent of the existing tramway conditions of the city, the electric overhead system of traction offers the best, most reliable, convenient, and economical solution of the transit requirements of the city and suburbs.

(5) That in the detailed treatment of the overhead equipment, special care should and can be given to the preservation of the amenities of the city.

(6) That we have in our summary of estimates restricted "the central parts of the city" to Princes Street, and for this street we suggest that the tramway should be laid along the south side of the roadway.

(7) That as regards this "central part of the city," whilst temporarily it must be equipped with the overhead system (unless diverted), the conduit system may be constructed subsequently—should the Corporation so desire.

(8) That it is desirable that facilities for through-running between the tramways of the city and the neighbouring tramway undertakings should be provided.

(9) That, "keeping in view the proper development of the undertaking in relation to future extensions," we think that the tramway system should be extended by a total route length of 8¼ miles.

(10) That we think that the influence of the motor omnibus traffic upon the future of street transit in the city should be considered by the committee with a view to co-ordination and the avoidance of waste.

(11) That the electric current should preferably be obtained from the Corporation's new power station at Portobello.

(12) That it will be necessary at an early date to initiate arrangements with respect to the provision of suitable rolling stock and additional depot accommodation.

(13) That if the Corporation decide to continue the cable system after the expiry of lease, it will be necessary:—

(a) To initiate arrangements for the provision of new rolling stock (suitable for conversion and adaptation to other form of traction at a later date).

(b) To provide additional depot accommodation.

(c) To restrict the programme of extensions to routes capable of being worked by "self-propelled" cars, and running along and over the existing cable lines, and

(d) To arrange for the cables which will be doing duty at the close of the lease being available thereafter.

(14) That it is desirable in the event either (1) of electric being installed or (2) of the cable being continued, that an electric battery tramcar and a "self-propelled" tramcar should be acquired with a view to running in series with other cars, provided arrangements can be made for their trial.

ESTIMATES OF COSTS AND ANNUAL BALANCES.

Estimates of costs of installation and of working, with the resultant surplus or deficit upon each system, are shown upon several tables, and the following summary is given, the year of working assumed being 1919–20:—

	Revenue per Annum.	Operating Costs per Annum.	Capital Expenditure. New Debt.	Interest and Redemption Charges in respect of New Debt.	Annual Balance available. +Surplus. −Minus.
	£	£	£	£	£
1. Cable (confined to present lines) ...	322,908	228,034	256,312	26,655	+68,219
2. Cable (confined to present lines) but two extensions operated by "self-propelled" cars	334,908	238,130	342,510	35,088	+61,690
3. Electric overhead as in No. 2 ...	340,908	207,112	836,750	66,747	+67,049
3a. As No. 3 but with conduit in Princes Street ...	340,908	211,112	924,250	72,747	+57,000
4. Electric overhead throughout (with 8¾ miles extensions)	356,908	217,007	936,500	73,663	+66,236
4a. As No. 4 but with conduit in Princes Street ...	356,908	221,007	995,000	65,665	+58,000
5. Electric conduit, restricted to existing cable routes (with Queen Street added)	328,908	211,639	1,335,750	99,305	+17,964
6. Motor omnibuses (over extended routes as No. 4)	350,000	283,334	602,000	82,318	−15,562

The capital expenditure under No. 1 is chiefly for rolling stock.

The result under No. 2 is affected by local conditions, and does not correctly reflect operation by "self-propelled" cars.

Under Schemes 3 to 5 the capital cost of the conversion, reconstruction, and extensions of electric systems are included, and charged against the gross surplus before striking the net balance available.

Under No. 6 the direct deficit plus indirect charges amounts in all to about £39,425 per annum.

The general effect of the report is to recommend overhead traction on all routes, the conduit being substituted in Princes Street if an experiment with the overhead on the south side of the street does not prove satisfactory. As regards Princes Street, the Corporation might be helped to a wise decision at a later stage by the adoption of Queen Street (north side) as an alternative route, so enabling Stockbridge, Comely Bank, and Canonmills districts to be brought into immediate communication with the Caledonian and Waverley Stations without change of car. The cessation of cable traction on the termination of the lease need not, the report states, be viewed with anxiety. Against the unredeemed capital there would be assets in the rails, concrete foundation, paving setts, four power stations and their sites, the power plant (engines and boilers), and the Ardmillan to Slateford electric line. The debt which would remain upon the whole undertaking has therefore valuable tangible assets to be deducted from the £400,000 unredeemed at the close of the lease; the actual net charge to be carried forward to the new system of traction would therefore be approximately £200,000. Compared with the debt assumed by other tramway undertakings as the price of municipalisation, this sum, the report observes, is small and need create no uneasy feeling concerning the capabilities of the new system to bear it.

Bombay Tramways Extension.—A committee of the Bombay Corporation have recommended that sanction be given to an application by the Tramways Company to extend their lines along Kingsway. This new thoroughfare has not yet been taken over by the Council, but the Corporation solicitor has advised that the authority have the power to grant the application. Attached to the committee's recommendation is a proviso that if the Corporation at some period subsequent to the laying of the lines decide to lower the levels of the road the company shall bear the expense of any alteration in the levels of their lines.

Digitized by Google

LONDON COUNTY COUNCIL TRAMWAYS.

The London County Council have from time to time formulated certain rules for the guidance of the Tramways Department, and the rules now form a part of the "Standing Orders" of the Council. They deal only with a few particulars, however, on which there have been discussions at various times, and in regard to which the Council have been able to arrive at definite instructions. These regulations, which we give below, received, of course, the previous approval of the Highways Committee, to which the general direction of the tramway undertaking is entrusted. This committee consists of a chairman (Mr. G. H. Hume) and 15 other members, who carry on the routine work by means of various sub-committees. The permanent head of the department is described as the "Chief Officer of Tramways." This position was filled by Mr. Alfred Baker from January, 1899, to December, 1903, when he resigned in order to accept the general management of the Birmingham Corporation Tramways. Mr. A. L. C. Fell, then general manager and engineer of Sheffield Corporation Tramways, was appointed as successor to Mr. Baker, and he has been responsible for the management of the Council's undertaking during the past twelve years—a period which has witnessed the practical completion of the conversion to electric traction and the great extension and growth of the system. The tramways have become so essential to the life of the Metropolis that they are now taken as a matter of course, like those wonderful undertakings the Metropolitan Waterworks and the sewerage system, which are so vitally important, but about which so little is said. The magnitude of the responsibility which rests upon the Highways Committee and their Chief Officer may be to some extent appreciated when it is remembered that the total capital now invested in the Council's tramways aggregates £13,028,000. This sum has provided 277 miles of electric and 14 miles of horse tramway track, more than 2,000 cars, the great generating station at Greenwich, and the necessary sub-stations, besides the car depots and repair shops, which are required for the maintenance of the plant and rolling stock.

REGULATIONS RELATING TO THE TRAMWAY DEPARTMENT.

Chief Officer of Tramways.

The Chief Officer of Tramways shall have control of the staff exclusively employed in connection with the working, maintenance, repair, and renewal of the tramways, and with the maintenance, repair, and construction of the cars and other vehicles used on or in connection with the tramways; and except as regards officers appointed under any scheme of classification approved by the Council he shall have power to appoint and to dismiss any person under him, and he shall be responsible for the conduct of the entire staff, and generally for the efficient working of the tramways undertaking under his charge.

Overtime and Temporary Assistance.

The Chief Officer of Tramways shall be authorised to employ men on overtime when required and to pay them therefor; and to engage from time to time such temporary assistance as he may require in connection with the working of the tramways.

Medical Examination of Motormen.

Motormen about to be employed in the Council's tramway service shall undergo a medical examination (including an eyesight test).

Drivers of horse cars whom it is proposed to transfer to electric cars shall be submitted to a modified medical examination, which shall be of such a character as to guarantee the public against danger from the collapse of men predisposed to fits, fainting, and sudden death, having regard to the nature of the men's employment.

Provision of other Employment for Men Disqualified on Medical Grounds.

Drivers of horse cars about to be promoted to drive electric cars, who are medically examined and found to be medically unfit to act as motormen, shall not be dismissed on account of the result of this examination, but shall be offered other employment in the tramways department at rates of pay not less than those of the lowest grade of their present employment, provided that the men are physically fit for the duties that they are thus called upon to perform, and so long as they efficiently perform such duties, it being understood that full power is reserved to dismiss any man for misconduct.

Medical Examination of Switchboard Attendants and Charge Shift Engineers.

Before any man is employed as a switchboard attendant or charge shift engineer at the Greenwich generating station or at a sub-station he shall be medically examined, and arrangements shall be made for all such persons to be re-examined periodically.

Applicants for employment in the tramways department who have made claims under the Workmen's Compensation Act, and men transferred or appointed to positions to which sick pay allowances are attached, shall be medically examined.

Clothing for Tramway Employees.

Uniform or other suitable clothing shall be supplied in accordance with such rules as may be prescribed to the operative staff of the tramways department.

Permanent Way Employees—Payment during Inclement Weather.

Permanent way employees in the tramways department engaged on road repairing work who arrive at their work at the regular time in the morning, and are prevented from starting work owing to inclement weather, shall be paid for one hour's work at their respective rates of pay in respect of each such morning, provided that this regulation shall not apply to cases in which men put in an appearance contrary to standing instructions.

Motormen and Conductors.

Motormen and conductors in the tramways department shall receive half pay while learning, motormen for a period not exceeding three weeks, and conductors for a period not exceeding one week.

Special Service Pay and Badges.

The motormen engaged before November 15, 1910, on routes of the Council's electric tramways which were before that date regarded as special on account of steep gradients, etc., shall be awarded extra pay as follows:—

(i.) For one year from the date of transfer to a special route, a bonus of 2d. a day.

(ii.) After one year's satisfactory service on a special route, a second bonus of 2d. a day.

(iii.) After two years' satisfactory service on a special route, a third bonus of 2d. a day.

Precautions against Fire.

An inspector shall be employed in the tramways department at a rate of pay of £3 10s. a week to drill periodically a certain number of the men at each tramways depot both on day and night duty, and to examine the fire appliances, etc., at such depots. The men shall be drilled during working hours, and shall be paid, in addition to their ordinary wages, a sum of 7s. 6d. a quarter each.

Sick and Accident Pay.

Payment in accordance with such rules as may be prescribed shall be made (i.) during absence through illness not due to intemperance or misconduct to such of the operative staff in the tramways department as are in receipt of standard weekly wages and (other than temporary office assistants and women checkers) are not paid for overtime, and (ii.) during absence owing to injury received in the execution of duty to any member of the operative staff.

London County Council Tramways Employees' Sick Fund.

An annual contribution not exceeding £50 shall be made towards the London County Council Tramways Employees' Sick Fund.

Assistants in Ticket Checking Section.

(*a*) The total weekly office hours (including time allowed under clause (*b*) of this regulation for assistants in the ticket checking section of the tramways department shall be 46, viz., from 9 a.m. to 5 p.m. each weekday except Friday and Saturday; from 9 a.m. to 7 p.m. on Friday; and from 9 a.m. to 1 p.m. on Saturday.

(*b*) Every assistant in the ticket checking section of the tramways department shall be allowed to be absent one hour for refreshment in the middle of each day except Saturday.

(*c*) Every assistant in the ticket checking section of the tramways department shall be paid on the basis of her respective rate of pay for such time as she is required to work beyond her usual office hours, provided that overtime of less than half an hour on any one day shall not be taken into account in computing the number of hours to be paid for each month, and provided also that such overtime shall only be worked under the special authority of the Chief Officer of Tramways.

Allowances to Inquiry Officers and Pay Clerks.

An allowance of 1s. a day each shall be made to tramways pay-clerks when engaged in the payment of wages, but the allowance to any one clerk shall not exceed 3s. in one week.

An allowance of 5s. a week shall be made to one of the inquiry officers in the tramways department whilst employed in making private and confidential inquiries in respect of claims arising out of tramway accidents.

Night Work for Engineers at Tramway Depots.

Engineers employed at the tramways depots shall be paid in respect of night work in accordance with the conditions of labour agreed between associations of employers and trade unions (time and a half for night shifts). Night work shall, as far as possible, be dispensed with.

Absence owing to Infectious Disease.

When a man employed in the tramways department is required to remain at home owing to the presence of infectious disease in his house, the Chief Officer of Tramways shall be authorised to allow such man half pay, subject to the production of a medical certificate to the effect that such absence is necessary. The Chief Officer may, in such cases, allow an addition to the half pay provided that the rate of full pay is not exceeded.

Digitized by Google

Temporary Clerical Assistants.

(*a*) Candidates for appointment as temporary clerical assistants (youths) in the tramways department must be over 15 and under 17 years of age on the latest date for receiving applications to sit for the examination for such appointments.

(*b*) The rates of pay of temporary clerical assistants in the tramways department shall be :—

Youths, commencing at 15s. a week and rising by 2s. a week annually to 29s. a week.

Men, section (*b*), commencing at 30s. a week and rising by 2s. 6d. a week annually to 40s. a week.

Men, section (*a*), commencing at 40s. a week and rising by 2s. 6d. a week annually to 60s. a week.

Office Hours.

(*a*) The office hours at the head offices of the tramways department so far as the requirements of the service permit, shall be from 9 a.m. to 5 p.m. each weekday, except Friday and Saturday ; on Friday the hours shall be from 9 a.m. to 5.30 p.m., and on Saturday from 9 a.m. to 12.30 p.m.

(*b*) Every officer shall be allowed to be absent one hour for refreshment in the middle of each day except Saturday.

(*c*) The classified and temporary staff in the tramways department shall record their time of arrival at, and departure from, the head offices on an attendance signature clock ; typists shall record their time of arrival and departure in an attendance book. A record shall be kept of the occasions on which officers arrive later than ten minutes after the time fixed for commencement of work.

Overtime for Office Staff.

Members of the temporary clerical, technical, and drawing office staff at the Finsbury Pavement, Belvedere Road, and Camberwell tramways offices who are in receipt of a rate of pay not exceeding £3 a week, and officers in the fourth class in the tramways department, if recommended by the Chief Officer of Tramways, shall be paid on the basis of their respective rates of pay for such time as they are required to work beyond their usual office hours, provided that overtime of less than half an hour on any one day shall not be taken into account in computing the number of hours to be paid for each month. Payments hereunder shall be made in each case on the recommendation of the Chief Officer of Tramways, subject to details being reported to the appropriate committee in due course by the chief officer, and to the Clerk of the Council reporting periodically on such overtime. Assistants entitled to overtime payment under this regulation shall not be allowed to receive refreshment allowances.

Central Administrative Staff.

(*a*) The expression "central administrative staff," when used in relation to the tramways department, shall include such of the staff of that department as are appointed by name by the Council, except such officers as are engaged on work peculiar to the tramways department.

(*b*) The expression " operative staff of the tramways department " shall include all staff in that department in relation to which the Council has by its resolution of March 29, 1899,* entrusted special powers to the Chief Officer of Tramways.

Service of Tramways Employees on Juries.

Men employed in the tramways department shall be paid their ordinary wages when serving on juries, but any fees which they may receive shall be paid into the tramways account.

Apprenticeship Scheme.

(*a*) Apprentices may be engaged in the tramways department between the ages of 15 and 17 years for a period of not more than five years nor less than four years of not more than 2,700 working hours each year.

(*b*) The wages of apprentices shall be :—

Until he attains 16 years of age, 6s. a week ; 17 years, 8s.; 18 years, 10s.; 19 years, 12s.; 20 years, 14s.; 21 years, 16s.

Provided that (i.) Apprentices in the permanent way section shall be granted, in addition to their ordinary wages, an outdoor allowance of 2s. a week during the first three years of the apprenticeship course, and 3s. a week during the remainder of the term. (ii.) Boys employed in the permanent way section who are to be indentured as apprentices on attaining the age of 16 years shall be paid at the rate of 6s. a week, with an outdoor allowance of 2s. a week during their pre-apprenticeship stage.

(*c*) Apprentices over 18 years of age when working overtime shall be paid the usual overtime rates obtaining in the district ; the time so worked shall be reckoned as working hours.

(*d*) No apprentice less than 18 years of age shall work after 2 p.m. on Saturday or 6 p.m. on any other working day.

(*e*) Apprentices shall be allowed not more than six hours' time off in any one week for the purpose of attending approved classes of technical instruction ; and time spent at classes shall be reckoned as working hours.

(*f*) Pay in respect of absence owing to illness or other incapacity to work may be granted to apprentices at the discretion of the Chief Officer of Tramways, and any other conditions under which they may work shall be in accordance with such rules as may be prescribed.

* See regulation above relating to chief officer of tramways.

Boys and Youths.

The rates of pay of boys and youths (other than apprentices) employed at the central car repair depot shall be as follows :—

Until attaining the age of	16	years	...	2½d.	an hour.
,, ,, ,,	17	,,	...	3d.	,,
,, ,, ,,	18	,,	...	3½d.	,,
,, ,, ,,	19	,,	...	4d.	,,
,, ,, ,,	20	,,	...	4½d.	,,
,, ,, ,,	21	,,	...	5d.	,,

After attaining the age of 21 years not less than 6d. an hour.

Boys in the printing section shall be paid from 8s. to 18s. a week, rising by annual increments subject to satisfactory service.

Messenger and telephone boys shall be paid from 10s. to 18s. a week, rising by annual increments subject to satisfactory service.

Until he attains the age of 18 years each boy or youth (other than an apprentice) employed at the central car repair depot shall attend, during working hours, classes for technical instruction ; these classes shall be conducted at the central car repair depot ; no deduction in pay shall be made for the attendance, and each class shall meet for two periods each of two hours a week.

Medical Advice on Tramway Claims.

Three medical men shall be retained to act as medical advisers in connection with tramway claims upon the undermentioned terms—a retaining fee of £21 a year each, 10s. 6d. for each examination, and £2 2s. for each attendance at court to give evidence, with special fees to be determined by the solicitor for examination outside the County of London, having regard to the distance. These arrangements shall be terminable at any time on short notice.

Vehicles, etc., Damaged in Tramway Accidents.

The Chief Officer of Tramways shall be authorised to make such payments as he may deem necessary in respect of obtaining expert assistance with regard to the examination of vehicles, etc., damaged in consequence of tramway accidents.

Fares for Parties of Children and the Blind.

Such special fares as may be prescribed shall be charged on the Council's tramways to parties of children under the charge of a responsible person, provided that the journeys each way are so timed as not to interfere with the ordinary tramway traffic.

Necessitous blind persons properly authenticated shall be carried free on the Council's tramcars provided that they are accompanied by a guide.

Carriage of Parcels.

Parcels shall be allowed to be carried by passengers on the Council's tramways in accordance with such rules as may be prescribed.

Wood Paving in Tramway Tracks.

In connection with the construction and reconstruction of tramways for electric traction, wood or some other form of noiseless paving material shall be used for the tramway area (i.) in front of hospitals, and (ii.) opposite places of worship which abut on or are situated adjacent to the roads in which the tramways are laid.

Paving of Tramway Tracks opposite Schools, etc.

Use of Silent Material.—In cases in which the Council is laying electric tramways on new or existing routes or in which it is decided to renew the paving of existing tramways, the portions of the tracks opposite elementary and secondary schools, polytechnics, and other educational institutions wholly or partly maintained by the Council and abutting on the roads in which such tramways are laid, shall be paved with wood or other silent material, provided that the remainder of the carriageway opposite any such school or institution is also paved with wood or other silent material.

Distance between Centres of Tracks.

Except at curves and at other places where special circumstances apply, the Council's electric tramways shall be laid with a distance of 8 ft. 6 in. from centre to centre of the tracks.

Allocation of Cost of Improvements.

When the widening of a thoroughfare is entirely necessitated by the construction of a new tramway, or the doubling of an existing single line of tramway, the whole cost of the improvement shall be charged to the tramways account.

When the widening of a thoroughfare is partly necessitated by the construction of a new tramway or the doubling of an existing single line of tramway, the cost of such widening, or such balance as is not contributed by a metropolitan borough council, shall be allocated to the tramways account and the account of the improvement respectively, in such proportion as shall be fixed, regard being had to the benefit accruing to the tramway traffic and to the general traffic respectively, provided that the consideration whether a tramway is likely to result in financial loss or gain shall not be a determining factor in deciding whether any or what proportion of the cost of a street widening consequent on the construction of the tramway shall be debited to the account of the improvement.

Digitized by Google

In cases of street widenings along the routes of existing tramways electrically worked, where double lines already exist, and there is a margin of at least 9 ft. 6 in. between the outer rail and the kerb, and where there is a sufficient radius, no amount shall be charged to the tramways account.

When powers are obtained for new tramways along thoroughfares which have been widened for the purposes of general traffic, and the width is sufficient for a double line of tramway, no amount shall be charged to the tramways account, provided that the improvement has been completed for more than five years.

When improvements have been undertaken in connection with tramway schemes, but powers for the construction of the tramways have not been obtained, no amount shall be charged to the tramways account until such time as powers to make a tramway have been obtained.

RECEIPT OF FEES.

Any fees received by an officer or employee of the Council, either as a witness or in any other capacity, shall, unless otherwise ordered by a committee, be paid into the county fund.

WEEKLY REST DAY.

Every employee of the Council shall, unless otherwise ordered by resolution of the Council, have the equivalent of one complete day's rest from his employment in seven days, provided that (i.) in cases of emergency chief officers of the Council may require all or any employees to work on the day secured to them for rest, but the making of such a requirement and the facts upon which it is justified shall be forthwith reported to the Council; and (ii.) this regulation shall not apply to the members of the London Fire Brigade, nor to any person employed for part time on night inspection duty at the central offices.

OFFICERS PERMANENTLY ENGAGED.

(*a*) Officers permanently engaged on clerical, professional, or technical work shall be classified as follows:—

Fourth Class.—Section (*b*), commencing at £75 a year and rising by £5 annually to £100 a year. Section (*a*), commencing at £100 a year and rising by £10 annually to £150 a year.

Third Class.—Commencing at £160 a year and rising by £10 annually to £200 a year.

Second Class.—Commencing at £200 a year, and rising by £12 10s. annually to £250 a year.

First Class.—Commencing at £255 a year, and rising by £15 annually to £300 a year.

(*b*) Appointments to the fourth class in the tramways department shall be made on the combined results of examination and selection; the examination shall include a compulsory paper on tramways work; and this examination may be taken by assistants who have entered the service *under Regulation No.* 695, that is, as temporary clerical assistants, after not less than three years' and not more than seven years' service in the department in the capacity of temporary clerk.

(*c*) Each officer appointed under this regulation shall be on probation for a period of twelve months from the date of appointment, and at the end of that period the head of the department in which he is serving shall report not only as to the conduct of the officer, but also whether his abilities justify his retention on the permanent staff.

(*d*) Promotion to the third, second, or first class shall take place only upon the occurrence of a vacancy in those classes or on the addition to the staff of officers in those classes.

SUBSISTENCE.

Subsistence allowances shall be made to officers and employees in accordance with such rules as may be prescribed.

TRAVELLING EXPENSES.

Expenses necessarily incurred by persons employed by the Council in travelling in the course of their duties shall be paid by the Council, provided that this regulation shall not authorise the payment of any travelling expenses incurred by any such person in reaching or returning home from the district, office, or institution in or at which he or she is ordinarily employed.

LEAVE TO AUXILIARY FORCES.

Subject to the exigencies of the service permitting in each individual case the adoption of such a course, facilities as to extra leave shall be afforded in accordance with such rules as may be prescribed to such officers and employees, including persons engaged at hourly rates of pay or paid for piecework who have been continuously employed for three months, but excluding members of the London Fire Brigade, as are members of the Royal Fleet Reserve or the Territorial Force to enable them to attend annual training, on the understanding that such extra leave is not in any sense to be regarded as a right, and may be withheld at any time.

RETIRING ALLOWANCES.

(*a*) No special allowance in addition to any allowance payable under the Superannuation and Provident Fund Scheme shall be made in respect of officers or employees merely on the ground of their having entered the service at the age of 30 or upwards.

(*b*) The question of granting to any officer or employee who has rendered distinguished or exceptional service, or who breaks down at an early age, a special allowance additional to any allowance payable under the Superannuation and Provident Fund scheme shall be dealt with on the merits of the case.

(*c*) Any special allowance granted to any officer who may have had a considerable temporary or unestablished service before becoming a contributor to the Superannuation and Provident Fund, and who has not been given the option of paying up back contributions to the fund in respect of his service in a temporary capacity, shall be the equivalent of what the Council would have contributed during temporary service if the officer had been a contributor.

PENSIONS AND SUPERANNUATION.—ASSIGNMENT OF PENSIONS.

(*a*) No voluntary assignment of pensions granted by the Council to officers transferred to the service under the provisions of the London Parks and Works Act, 1887, shall be recognised by the Council.

(*b*) Any pension or allowance granted in accordance with the provisions of Section 60 of the London County Council (General Powers) Act, 1891, Section 44 of the London County Council (General Powers) Act, 1895, Section 55 of the London County Council (General Powers) Act, 1907, or Section 63 of the London County Council (General Powers) Act, 1909, shall be granted on condition that the Council may, if it thinks fit, determine such pension or allowance if the person to whom it shall have been granted shall assign the same without consent on behalf of the Council or if such pension or allowance become chargeable with the debts of such person.

EMPLOYMENT OF SUPERANNUATED EMPLOYEES.

No person in receipt of a retiring or superannuation allowance or pension granted by the Council shall be employed in the Council's service to perform duties which are the same as or analogous to those performed by him in his original office. In no case shall the salary or wages paid to any person, together with any such retiring or superannuation allowance or pension, exceed the rate of salary or wages of which he was in receipt at the time of his retirement.

NATIONAL INSURANCE ACT.—DEDUCTIONS FROM SICK PAY.

Where necessary, deductions shall be made from the sick pay allowed to employees insured or exempted under Part I. of the National Insurance Act, 1911, so as to ensure that the total rate of sick pay from the Council and of sickness or disablement benefit under the National Insurance Act shall not exceed the full rate of pay. For the purpose of computing these deductions every employee insured or exempted to whom sick pay is granted by the Council shall be deemed to receive sickness benefit under the Act at the rate of 10s. a week in the case of a man and 7s. 6d. a week in the case of a woman during the first 26 weeks after the first three days of sickness, and thereafter, disablement benefit at the rate of 5s. a week if the disablement continues; provided that (i.) if an insured employee produce to the satisfaction of the comptroller proof that he or she was not in receipt of or entitled to sickness or disablement benefit, or was in receipt of reduced benefit, he or she shall be refunded any deduction or excess deduction which may have been made on the basis of the receipt of full benefit; and (ii.) in case of doubt or where it appears that the refund should not be made the comptroller shall submit the application to the appropriate committee for their decision.

Every officer or employee of the Council who, under the certificate granted under Part II. (*b*) of the first schedule of the National Insurance Act, 1911, by the joint committee of the several bodies of commissioners appointed for the purpose of Part I. of the Act acting jointly with the Insurance Commissioners established under the Act, is excepted from the operation of Part I. of the National Insurance Act, 1911, shall receive not less than the remuneration and be entitled to not less than the allowances specified in the schedule which is attached to such certificate, and which is applicable to conditions under which he serves as regards superannuation or pension.

Melbourne Council Ask for Conduit Traction.—A resolution has been passed by the City Council of Melbourne asking the Government if it is decided to electrify the cable tramways to provide for placing the electrical equipment underground. A recommendation to that effect was made to the Corporation by their Public Works Committee, and the Lord Mayor stated that any scheme for the overhead system would be strongly opposed. In the bill about to be introduced by the Government for the control of the tramways in and near Melbourne, provision is made for compensating the Railway Commissioners for the loss of revenue anticipated on the suburban railways after the electrification of and linking up of the tramways.

Metropolitan Association of Tramways Managers.—A meeting of the members of this association was held at the Municipal and County Club, Whitehall Court, Whitehall, S.W., on October 20, when there were present Messrs. W. C. Ullmann (East Ham), F. Schofield (Leyton), L. E. Harvey (Ilford), J. C. Williams (Erith), W. E. Hammond (Metropolitan), J. Mackinnon (London United), A. V. Mason (South Metropolitan), L. Slattery (West Ham), and T. B. Goodyer (Croydon). Mr. Ullmann was re-elected chairman, Mr. Hammond was elected vice-chairman, and Mr. T. B. Goodyer was re-elected hon. secretary. Letters of inability to attend were received from Mr. J. K. Bruce (London County Council), Mr. W. Murray (Walthamstow), and Mr. H. P. Stokes (Bexley). Various matters of interest were discussed.

Digitized by Google

LONDON GENERAL OMNIBUS COMPANY SAFETY CAMPAIGN.

An admirable idea has been adopted by the London General Omnibus Company with a view to stimulating the interest of their employees in the "Safety First" campaign. It is an order of merit chart showing the positions of each of the 25 garages in regard to the number of accidents per 10,000 miles run in 1916 as compared with 1915. The chart is exhibited in the garages, and Mr. H. E. Blain, the operating manager, has had it reduced in size for reproduction in the company's weekly traffic circular, so that the employees can study it at their leisure. The innovation should certainly exert a beneficial influence by inducing the drivers and conductors to strive to place their garage in the premier position. This is now held by Mortlake, with a record of 1·483 accidents per 10,000 miles, as compared with 1·797 in 1915. For the whole of the garages there is this year a decrease of 24·8 per cent. in accidents per 10,000 miles as against 1915. The chart is in the form of a staircase, and there is a well-worded expression of approval of the Mortlake figures and an exhortation to other garages to "step up to safety." In one corner is the inscription, "When in doubt take the safe course."

IMPROVED DESTINATION LAMPS.

Messrs. Gabriel and Company, of Birmingham, have recently put upon the market an improved arrangement for indicating the destination of tramcars and other vehicles. Owing to the restricted lighting regulations it is very important to secure a distinct and at the same time a subdued light at night. Messrs. Gabriel have successfully overcome the difficulty involved, and, as can be seen from the illustrations, make use of the dash lamp at present in use, which clearly indicates the destination of the car both by day and by night. The arrangement is very simple in construction, and can be added to any existing lamp at a moderate cost without having to make new fronts for the lamps.

The illustrations show two designs. In Fig. 1, "Cannon Hill, 37," the clear glass is placed as usual in the front of the lamp, and at the back of this is placed a lettered plate or stencil with the number of the route and destination of the car. The retaining ring is hinged inside the lamp, and into this is fitted by means of clips an opal glass circle at the back of the stencil. The stencil is painted a dull black, and when the lamp is viewed from the front a perfectly distinct clear sign is shown by day, and when the lamp is lighted at night an equally clear sign is shown.

Destination Lamps for Tramway Cars.

The second design shows a similar arrangement indicating "Alcester Lanes End," but in this case the stencil "Birmingham" (Fig. 3) is fitted into a rim or circular groove at the front of the lamp, as shown in Fig. 2. A clear glass is fitted to the front of the lamp as usual, and an opal circle is placed at the back, the whole being held together by the retaining ring. In some cases this arrangement is preferable when the route has to be constantly varied.

The stencils are fitted with eyes or loops by which they can be conveniently carried on the inside of the dash of the car. Either arrangement is perfectly water and dust proof, and when used the destination box can be dispensed with.

Messrs. Gabriel and Company have recently fitted a number of the Birmingham Corporation cars with this arrangement, which should appeal to many tramway managers.

WOMEN DRIVERS AND CONDUCTORS.

The appended list gives the number of women employed as drivers and conductors upon the various municipal tramways in the United Kingdom up to the end of September. Some additions have been made to the numbers employed in a number of towns, and including company-owned tramways there are probably not less than 10,000 women now engaged in tramway service.

WOMEN EMPLOYED ON MUNICIPAL TRAMWAYS.

Corporation.	Conductors.	Drivers.
Aberdare U.D.C.	7	—
Aberdeen	107	—
Accrington	17	—
Ashton-under-Lyne	8	—
Ayr	12	16
Barking Town U.D.C.	—	—
Belfast	—	—
Bexley U.D.C.	21	—
Birkenhead	60	—
Birmingham	860	—
Blackburn	30	3
Blackpool	48	—
Bolton	44	—
Bournemouth	—	—
Bradford	215	—
Brighton	82	—
Burnley	38	—
Burton-on-Trent	11	—
Bury	54	—
Cardiff	120	8
Chester	1	—
Chesterfield	27	—
Colchester	16	—
Colne	—	—
Coventry	67	—
Croydon	98	—
Darlington	22	—
Darwen	11	—
Derby	53	—
Doncaster	40	6
Dover	12	—
Dundee	—	—
East Ham	—	—
Erith U.D.C.	15	—
Glasgow	1,054	150
Gloucester	26	—
Great Yarmouth	9	—
Halifax	80	—
Haslingden	—	—
Heywood	—	—
Huddersfield	55	—
Hull	113	—
Ilford	20	—
Ilkeston	11	—
Ipswich	49	—
Keighley	17	—
Kilmarnock	12	—
Kirkcaldy	13	—
Lancaster	—	—
Leeds City	397	—
Leicester	182	—
Leith	36	—
Leyton U.D.C.	42	—
Lincoln	—	—
Liverpool	450	—
London County Council	1,087	—
Lowestoft	16	—
Maidstone	13	—
Manchester	515	—
Nelson	7	—
Newcastle	255	—
Newport	12	—
Northampton	25	—
Nottingham	145	—
Oldham	76	—
Pontypridd	3	—
Portsmouth	150	—
Preston	58	—
Rawtenstall	17	—
Reading	47	—
Rochdale	32	—
Rotherham	65	—
Salford	266	—
Sheffield	575	—
Southampton	80	—
Southend-on-Sea	40	—
Southport	24	—
South Shields	26	—
Stalybridge, Hyde, Mossley, and Dukinfield	32	—
Stockport	45	—
Sunderland	70	—
Swindon	—	—
Wallasey	64	—
Walsall	30	—
Walthamstow	90	—
Warrington	21	—
West Ham	54	—
West Hartlepool	24	—
Wigan	59	—
Wolverhampton	42	—
York	41	6
	8,768	189

OMNIBUS TRAFFIC IN WORCESTERSHIRE.

In the annual report of Mr. C. F. Gettings, the county surveyor of Worcestershire, on main road and bridge maintenance during the year ended March 31 last, the following paragraph appears:—

"The motor omnibus traffic has continued to increase, some new services being opened and a number of the services already scheduled in previous reports being extended. There are now services over 216 miles of main roads in the county, which is exclusive of roads maintained by borough or urban district councils. As I pointed out in my last annual report, the whole of these services have been put into operation since September, 1912. The Local Government (Emergency Provisions) Act, 1916, which includes special clauses relating to the establishment of motor omnibus routes, is now under your consideration. It appears that this Act was brought about more to prevent the immediate extension of motor omnibus services than to establish a principle of contribution towards the upkeep of the roads. Unfortunately this county has been hit very severely in this direction, and, although it is admitted that the services are a convenience to the public, it is a debatable question as to whether the benefits enjoyed are recouped by the county in an indirect manner. There is no doubt that this traffic is one of the most destructive that has ever been put on to the public highway."

Last year a sum of £85,834 was allotted for maintenance, the surveyor's estimate having been reduced by £14,901 in consequence of the shortage of labour and the difficulty of obtaining material. These causes also led to an unexpended balance of £9,572 being carried over to the present year. Mr. Gettings adds that it is quite evident that this reduction of expenditure cannot be continued without serious results, especially as the heavy motor traffic continues to increase, and it is already quite perceptible on many of the roads which have been starved.

Digitized by Google

RUSSIAN TRAMWAYS LAID ON ICE.

OPENING OF LINE AT ARCHANGEL.

In connection with the electric tramways undertaking recently opened by the Archangel Council, Mr. Stephen Graham has incidentally recorded, in a report of the inaugural ceremony contributed to the *Times*, that "soon the harbour will freeze and the rails will be laid on the ice all the way to the Economy Piers, and there for a time the ships will unload." The expedient of laying an electric trolley tramway on the ice is not, we may observe, a new one in Russia. Such a tramway is in operation for five months of the year over the River Neva at Petrograd, the line being one and a half route miles. A description and illustration of the tramway appeared in THE TRAMWAY AND RAILWAY WORLD of April 17, 1902, and the information was embodied in a paper on "Tramways of the World," read by the late Sir J. Clifton Robinson, managing director of the London United Tramways Company, at the Congress of the Tramways and Light Railways Association in 1908.

Mr. Graham's report of the Archangel ceremony is appended, and from it readers will observe that our Ally imparts a religious aspect to the inauguration of tramways, which is in striking contrast to the Turkish habit of slaughtering a ram on the rails. "I was invited by the town council," writes Mr. Graham, "to partake of a glass of tea on the occasion of the opening of the electric tramway. All the notables of the town were accommodated on board a special steamer, and went slowly along from the Cathedral Pier a mile or so to the new electric power station. Here priests met us with banners and ikons and holy water. A service was held in the power station, and the smell of burning incense mingled strangely with the smell of new paint and oil and machinery. Holy water was flung in all corners and over our heads, and then the dynamos were set in motion and the whole place buzzed and groaned. I think Repin, the engineer, proud of having constructed the most northern tramway in the world, was a little anxious lest the holy water should spoil his engines. But all went well, and we took our seats in the cars to make the first journey, all the notables of the town, and with them every beggar and labourer and tatterdemalion dockhand that could get a footing. In Germany I can imagine how swiftly these gentlemen would have been dealt with. But in Russia 'all is permitted.' We went cheerfully along on our parade journey. The women conductors in new uniforms and clips and punches stood with their money bags and their rolls of tickets. Directly following our trip to the town hall the cars were open to the public, and fares would be collected. Car after car drew up there, and we came out and walked up the stone stairs to the long tables and the glasses of tea and the proud speeches of the great men of Archangel. Now the cars are in full operation, and bring in about £1,000 a week. Archangel is united, and friends within the city have become nearer. All day the cars carry passengers, and all night they carry goods, so I am told." The war has brought a vast increase of trade to the port of Archangel, most of the ships being British.

NEWCASTLE TRAMWAYS WAR SERVICE.

In his annual report Mr. E. Hatton, the general manager of the tramways, says that the number of passengers for the year ended March 31 last was 73,000,000, being an increase of over 7½ on the figures for 1914-15. Owing to pressure put on the department by the Ministry of Munitions to provide further workmen's cars morning and evening, and also due to the great strain the motormen were suffering under in driving in the darkness, it became necessary to curtail the running of the cars in the evening. This curtailing of the hours of running reduced the earning capacity of the cars and at the same time increased the cost of running. At the same time a considerable number of additional cars were put into the workmen's service morning and evening, and Mr. Hatton thinks it may be truly said that no tramway system in this country has done so much for the conveyance of men employed on work of national importance. Notwithstanding the strenuous efforts that have been made to cope with the workmen's traffic the demands have at all times been in excess of the available supply, and the utmost difficulty is experienced in keeping a sufficient number of cars in service to satisfy reasonable demands. Mr. Hatton again records his thanks and appreciation of the services rendered to him by the volunteer drivers and conductors. Without their help it would have been impossible to maintain anything like an adequate service of workmen's cars, and he hopes the workmen in the area served by the cars fully appreciate what these men have voluntarily done for their comfort and financial gain.

Christmas Day Holiday.—Last Christmas Day numerous tramway undertakings granted a holiday to the whole of their employees in consideration of the strain entailed by carrying on the services with a reduced staff. Coventry Tramways Committee are the first to announce a similar concession for Monday, December 25 next.

RAID WARNINGS AND CAR SERVICES.

With the concurrence of the Field-Marshal Commanding-in-Chief the Home Forces, the following regulations have been promulgated for observance by all persons operating tramway services in the Metropolis during the period of threatened air raids. The police have been instructed to enforce the proper observance of the regulations:—

(1) The several authorities to be warned by telephone to take air raid precautions.
(2) Immediately on receipt of this order the several authorities are to at once communicate in an approved manner the indication to the car drivers throughout their area.
(3) The speed of all cars must be instantly reduced (by running on series only), so that the speed in no case is in excess of six miles per hour.
(4) That only one lighting circuit be used, no additional circuit being put on until the warning is withdrawn.
(5) That the trolleys be connected with and disconnected from the trolley wire in such a manner that flashing is avoided.
(6) That the drivers "throw off" at all section insulators and when passing special work, frogs, ears, etc., where flashing would be likely to occur.
(7) That tramway managers take special precautions to ensure that no defective trolley wheels are used.

The public carriage inspecting staff will co-operate with the police to enforce these regulations, members of that staff taking up the positions allotted to them as soon as the warning is received. Should the police observe any infringement of the regulations they are to stop and warn the driver of the risk occasioned by his neglect, and they will also prepare a report for the information of the Commissioner of Police.

At the request of the Commissioner of Police the Highways Committee of the London County Council have arranged a scheme for warning motormen and conductors of possible air raids. The expenditure involved in carrying out the scheme is £624. A considerable expenditure has also been incurred on this and all the tramways in the Metropolis to fit to each angle of the cars a shaded light, in compliance with the order made some time ago under the Defence of the Realm Act. Under this order all vehicles are required to display two front lamps, one on each side, and a red rear light on the off side. The dashboard lamp is not now used, and it cannot be said that the change in the exterior lighting of the cars has added to the safety of the streets. Another heavy expense has been entailed by the Lights (London) Order of August 26, 1916, which provides that the lights of tramcars must not be more than is sufficient to enable fares to be collected. On the London County Council cars it has been necessary to make alterations and additions to the wiring. The work is estimated to cost £3,020 on the County Council's cars alone.

PURCHASE OF STEEL FOR TRAMWAYS.

The secretary of the Tramways and Light Railways Association has notified the members that in making application to the Ministry of Munitions for permission to purchase steel of any description, they should supply the information in the following form instead of in the form previously set forth:—(1) Whether they are engaged in war work; if so giving particulars; (2) the quantity and kind of steel now required; (3) the purpose for which the steel is required; (4) the name of the contractor supplying the steel. A certificate from the Ministry of Munitions is now required before steel of any description and for any purpose can be obtained.

RAILS TAKEN UP TO LAY ELSEWHERE.

In connection with the proposal of Croydon Tramways Committee to relay a portion of the Selhurst Road track and to construct a double line at an estimated cost of £2,156, the borough engineer has reported that he has been unable to obtain delivery of rails. He has been informed by the Ministry of Munitions that owing to Government requirements no definite promise could be given as to permission being granted for the rolling of the quantity of rails required. The committee have advised the Corporation that, for the safety of the public, the work should be immediately carried out, and they recommended that the required number of rails should be removed from the Whitehorse Road section, which is not being operated, and utilised for the purpose, and that subject to the necessary consents being obtained the works be proceeded with. Alderman G. J. Allen, chairman of the Tramways Committee, in moving the adoption of the report, said that it would not be possible to obtain new rails until some time next year, and it would be cheaper to take up rails in Whitehorse Road and relay them in Selhurst Road. The Council agreed to that course.

Restriction of Copper Wire Manufacture.—By an order of the Minister of Munitions issued on November 4 the manufacture of copper wire is now prohibited in the United Kingdom except for the fulfilment of Government contracts or other contracts specially sanctioned.

Digitized by Google

FINANCIAL REPORTS AND MEETINGS.

Calcutta Tramways Company.—An interim dividend on the ordinary shares of 3 per cent. is announced.

Rio de Janeiro Tramway, Light, and Power Company.—A dividend is announced of 1¼ per cent. on the capital stock.

Shanghai Electric Construction Company.—The directors announce an interim dividend of 4 per cent. (8s. per share).

Sao Paulo Tramway, Light, and Power.—The directors have declared a dividend of 2½ per cent. on common stock.

Brazilian Traction, Light, and Power Company.—The directors announce a dividend of 1 per cent. on the ordinary stock.

United Electric Tramways of Caracas.—A dividend of 7 per cent. less tax, for the past year is recommended by the board, carrying forward £2,428.

Callender's Cable and Construction Company.—The board have declared an interim dividend on the ordinary shares of 5s. per share (10 per cent. per annum).

City of Buenos Ayres Tramways Company.—The board announce a dividend of 1s. 3d. per share (5 per cent. per annum) for the three months ended September 30.

Montreal Light, Heat and Power Company.—An interim dividend is announced on the capital stock at the rate of 8 per cent. per annum, for the quarter ending October 31.

Brisbane Electric Tramways and Investment Company.—A dividend has been declared at the rate of 8 per cent. per annum (4s. per share), free of tax, on the ordinary shares for the past half-year.

Hurst, Nelson and Company.—The directors recommend a dividend of 10 per cent., together with a 2½ per cent. bonus, both free of tax. The profits were £73,426, to which has to be added £15,000 brought forward.

Interborough Rapid Transit Company.—The operating revenue for the year ended June 30 was 35,891,528 dollars, an increase of 2,457,785 dollars on the previous year, and operating expenses were 14,008,165 dollars, an increase of 1,066,851 dollars. The surplus over dividends of 20 per cent. on the capital stock was 1,892,014, a gain of 817,867 dollars over the previous year.

Mexico Electric Tramways, Limited.—At a meeting of holders of the 5 per cent. debentures, held on October 10 in London, Mr. G. S. Pott was appointed a trustee for the debenture holders in place of the late Mr. C. Rube. It was agreed that the payment of the debenture interest should be postponed until July 1, 1917. Mr. Pott, who presided, said the group of companies interested in Mexico had decided to present a united front and assist each other.

Bahia Tramways, Light, and Power Company.—The trustees have presented a report to the bondholders on the present position owing to the Municipal Council having repudiated their contract to purchase the undertaking. Sir Wm. Plender, who presided at the meeting, said that matters were now at a deadlock, for though the courts had recognised the rights of the company there seemed to be no way of effectively enforcing those rights. The Council had behaved in a manner that was a disgrace to a civilised community.

Trafford Park Estates, Limited.—The report for the year ended June 30, 1916, states that the capital expenditure, mainly on new buildings, during the year, has amounted to £128,582. About 50 acres of land adjoining the estate had been acquired by the company, and the profits amount to £30,172. With the balance of £45,070 brought forward from last year there is an available sum of £75,242. The payment of a dividend at the rate of 4 per cent. on the ordinary shares is recommended. This will require £24,890, leaving a balance of £50,352 to be carried forward.

Manaos Tramways and Lighting Company.—The report for the year ended April 30 states that the depreciation of currency has resulted in a loss of £13,093 on remittances from Manaos. The gross earnings were £110,524, as compared with £110,420, and operating expenses £76,172, against £82,240. The net operating revenue carried to profit and loss account increased from £26,180 to £34,352. After providing for debenture interest, sinking fund, interest on loan, London office expenses, sundry charges, and the loss in exchange already referred to, £1,661 is carried to the balance sheet.

London County Council Tramways.—At the first meeting of the County Council after the recess it was reported that the tramway receipts during the eleven weeks ended October 4 amounted to £554,271, an increase of £36,868 as compared with the corresponding weeks in 1915. The passengers numbered 130,814,286, an increase of 9,855,782. During the two weeks ended October 18 the receipts amounted to £98,356, an increase of £5,971 as compared with the corresponding weeks in 1915. The passengers numbered 23,414,103, an increase of 1,721,613. The total traffic receipts from the beginning of the financial year from April 1, 1916, to October 18 aggregated £1,408,250, an increase of £140,908 over the corresponding period.

Norwich Tramways Company.—At the twentieth annual meeting, held in London on October 30, Mr. Charles Pakeman (vice-chairman), presided and moved the adoption of the report, which recommended payment of a dividend of 3 per cent. for the year ended June 30, placing £5,000 to the reserve fund account, and £1,000 to the 1914 Act account, and carrying forward £428. The only point that called for comment, he said, was the large sum placed to the reserve fund account. This provision had been made because, owing to the lighting restrictions, it had not been possible during the year to carry out all the renewals that had been planned. This amount would otherwise have been largely spent on these purposes. Mr. E. A. Hopkins was re-elected as a director.

Half-yearly Results at Bradford.—The general manager on October 16 presented the appended comparative half-yearly return to the Tramways Committee:—

	1916.	1915.	Increase.
Traffic receipts (incl. parcels)	£184,572	£175,962	£8,610
Car-mileage	3,160,153	3,143,156	16,997
Receipts per car-mile ...	14·01d.	13·43d.	·58d.
Units consumed	6,228,912	6,097,351	131,561
Units per car-mile	1·971	1·939	·032
Passengers carried	40,148,066	37,975,411	2,172,655
Wages on revenue account, including permanent way	£75,332	£69,346	£5,986

Auckland Electric Tramways.—Mr. C. G. Tegetmeier, presiding at the ordinary general meeting of this company on October 31, said that in spite of adverse conditions the traffic receipts for the year ended June 30 showed an increase of £6,989 over the preceding year, the total being £274,783, or at the rate of over £10,000 per route mile. The number of passengers carried was 42,352,000, an increase of nearly a million. The receipts had increased by nearly 3 per cent. notwithstanding that a large proportion of the male population of Auckland had left industrial pursuits to share in the defence of the Empire. Concessions from various suburban authorities expired at various dates from 1934 onward, and the terms of purchase were favourable to the company, being based upon the value of their undertaking as a going concern.

Mexico Tramways, Light and Power Group.—Sir Alex. Roger presided at a meeting of the holders of 5 per cent. first mortgage gold bonds of the Pachuca Light and Power Company, held on October 5, when resolutions were passed for the purpose of giving effect to the policy approved at the joint meeting of holders of the various bond issues of the Mexico Tramways, Light and Power group of companies held on July 14 last. The chairman said it was important that all the companies should stand together for mutual protection. The policy laid down was a temporary expedient to bridge over the present conditions in Mexico. Affairs in that country had not improved since July, and it seemed unlikely that any permanent stability would be reached unless some form of intervention and financial control was introduced.

Belfast Tramways Half-yearly Report.—For the six months ended September 30, the working of the Corporation Tramways undertaking shows a surplus profit of £3,883, as against £8,380 for the similar period of 1915. The revenue was £151,980, as compared with £141,580, an increase of £10,400. There was no appreciable increase in car mileage. The receipts per car mile were 11·58d., as against 11·01d. for the corresponding period of 1915. The average receipts per car mile for September was the highest yet reached—viz., 11·93d., while the working expenses were also a record—7·03d. The increase in the revenue is balanced by a rise of £11,000 in the expenditure, the aggregate being £89,723, as against £78,189 for the same period in 1915. The increased expenditure is due to higher payments for wages, war allowances, sinking fund, income tax, track and car maintenance, and electrical energy, the latter total being £20,824, as compared with £14,649 in the corresponding period. Wages increased by £2,000, and allowances from £3,700 to £4,400. Car works expenditure is up by £1,800, and permanent way and electrical equipment by £1,300.

Birkenhead Corporation Tramways.—Mr. C. Clarke, general manager, in the fifteenth annual report, states that in his last annual report, which included the first eight months of the war, he recorded a decrease in the receipts of £2,715 for the eight months, as compared with the pre-war period. The traffic had since so far improved that for the past year the income amounted to £72,820, or £4,212 higher than ever previously recorded. The working expenses amounted to £38,833; sinking fund, income tax, etc., £23,417; balance £10,570, which had been allocated as follows:—In aid of rates £4,000, reserve fund £2,000, renewals fund £4,570. The reserve fund stands at £3,040; the renewals fund £27,397. The price of current had been raised from ·953d. to 1·053d. Revenue per car mile averaged 14·84d. and working expenses 7·91d. War allowances to dependents of employees amounted to £1,589, and war bonus to £884. Up to date 67 employees had volunteered, and five had been killed. The female employees had carried out the work of cleaners and conductors satisfactorily. The collections on the cars for war charities amounted after 34 weeks to £2,093.

Dundee and District Tramways Company.—In moving the adoption of the report at the thirteenth annual meeting, Mr. George Balfour stated that the receipts amounted to £11,825, a decrease of £1,468. There was a decrease in the number of passengers of 125,929. The

Digitized by Google

very severe lighting restrictions affected the volume of local traffic —the short-distance travelling in and between Broughty Ferry and Monifieth—while this was further adversely affected by the unfavourable weather during the early summer. The receipts this year to date showed a considerable improvement. A total of £15,540 debenture stock had been redeemed at July 31 last. The directors proposed to apply each year the interest on redeemed stock in purchasing further stock until the whole had been paid off. This was, in his opinion, the soundest form of providing for depreciation, viz., by actual cash repayment of capital indebtedness out of profits. In his opinion, immediately normal conditions prevailed the company would earn as large or even a larger profit than in any previous year. He moved that a final dividend at the rate of 6 per cent., less income-tax, be paid on preference shares for the past half-year. Lieutenant Hynd and Mr. E. Cowan were re-elected directors.

Record Nine Months at Liverpool.—In responding to a vote of thanks at the final meeting of Liverpool Tramways Committee for the municipal year, Mr. Russell Taylor, the chairman, said that the past nine months had been a record for the tramways as regarded the receipts and the number of passengers. The increase in the receipts had been £27,547, and in passengers 4,451,477. The mileage had decreased by 56,044, and the earnings per car mile had increased ·76d. That statement would convey something of the great carrying capacity of the cars. The department had been handicapped owing to the war in many directions. The greater part of the staff had joined the army, and the manager had had to supplant them by inexperienced men and women. At the end of the year the balance sheet might not be as satisfactory as some of them would like it to be, as they had considerable additional expense owing to army allowances and war bonuses, and increased outlays in other directions. The reduced lighting of the cars had been responsible for some inconvenience to passengers, and owing to the shortage of labour the service was not kept up as efficiently as the manager would like. He had to ask the public still to endure the inconvenience.

Cape Electric Tramways.—The report for the year ended June 30, 1916, shows gross earnings of £212,792, an increase over the previous year of £6,669. The profit on the Cape Town and Port Elizabeth Tramways amounted to £81,877 ; interest on investments, £2,301 and transfer fees £12, making a total of £84,190. General and office expenses amounted to £1,480, income tax provision and excess profits duty on profits to June 30, 1915, £8,359, interest and exchange £388, directors' fees £1,300, trustees' fees £166, leaving a balance of £72,497. After providing for debenture interest, redemption of debentures, and taking into account the balance brought forward from last year, there is a net credit balance of £31,404. A sum of £5,000 has been placed to reserve, leaving a balance of £26,404. The directors recommend the payment of a dividend for the year of 3¾ per cent. on the ordinary share capital, and this will absorb £18,421, leaving a balance to be carried forward to next year of £7,983. The passengers carried during the past year totalled 22,477,366, as against 21,680,070. A small improvement in traffic receipts was more than counterbalanced by the increased cost of operation due to labour charges and allowances granted to employees who have joined the forces. Excess profits duty and increased income tax charges have also had to be met.

Portsmouth Corporation Tramways.—The importance of the tramways in the great naval centre is indicated by the increases in the number of passengers during the past two years, although during each period the shortage of staff led to reductions in the car mileage, especially in the past year. While in 1915-16 there were nearly two million more passengers, the mileage decreased by 267,843 miles. The improved result shown in the appended tabular statement was achieved in spite of the concession in May, 1915, of issuing books of 16 tickets for a shilling and eight for sixpence and the lengthening of the fare sections. The books give a reduction of 25 per cent. on ordinary fares.

Year ending March 31,	1916.	1915.	1914.
Capital expenditure	£733,181	£731,174	£772,684
Amount outstanding	£396,624	£423,103	£449,206
Traffic revenue	£126,324	£121,909	£115,168
Total revenue	£127,546	£123,991	£116,991
Working expenses	£59,301	£56,888	£57,620
War allowances	£2,778	£1,770	—
Gross balance	£65,467	£65,333	£59,371
Net profit	£23,278	£22,568	£18,702
Passengers carried	29,338,918	27,554,194	26,266.342
Fare per passenger	1·033d.	1·061d.	1·052d.
Car mileage	2,170,778	2,438,621	2,506,058
Units per car mile	1·238	1·139	1·103
Power cost per car mile ...	·760d.	·549d.	·576d.
Traffic receipts per track mile	£3,650	£3,535	£3,325
Traffic receipts per car mile	13·966d.	11·998d.	11·030d.
Expenses per car mile ...	6·556d.	5·599d.	5·518d.
Ratio of working expenses ...	46·49	45·88	49·25
Total track mileage	34 m. 48 c.	34 m. 48 c.	34 m. 51 c.
Number of cars	100	100	100

DICK, KERR & COMPANY, LTD.

A Prosperous Year.

The ordinary general meeting of the shareholders of Dick, Kerr and Company, Limited, was held on Thursday, October 26, at the Cannon Street Hotel, London, E.C., Mr. Claud T. Cayley, chairman of the board of directors, in the chair, supported by Mr. R. H. Prestwich, deputy chairman, Messrs. D. C. Ellis, J. Sampson, T. D. Lingard, directors, and Mr. Walter Rutherford, managing director.

The Secretary (Mr. E. D. Johnson) read the notice convening the meeting and the auditors' certificate.

The Chairman, in submitting the directors' report and statement of accounts, said the past year had been a strenuous one for everyone connected with the management of the company. At the last meeting he had indicated as far as advisable the nature of the work on which they were then employed and expected to be engaged in during the period under review. As shown to some extent by the balance sheet, the work actually undertaken had been of greater magnitude than the directors had anticipated. He was not permitted to give details, but it would suffice to say that both the manufacturing department and the new contracts department were dealing with a larger turnover than ever before, and in his opinion it was greatly to the credit of the staff that this should be the case in view of the extent to which it had been depleted by many members having joined the forces. The balance sheet showed that "capital expenditure at the works, including goodwill and patents," had been reduced. This might be misleading in view of the evident material extensions. The explanation, however, was to be found in the item, "contracts due for work, stock of materials, etc." It was considered for the purpose of comparison better to keep the expenditure in connection with abnormal works separate, and this had been done by dealing with them as separate and independent contracts. When they returned to normal times there would of necessity be an adjustment, but it was no use attempting to make that adjustment now, as under the Munitions Act the Government would have a very considerable say as to how it should be carried out. The reduction in "capital expenditure, etc., at works" of over £18,000 roughly represented the amount written off for normal depreciation. The auditors stated "No provision has been made for the shrinking of assets due to the present exceptional circumstances, but the usual charges for depreciation had been made." That was correct so far as the balance sheet was concerned, but he drew attention to certain words in the profit and loss account, i.e., "after setting aside reserve for extra depreciation." Everyone experienced in manufacturing knew that depreciation of machinery increased with the time it was at work but not in direct proportion. The more continuously machinery was operated the less time there was to carry out normal repairs; consequently the life was shortened out of all proportion to the actual amount of time worked, and the directors considered it necessary to provide amply against this exceptional wear and tear. The year's profit added to the sum of £18,346 brought forward gave £79,296 available for appropriation. Out of this it was proposed to add £25,000 to "special reserve for contingencies," which would bring the total of that reserve up to £50,000. The work on which they were engaged was abnormal in great part, and a transition period was bound to come when all their energies would have to be directed to re-establishing normal conditions. It was therefore sound policy to build up a reserve to help them over that transition period. It was impossible to say much about war taxation, except that a sum had been reserved in the accounts which was considered sufficient to meet any claims.

Advantage was taken during the year of an opportunity to acquire a controlling interest in the shares of Messrs. Willans and Robinson, with whom they had done a large business and had had pleasant relations. It was not proposed to make any alteration in the present directorate and management of that firm, and it would be recognised that there was now no obstacle to cementing their relationship by closer combination of working interests, leading eventually to material benefits to both. It had been a great satisfaction to the board to see the mobile manner in which the staff had thrown themselves into the work of re-organisation to meet an entirely new class of manufacture, and with no little success under very adverse circumstances. He attributed the success attained, both at their own works and the new factory, to the fact that they were able to provide the nucleus from old employees, and in this connection he wished not only to include members of the staff, but foremen and workmen alike. In these days, when so much was said about slacking and loss of time, it was pleasant to be able to state that the time lost by their workers at Preston from all causes, illness included, over the year under review was under 1·4 per cent. This included men and women, forge and machine shops. He was not inclined to prophesy as to the future any more than he was two years ago, but he was prepared to say now that with such a staff as theirs had proved itself to be, that given reasonable protection of a permanent nature against unfair competition from outside the Empire, there was every reason to look to the future with confidence. He thought that on examining the balance sheet they would agree that under all the circumstances the business had been most satisfactorily carried on. He moved the adoption and confirmation of the 6 per cent.

Digitized by Google

dividend on preference shares already paid and the 6 per cent. dividend on ordinary shares. (Applause.)

Mr. R. H. Prestwich, deputy chairman, formally seconded the motion.

Some questions were asked as to several items in the accounts, and three or four shareholders warmly congratulated the board of directors on the results of the year's working. Much satisfaction was also expressed that the company, after five years, again ranked in the list of dividend paying concerns.

The Chairman, replying, disposed of the questions satisfactorily, and said that as regards contracts in hand the shareholders could rest assured the directors were not going along with their eyes shut as to the future when the war was over. They were now doing an enormous business. The goodwill was not now separately stated in the accounts, but it had not been increased. He was not free to make any definite statement as to stocks, but there was no danger or risk in that respect. The directors were keenly looking after the interests of the company, and he might remind them that they were largely represented in the share capital. The managing director had given most careful attention to organisation, and they had before them the names of the management committee. The business was naturally divided into departments, over each of which was one man responsible to the managing director, who in his turn was responsible to the board. They had proceeded on what they regarded as a fair and proper basis, and were convinced that their customers were extremely satisfied with all that the company had done. (Applause.)

The motion was then agreed to unanimously, and the retiring directors, Messrs. R. H. Prestwich and T. D. Lingard, were re-elected on the proposition of the chairman, seconded by Mr. D. C. Ellis.

The auditors, Messrs. Gane, Jackson, Jefferys, and Freeman were re-elected, and in acknowledgment Mr. Freeman warned the shareholders that under existing circumstances they must not expect the accounts would be ready quite so early next year.

The Chairman proposed a hearty vote of thanks to Mr. Walter Rutherford, the managing director, and the staff for their successful conduct of the company's business, and this having been acknowledged, a similar compliment to the chairman and board of directors closed the meeting.

The report for the year ended June 30 shows a notable improvement on the previous year. The profit earned during the past 12 months amounted to £71,740, an increase of £24,781. This enabled the directors to make all necessary provisions and to recommend a dividend of 6 per cent. on the ordinary share capital, while carrying forward a balance of £20,397. A comparison of the figures for the past five years is appended :—

	1916.	1915.	1914.	1913.	1912.
	£	£	£	£	£
Net profits	71,740	46,959	44,761	30,092	3,275
Balance from last year ...	18,347	25,526	10,325	10,016	36,892
	90,087	72,485	55,086	40,108	40,167
Debenture interest and trustees' fees	10,490	10,538	10,961	11,183	11,551
Premium on debenture stock redeemed ...	300	300	300	300	300
Dividend on 6 per cent. preference shares ...	18,300	18,300	18,300	18,300	18,300
Dividend on 6 per cent. ordinary shares ..	15,600	—	—	—	—
Reserve against contingencies	25,000	25,000	—	—	—
Balance carried forward	20,397	18,346	25,525	10,325	10,016

PURCHASE OF A.E.G. COMPANY BY DICK, KERR AND COMPANY, LIMITED.

The A.E.G. Electric Company, one of the three subsidiaries in this country of the Allgemeine Elektricitats Gesellschaft of Berlin, has been sold by the controller appointed by the Board of Trade to Dick, Kerr and Company, Limited. The company was the most important of the three subsidiaries, and had offices and works in London, Newcastle, Cardiff, and Birmingham. One of the reasons advanced for the continuance of its operations after the outbreak of war is understood to have been the importance of the work it had undertaken for firms engaged on Government contracts. The liquid assets held in this country amounted to over £100,000. As these assets are now transferred to the Public Trustee practically all that was saleable, apart from stock, was the goodwill, and as the company's profits have fallen off during the war, the price paid was not large. Before the war the company employed a great number of German workmen, and the whole of the capital was held by the parent company in Berlin. During the war the German staff has been replaced by a British staff, and the latter is now taken over by Dick, Kerr and Company, together with a number of uncompleted contracts.

CONTRACTS AND ORDERS.

Siemens Brothers' Dynamo Works have an order from Paisley Council for a high-tension switchboard.

Yarmouth Tramways Committee have accepted the tender of a local firm for 40 oilskin overcoats at 16s. 6d. each.

Ford Motor Company (England), Limited, have a contract to supply motor delivery vans to the War Department.

Croydon Council have purchased a high-tension feeder cable from Callender's Cable and Construction Company, Limited.

Edgar Allen and Company are supplying special trackwork for the Wolverhampton and Manchester Corporation Tramways.

The Motor Rail and Tramcar Company, Limited, recently supplied a number of petrol tractors and parts to the War Department.

C. A. Vandervell and Company, Limited, of Worple Way, Acton, W., have received a contract to supply magnetos to the War Department.

Halifax Council have a contract with Arden Hill and Company, Birmingham, for the supply of an armature drying oven for the car depot.

Bradford Tramways Committee have made a purchase of cloth from R. Gaunt & Sons, Limited, Farsley, for uniforms for the employees.

Manchester Tramways Committee have accepted the tender of the Frances Motors, Limited, for a Ford motor van for the parcels department.

Messrs. Johnson Brothers and Company, of Ford Road, Bow, E., have an order from the London County Council for 1,450 oilskin coats for motormen.

Sunderland Council have accepted the tender of Everett Edgcumbe and Company for surge arresters, and of W. T. Henley's Telegraph Works, Limited, for cable.

Ilford Coal Contract.—Under the Price of Coal (Limitation) Act, the coal contractors to Ilford Urban Council have raised the price for Welsh coal by 2s. 6d. per ton.

Chatteris Engineering Company, Limited, have a contract from Sheffield Corporation for converting to electrical working a 20-ton overhead travelling crane at a cost of £902.

Glasgow Tramways Committee have placed a contract with Pirelli, Limited, for vulcanised india-rubber cable, and W. Miller and Company for chilled iron brake blocks.

The Highways Committee of the London County Council have placed an order for the supply of car axle oil for the tramways department with Worringham and Company, Deptford.

The War Office have placed a contract with Mr. W. Jones, Upper Thames Street, E.C., for the supply of tramway track, and with the Wantage Engineering Company, Limited, for rail trolley parts.

Messrs. Briggs, Jones and Gibson, Limited, have a contract to supply uniform clothing to Wolverhampton Corporation tramway inspectors, motormen, and male conductors for twelve months, at £2,104.

The Mirrlees Watson Company, Limited, Glasgow, have recently received orders for 34 sets of condensing plant, practically all for war service work, and of varying steam duties up to 130,000 lbs. steam per hour.

Shepherd's Parging Block Company, Limited, of Rochdale, have received an order for the supply of their block parging to the Bexley Council Tramways, Rochdale Corporation Tramways, and Rhondda Valley Tramways.

Thomas Tilling, Limited, have been awarded the contract by London County Council for the supply of horses for drawing trailer cars to and from the depôt of Evelyn Street, at the rate of £145 a horse a year.

Newcastle Corporation have accepted the only tender received for the supply of coals. It was from the present holder, who would only contract for six months at 2s. per ton extra, this sum being for the cost of carting.

Johannesburg Council have allotted the following contracts :— Telegraph Manufacturing Company, five miles of trolley wire ; Bruce, Peebles and Company, Limited, 2,000-K.W. La Cour motor converter and spares.

Rotherham Council have accepted the offer of the British Westinghouse Company to supply a 5,500-K.W. turbo-alternator at £23,700, and of the British Niclausse, Limited, for the supply and erection of two water-tube boilers at £13,250.

Liverpool Corporation have adopted the recommendation of the Tramways Committee to purchase women conductors' overcoats from J. Hunter and Son, Limited, Liverpool, and costumes from Coop and Company, Limited, Liverpool.

Wolverhampton Council have given an order to Messrs, Melville, Dundas and Whitson to supply and fix a crane gantry at the electricity works, and to Gibbons Brothers, Limited, for a steel roof to the boiler-house of the generating station.

Tramway Material for London County Council Tramways.—Orders for tramway material and the execution of small works and repairs, at an estimated cost of £38,110, arranged by the Highways Committee, have been approved by the Council.

Digitized by Google

Tudor Accumulator Company have agreed to an extension for twelve months of their contract for maintaining the batteries of two ambulance vehicles belonging to the Metropolitan Asylums Board, which are used at Queen Mary's Hospital.

Luton Council have been recommended by the Electricity and Tramways Committee to place a contract with Messrs. Herbert Morris, Limited, for an electric overhead runway and two skips for the removal of ashes at the generating station.

Lifting Jacks.—Manchester and Blackpool Tramways Committees have given an order for car lifting jacks to the Equipment and Engineering Company, of 2 and 3, Norfolk Street, London, W.C. The Blackpool Authority intend to place a jack on each car.

Barking Council have accepted the following tenders:—Siemens Brothers' Dynamo Works, extra high tension cable, £1,913; General Electric Company, switchgear, £888; Brush Engineering Company, transformer, £611; Babcock and Wilcox, chain-grate stoker.

H. Lotery and Company, Limited, whose contract of November 30, 1915, for uniform clothing for the parks department of the London County Council has been reconsidered, have been granted a new contract as from January 1, 1917, at slightly increased prices.

Derby Corporation have made the following contracts:—R. Wade and Sons, tramway standards; British Thomson-Houston Company, switchgear and extension of switchboard; British Electric Transformer Company, two transformers; British Insulated and Helsby Cables, Limited, armoured and copper cable.

Rotherham Tramways Committee have purchased 60 motormen's oilskins at 27s. each and 60 conductors' mackintoshes at £1 11s. 6d. each from Tasker, Son and Company. Stores for the tramways and electrical departments will not be contracted for during the ensuing year, but purchases will be made as required.

Sheffield Corporation have placed the following contracts for the supply of spare apparatus for the auxiliary plant at Neepsend Station:—Siemens Brothers' Dynamo Works, motors and transformer; Dick, Kerr and Company, British Westinghouse Company, and Fuller Electrical Company, motors; Igranic Electric Company, motor starters.

Victorian Railway Commissioners have placed the following contracts:—Motor generator, etc., for battery charging of baggage trucks, switchboard and connections, Electric Construction Company, Limited; electric lamps for signal system, Edison-Swan Electric Company, Limited; lampholders for signal system, Australian General Electric Company.

Switchgear for London County Council Tramways.—The offer of the British Westinghouse Electric and Manufacturing Company, amounting to £2,964, for the alteration of existing low tension wiring and the provision of a portion of the switchgear for the third additional turbo-generator to be installed at Greenwich generating station, London County Council Tramways, has been accepted.

Three Years' Contract for Uniforms.—Blackburn Council have adopted a recommendation by the Tramways Committee to enter into a three years' contract for the supply of uniforms. Councillor Higham, vice-chairman of the committee, stated that there had been great difficulty in obtaining uniforms during the war, and if the conflict ended to-morrow there would be no drop in prices for a considerable period.

Salford Council have accepted the following tenders:—I. Bentley and Company, Limited, Manchester, supply and delivery of oil and paints required by the tramways department during the six months ending March 31, 1917; British Westinghouse Company, Limited, blank cubicle with high-tension switchgear and control panel for the rotary converter recently supplied by the company; J. Heaton, Ramsbottom, 2,500 tons of Tyldesley slack at 17s. 11d. per ton.

Castings for Permanent Way.—Ninety firms were recently invited by the London County Council to tender for steel and iron castings for permanent way for the tramways department. The following are the successful tenderers:—Hadfields, Limited, East Hecla Works, Sheffield; Robert Hyde and Son, Limited, Abbeydale Foundry, Sheffield; John Needham and Sons, Limited, Millgate Foundry, Stockport; and Samuel Osborn and Company, Limited, Clyde Steel Works, Sheffield. Some iron castings will be supplied by R. A. Bradshaw and Son, Retford.

Manchester Corporation have placed the following contracts:—Grange Iron Company, Limited, ash hopper; Etchells, Congdon and Muir, Limited, hoist gear, etc.; Aiton and Company, Limited, steam and feed pipes and supports, including alterations to existing pipework to two boilers; Avonside Engine Company, Limited, Bristol, saddle-tank steam locomotive; R. White and Son, Widnes, second-hand railway material; F. W. Brackett and Company, Limited, water screen; F. Mitchell and Son, Limited, foundations for wagon lift and turntable; British Thomson-Houston Company, Limited, switchgear and switchboard; Mather and Platt, Limited, electrically-driven circulating water-pump; Ferranti, Limited, extension switchgear, etc.; Stewarts and Lloyds, high-pressure pipework; cables—Callender's Cable and Construction Company, Limited; British Insulated and Helsby Cables, Limited; Pirelli General Cable Works, Limited; C. Macintosh and Company, Limited, Johnson and Phillips, Limited.

PERSONAL.

Mr. A. C. Swales has relinquished the secretaryship of the Junior Institution of Engineers, owing to ill-health.

Mr. L. Slattery, the new general manager of West Ham Corporation Tramways, entered fully upon his duties on November 1.

Mr. L. E. Harvey, general manager, Ilford Council Tramways, has been granted an increase in salary from £460 to £480.

Mr. W. W. Bell, chief clerk, Yarmouth Corporation Tramways, has been granted a bonus of £10 per annum during the war.

Mr. A. M. Simpson has been appointed general manager of the Malta Tramways Company's undertaking in Valetta and district.

Colonel Sir H. C. L. Holden, director of mechanical transport at the War Office, has been elected upper warden of the City Guild of Gunmakers.

Mr. J. C. Williams, electrical engineer and tramway manager of the Erith Urban District Council, has been granted £50 for extra services rendered since his appointment.

Chief Inspector A. W. Baker, Doncaster Corporation Tramways, has been appointed traffic superintendent, filling the vacancy caused by the resignation of Mr. A. M. Strachan.

Mr. G. R. Archdeacon, who has been appointed general manager of the Canadian Hart Accumulator Company, was formerly with Messrs. Ferranti, Limited, and the Chloride Electrical Company.

Mr. Harry Lotery, of Messrs. H. Lotery and Company, Limited, uniform clothing contractors, of 4 to 8, St. Mary Street, London, N.E., has been elected a member of the Stepney Borough Council.

Councillor J. Harrison, convener of the Tramways Committee of Edinburgh Corporation, is mentioned as one of four probable candidates for the impending vacancy in the Lord Provostship of the city.

Mr. J. M. McElroy, at the request of the Board of Trade, has been granted permission by the Manchester Tramways Committee to act as referee to determine the disagreement between Bacup and Rawtenstall Corporations as to fares and stages on the tramways.

Mr. F. Golding, assistant electrical engineer in the Postmaster-General's Department, New South Wales, has been appointed electrical engineer for Victoria. He succeeds Mr. A. A. Dircks, who has become electrical engineer to the Government of New South Wales.

Alderman J. H. Hargreaves, who was selected as Lord Mayor of Hull for the fourth year, has declined the honour owing to ill-health. During the present year his lordship resigned the position of chairman of the Tramways Committee, which he had held for a number of years.

British Thomson-Houston Company, Limited.—At a recent board meeting of this company, the managing director, Mr. H. C. Levis, was appointed chairman in succession of Mr. J. F. Nauheim, who has retired. Mr. Levis retains the managing directorship of the company.

Mr. Conway, who has held important positions in various light and power companies, has proceeded to Mexico at the request of the committee who are acting in the interest of the Mexico Tramways, Light and Power group of companies, owing to the unsettled condition of that country.

Sir Wm. Clark has been appointed comptroller-general of the Department of Commercial Intelligence of the Board of Trade, which has been formed by the amalgamation of the Commercial Intelligence and Exhibitions branches of the Board. **Mr. T. Worthington,** who has just retired from the post of director of the Commercial Intelligence Branch, will assist the new department in a consultative capacity as commercial adviser.

Mr. Cyril W. Goodman, a son of Mr. W. G. T. Goodman, engineer and general manager of the Adelaide Municipal Tramway Trust, has been awarded the Angas engineering scholarship by the Council of Adelaide University. The scholarship is of the value of £200 per annum, and is tenable for two years. Mr. C. W. Goodman was graduated from the University last year as a bachelor of engineering. He has since enlisted for active service.

Mr. A. W. Tait, a member of the committee appointed by the Board of Trade to inquire as to the measures to be taken to safeguard the metal trades after the war, is chairman of the British Aluminium Company, Ferranti, Limited, Llandudno and Colwyn Bay Electric Railway, Delhi Electric Tramways and Lighting Company, Fraser and Chalmers, the Russian Corporation, and the Metropolitan Electric Supply Company. He is also a director of Barbados Electric Supply Corporation, Bruce Peebles and Company, and Falkirk and District Tramways Company.

Mr. J. S. D. Moffet received a congratulatory vote from West Ham Council on the occasion of his departure to take up the duties of general manager of Belfast Corporation Tramways. The Corporation also approved of the Tramways Committee's suggestion

Digitized by Google

that he should be presented with a testimonial on vellum under the Corporation seal, placing on record their appreciation of Mr. Moffet's successful management of the undertaking during his three years' service, and also the satisfactory manner in which the track repairs and the re-modelling and reconstruction of the cars had been carried out.

Mr. Adam Gowans Whyte, Editor of "Electrical Industries," is the author of a recently published novel, "The Correct Thing." As a reviewer in *The Times* remarked, "there is real fibre and thought in the book and a good deal of literary power." The dialogues of the characters, to which the author has evidently devoted much care, show unusual discernment and insight, and they add not a little to the interest of the story. An earlier novel by Mr. Whyte, "The Comedy of Ambition," was highly commended by some eminent critics, and won the praise of many whose literary tastes are not easily satisfied.

Mr. F. Schofield, general manager, Leyton Council Tramways, has lately been a victim of a false statement that he is a German. Councillor F. M. Read, chairman of the Tramways Committee, writing to the local newspapers, says:—"The sole basis of this wicked lie is that the manager's name is Schofield, which is as good an English name as any in the country. For hundreds of years Englishmen of the name of Schofield have lived in Lancashire and Yorkshire. Mr. Schofield was born in the latter county, and resided there until he came to Leyton about eleven years ago. His two sons are officers in the British Army."

Mr. W. Gordon Davies, traffic manager of the Chatham and District Light Railways Company, has died.

The late Sir George Franklin, of Sheffield, besides being on the board of many telephone companies, was a director of the Lanarkshire Tramways Company and the British Thomson-Houston Company.

Mr. W. Barfoot, J.P., of Leicester, who died at Bournemouth on October 17, at the age of 89, was one of the chief promoters of the old horse tramways companies in Leicester and Derby, which were purchased by the respective Corporations on the expiration of the original concession under the Tramways Act of 1870.

Sir Joseph Beecham, Bart., who died suddenly on October 23, was an alderman of St. Helens Corporation, chairman of their Electricity and Tramways Committees, and a director of the Lancashire Light Railways, Lancashire United Tramways, South Lancashire Tramways, and West Cumberland Electric Tramways Companies.

WITH THE FORCES.

Captain V. Smith, borough surveyor of Chesterfield, who is serving in the A.S.C., has been gazetted major.

Corporal J. Richardson, of the York Tramways Electricity undertaking, has been congratulated by the Corporation on receiving the award of the Military Medal.

Lieutenant W. H. Kember, South Lancashire Regiment, of Bolton, who is reported wounded, was formerly engaged at the British Westinghouse Works, Manchester.

Second Lieutenant A. R. Courtenay, until recently acting manager of the publicity department of the General Electric Company, Limited, has been promoted to lieutenant. After nine months' service in Egypt and Salonika he was invalided home with dysentery, but has now recovered.

Oldham Employees' War Distinctions.—Sergt.-Instructor Hope Travis, an enlisted employee of Oldham Corporation Tramways, has gained the Distinguished Conduct Medal, and Company-Sergt. Major J. Holmes, another former employee, has been recommended for the same distinction.

Lieutenant R. G. Collinson, assistant borough engineer, Swansea, has been appointed to fill the post of borough engineer, rendered vacant by the retirement of Mr. R. H. Wyrell at a salary of £800. The Corporation have applied for his release from the army, which he entered as a sapper in the Royal Engineers in 1914, and was subsequently given a commission.

Private R. Gardener, a former employee of the Bristol Tramways and Carriage Company, has been awarded the Military Medal for "bravery and untiring energy while carrying out his duties as battalion runner during the attack and after the capture of the German trenches at the —— Redoubt on August 22-23, 1916." He took several messages under heavy shell fire.

Mr. W. E. Riche, secretary of the Roads Improvement Association, has joined the Artists' O.T.C., and the Council of the Association have appointed Mr. J. D. Haworth, of the firm of Messrs. Tulloch and Haworth, consulting and civil engineers, 28, Victoria Street, as acting secretary during Mr. Riche's absence. Communications to the R.I.A. should be addressed to 15, Dartmouth Street, S.W.

Captain Leo Myers, a director of the Auckland Electric Tramways, joined the army as a private in the early days of the war. At a meeting of the Auckland Electric Tramways recently the chairman said that Mr. Myers had worked his way up to commission rank, and he was sure that the shareholders would join the board in congratulating him on his appointment to a position on the Home Staff.

Second Lieutenant T. Higgins, R.E., engineering assistant in the borough surveyor's and tramway engineer's office, Leicester, has been awarded the Military Cross for the following action, as described in the *Gazette*:— "He persisted in the consolidation of the captured trenches under intense shell fire. Later he volunteered to assist the infantry by carrying up material, and made several journeys through a heavy barrage."

Captain S. W. Carty, formerly of the electrical department of Liverpool Corporation Tramways, is one of the officers mentioned as deserving of special notice and commendation by General Reginald Wingate, Sirdar and Governor-General of the Soudan, for their services in the operations in Darfur. Captain Carty had charge of the motor transport supply column, A.S.C., and for his successful carrying out of a very difficult task he was promoted to captain.

Private W. Lorimer, on October 21 arrived in Glasgow, after having spent two years as a prisoner of war in Germany, having made an adventurous escape. When war broke out he was a conductor in the employment of Glasgow Corporation. He was called up on August 5, 1914, landed in France eight days later, and was taken prisoner, along with 450 others, on August 27. He states that but for supplies from home they would have been starved to death.

Lieut. C. Basil Harness.—Many of our readers will be interested to hear that Mr. Albert Harness, of the India-rubber Products Company, Limited, of Liverpool, has received news that his brother, Lieutenant C. Basil Harness, of the Middlesex Regiment, now attached to the King's Royal Rifle Corps, who was in Egypt for some considerable time, has now been transferred to the Salonica forces. Before joining his original battalion he was associated with the Goodrich Tyre Company, and was the managing director of the South African branch of the Prowodnick Company of Riga.

Sergeant D. S. Greenhill, late of the Rugby staff of the British Thomson-Houston Company, has died of wounds received in action.

Second Lieutenant A. F. E. Prescott, Liverpool Regiment, who has been killed, was formerly on the staff of Liverpool Corporation electricity department.

Corporal L. Davies, who has been killed at the front while at work with the Royal Engineers, was formerly on the laboratory staff of the British Thomson-Houston Company.

Second Lieutenant J. R. Moore, Connaught Rangers, who was killed in action on September 9, was in the employ of the British Westinghouse Company at Trafford Park at the outbreak of the war.

Sergeant H. W. Atkinson, Duke of Wellington's West Riding Regiment, who has been killed in action, was a traveller for the United Electric Car Company. At the time of his enlistment he was 43 years of age.

Captain Hugh McKean, Manchester Regiment, of Norwood Hill House, Surrey, late general manager of the Ceara Tramway Light and Power Company, Foetaleze, Brazil, who was killed in action on July 7, left estate valued at £36,344.

Captain J. H. Llewellyn, who represented the Stern Sonneborn Oil Company at Hereford and in the West of England, has died. On the outbreak of war he enlisted in the Yeomanry, and was soon transferred to commissioned rank in the King's Shropshire L.I.

RAILWAY OFFICERS AND STAFF.

Sir W. Guy Granet, general manager of the Midland Railway, has been appointed deputy director-general of military railways in the War Office.

Mentioned in Despatches.—The following officers of the Soudan Government Railways are mentioned in the Governor-General's despatches on the suppression of the rising in Darfur last year:—Mr. C. J. H. Hunter, district traffic manager; Hon. H. G. G. Pelham, assistant traffic manager; Mr. F. G. A. Pinckney, district engineer; Mr. G. R. Storrar, district engineer.

Colonel Sir Eric Geddes, of the Railway Staff Corps, Royal Engineers (T.F.), was on October 26 gazetted temporary major-general. This former deputy general manager of the North Eastern Railway last year became deputy director-general of the Ministry of Munitions, and on Mr. Lloyd George leaving that department he took Sir Eric with him to the War Office to make a report generally on transport service. Subsequently Sir Eric was appointed director-general of military railways in the War Office, and it has since been announced that the Commander-in-Chief of the British Army in France has appointed him inspector-general of transportation with that force. Major-general Geddes will hold both appointments.

Digitized by Google

TRAMWAY AND LIGHT RAILWAY NOTES.

BIRMINGHAM.

CURTAILED SERVICES DUE TO A POWER STATION BREAKDOWN.

In consequence of a breakdown at Nechells power station, the Birmingham tramway services were curtailed for nearly three weeks from October 10. The normal services were run until 7.30 a.m., but from that period until 9.30 a.m., and again between 5 and 6.30 p.m., there were restricted services. Many passengers resorted to the railways. In a report presented to the City Council on October 17 the Electricity Committee stated that the interruptions of the supply during the past 18 months were due to the strain imposed by munition establishments. The boilers were designed for a low grade of fuel; the heavy load could only be met by forcing them and by the employment of higher grade fuel. Councillor Harrison Barrow, chairman of the Tramways Committee, criticised the Electricity Committee, and said that if the 1913 scheme had been carried out the difficulties would not have arisen. In three days alone the tramways lost nearly £2,000. On October 12, 1915, the service, he said, was shut down for an hour, the difficulty being caused through a shortage of coal, which could not be got at because it was on the other side of the canal. He had men sent from the Tramways Department to move the coal. On September 26, 1916, having been told the previous day that unless men were sent the Electric Supply Department would have to shut off part of the tramways load, 30 men were sent, and were told they were not wanted. Later, the manager was informed that unless 40 men were sent immediately the tramway supply would cease. As temporary remedies he now suggested that some manufacturers should be asked to revert to summer time and arrange the dinner interval an hour earlier; other factories might be induced to work at night. The reply of Alderman Jephcott, chairman of the Electricity Committee, was to the effect that there was an arrangement between each committee as to the emergency gang.

BLACKPOOL.

A JACK FOR EVERY CAR—RUNNING POWERS TO A COMPANY—NOTABLE PROMENADE TRAMWAY SCHEME.

The Tramways Committee have given an order to the Equipment and Engineering Company, Limited, for a large number of jacks, with the intention of providing a jack for every car. When the lease of the tramway between the Grand Hotel and Squire's Gate to the Blackpool, St. Anne's and Lytham Tramways Company expires in July next, the Tramways Committee propose to take over the section. The company have made an offer for running powers on this line, and also from the Central Station to the Grand Hotel. A sub-committee of the Corporation have recommended that a Bill be promoted at an early date for the construction of a new promenade, a mile and a quarter in length, linking up the South Shore parade with the St. Anne's boundary. The plans include the provision of a 40-ft. carriage drive, a 20-ft. tramway track, an island footpath 10 ft. wide, a grass plot 25 ft. wide, and a 40-ft. wide promenade on the seaward side, with a 10-ft. footpath on the easterly side.

BRADFORD.

INCREASED CHARGES FOR PARCELS—POWER TO CURTAIL SERVICES.

Bradford Tramways Committee have increased the charges for ordinary parcels, and for all contract parcels (other than those carried for Corporation departments) by 25 per cent. Subject to the consent of the Corporation, the Tramways Committee have empowered the general manager to curtail the services as he may think fit, owing to the restricted lighting and the shortage of labour in the department.

DONCASTER.

NEW BY-LAW REGARDING PAYMENT OF FARES.

Doncaster Corporation have adopted the following by-law suggested by the Tramways Committee in place of the existing by-law No. 9, namely:—"Each passenger shall, either on demand or before leaving the car (whichever first happens), pay to the conductor or other duly authorised officer of the Corporation, the fare for his journey, and shall obtain a ticket therefor. Any person leaving a car shall be deemed to have completed his journey." Application has been made to the Board of Trade to approve the same and repeal the existing by-law.

GLASGOW.

MOTORISTS AND TRAMWAY PASSENGERS.

A fine of £10, with the alternative of 21 days' imprisonment, was imposed at Glasgow Sheriff Court on a motor-car driver, 17 years of age, who was charged with running down a young woman with a motor car on Sunday, May 21, in Church Street, Shettleston. The complainer had alighted from a car and proceeded round the back of it to cross the street. The motor car ran her down and she sustained severe injuries. The Sheriff said it was a very serious case, as the youth deliberately broke the by-laws by driving among passengers alighting from a car.

HULL.

NO APPLICATIONS FOR EXEMPTIONS OF EMPLOYEES.

Following the arrest of two motormen on a charge of being absentees from military service, the tramway employees appointed a deputation to the Tramways Committee with the object of ascertaining the position of the men of military age. The committee passed a resolution to the effect that they could not recommend any alteration in the policy hitherto proposed, namely, that no appeals be made in respect of any employee. The Bench have since handed the two men over to an escort, but did not impose a fine.

LEEDS.

DEVELOPMENT OF MINERAL TRAFFIC—REWARD TO A MOTORMAN—TRAINING OF MOTORMEN.

The transport of fireclay and coal from the Leeds Fireclay Company's mines at Harehills to the works at Wortley and Elland Road—a distance of five miles—has proved so satisfactory during the past twelve months that a proposal has been made for the conveyance of material from the Cardigan pit of the same company. A sub-committee of the Tramways Committee has been authorised to arrange with the company for the construction of a light railway from Cardigan pit to Wortley. On the recommendation of the general manager, Leeds Tramways Committee have awarded the sum of £5 to motorman S. Clayton for holding up with his car another car that had run backwards on Beeston Hill. On account of the shortage of men the tramways department have modified the rule that no man can become a driver unless he has served as a conductor. The course of instruction has, however, been made more thorough in order to atone for the shortened period of tuition. Both before and since the war motormen have been examined once a year in order to see if they retain all the knowledge imparted. These tests include the steps to be taken in various emergencies, such as a car running backward on a gradient owing to a sudden failure of electrical energy.

LIVERPOOL.

SUGGESTED INCREASE OF FARES—TOP DECK FARES—SOLDIERS' PASSES.

Sir Charles Petrie, a former chairman of the Tramways Committee, in reviewing the work of the Finance Committee during the municipal year, said he feared that the war grants and bonuses would more than absorb any saving effected in response to the request of the Government. He urged the several committees to continue to curtail or defer expenditure. To the Tramways Committee he suggested the advisability of re-arranging the penny stages. Many overlapping stages might be done away with. When everything had gone up in price people could not expect three-mile journeys for a penny. If in this way the committee could contribute £50,000 to the Corporation it would be acceptable. In acknowledging a vote of thanks accorded to him during the past year, Councillor Russell Taylor, chairman of the Tramways Committee, asked the public to continue to endure the inconveniences imposed by the war. He also requested passengers to assist the women conductors by paying fares before going to the top deck. Denying at the October meeting of the Corporation an assertion that wounded soldiers were not allowed free travel in the first-class cars, Councillor Taylor said that if they were allowed to travel without a ticket the system of checking would be upset. Up to the end of September 8,546,000 passes had been issued to wounded and unwounded soldiers and sailors, 240,000 to officers, and 153,000 to nurses. The carrying of soldiers, even at the penny fare, represented about £40,000. The time was approaching, owing to the restricted service, when they would have to reduce the number of passes during the crush hours. In the previous week they granted 75,000 passes. In only two towns did the naval or military uniform now entitle the wearer to a free ride. A vigilant outlook had to be kept for cases of fraud.

LONDON.

THE LONDON UNITED TRACKS—TAKING UP RAILS TO USE ELSEWHERE—THE MUNITIONS ACT—THE WAR AND L.C.C. DEVELOPMENTS—LINKING-UP OF POWER STATIONS—HALFPENNY FARES.

As the result of an interview with the managing director of the London United Tramways Company, the Ealing Council have decided that the Company should not be pressed in regard to reconstruction of track immediately upon the termination of the war. Meanwhile the company are to improve the condition of the track in Ealing. One or two councils do not seem to realise how the war has curtailed the supply of materials and labour. Brentford, for instance, have repeated their complaints to the Board of Trade regarding the alleged danger of the track. A member of this Council suggested that the omnibus company should be asked to extend their services, forgetting the shortage of petrol and that there are no vehicles available. The Traffic Group would also be justified in objecting to run the vehicles on roads that have deteriorated from the same causes that beset tramway authorities with difficulties all over the kingdom. To a complaint of the noise caused by cars turning a corner at Surbiton, the company replied that attention was being given to watering the rails, whereupon the local Council sent a reply that the noise was due to worn-out rails, and asked for repairs and renewals at the earliest possible date. Local authorities should be better able to appreciate the position when they learn that in consequence of the high price of rails the company are taking up the rails of the at present unused line in Lower Boston Road, Hanwell. The District Council have agreed not to consider this action as an abandonment of the line. The Ministry of Munitions

Digitized by Google

having certified that the London County Council tramway facilities are of importance for the carrying on of munition work, the undertaking has become subject to Part I. of the Munitions of War Act. In the course of his annual review of the year, the chairman of the County Council said the energies of the Highways Committee and the tramway staff had been devoted to the task of providing sufficient and efficient means of transit for the thousands of munition workers. Owing to the war much work for development and linking-up would have to wait still longer for its accomplishment. Poplar Electricity Committee are negotiating with the County Council in order to link up the borough council's generating station with the power-station of the tramways. Poplar's electrical engineer states that this plan would be advantageous to both undertakings, as their peak loads occur at different hours. A conference of Metropolitan Councils has been arranged for consideration of the question of linking-up in the Greater London area. On account of the improved financial result of their tramways for the past year, Ilford Council decided not to abolish halfpenny fares. After considering a report by their manager on the attitude of the London County Council on the question, East Ham Council have deferred consideration of a similar proposal. This action may weaken the scheme for halfpenny fare abolition and the institution of a universal penny fare in each of the East London tramway areas.

NEWCASTLE-ON-TYNE.

ASSESSMENT OF THE TRAMWAYS.

The Tramways Committee have withdrawn their appeal against the assessment of the tramways, the Assessment Committee having agreed upon the figure of £40,606, instead of £50,000. The former amount is that for which the Tramways Committee had contended.

OLDHAM.

ROUTE NUMBERS—CARS SOLD TO ROTHERHAM.

Complaints having been made that it is impossible to tell from the indicators the destination of the Oldham cars, the number system is being adopted. Mr. Percy Priestly, the manager, had prepared a number of boxes in anticipation of the change being agreed upon. Rotherham Council have asked the Board of Trade to sanction the purchase of 12 tramcars from Oldham.

PLYMOUTH.

THROUGH RUNNING AND UNIVERSAL PENNY FARE.

The inauguration of the linking-up of the late Devonport Tramways Company's lines with those of Plymouth Corporation and the universal penny fare on all sections took place on October 23. Before that event the Mayor and Corporation made a tour of the tramways, after which Alderman W. Blackall, deputy mayor, expressed satisfaction at the inauguration of the dual innovation, which would, he said, be of especial benefit to the dockyard men, who lived at one end of the town and worked at the other end. The Mayor (Alderman T. Baker) said it was not yet possible to link up with the company which served Stonehouse and Devonport, but the lease expired in 1922, and he hoped an arrangement would be made long before then. Councillor J. P. Goldsmith, the mayor-designate, observed that the facilities would lead to the solution of the housing congestion by opening up four outlying districts. An indication of the outlook was given by Alderman S. H. Phillips, chairman of the Tramways Committee. Hitherto in both areas from 80 to 90 per cent. of the fares were for a penny, and the chairman looks to the increased traffic to make good the balance. Since taking over the Devonport tramways some of the fares have been reduced and the distances extended. For the year ended December 31, 1914, the company carried 6,694,154 passengers, and the receipts were £33,039. The Corporation figures on the same section for the year ended October 1, 1916, were 8,932,288 passengers and £39,430 receipts. For the nine months to October 1, 1916, the receipts were £30,500, as against £28,850 earned by the company for the nine months, to October 1, 1915. By May or June next the department hope to obtain delivery of eight new cars.

PORTSMOUTH.

VOLUNTEER MOTORMEN'S SUCCESSFUL WORK—GOOD SERVICE AND CONDUCT BONUSES.

In his fourteenth annual report, Mr. W. R. Spaven, general manager of the Corporation tramways, thanks the gentlemen who came forward to be trained as motormen, thus enabling the afternoon and evening services to be restored in March, 1916, to their original frequency. Mr. Spaven reports that the Tramways Committee decided on July 20, 1915, in consideration of the difficult conditions under which the ordinary staff are working, to increase the bonus paid to motormen and conductors whose conduct has been satisfactory and free from blameable accidents from 10s. a man each half year to 30s. a quarter; the women conductors to receive a bonus of 10s. each half year for general good conduct and freedom from reports. The number who have received the bonus is very satisfactory.

SALFORD.

MANCHESTER-BURY THROUGH RUNNING—LOST PROPERTY REGULATIONS.

In reply to Whitefield Council, the Salford Tramways Committee have stated that they cannot consider the question of a through service between Manchester and Bury until the conclusion of the war. Whitefield Council have replied: "That as the matter is one capable of arrangement with the Bury Tramways Committee, the Salford Corporation be informed that this Council do not consider that such through service would necessitate any increase in the number of drivers." Salford Tramways Committee have adopted regulations for dealing with lost property. All property that is not immediately claimed will be handed to the police, who will return it to the owners on payment of reward to the finder at the following rates:—Value under 5s., 6d.; 5s. and under 10s., 9d.; 10s. and under 20s., 1s.; 20s. and not exceeding £5, 2s. 6d. in the £; £5 and not exceeding £10, 3s. in the £; over £10, by special arrangement. If the property is unclaimed and afterwards sold, the finder will receive a percentage according to scale.

SHEFFIELD.

NEW CARS TO BE TENDERED FOR—JOINT WELDING FOR WORN-OUT RAILS—MATERIAL FOR UNIFORMS—PASSENGER SHELTERS—EMPLOYMENT OF DISABLED MEN.

Sheffield Tramways Committee are seeking the sanction of the Treasury to expend £35,000 for the purchase of 25 new tramcars, for which it is proposed to invite tenders at an early date. Mr. W. J. Hadfield, the city engineer and permanent way engineer to the tramways department, in his annual report, states that the number of welded joints on March 25 was 6,876, of which 3,762 were electrically welded. "This work," the report states, "has been a great help in dealing with old tracks that could not be renewed. Usually the joints wear out first, and the welding process has provided a practical method of lengthening the life of the track, which otherwise must have been relaid." The material used by a local firm which supplies the uniforms of the Sheffield women car conductors is khaki serge dyed navy blue indigo. The contractor states that there is nothing stronger, which accounts for the uniforms keeping their shape, although a good deal depends upon the way the wearer treats her clothes. The Tramways Committee have asked the city architect and the general manager to prepare plans and estimates for passenger shelters at Firth Park and Lodge Moor termini. A conference of chairmen of committees of Sheffield Corporation and their officials has drawn certain recommendations as to the terms on which to re-engage employees disabled in the war. Before adopting the draft it was decided to consult representatives of the Municipal Officers' Guild, Union of Tramway Workers, etc.

SOUTHEND.

LIGHTING RESTRICTIONS AND CORRUGATION REMOVAL—CAR MAINTENANCE DIFFICULTIES.

In order to cope with the development of corrugation, the tramways engineer has been authorised to make arrangements for the use of a machine during the slack period of the day, as the lighting restrictions prevent it being operated at night. Mr. R. Birkett, tramways manager and electrical engineer, has reported upon the difficulties experienced in maintaining the cars owing to the restrictions placed on manufacturers engaged on war work. In the event of alterations that have been made to the trucks of certain cars not proving satisfactory, prices will be obtained for three new trucks, to be delivered next spring.

SWANSEA.

NEW LEASES FOR THE TRAMWAYS COMPANY—MUNICIPAL SUPPLY OF ELECTRIC ENERGY.

Swansea Corporation have adopted a report presented by the Tramways Committee advising the granting of new leases to the Improvements and Tramways Company of (a) the tramways included in the tramway lease dated October 23, 1906; (b) the light railways and electrical equipment included in the light railway lease of October 23, 1906; and (c) the tramways recently constructed under the Swansea Corporation Act, 1912. The existing tramway and light railway leases are to be surrendered. On and after November 4 the Corporation are supplying the Tramways Company with electric energy for all their lines. Some months ago the company disposed of their generating station to the municipality, and considerable extensions of plant have been installed by the Town Council.

FOR HIGH-CLASS
CONDENSING PLANT
WRITE TO
THE MIRRLEES WATSON CO., LTD.,
SCOTLAND STREET, GLASGOW.

Digitized by Google

PATENT LIST.

Abstracted for "The Tramway and Railway World" from the Official Journal of Patents.

*** If the inventions have been communicated the names of the communicators are given below in italics.

APPLICATIONS FOR LETTERS PATENT.

Fuel supply for motor vehicles (13,864)—T. A. Barton.
Tie-rod and steering arms for motor vehicles (13,570)—G. C. Hayes and C. C. D. Steele.
Solid rubber tires (13,807)—W. and A. Bates and J. Healey.
Driving mechanism for motor vehicles (13,595)—C. H. Blomstrom.
Electric train lighting systems (13,942)—H. Leitner.
Transmission gear for motor vehicles (13,804)—C. F. Oliver.
Trolley pole attachment for preventing flash at breaking points (13,768)—G. T. Theobald.
Mechanically propelled vehicles (13,552)—W. W. Woolidge.
Lubricating wheels and axles of railway vehicles (14,145)—J. Abbott.
Rail fasteners (14,152)—G. C. Amundson.
Train controlling apparatus (14,108)—A. F. Bound and W. Rowland.
Band brake for steam motor vehicles (14,053)—R. Bradbury and F. C. Saunders.
Motor vehicles (14,196)—W. E. & C. H. Crawley, and M. E. Starkey.
Repairing electric power transmission lines (14,068)—J. E. Husebye.
Heavy fuel carburetters for internal combustion engines (14,173)—London General Omnibus Company and C. J. Murfitt.
Life-guards attached to fore part of power-driven vehicles (14,043)—E. W. Mannion.
Closed bodies for motor vehicles (14,015)—L. W. Pratt.
Window fittings for motor vehicles (14,016)—L. W. Pratt.
Electrically propelled vehicles (14,169)—F. W. A. Radford.
Rail joints (14,431)—A. A. Goss.
Motor vehicles (14,448)—M. Goudard and M. Mennesson.
Rail dressing machines (14,581)—W. E. Hanshue.
Clutch and gearing for motor cars (14,493)—L. T. Jones.
Route indicator for tramcars (14,425)—W. H. Lancaster.
Inflating pneumatic tires of power-driven road vehicles (14,639)—G. Lister.
Motor-driven vehicles (14,398)—A. E. Munby, J. Williamson, and the Portland Engineering and Traction Company.
Means for obscuring the lights of railway signals, trains, and vehicles (14,434)—H. Rawson.
Reinforced concrete railway sleeper (14,610)—F. L. Rings.
Frames of motor road vehicles (14,630)—F. Sumner-Smith and R. P. Yates.
Motor road vehicles (14,502)—O. Tilley and B. L. Wilson.
Automobile vehicles and tractors (14,885)—H. J. Balcombe and the Daimler Company.
Safety signalling device for motor cars (14,657)—W. W. Castelow.
Built-up metal wheels for motor vehicles (14,969)—W. Challiner.
Train-stopping apparatus (14,835)—J. L. Duggan and J. D. Maynard.
Mudguards for vehicle wheels (14,869)—C. Guise and T. J. Southall.
Stopping-place indicator for tramcars (14,677)—E. Roscoe.
Permanent way chair (14,905)—E. Webb.
Live back axles for motor vehicles (15,224)—Albion Motor Car Company and T. B. Murray.
Speed indicating devices for motor vehicles (15,199)—A. A. Benson and Benson, Flick and Solberg.
Automatic train-stops (15,190)—C. H. Buhl.
Railway sleepers and means for fixing rails thereon (15,143)—L. Pelnard-Considère.
Brake operating levers of motor cars, etc. (15,056)—G. R. Dundas.
Means for propelling road vehicles (15,118)—R. W. Hutton.
Driving gear for motor road vehicles (15,404)—G. F. Joseph, Portholme Aerodrome, Limited, and W. G. Wilson.
Steering gear for motor road vehicles (15,403)—G. F. Joseph, Portholme Aerodrome, Limited, and W. G. Wilson.
Shoe or skate for electric railways (15,334)—H. L. Lambert.
Power-driven road vehicles (15,411)—G. Lister.
Live back axles and gearing for motor vehicles (15,300)—R. R. Mellor and T. M. G. Morton.
Motor road vehicles (15,275)—H. Menche de Loisne.
Locking devices for automobiles (15,142)—I. D. Perry.
Trolley heads for electric tramcars (15,365)—C. Svombo.

SPECIFICATIONS PUBLISHED.

1915.

Electric lighting of vehicles (12,781)—Smith and Robinson.
Anti-slip devices for the wheels of motor vehicles (13,154)—Wilson.
Road vehicles (13,520)—Stell and Stell.
Transmission of power, especially applicable to vehicles (12,949)—Thomas.
Method of securing traction of driving wheels of vehicles (13,289)—Macfarlane, Anderson and Robinson.
Safety railway facing points (14,197)—Woodward.
Brakes for motor vehicles (14,483)—Roe and the R.E.T. construction Company, Limited.
Ventilators for railway carriages (13,860)—Mead, McLean and Company and Mead.

1916.

In the following list the numbers in *italics* are those that the specifications will finally bear and under which they will be indexed and abridged before acceptance and finally printed. The application numbers should, however, still be used for correspondence purposes.

Automobile tires (5,102—*101,317*)—J. C. Anderson.
Means for slidably connecting multi-concentric driving members, with special reference to gear boxes for motor vehicles (8,144—*101,460*)—W. Skaife.
Roller bearings for the axles of railway vehicles (10,255—*101,468*)—J. Heppell and R. G. Dobson.
Railway rail anti-creepers (10,617—*101,469*)—B. B. Betts.
Means for joining railway rails with fish plates and chairs (1,528—*101,494*)—F. W. Ruffell.

Colonial and Foreign Tramways Traffic Returns.

NAME OF COMPANY.		1915. WEEKS ENDED.					1916. WEEKS ENDED.					AGGREGATE.		
		Oct. 2	Oct. 9	Oct. 16	Oct. 23	Oct. 30	Sept. 30	Oct. 7	Oct. 14	Oct. 21	Oct. 28	Wks.	1916.	Increase or Decrease.
		£	£	£	£	£	£	£	£	£	£		£	£
Anglo-Argentine		49 939	53,082	53,405	50,754	...	50,947	54,067	53,349	...	...	43	2,138,409	+ 343
Calcutta	Rs.	63,824	71,039	69,492	66,319	...	74,297	76,405	64,042	65,596	...	43	2,858 015	+129,811
Madras	Rs.	28,304	(2 weeks)	29,529	(2 weeks)	...	31,788	(2 weeks)	32,305	(2 weeks)	...	41	602,091	+ 44,501
Pernambuco	$	2,945	3,035	3,070	3,078	...	3,094	3,369	3,216	3,216	...	42?	127,369	− 2,016

Companies Issuing Monthly Statements.

		1915.						1916.						Wks.	AGGREGATE.	
		May.	June	July.	Aug.	Sept.	Oct.	May.	June.	July.	Aug.	Sept.	Oct.		1916.	+ or −.
		£	£	£	£	£	£	£	£	£	£	£	£		£	£
Ballarat & Bendigo		2,885	2,692	2,677	2,860	...	...	3,955	2,793	2,704	2,791	...	...	20	15,870	+ 836
Brazilian Traction Mtrs		6670110	6591940	6703000	6576000	6494000	...	7091000	6961000	7195000	7184000	6920000	...	39	61,249.000	+ 3,791.890
Brisbane		31,780	29,880	31.150	35,064	30.360	...	33.510	31,390	32,880	37,900	32,530	...	39	297,660	− 22.586
British Columbia	$	512,568	498,093	510,723	507.126	517,022	..	542.353	529,078	538,293	550,293	540,440	...	13	1,629,026	+ 94,155
Buenos Aires Pt. & C.		...	...	...	...	...	...	...	...	...	...	...	...	—	—	—
Buenos Ayres Lacroze		44,480	40.421	41,460	41,468	39,355	43.516	41,503	36,213	38,439	36.431	37,075	39.670	17	151,615	− 13.184
Burma		...	...	...	25,159	22,163	...	...	...	...	24,412	23,749	...	9	48,161	− 839
Cape Town		...	...	...	...	...	...	...	12 920	13 357	13,394	...	...	—	—	—
Carthagena & Herrerias		1,931	2.059	2.157	1,523	1,252	2.169	2.927	3,512	2,371	2.081	1,779	2.539	44	25,139	+ 7,390
Cordoba		14.494	14 059	14,375	14.159	13.210	...	14.868	14 129	14.263	13.852	13.389	...	26	84,554	+ 648
East India		2.119	2 194	2.231	2 266	2,054	2.069	2.161	2.283	2.220	2.522	2,523	2.080	13	7.125	+ 736
Kalgoorlie		3.269	2.707	2 775	3.165	...	...	2.921	2.500	2.521	3,021	...	...	35	20.479	− 1,640
La Plata		4.489	3.875	4.054	4.164	3.894	...	4,343	3,735	3.909	3.792	3.994	...	39	37,622	− 257
Lima		...	...	...	32.004	30,530	...	...	...	...	33,395	33.348	...	39	304,058	+ 15,777
Manaos	Rs.	...	...	...	...	...	...	152.854	144,913	152.380	...	...	...	—	—	—
Manila		...	...	23,750	...	...	...	...	...	33,700	...	...	...	31	887,739	+ 39 986
Melbourne		...	...	...	...	...	...	69,275	...	...	...	...	...	—	—	—
Mexico	$	...	...	...	...	...	...	...	...	...	...	...	...	—	—	—
Monte Video		27,771	24 266	25.161	26.494	25.070	...	28.349	25,300	25,220	26.044	26.711	...	48	319.043	+ 15.626
Peruvian		737,166	759,374	724,838	819,039	755,280	...	826.900	929,500	835.430	895,900	911,910	...	13	2,643,240	+ 344,083
Port Elizabeth		...	...	...	...	...	...	2.809	3.166	2.863	...	...	...	—	—	—
Rangoon		4 887	4,997	4 629	4.510	4,445	4.886	4.589	4,205	4.357	4,253	4.137	5.043	44	46 371	− 1,844
Toronto	$	795.262	787.558	773.013	762.627	804.902	...	903,924	884.491	867.789	889.241	913.535	...	39	8.005,764	+ 855.159
Winnipeg	$	263.302	255.549	248.022	251.189	261.982	...	276.980	254.686	242.688	249.795	267.497	..	39	2.461.454	− 51.995

(Continued on page 364)

Digitized by Google

TRAFFIC RETURNS—*continued.*

Tramways and Omnibus Undertakings in the United Kingdom.

NAME OF COMPANY OR CORPORATION.	1915. WEEKS ENDED.					1916. WEEKS ENDED.					AGGREGATE.		
	Oct. 2	Oct. 9	Oct. 16	Oct. 23	Oct. 30	Sept. 30	Oct. 7	Oct. 14	Oct. 21	Oct. 28	Wks.	1916.	Increase or Decrease.
	£	£	£	£	£	£	£	£	£	£		£	£
Aberdare U.D. Council	356	377	373	339	...	431	443	394	407	...	30	11.876	+ 1.360
Aberdeen Corporation	1,767	1,729	1,673	1 674	...	2.025	1,912	1,880	1,768	...	20	39.517	+ 2.201
Accrington Corporation	584	484	540	545	...	670	554	524	571	...	29	17,173	- 636
Ayr Corporation	363	284	276	254	...	438	331	300	283	...	23	11,626	+ 989
Bath Electric	*	...	...	...	...	...	...	...	...	...			
Birkenhead Corporation	1,366	1,355	1,408	1,282	...	1,671	1,596	1,598	1,585	...	29½	45,760	+ 4.529
Birmingham Corporation	15.213	15,403	15.348	15.185	...	18.118	17.079	14.725	14,766	...	29	480.859	+ 66.610
Birmingham Corp. Motor Omnibuses	829	880	891	786	...	1.078	961	1.058	991	...	29	29.348	- 3.732
Blackburn Corporation	1,245	1 135	1.188	1.173	...	1.385	1.221	1.123	1.157	...	29⅝	38 607	- 1.124
Blackpool and Fleetwood	800	665	496	393	...	2.462	845	566	442	...	42	40.768	+ 4.830
Blackpool Corporation	*	...	...	...	...	...	...	...	...	...			
Bolton Corporation	2,545	2.693	2.698	2.580	...	3.539	2.911	2.853	2 892	...	30	87.146	- 6.110
Bournemouth Corporation	1.981	1.995	1.977	1.723	...	2.337	2.223	2.118	2 032	...	30	73.244	+ 5.231
Bradford Corporation	6 393	6.267	6.616	6.149	...	7.077	6.492	6.928	6.587	...	29	204.579	- 7.275
Brighton Corporation	1.101	1.099	1,067	956	...	1.421	1.228	1.231	1.154	...	29⅝	40.014	+ 4.085
Bristol	9,702	9.096	9.282	9.483	...	10 997	10.570	10.321	10 358	...	42	425.467	+ 21.807
Burnley Corporation	1,592	1.564	1.615	1.553	...	1.766	1.797	1 678	1.707	...	30	52.135	- 2 949
Burton-on-Trent Corporation	286	316	274	263	...	294	321	310	278	...	29	8.219	- 529
Bury Corporation	1.329	1.332	1.313	1.256	...	1.726	1 408	1.410	1.372	...	30⅝	43.738	- 2.102
Cardiff Corporation	2,717	2 667	2 653	2.540	...	3.151	3,157	3.057	2.993	...	29	89.500	- 8.031
Chatham and District	1,241	1,221	1,220	1,147	...	1.381	1 353	1.343	1.316	...	42	52.197	- 2 488
Chesterfield Corporation	268	266	275	266	...	285	301	281	281	...	29	8.351	- 319
Colne Corporation	246	253	258	253	...	278	316	259	262	...			
Cork Electric	503	542	522	500	...	542	540	567	544	...	42	21.635	- 282
Croydon Corporation	*	...	...	...	...	...	...	...	...	...			
Derby Corporation	1.014	1 017	1.052	992	...	1.163	1.190	1.180	1,148	...	29½	34 028	+ 2,398
Dover Corporation	*	...	...	...	...	...	...	...	...	...			
Dublin and Lucan	165	150	149	136	...	189	165	148	143	...	16	2.920	+ 223
Dublin United	6.264	6.077	6.241	6.062	...	6.682	7.058	6.549	6.341	...	42	256.127	- 1.216
Dundee City	1.351	1.449	1.395	1.345	...	1.393	1.438	1.394	1.347	...	22⅝	31.813	- 752
East Ham Corporation	1.299	1 232	1.298	1.277	...	1.392	1 302	1.317	1.288	...	29½	39.146	- 196
Exeter Corporation	367	363	370	347	...	445	431	427	394	...	29	12,147	- 457
Gearless Motor 'Buses	*	...	...	...	...	...	...	...	...	...			
Glasgow Corporation	23.054	22.359	22.551	21.965	...	24.543	24.296	23.899	24.246	...	20⅝	481.573	- 34 098
Glasgow Subway	1,096	1,107	1,064	1.096	...	1.123	1.165	1.169	1.224	...	42	47.958	- 4.224
Glossop (Urban Elec. Supply Co.)	128	136	133	128	...	162	146	146	140	...	43	5.995	- 588
Halifax Corporation	2,287	2,106	2.094	2.132	...	2.341	2.223	2.044	2.098	...	28⅛	67 308	- 926
Halifax Corp. Motor Omnibuses	50	48	49	47	...	52	52	49	51	...	28⅛	1,458	- 52
Hastings and District	1,032	984	956	874	...	1.267	1.076	960	936	...	42	45.286	+ 2.873
Huddersfield Corporation	2.822	2.557	2.526	2.512	...	3.117	2.791	2.789	2,775	...	29	85 008	+ 7.454
Hull Corporation	3.067	3,064	3.078	3 042	...	2.979	3.025	3.269	3.139	...	29	91.645	+ 1.468
Ilford U.D. Council	627	620	608	603	...	689	669	677	642	...	29	20 539	+ 1.085
Ilkeston Corporation	*	...	...	...	...	...	...	...	...	...			
Ipswich Corporation	542	523	518	506	...	557	474	471	435	...	29	16.045	- 849
Isle of Thanet	372	340	330	287	...	436	338	336	292	...	3	966	- 106
Kilmarnock Corporation	163	164	162	166	...	181	180	174	176	...	22⅝	4,076	- 64
Lanarkshire	2,426	2.101	2.152	2.318	...	2.658	2.485	2.416	2,289	...	42	97.467	+ 14 144
Lancashire United	1,788	1.705	1.734	1 718	...	2.170	2.349	1.873	1.850	...	42	77.398	+ 3.815
Leeds City	8.998	8.821	8.817	8,666	...	10.310	9.902	9,909	9.692	...	30	292.481	+ 26,259
Leicester Corporation	*	...	...	...	...	...	...	...	...	...			
Leith Corporation	786	765	776	741	...	909	886	867	858	...	22⅝	20.510	+ 2.466
Leyton U.D. Council	1.606	1.561	1,584	1.512	...	1.889	1.651	1.557	1.537	...	29	49,962	+ 988
Liverpool Corporation	13.492	13.544	13,665	13,248	...	15.080	14,619	14.943	14.477	...	42⅛	595.782	+ 31.129
Llandudno and Colwyn Bay	352	302	276	250	...	461	327	316	284	...	46⅛	17,502	- 1,089
London County Council	46,950	45,729	46.423	45.962	...	51.640	50,215	49,436	48,920	...	28⅛	1,408.250	+ 140 908
London General Omnibus	*	...	...	...	...	...	...	...	...	...			
London United	*	...	...	...	...	...	...	...	...	...			
Lowestoft Corporation	*	...	...	...	...	...	...	...	...	...			
Maidstone Corporation	266	253	226	215	...	248	260	221	216	...	29	6,625	- 172
Manchester Corporation	17.606	18,289	18,281	17,879	...	19,765	19,169	19,216	18,648	...	28	558,205	+ 29.712
Metropolitan Electric Tramways	*	...	...	...	...	...	...	...	...	...			
National Steam Car	*	...	...	...	...	...	...	...	...	...			
Nelson Corporation	201	200	182	179	...	237	201	196	197	...	29½	6,395	+ 494
Newcastle-on-Tyne Corporation	6.542	6.509	6.507	6.364	...	7,117	7,123	7,150	7,017	...	29	196,466	+ 9,625
Newport (Mon.) Corporation	831	814	822	795	...	1,014	1.064	982	950	...	29	28.275	+ 3,012
New St. Helens and District	1,037	961	982	953	...	1,111	1,170	1,075	1.041	...	16	19.258	+ 1,199
Northampton Corporation	707	675	686	659	...	732	732	721	722	...	29	20.963	- 1.229
Nottingham Corporation	3.682	3.725	3.773	3.689	...	4.592	4.064	4.077	4.041	...	29	115.568	- 4.702
Oldham Corporation	2.169	2.373	2.352	2.240	...	2,498	2.303	2,468	2.382	...	30	76,493	+ 4,463
Portsmouth Corporation	2.372	2.398	2.362	2 220	...	2.883	2,746	2.686	2,526	...			
Preston Corporation	962	962	954	956	...	1,156	1.163	1.177	1.184	...	28⅝	32.329	+ 3.903
Provincial	2.172	2.244	2,246	2,105	...	2,591	2,281	2,373	2 251	...	3	6.905	+ 265
Reading Corporation	781	767	768	739	...	924	930	930	891	...	28⅝	25.350	- 1.847
Rhondda Tramways	1.252	1.241	1.271	1,256	...	1,424	1.418	1,383	1.363	...	42	54,162	- 4.636
Rochdale Corporation	1.619	1,714	1,710	1,646	...	1.885	1,809	1.784	1,715	...	29⅛	54.258	- 2,160
Rotherham Corporation	1.179	1.191	1.167	1.176	...	1.625	1 652	1,590	1.618	...	29⅞	46,549	+ 11.721
Salford Corporation	5.104	5,302	5.279	5.048	...	5.800	5,488	5.413	5.421	...	28⅞	164.865	- 8.453
Sheffield Corporation	9.130	9,196	9.331	9,099	...	11.505	10,471	10,709	10,656	...	30⅛	318.979	+ 49.704
Southampton Corporation	1.547	1,556	1.548	1,469	...	1,721	1,820	1,771	1.726	...	28⅞	49,302	+ 4,374
Southend-on-Sea Corporation	809	723	699	670	...	954	929	833	786	...	29	30,233	+ 3,478
South Metropolitan Tramways	*	...	...	...	...	...	...	...	...	...			
South Shields Corporation	791	821	775	764	...	871	861	854	829	...	29⅛	25.043	+ 1.146
Sunderland Corporation	1.470	1,479	1.502	1,426	...	1,603	1.655	1.657	1,630	...	29	48.852	+ 3 681
Sunderland District	595	564	1.034	585	...	698	656	726	726	...	50	31,724	+ 2,178
Swindon Corporation	209	198	196	191	...	220	222	209	205	...	28⅞	6.056	+ 156
Torquay Tramways	573	539	526	506	...	741	624	592	544	...	42	25,830	+ 1.975
Tramways (M.E.T.) Omnibus Co.	*	...	...	...	...	...	...	...	...	...			
Tyneside Tramways and Tramroads	619	593	592	574	...	689	636	640	633	...	16	11.247	+ 836
Wallasey Corporation	1.187	1,213	1.191	1.118	...	1,434	1.299	1,320	1,243	...	29⅛	42.309	+ 2.510
Walsall Corporation	775	802	798	774	...	869	841	842	823	...	43	34,778	+ 3.254
Walthamstow U.D. Council	823	820	805	771	...	1,323	1.071	1,058	1.021	...	29	33.543	+ 5.456
Warrington Corporation	466	464	470	457	...	535	521	514	530	...	29	14.453	+ 1.189
West Ham Corporation	3,081	3,034	3,086	2.964	...	3.666	3.395	3.287	3.271	...	28⅝	95.589	+ 3,799
Wigan Corporation	1,548	1,553	1,597	1,586	...	1,776	1,768	1,719	1,734	...	29	49,217	+ 4,165
Wolverhampton Corporation	*	...	...	...	...	...	...	...	...	...			
Yorkshire (West Riding)	1,579	1.540	1,579	1.436	...	1,915	1.834	1.803	1,757	...	43	75.910	+ 7.604

* TRAFFIC RETURNS SUSPENDED.

Owing to the European war, the Government have taken over the railways of Great Britain as from August 4, 1914, and the issue of traffic returns has been suspended. Consequently the traffic returns of the electric railways which usually appear on this page cannot be given.

The Publication of the Traffic Returns of the Tramways marked with an asterisk in the above table have also been suspended during the war.

TRAMWAY DIRECTORIES.

A useful feature of this issue is the directory of electric railways and electric tramways which will be found among the advertising pages. This directory contains the names of the chief officials and the principal particulars relating to each undertaking.

THE TRAMWAY AND RAILWAY WORLD

can be obtained, post free, at the following rates:

For the United Kingdom—
Twenty-five Shillings per annum (including 64 issues, of which 12 are large illustrated numbers).

For Places Abroad—
Thirty Shillings per annum.

Tel. No.: **2948** Gerrard.
Telegraphic Address: **"Tramigro," London.**

Amberley House, Norfolk St., W.C.

Digitized by Google

DAIMLER
COMMERCIAL VEHICLES

PROFIT

THE possibilities of extra profits become realities when the Daimler gets to work.

A two or three ton Daimler lorry will do the work of six or eight horses, and do it better, cheaper, quicker, and with unfailing regularity.

"The old order changeth"—the days of Higher Efficiency, Better Results, Bigger Profits, are the only days to look forward to.

It is time to investigate Motor Traction NOW. Write for the benefit of our experience and advice.

The Daimler Company Ltd.
COVENTRY

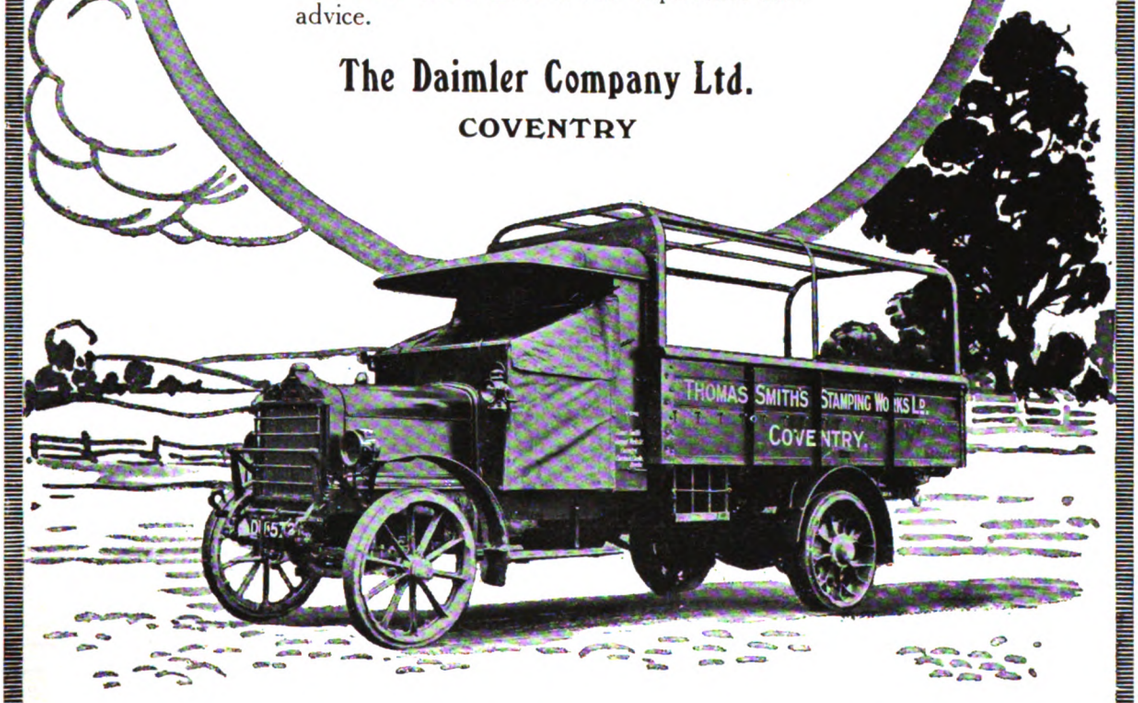

Digitized by Google

BRITISH **NAPIER** BUILT

BUSINESS VEHICLES

Railway Delays!

These are **Acute** now. Be Independent by Purchasing a

3½ TON **NAPIER** BUSINESS VEHICLE.

Full particulars from

WORKS:-
ACTON, LONDON, W.

D·NAPIER & SON, LTD.,
14, NEW BURLINGTON STREET, LONDON, W.

Digitized by Google

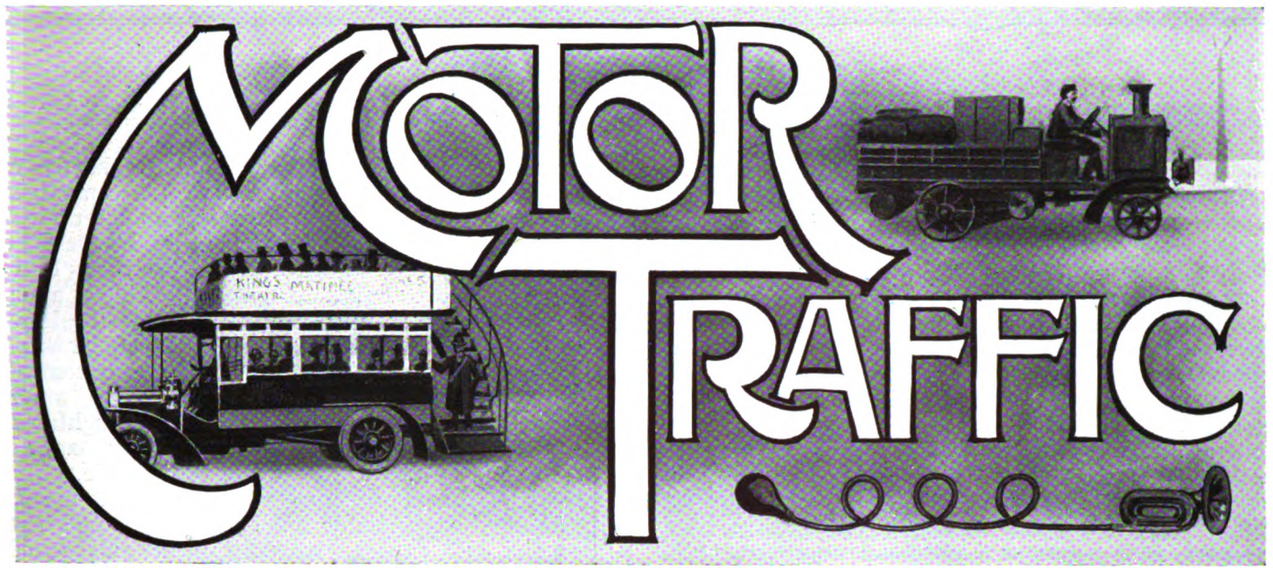

In the process of reconstruction that must inevitably follow after the war has reached an end there is every sign that questions of roads and transport will come in for a very large share of attention. In the first place, the effect upon the roads of the abnormal war traffic, plus the relative neglect in regard to repairs arising from shortage of labour and materials, and to some extent from wrong ideas of economy, will call for very extensive schemes of reinstatement all over the country. Secondly, the question will arise as to whether, in the interests of national development, it may not be necessary to study, from an entirely fresh aspect, such problems as those of rural transport. For instance, there is quite an appreciable body of opinion in favour of the establishment over here of light railways, running alongside the highways, similarly to the "vicinales" of Belgium. Thirdly, the military lessons of this war, whereby the strategic importance of roads has been increased a hundredfold, as compared with pre-motor campaigns, may in itself have no little influence in the future of our highways. We may, in fact, find it advisable to take the soldier into our counsels when laying down programmes of road construction in the times to come. For various reasons therefore the whole broad issue of roads and locomotion is, or will be, more or less in the melting-pot. It is to be hoped that the opportunity thus afforded to consider all the various factors afresh will be well and wisely used. There is no longer any excuse for prejudice in these matters—especially anti-motor prejudice. Our roads for the future must be essentially *motor roads*, designed and constructed to meet the needs of motor traffic, and with an eye to the possible use of a part of such roads for tramways or light railways. That being done, the problem of heavy upkeep expenditure alleged to be due to such motor traffic hitherto will automatically disappear, and there will not be even a colourable case for that additional taxation of motor vehicles which was being pretty extensively advocated just before the outbreak of the war. The expenditure thus incurred can only be regarded as part of the cost of national recuperation after the war, serving, as it will do, the purposes and interests of the whole nation, and not merely that of people concerned with the operation of motor traffic.

* * * * * *

Everything, indeed, must be done to make transit of all kinds cheaper than it has ever been; and as mechanical transport is destined in the future to play a more and more important part, the question of freeing it entirely from all taxation might well be considered. Economically, the motor spirit duties have always been unsound, because they tended to raise artificially the cost of what has become in present day conditions a prime necessity of life—that of transit. With the necessity of cheapness and efficiency in mind, and especially in view of the peculiar demands of rural transport, the claims of the light railway in connection with mechanical road vehicles will need the very closest and most careful examination. Against the former is the fact that the outstanding need in the transport of agricultural produce is that it shall go through without intermediate handling from its place of origin to destination. The railway, whether light or otherwise, usually fails to meet this need, and that is why farmers and market gardeners within a hundred miles of London are sending more and more of their goods by motor. It is urged that this heavy goods and industrial traffic is too much for the roads. No doubt it is, but, as already pointed out, we shall have in the future—let us hope it will prove to be a near future—an excellent opportunity of rebuilding our highways so that they may withstand more satisfactorily the traction of heavy motor vehicles. Even when this has been done it is not difficult to see that where traffic is heavy and continuous, motor vehicles may require to be supplemented by light railways; for it must not be forgotten that no method of traffic cheaper than a metal wheel on a metal rail has yet been discovered. As to how far the military factor is destined to enter into future road plans, it is perhaps somewhat early to speculate, and therefore little more can profitably be said on this aspect of the roads problem. But that this new factor cannot be entirely ignored in future, even in Great Britain, is quite certain, whilst on the Continent its importance may be very pronounced. To some extent, however, it would appear that military and civilian needs in regard to road facilities are much the same. Both require that highways should be well constructed, straight and wide; that they should be sufficiently numerous to distribute traffic over a wide area, and not cause it to converge over much and create congested centres. In other words, there is a military as well as a civilian traffic reason for bye-pass roads.

From roads to municipal motors is not a violent transition. For more reasons than one the development of motor transport for public services has received truly remarkable impetus since the end of 1914. In

Digitized by Google

MOTOR TRAFFIC.

many cases, it is true, owing to the wholesale manner in which horses were commandeered at the commencement of hostilities, municipal officials—however conservative they had been before—found motors thrust upon them, so to speak. With others the acquisition of motor vehicles was in large degree a measure of self defence against the demands of contractors. In other cases, let it be said, the war gave officials the opportunity to carry out ideas which they had previously in mind but which the conservatism and the mistaken notions of economy of their councils had hindered them from carrying out. The general result has been that those places and departments that had stood out against mechanical transport were compelled to give way, and fleets already existing have been increased, with consequent all-round improvement in efficiency of services, and appreciable saving of money.

* * * * * *

Good as are the results that have been achieved, however, it is becoming increasingly clear to everyone concerned—engineers, officials, and motor manufacturers alike—that they do not represent the best possible. The average municipal vehicle spends too much of its time standing idle, this being due to the fact of its being adapted as a rule for one particular purpose only in which full employment cannot be found for it. Accordingly a demand is arising—and manufacturers are endeavouring to meet it—for a municipal lorry for general purposes. There is no reason why one and the same chassis should not serve, by means of interchangeable bodies, as a dust van, as a watering vehicle, and as an ordinary goods carrying lorry. The adoption of such a type would materially reduce the cost of municipal services in many places, while standardisation would keep the price of such vehicles down to the lowest possible minimum, affecting thus a double economy. As a practical proposal, standardisation should be easier to achieve in public service vehicles than with trade vans, because the essential purpose never varies, and the loads to be carried and the work to be done are generally speaking always the same. Nevertheless, borough and county engineers have in the past often needlessly added to the cost of the vehicles they acquired by insisting on totally superfluous modifications from the makers' own designs. With closer study of the municipal vehicle problem, and with greater experience in the use of motor transport, however, this tendency has become much less pronounced, and it is now generally realised that the ideal for municipal work is the general utility vehicle, built on a highly standardised model, and giving for this reason the utmost in the way of service for the smallest expenditure.

In consequence of drivers of other vehicles having driven through passengers leaving and entering tramcars a suggestion has been made that the Newcastle Corporation should obtain sanction to a by-law prohibiting the practice. Such a regulation exists and is enforced in the city of Glasgow. There was a likelihood of a demand for a similar regulation arising in London at the time when the competition between omnibuses and tramcars led the drivers of the former to blanket the cars at the stopping-places. Thanks to the present management that procedure has been dropped, and the regular stopping points are for the most part separated. Wherever it is possible the omnibuses draw up under a lamp, a procedure that fits in at night with the company's safety first campaign. If there is a considerable crowd waiting to enter a car the omnibus driver will sometimes stop his vehicle, particularly during darkness, but car passengers have now become used to lining up against the side of a car when an omnibus horn is sounded. While the legal consequences of an accident or a fatality under such circumstances might be serious, yet if the oncoming vehicles were always compelled to pull up much obstruction would be created in busy thoroughfares, for it is seldom that the traffic is sufficiently slack to enable drivers to pass a tramcar on the off side. The flexibility of the motor omnibus enables that course to be adopted occasionally, but at night it is one that is attended with danger, especially during this period of restricted lighting. Viewed from this aspect the risk attendant on attempts to pass on the off side has been increased by the fact of the military authorities having forced tramway undertakings to cease the use of the familiar light on the centre of the dashboard, substituting a small lamp higher up on each side. On consideration of every aspect of the case it must be admitted that omnibus drivers in London now show greater consideration for other users of the road; their task will be rendered easier as progress is made by the "General" Company in educating the public to adopt habits of safety. One of the company's recent advertisements in that connection renders a service to tramway as well as omnibus operators. It is in the series "Behind the Scenes on the L.G.O.C.," and gives an explanation of how the vehicles are run to time. Passengers are reminded that they can assist in securing that result, and also help to ensure the convenience of the public by "boarding and alighting at recognised stopping-places whenever practicable; alighting when the omnibus halts near their destination, instead of stopping it again almost as soon as it has re-started; allowing alighting passengers to get off first; and the observance of other little matters of a like nature."

PROGRESS OF THE BATTERY VEHICLE.

According to statistics in the *Electric Vehicle*, published by the Electric Vehicle Committee, there were in August last in use, or on order, in this country 778 battery propelled vehicles, as compared with 150 in 1914. Among the largest users are the Midland Railway, 76; other railway companies, 39; Harrod's Stores, 64; Hertford Street Motor Company (London), 120; tramway authorities, 22; private cars, 57; municipal authorities, 36; electricity undertakings, 42; munition works, 23. A two-column article deals with a report prepared by Mr. Pearce, Manchester City electrical engineer, of an eight weeks' trial of a 1-ton Edison lorry. Mr. Pearce was sceptical as to the possibility of the electric lorry being able to compete with the existing contract carting arrangements based on a payment of 1s. 6d. per van per hour, and also as to the claims made for the former. The report shows that the cost of running of the lorry comes to about 2s. 1½d. per hour, including depreciation, interest, insurance, and the usual working expenses. Energy consumed worked out at approximately one unit per mile, the cost being ½d. per unit. The electric vehicle is shown to be worth 2½ horse vans. The horse van costs 9d. per mile traversed, with no known allowance for depreciation or renewal, while the lorry cost only 7·05d. per hour, running 188·1 miles a week average and showing a weekly ton-mile total of 81·95. This running cost per mile allowed for complete renewals of the battery at the end of ten years. Mr. J. R. Mead, Ipswich borough surveyor, contributes an article on a year's experience of an electric 3-ton tipping wagon supplied by the General Vehicle Company. Mr. Mead's only criticism is of the slowness of the hand-tipping gear, and he suggests that power-operated gear should be fitted.

Digitized by Google

MOTOR TRAFFIC.

STRAKER MACHINES FOR THE RUSSIAN GOVERNMENT.

The group of Straker-Squire 40-H.P. lorries, shown in the accompanying illustration, is part of a large order from the Russian Government, the delivery of which has now been completed. The chassis of these machines is the Straker-Squire standard "CO_4" type and is constructed to carry a nett load of 4 tons, excluding the weight of the body. The principal dimensions of the chassis are as follow :—

Overall length	20 ft.	1 in.
Overall width ... ... (4 tons)	7 ft.	1¾ in.
Wheel base	13 ft.	6 in.
Wheel gauge to centre of tires (4 tons)	5 ft.	9¼ in.
Length from dash to rear of frame ...	15 ft.	3½ in.
Length from dash to centre of back axle	11 ft.	2⅜ in.

The engine is of the four-cylinder type, 4½-in. bore by 5-in. stroke, cast in pairs. All the valves are interchangeable and are located on one side of the cylinders, being operated by one camshaft. An automatic system of lubrication is maintained by means of an oil pump driven by spiral gearing from the camshaft. All water passages and pipes are of large dimensions, as the cooling is on the thermo-syphon system. High-tension magneto ignition is fitted, the drive of the camshaft and magneto being by helical wheels, thus insuring silent running.

The gear box provides for four speeds forward and a reverse by sliding gears, the ratio between the top and bottom speeds being 4 to 1. The direct drive is on the top speed. The transmission from the gear box to back axle is by cardan shaft and worm and wheel gearing, the drive being then transmitted through two shafts direct to the wheels, which rotate upon the stationary axle forging at the ends of the tubular arms. No portion of the vehicle or its load is therefore taken by the driving shafts. The wheels are of cast steel, and are fitted with "Wood-Milne" tires 1,010 × 120 mm. twin on the back, and 900 × 120 mm. on the front.

A Group of Straker-Squire 4-Ton Lorries Ready for Delivery to the Russian Government.

LIMITED NUMBER OF SOLID TIRE FITTERS.—An appeal was made on October 13 to the Law Society Tribunal, London, by a company supplying commercial motor tires, for the exemption of a solid tire fitter. A representative of the firm stated that he did not suppose there were more than 25 solid tire fitters in England, and the man was given two months before going to the army.

FRENCH ARMY TRANSPORT.

In several special articles contributed to the *Westminster Gazette* in October by its Editor, as the result of a recent visit to the French Army, from the Meuse to the Somme, interesting details are given of the railway and road motor organisation of our ally. Mr. Spender states that "scores of miles of new railway may be built for one operation, and the rapidity with which this work is carried out is one of the marvels of the war. Lines which would take a year or two years to build in time of peace are built in a month or two months. A whole new railway 80 kilometres in length, and double-tracked, was laid at Verdun in ten weeks.

"The railhead is seven or eight miles from the trenches, or even farther, if the army has advanced several miles since it was established. From this point the motor lorry takes up the work and carries on the supply to divisional, brigade, and regimental headquarters, from which again there is a final journey by forage cart, by mule, pony, donkey, and the human back up to the communication trenches. Immense convoys of motor lorries await the trains, and from that point forward there is a continuous traffic, thickening and multiplying as you approach the front. The lorry is boss of the road. With its broad beam and domed roof, it dominates the landscape; you see it by the dozen, by the score, by the hundred, by the thousand, keeping its distance, like a ship in line ahead, making its steady fifteen knots where the roads are good and there is a free run, at other times gallantly ploughing through seas of mud, and clearing shell-holes with scarcely a wince. Watching the performances of the lorry on a mud slope after a night of rain prepares the mind to accept the accomplishments of the 'tanks' with a sober credulity. Lorry follows lorry into the place of death, and comes out at the other end at the same methodical pace, at the same correct distance from its fellows, for all the world like those amazing processional insects described by M. Fabre. In the war zone one gets a genuine affection for the lorry and a high esteem for its steady, faithful, plodding, persistent character. The French are admirable drivers of all motor vehicles, and one cannot speak too highly of the competence and discipline of their lorry-men.

"If everything could be left to the motor lorry there would be an end of the trouble. But there are also the troops going up and down, immense numbers of horses, and every variety of horse and mule traffic, from the big gun going up with a team of eight to the forage-cart drawn by a humble nag, the motor cyclist, the officer's car. The pack grows denser and the roads narrower and muddier as you get near the trenches. The car or the lorry cannot resist

Digitized by Google

MOTOR TRAFFIC.

the temptation of passing the horse traffic, rushes out of line on a road which can just accommodate two vehicles, and presently makes a hopeless block with a convoy coming the other way. Fortunately in France there are no hedges by the roadside, and relief may be got by drawing the offenders temporarily into an adjoining field."

How the Light Railway Scores.

"The best solution is to relieve the roads of the heavier traffic by light railways built alongside them. Here the French have been extremely skilful and active, and we shall probably be wise to follow their example. The light railway both relieves the traffic and saves the road, which otherwise is called upon to bear an intolerable weight of heavy traffic. Let the light railway take the guns and the shells and the heavier stores, and even narrow country roads will manage the rest, and remain passable through winter. Fortunately for themselves, the French had the light railway habit before the war broke out. All through France you may see the line by the side of the road, which takes the country people to market and carries their parcels and produce. The engineering firms are used to it, and had the plant ready. So if you go to the advanced railheads you may see them discharging a chief part of their heavy stores into little goods trains, which go right up to where the trenches begin, and serve the big guns straight from the trucks. They are specially built to resist shell-fire, and have lightly armoured engines which are proof against shell splinters and shrapnel. When an army moves on the lines for these can be built more quickly than the shell-shattered roads can be repaired. I have heard Frenchmen go so far as to say that they are the key to the whole transport problem, and though that may be an exaggeration they are certainly very important."

First Life of the Lorry.—Motor Repair Shops.

"The wear and tear of all that appertains to transport is immense, and if delay is to be avoided it must be made good as far as possible, at or near the front. The French are by nature admirable mechanics, and have shown great skill and aptitude in devising repair-shops for all kinds of machinery. You go into a little country town which three years ago was wholly innocent of engineering, and find that an immense motor repairing shop has been constructed out of a collection of barns, flour-mills. I was told that one of these shops which I saw in a comparatively small town could turn out complete motors of various types. That is not its *métier* at present, but it was repairing lorries and military cars by the hundred, and returning them to the lines with astonishing rapidity. The motor lorry, if not mishandled, has an average life of eighteen months on the line before it goes into dock for the first time, and then, if carefully overhauled, it should be good for at least another year. Some of these shops are within sound of the guns, and one is conscious of the peculiar stimulus which is given to work by the near presence of the battle."

NORTHAMPTON TRAMWAYS PARCEL VAN.

Mr. J. F. Cameron, general manager of Northampton Corporation Tramways, has sent to us a photograph of a parcel van which he recently put into service at the small cost of £62 10s., including the

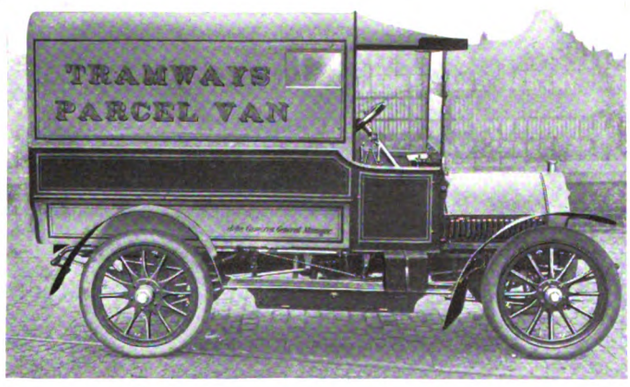

painting. The motor is an old 12-15 h.p. Humber chassis with three-speed reverse gear box, which was overhauled in the tramway shops, and is now working very satisfactorily. The vehicle is proving an important factor in the success of the parcel service.

THORNYCROFT CHASSIS IN PEACE AND WAR.

The accompanying photograph depicts a 40 h.p. type "J" van supplied by John I. Thorneycroft and Company, Limited, of Southampton and Basingstoke, to Messrs. Woof and Sutcliffe, carriers, of Burnley. The order was received by Messrs. F. Groome, Limited, the local representatives for the Thornycroft chassis, and the vehicle is similar to those being supplied in large numbers to the War Department.

The manufacturers will no doubt be interested to learn of an instance of the use of their chassis that probably has not come to their notice. From a statement describing the patriotic work of the Victorian Government Railways, issued in Melbourne, we observe that

Thornycroft 40-h.p. Type "J" Van.

the staff of the Newport workshops have constructed a motor hospital car, a travelling kitchen, and three ambulances for the use of the Victorian troops in the war. The hospital car has a Thornycroft chassis, which was previously in the use of the railway department, and at the time the new body was constructed to embody the ideas of Colonel Fetherston, the motor hospital was understood to be the first of its kind in the world. The car is practically a portable operating theatre. Its approxiamate weight is 5 tons, and the dimensions of the body are 10 ft. by 7 ft., it is 6 ft. 9 in. high. In the centre is a nickel-plated operating table, 6 ft. long by 18 in. wide, of which 18 in. at each end is hinged, and can be raised or lowered as required. A supply of hot water is provided by means of reservoirs under the car, in series with a filter, and a primus-heated boiler inside. The capacity of the reservoirs is over 60 gallons, and of the boiler 4½ gallons, and the latter is capable of raising 4½ gallons of water to the boiling point in 15 minutes. At the front end of the car are two nickel-plated hand basins, with hot and cold water taps, and two lotion basins. At the side are two sterilisers—a large one for linen, &c., and a small one for surgical instruments. Lighting is provided for by large windows at the sides and in the double door at the back, each window having adjustable canvas blinds inside and out. At night the car is lighted from acetylene gas fittings. The interior equipment is completed by numerous drawers, cupboards and racks for surgical instruments, linen, anæsthetics, antiseptics, etc. Underneath the car are racks for carbide, tins of petrol, a ladder, and a tank for kerosene.

London to Manchester.—The fleet of steam wagons which do the London, Birmingham, and Manchester journey of 200 miles each way, and which bear the name of Mr. J. T. Lawton, one of Manchester's leading motor haulage contractors, comprises six Sentinel vehicles, all shod with Spencer-Moulton solid rubber tires. The facts compiled with regard to the month of October show that all the vehicles did their task of carrying a maximum load of five tons each way every day. This is a notable instance of consistent running, and speaks well for the motor and tires, as well as for the drivers. As efficient service by tires is a feature to which attention is devoted by tramway and railway companies, the facts above related will interest intending buyers of tires for replacement purposes, or those firms who are placing orders for new vehicles. It is appropriate to mention that Messrs. G. Spencer, Moulton and Company, Limited, have been tire manufacturers to railway companies for over forty years, and that the firm has been in existence as india-rubber manufacturers for over sixty years.

Digitized by Google

MOTOR TRAFFIC.

INSTITUTION OF AUTOMOBILE ENGINEERS.

PRESIDENTIAL ADDRESS BY MR. L. A. LEGROS, M.INST.C.E.

At the opening meeting of the Institution of Automobile Engineers for the session 1916-17, held on October 16 at the Royal Society of Arts, London, Mr. L. A. Legros delivered his presidential address. He thanked the members for the signal honour conferred on him in electing him as president for a second term, and said that the stirring times in which we live provide many heads, on some of which he could not help touching more or less imperfectly and very incompletely, because the field of thought laid open by the war is too vast for a general summary survey.

AUTOMOBILE ENGINES.

It had been suggested to him by a former president, Mr. Lanchester, that the special function of the automobile engineer, as contrasted with those of other engineers, was weight-saving, and that this Institution might well be said to represent the weight-saving engineers. In a paper read by Mr. Lanchester in 1900, the question of least weight was investigated theoretically in detail, and two years later by Mr. Mervyn O'Gorman in a paper on the "Weight of Motor Cars and Motor Car Parts," in which a new conception was introduced, namely, the "liveliness" of a car.

One fundamental conception, the study of which had contributed greatly to progress in automobile design, was torque. Most manufacturers plotted the records of their engine tests as curves of brake horse-power, many also plotted the torque curve and others the curves of fuel consumption. He (the president) had already expressed the opinion that the torque curve gave more information about the performance of an engine in a car than was apparent from the horse-power curve; moreover, it gave the data in the form in which they were actually wanted for all traction problems. An example of a torque curve was given early in the Proceedings (*Ibid.*, p. 245), but no general comparison of torque curves appeared to have been made up to the present. To remedy this deficiency he had made application to the best-known engine and automobile manufacturers in this country, in allied countries and in America, as well as to other authorities, with the result that he had been enabled to obtain curves and data for 130 engines. The leading dimensions and weights for these engines with and without flywheels were given in a table under the same reference numbers as were used in a series of 15 charts, which were appended to the paper.

To facilitate comparative examination of these curves the engines were separated into the following classes:—Commercial vehicles, public service vehicles, miscellaneous (engine builders), passenger cars (4-cylinder), racing cars, passenger cars (6-cylinder), passenger cars (8- and 12-cylinder), aero engines (vee), aero engines (vertical), aero engines (radial), aero engines (rotary), general summary. With a view to showing the decrease of weight per unit of torque (or, as plotted, the increase in the effective radius), he had made an endeavour to secure examples of the practice of six years ago as well as of that of to-day, but the figures for the first period were rarely kept sufficiently accurately to afford good evidence of the improvement effected. In the curves for commercial car engines, curve 2, Fig. 1, showed the drop due to governing. The range from maximum to minimum effective radius for different engines was about 2 to 1; the mean curves for this class, A, B, C, Fig. 2, showed an increase, in six years, of about 30 per cent. in speed and nearly 50 per cent. in effective radius at 1,100 revolutions per minute. The conditions of public service vehicles were so onerous and so many special provisions had to be made against mechanical failure or dropping of lubricant and for preventing noise, that it was not surprising to find that the mean curve for this class, while similar in form to that of the mean of the latest commercial vehicles, was some 15 per cent. lower. Having dwelt upon the facts indicated by the various curves, the president observed that the progress made in the motor had taken very different directions for different classes of work. In nearly every case there was an increase in range of speed and in maximum speed, as well as an increase in the effective radius of the engine. The 6-cylinder class formed an exception, for it showed on the average for each period a diminution in the effective radius as well as a distinct difference in the form of the curve.

The fuel question, to which the motor next brought them in line of direct thought, was a problem which had formed the subject of papers which had been discussed before this Institution. The questions raised were of great magnitude: first, that of assuring for the future a national supply of liquid fuel; and secondly, that of price due to the ever-increasing number of motors and of the purposes for which they were used. It was to be hoped that some interesting papers and discussions on this subject might be forthcoming in the near future.

EDUCATION AND THE NEGLECT OF SCIENCE.

From the motor, which symbolised the work done and progress made by the membership of the Institution, he would pass to its sponsor, the automobile engineer, and would begin with questions concerning his education which had occupied the attention of the Council, though the views which he expressed must not be taken as representative of that body. The broad question of the shortcoming of our whole educational system had been laid bare at meetings such as the one held at Burlington House on May 3, 1916, when Col. Crompton attended as representative of this Institution and took part in the discussion. It was difficult to imagine that any engineer, unless he had been at work in a neutral country far from the seat of war, could fail to have been impressed with the appalling ignorance of technical and scientific matters among those on whom the responsibilities for running this war had fallen. As one well-known engineer wrote to the newspapers:—"They say this is an engineers' war—I sometimes think an engineer should run it!" Never in the history of engineering had the ignorance of science by the politicians, the military, and the other authorities been so openly displayed as in the early stages of the war, and never had it proved so costly in time, in life, and in substance. The protagonists of the methods of the old schoolmen still pleaded for one hour a day for classics, but it could not be too clearly understood that this one hour in class might involve about double that amount of time in preparation, to the prejudice of work more important for any professional career dependent on sound training in science.

It should be abhorrent to the engineer to produce effects by slow or obsolete methods when better were available; no sane man would now think of apprenticing his son to a works in which neither miller nor grinder existed, and where all plane surfaces were still obtained by hammer, chisel, and file, though in the early decades of last century such shops produced the most *débrouillard* type of mechanic.

A knowledge of the classics was undoubtedly of value to men of the clerical, legal, literary, and even of the medical professions, but how much greater would have been the value in this present war of that small section which dealt with politics had it been as well grounded in the sciences as in the dead languages? How many millions and how many lives would the country have been saved if as much study in time and thought had been expended on science as on classics by the whole of our law-makers and law-givers?

If general knowledge is to be improved by generalising the system of education, it is of the highest importance that the technical teaching class, which forms so high a percentage of the total of professional men, should itself be reformed by a broader education in which science is given its proper part. But the earliest education of all was not in the hands of professional teachers, and, generally, elementary education required attention in still earlier years.

EARLY EDUCATION AND EXAMINATIONS.

It was instinctive in a child to be inquisitive: "Curiosity, thy name is engineer!" is a modernisation of an old saying for which they could thank Col. Crompton, for it is the child with highly developed curiosity that will best acquire that general knowledge which is essential in the engineering profession. It is of the greatest importance that in the early days of childhood correct conceptions should be formed of the laws of nature, and that those questions which arise in the child's mind should be correctly answered.

Passing from general knowledge to the particular knowledge required in the professions, they came to the examination test. He suggested that the systems of examination were greatly at fault, and that the fault was due to the prevalence of the classical ideal. Another matter that required reform was the teaching of drawing. If the mechanical drawing of his schooldays was then thirty years behind the times, that which was evidenced in the London matriculation papers of this year was also at least as far behind. There was also the tendency of examiners to fall into antiquated methods, which could be remedied or removed altogether by appointing active members of high standing in the engineering, chemical, and other professions allied to industry to act as advisers in the drawing up of curricula and in the setting of the examination papers. The form in which he had expressed these views was in great measure due to the consideration which the Council of this Institution and its committees had given to the qualifications of candidates.

APPRENTICESHIP.

Following on general education came the question of apprenticeship. It was the student deflected at the outbreak of war from the study of machine construction to the practice of munition making or to active service who will have suffered more than the apprentice who had then entered the shops or who had just finished his theoretical course of training; for the apprentice there never was an opportunity like the present for getting the best of work, excellent experience, and good pay, though frequently in a totally different

Digitized by Google

MOTOR TRAFFIC.

branch of industry from that originally selected. The two cases were so different that the work done during the war years would need special detailed reference in applications for membership for many years to come, and the greatest care would need to be exercised by qualification committees in order to avoid unfair treatment of particular cases. This question had received the appreciation of the Senate of the University of London, who had elaborated a scheme for conferment of honorary (war) degrees. A great deficiency in our technical educational systems was the general absence of classes dealing with works organisation and works accounting, as well as absence of provision for the practical study of these necessary branches of technical knowledge for pupils and apprentices, who rarely had the opportunity to obtain more than an imperfect idea of a few details of a single system.

Employment—Technical Men for the War.

The senior Engineering Institution had decided that such a question as unemployment was outside its proper sphere, and had relegated it to a subordinate position under the Civil Engineers' Appointment Board, in which the main body of the Institution apparently took but little interest. On investigation he had found that the organisation of this Board was but imperfectly adapted to finding employment in any grade of responsibility above the most elementary. The next in seniority of the large institutions, that of the Mechanical Engineers, kept a register in which the information as to unemployed members was properly set forth, but its existence was by no means generally known to the members, and facility of reference was local to London. The Institution of Electrical Engineers, for legal reasons, does not undertake the question of finding employment for its members, nor has the question of re-employment during the transition period been considered.

Their own Institution had faced the problem in a different manner, paying the fee and having the power to act as a labour bureau without the obligation of advertising the fact, but confining its activity to its own membership. The result, he thought, had been that the officers of the Institution had been able to give helpful introductions to a greater percentage of those of the membership who had been unemployed than was the case with the other engineering institutions, and he believed that all those who had availed themselves of the facilities afforded them by this Institution were agreed in their appreciation of the services rendered to them.

At the beginning of the war the opportunity of taking up th strong position of finding the technical men that the Government needed was lost for two reasons. First, the position taken up by the Council of the senior Institution ; secondly, the essential difference of position of the engineer in the two services. The civil engineers had consistently refused corporate membership to Royal Engineers (or, as they styled themselves, sappers), though exceptions occur in the case of engineers who had retired from this branch of the service. It was unlikely that they would encourage membership of naval officers, though he found the name of one engineer lieutenant R.N. (member) and of one lieutenant R.N. ret. (associate member) in the 1914 list of members. To make this point clear he referred to the history of the struggle for recognition by naval engineers, and emphasised the difficulty, amounting almost to impossibility, of any effort being made from within the service to obtain such recognition. In his reference to the question the president observed that an improvement was effected by the Osborne scheme for training cadets, and said that actually the spirit of caste and social distinction had been practically broken down before the commencement of the war now raging.

This problem was one of great national importance, and it was to be noted that, as in the present instance, the leading engineering institutions held aloof from the matter, though they were fully cognisant of the struggle for emancipation by their brother professional men, men on whom the exigencies of their employment enforced the seal of silence. It was not his desire to see the older institutions relapse into the condition of mere examining bodies for, apart from finding the means to encourage research and standardisation, that was the end that the Institution of Civil Engineers and the Institution of Electrical Engineers were rapidly approaching, but there should have been some properly constituted body to which the Government could have applied for the brains and specialised ability in engineering which, during the war, it had from time to time required for different departments.

Far from the reason for such an amalgamation of interest no longer existing, it would be still more cogent when peace was declared and when, in addition to some 4,000 trained engineers to be released from the services, the mass of garage men, Long Acre salesmen, butchers, bakers, and candlestick-makers were thrown upon the brain market, with a spurious hall-mark of ability implied by the position they occupied during the war, a position which these unqualified men could never have occupied had the suggested properly constituted body been in existence.

He repeated, this was an engineers' war, but it was more particularly a mechanical and automobile engineers' war; for the civil, mining, and electrical branches of engineering, while taking their great and due share of the work, had not been responsible for the creation of either ordnance or munitions or for military transport of a kind and on a scale never before contemplated. Yet the mechanical engineer was not a recognised factor in the army! There was no chief mechanical engineer corresponding to the engineer-in-chief of the fleet, and it had been necessary to create a Ministry of Munitions to deal with vital questions of production ; the same applied right down the scale, with the result that men of high mechanical ability and qualifications were officered by men with only ordinary military knowledge or mere administrative capacity. It was for the recognition of the mechanical engineer as a unit in the service to be officered by men of his own profession that the engineering institutions should agitate, preparing their case now, and postponing action till immediately after the war. The twenty-two years of agitation for the American naval engineer, and the twenty-five years of delay from the " pouring of oil by a Lascar " view to incipient recognition of the engineer officer in the British Navy should be a sufficient warning as to the slowness of procedure in normal times of peace.

The War and Dilution of Labour.

Passing to the question of what they were doing towards winning the war, he said that it would not be fair to compare the total number of members, or even the percentage of membership, of the various engineering institutions at present with the colours, as many so serving had not notified these bodies, nor could account be taken of overlapping. From replies which he had received from the secretaries of the civils, the mechanicals, and the electricals, and from their own returns, it would appear that about 5,000 professional engineers had joined the services.

To those who have travelled in the United States or on the Continent the difference between the labour conditions in this and many other countries had become more and more apparent. Certain branches of trade were regarded as the provinces of skilled men, and no other could work at them ; even training at Polytechnics and other schools was regulated by trade union views as far back as 1899.

With the war, and later with the realisation of the magnitude of the enemy output as compared with our own, it was necessary to consider repetition work on a scale hitherto unprecedented. But time was required to appreciate the conditions of modern warfare as elaborated by the enemy nations, time was needed for politicians to grasp the full meaning of the change, and still further time to educate the labour leaders as to the great part those they represented had to play in the struggle. Even now, however, one could find many instances in which Belgian workmen, working for piece or bonus under equal conditions side by side with British workmen, earn much bigger wages ; at this we need not be surprised, for the Britisher, as he had seen in America, was capable of working " all out " when he was so far away from home that he could not walk back. At the present time dilution by unskilled and woman labour was proceeding rapidly, old prejudices and narrow-minded views are being swept aside for the one ideal—that of winning the war.

If one act stood out above all others, as showing the grasp of the problem taken by the then Minister of Munitions, it was the fact that the rate of production set by him was far greater than that demanded by the military authorities ; he took account not merely of the *increase* in the demand, but of the *rate of increase* in the demand ; in other words, he thought in terms of acceleration when his technical advisers only thought in terms of velocity. So successful had this work of dilution been that in some of the national shell factories the woman labour amounted to as much as 95 per cent. of the total. Nor had dilution only been applied to those classes of work in which repetition by the million or by the thousand took place, but it had been found that very many other classes of work could be done after but short training by men previously reckoned unskilled, and particularly by women. Of work done by women at the present time, selected from an ever-widening field, he took the following examples :—All varieties of machine shop work, such as drilling, boring, shaping, slotting, keyseating, milling, surface-grinding, universal grinding, tool-setting, fitting, skilled assembling, and erecting. Women were making equal progress in such industries as woodworking, aeroplane building, boiler-making, laboratory work, optical work, and instrument making, as well as in nearly all branches of ordnance, small arms, shell, and explosive work. They had also successfully taken up such occupations as driving overhead travelling cranes, shipyard and building cranes, motor testing, and inspecting and testing materials of all descriptions involving the use of micrometers, verniers, surface gauges, and other measuring instruments, including the slide-rule. In fact, so wide was the scope of woman labour that a well-known member

Digitized by Google

MOTOR TRAFFIC.

of this Institution, who had taken a leading part in the dilution campaign—and his view was not a solitary one—had stated to him his firm conviction that, given two more years of war, he could build a battleship from keel to aerial in all its complex detail and ready for trial entirely by woman labour.

AFTER THE WAR.

Already far-sighted politicians had discussed the transition period which must follow the war before normal peace conditions were resumed; the stability of our social fabric depends to a great extent on the accuracy of their forecast, and on the efficacy of the means devised to bridge this dangerous period. The automobile engineer, and for that matter every engineer, daily had to face problems of labour and material measured in length, mass, time, and money; a discussion on the subject of after-war conditions, not necessarily to be reported in the Proceedings of the Institution, might prove to be of great interest, and might bring to light some clear views on this difficult subject, a subject that was made the more difficult by the fact that the Allies now number many nations, and that our countrymen would form but a small minority if the plebiscite of all nations of the *entente* were to be taken.

If, as some thought, we were to adopt American standards, to work as hard and for the same hours as in the United States, to draw good money, and to adopt a standard of living higher than we knew it before the war, the only difficulty might be with the business men, or so-called business men. For the present conditions of holding in, ca' canny, or whatever term one likes to apply to them, now fortunately being abandoned for the higher standard, are equally the fault of the employer and employed. The same employers who had cut the price of labour to the lowest limit had frequently treated their technical engineers equally badly, cutting estimates and salaries in half, and making the conditions such that the business had speedily come into the hands of debenture holders.

Progress in the mechanical trades depended upon the invention of new machinery and the devising of new and improved methods of manufacture; at present these new fields offered but little inducement to the engineer, who knew that such incipient industries only too frequently came to grief from inadequate trust in the engineer or other technical adviser, from the cutting down of the conditions and salaries before work was commenced and from the excessive rapacity sometimes shown by the debenture holders. American machinery had maintained a high and very uniform standard for accuracy in length, mass, and time. The repetition method applied to highly specialised factories had enabled the manufacturers of the United States to produce machinery to the requisite and to uniform commercial limits of accuracy; they delivered it free without extra for packing, they furnished particulars of weights, countershafts, etc., in advance, and, in normal circumstances, they delivered to time; the war had brought them their due reward for these standardised commercial limits.

It was to the sacredness of the written agreement (with the avoidance of undue cutting of prices in the first instance) and to the determination to work our hardest that we must look if the future was not to be darkened by the cloud of anarchy, but which might easily come over us if all workers of every class did not realise that they would need to earn higher pay and to draw it. There was amongst our politicians at least one that could unconsciously differentiate acceleration from velocity: in the president's humble opinion this ability constituted an essential factor in the difference between statesmanship and politics, and it rested with him and with those who might have similar powers of thought to steer the ship of State through these dangerous and rock-strewn waters.

PETROL ALLOWANCES.

As the result of a visit to the Petrol Control Committee by the chairman of Glasgow Corporation Garage Committee, the former body have agreed to restore the normal supply of petrol on the understanding that the cars will be used on Corporation business only. The supply had been cut down to 25 per cent. of the original consumption.

NEWCASTLE CORPORATION'S CURTAILED SUPPLY.

In the annual report of the Newcastle Corporation Tramways department it is stated that owing to the difficulty of obtaining petrol, and latterly to the restrictions placed on the quantities available, the motor omnibuses, which were expected to serve as feeders to the system, have had to be taken off certain routes, and at the present time only one omnibus can be employed on the Westerhope route daily and one on the Benton and Annitsford routes respectively on Saturdays only.

MOTOR VEHICLES FOR MUNICIPALITIES.

GOLCAR COUNCIL have obtained prices and particulars of steam wagons.

STIRLINGSHIRE CONSTABULARY have purchased a motor bicycle and side car.

DARTFORD RURAL COUNCIL have agreed to purchase a steam tractor at a cost of £500.

DEWSBURY COUNCIL are considering a recommendation for the purchase of a motor wagon.

LEEDS COUNCIL have accepted the tender of Merryweather and Sons for supplying a motor fire engine.

STOCKTON COUNCIL have applied for sanction to purchase a steam wagon for the haulage of stone at £593.

MANCHESTER WATCH COMMITTEE contemplate acquiring a petrol vehicle for the removal of lunatics, sick prisoners, etc.

SALFORD TRAMWAYS COMMITTEE have ordered two 2-ton motor chassis from Halley's Industrial Motors, Limited, Glasgow.

MARGATE COUNCIL have decided to obtain a motor fire engine, at £1,165, subject to obtaining sanction to borrow the money.

DUNDEE DISTRICT COMMITTEE have placed an order for a road tractor, two wagons, and a sleeping van at a cost of over £900.

NORTHALLERTON STANDING JOINT COMMITTEE are providing motor cycles and side cars for the chief police officers in three districts.

LONDON COUNTY COUNCIL have placed an order with Leyland Motors, Limited, for the supply of two motor fire engines, at £907 each.

ROTHERHAM COUNCIL have received Treasury sanction for borrowing £735 for the purchase of a motor tipping wagon for the electricity works.

SALFORD HIGHWAYS COMMITTEE have placed with Fodens, Limited, Sandbach, an order for a steam motor wagon, fitted with a jib crane.

HALIFAX TRAMWAYS COMMITTEE have placed an order with Halley's Industrial Motors, Limited, Glasgow, for a 3-ton petrol motor tower wagon.

BACUP AND ROSSENDALE COUNCILS are considering a scheme for the provision of a motor ambulance. It is proposed that the fire brigades should unite for dealing with the outbreaks of fire, and that the Bacup steam engine should be sold and the proceeds devoted towards the purchase of the ambulance.

WOLVERHAMPTON TRAMWAYS COMMITTEE have agreed to purchase an electric lorry and car to enable the department to deal more expeditiously with breakdown work, repairs and testing, and also to permit of greater supervision being exercised. The sum to be paid for the lorry is £370 and for the car £217.

ABERDEEN COUNCIL have purchased a second-hand steam tractor, at the price of £250, for the use of the Streets and Roads Department. The Streets Committee estimate that the vehicle will save the department £150 per annum. The Electricity Committee are considering a proposal to purchase a battery-propelled coal tipping wagon.

GLASGOW ELECTRICITY COMMITTEE, who have had four electrically propelled delivery vans in use for some time, have added an electric 5-ton automatic tipping wagon for the conveyance of ashes from generating stations. Another electric wagon is in course of construction for the same department, and one is on order for the Cleansing Department.

DOVER ELECTRICITY COMMITTEE have deferred until after the war their consideration of the engineer's proposal for the purchase of a battery-propelled tipping wagon for the cartage of coal. The engineer had received offers of a 5-ton steam vehicle at £619, and an electric 4-ton wagon at £1,200, and he advised that the latter would be cheaper. He estimated that it would enable him to convey the coal at a cost of 1s. 3d. per ton, as compared with the present charge of 1s. 8d.

OMNIBUSES AND PAYMENT ON ENTRY.—Interviewed regarding an appeal made by Miss Violet Markham to omnibus and tramcar passengers to pay fares to women conductors on the step, a representative of the London General Omnibus Company said that to make such a practice general a new type of omnibus would have to be provided on the lines of the P.A.Y.E. system on cars in America. There would have to be a wider platform, and the staircase would have to be inside the entrance of the omnibus in order to check the top deck fares. The company supported Miss Markham's appeal to the extent of asking the public to pay isolated fares on the platform.

Digitized by Google

MOTOR TRAFFIC.

MOTOR TRAFFIC NOTES.

TRUCK MAKERS IN THE UNITED STATES.—There are 50 manufacturers of heavy commercial petrol motor vehicles in the United States of America.

NEW HACKNEY CARRIAGE LABEL.—From December 1, motor cars exempted from duty as hackney carriages must carry circular plates lettered "Hackney Carriage" above the number plates.

OMNIBUS AID DURING TRAMCAR CURTAILMENT.—As far as possible the motor omnibuses owned by the Birmingham Corporation Tramways Department have been used to minimise the inconvenience caused by the curtailment of the tramway service due to the breakdown at the generating station during the past four weeks.

NINE MONTHS' PETROL IMPORTS.—For the nine months ended September 30 the quantity of motor spirit imported into Great Britain and Ireland was 123,310,642 gallons, valued at £7,311,074, as compared with 105,718,990 gallons, valued at £3,714,078 for the corresponding period last year, and 97,123,125 gallons, valued at £3,514,265, for that of the year 1914.

A MODEL FOR CORPORATION GARAGES.—Glasgow Corporation Committee on the Motor Car Central Garage have recommended that two members and the general manager of the tramways should visit London to inspect a very large garage erected by the military authorities at Camberwell Green, with a view to obtaining information as to the more efficient and economical working of the Corporation garage.

THE OLD-TIME OMNIBUS CONDUCTOR.—During the hearing of an appeal at Shoreditch by a motor omnibus conductor under the Military Service Act, the Mayor remarked that before the ticket system was introduced in the old horse days the conductors were all "swells," and the omnibuses had never paid so well since. He knew one or two who owned racehorses, and ran them at Alexandra Park Races. On those occasions they were clothed in approved "sporting" style, wearing large "acid drops" on their fingers.

MUNICIPAL ENGINEERS AND MOTOR TRANSIT.—Much as road engineers may deprecate the use of motor vehicles on roads not constructed for that traffic, the Institution of Municipal and County Engineers are always glad to avail themselves of modern facilities for locomotion at their district meetings. On the occasion of a South-eastern District meeting at Worthing, on October 28, the members had motor omnibuses placed at their service by the Worthing Motor Services, Limited, to enable them to visit the municipal works of the borough.

MOTOR CAR'S UTILITY TO A RAILWAY CHAIRMAN.—At a hearing of a charge at Edinburgh against the chauffeur to Mr. Whitelaw, chairman of the North British Railway, for failing to report under the Military Service Act, Mr. Whitelaw gave evidence that the car the man drove was used to convey witness to different parts of the railway. It was chiefly on railway service; and he contended that the railway service badge exempted the man from military service. The North British Company had always held that no railway servant could attest without the company's permission. The Sheriff held that the man was liable for military service as he was not a railwayman.

DELIVERIES OF ELECTRIC VEHICLES.—Drake and Gorham, Limited, Felix Street, Westminster Bridge Road, have recently delivered 15 electric battery trucks and lorries, including two tipping wagons and a 1-ton lorry to the Chester and Manchester Corporations; 1-ton lorry each to Blackpool and Glossop Co-operative Societies; two lorries of 3 and 4 tons capacity to Greenall, Whitley and Company, Limited. The Broughton Copper Company, Limited, and Richard Johnson and Nephew, Limited, have each taken delivery of two trucks; and lorries have been sent to Brunner, Mond and Company, Limited, Levinstein, Limited, J. and J. M. Worrall, Limited, and Deakins, Limited. Several of the firms have placed repeat orders.

GOVERNMENT ALLOWANCES FOR USE OF PRIVATE CARS.—On October 6 the Army Council notified that the payment to be made to owners of private cars used on Government work would be 5d. per mile for a car with two or three seats and 7½d. with four or more seats. The old rates were 4d. and 6d. respectively. The new allowances may be drawn even in cases where an owner receives the benefit of the concession of the Finance Act, and is repaid or exempted from car and petrol licence duty on the ground that his car is used in connection with naval or military service, including ambulance or hospital work. The new rates will not, however, apply in cases in which petrol is obtained substantially below market price, either from army stores or under any other arrangements. The old rates will continue to be drawn in such cases.

MOTOR CAR CAUGHT BETWEEN TWO TRAMCARS.—At Aberdeen, on October 12, a farmer was charged with having, on the night of August 16, in King Street, near the junction with Seaton Place, driven a motor car recklessly and negligently, and, while passing a tramcar then proceeding northwards along the west side of the rails, attempted to cross from the east set of the rails to the west side of the street at an angle in front of another tramcar going southwards, whereby the motor car was jammed between the front parts of the two tramcars. The defence was that defendant went to the right-hand side as there might have been passengers waiting to board the tramcar, besides which he thought the light of the approaching car was further away than it was. The Sheriff imposed a penalty of £5. As the result of the collision a passenger in the motor car was seriously injured.

DAMAGES AWARDED AN OMNIBUS DRIVER.—At Bow County Court the driver of a motor omnibus was awarded £55 damages with costs against West Ham Corporation for personal injuries. The evidence showed that at Burnham Street tramway junction a tramcar belonging to the Corporation began to turn into that thoroughfare owing, it was alleged, to the points not being properly set. The car collided with an omnibus driven by plaintiff, who had his arm badly strained in manipulating the steering wheel, and had to be absent from work for six weeks. The motorman did his best to avert the collison. Prior to the mishap another car had been turned into Burnham Street, and plaintiff contended that there had been negligence on the part of the conductor in not seeing that the points were properly replaced, so that other cars could proceed along the main road. The defence was that a heavy fall of rain must have washed mud between the points, preventing them from closing, but Judge Graham advised the jury that as this had not been proved it was a mere surmise.

PROVINCIAL OMNIBUS OWNERS AND EXCESS PROFITS DUTY.

The *London Gazette* of October 27 publishes an order of the Board of Referees, granted on the application of the Provincial Omnibus Owners' Association, under which an increase is allowed in the statutory percentage of profit before the excess profits duty becomes payable. As from the commencement of the Act the statutory percentage is increased to 8 per cent. in the case of a trade or business carried on or owned by a company or other body corporate, and to 9 per cent. in the case of any other trade or business. The order gives the appended definition of the parties to whom the concession refers:—"The business carried on by persons who, owning mechanically propelled omnibuses, chars-a-bancs, wagonettes, and other similar carriages, constructed to carry a number of people, not less than ten, whether at separate fares or not, use these vehicles to ply for hire on public roads, or who let them out for hire—such business excluding that of railways, tramways, light railways, and trackless trolleys, and including only such part of any business as falls within the terms hereinbefore mentioned; and no part of any business is the subject of this application unless either no licence is required from any licensing authority, or unless the licensing authority whose authority is required is not the Commissioner of Police for the Metropolis (London)."

INSTITUTION OF AUTOMOBILE ENGINEERS.

The first general meeting of the session of the London Graduates of the Institution of Automobile Engineers was held on October 26, when Mr. T. D. Carpenter read a paper on "Factory Organisation," Mr. L. H. Pomeroy (vice-president) being in the chair. In the course of his paper the author dealt with the functions of the various departments of the factory and their method of producing results. He pointed out that the works manager should be the driving force of the works staff, and should attend not only to matters of importance but also to details. The designs and drawing office should be responsible for producing a practical design with working drawing, correct in all details, before the actual production is commenced. Operations should be arranged in proper sequence, time-saving tools designed, the minimum times of operations deduced, and waste movements eliminated. The author outlined the functions and duties of the ordering department, the stores, the costing department, and the experimental department. He recommended the adoption of the premium bonus system as the only method of obtaining output at a minimum cost, the advantage being that both the worker and the employer benefit from it.

An interesting discussion followed the paper, and some valuable hints in regard to organisation were given by the chairman.

ELECTRIC VEHICLES IN THE U.S.A.—*The Electric Vehicle* reports that the value of battery vehicles in America is £4,158,000, those operated in the United States Government service being valued at £87,000.

Digitized by Google

Registered Trade Mark

WORKS

675, Commercial Road London, E.

which is now their . . .

ONLY ADDRESS

THERMIT LTD.

Entirely British

Owned and Managed

THERMIT LIMITED
675, Commercial Road
LONDON, E.

Telegrams:—
"FULMEN STEP LONDON"

Telephone:—EAST 4157

Digitized by Google

Telegrams:
"THOUGHTFUL, LONDON."

THE

Telephone
8186 LONDON WALL

LORAIN STEEL CO.

36-38, New Broad Street, London, E.C.

Awarded "GRAND PRIZE" at Panama-Pacific International Exposition, 1915.

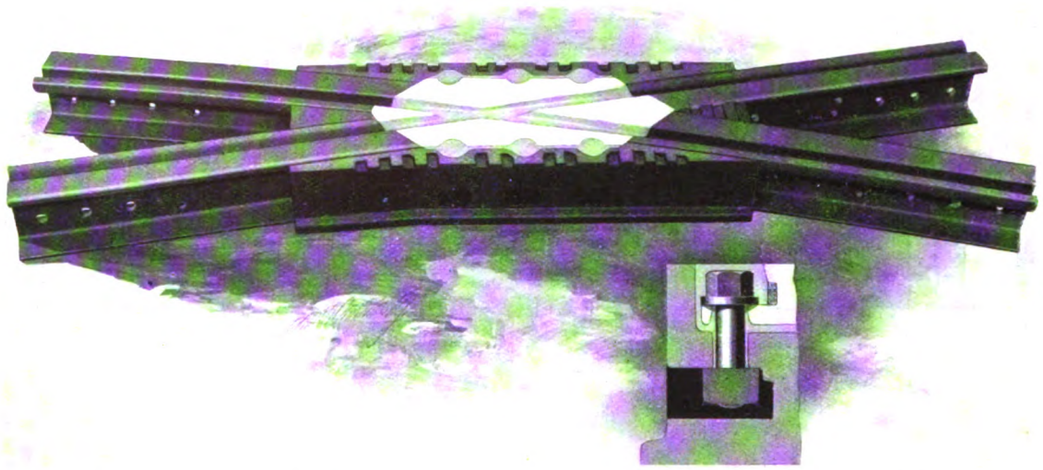

Ironbound "Guarantee" Construction with Manganese Steel Inserts fastened to machined bed with Heat Treated Chromium Steel Bolts run in with white metal and caulked.

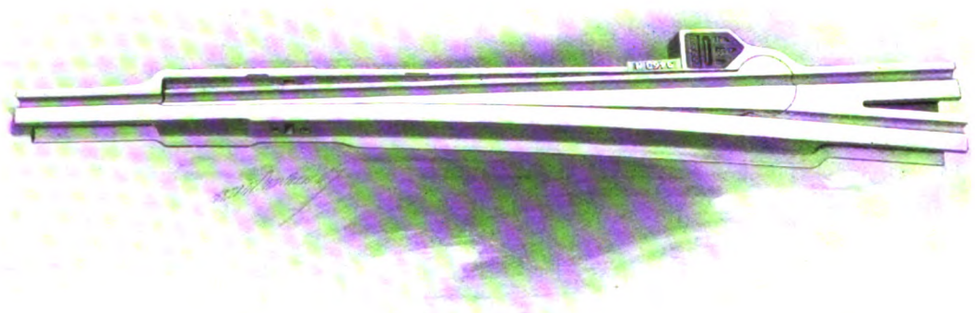

SOLID MANGANESE TADPOLE TONGUE SWITCH

Made with either grooved or plain Tongue.

Digitized by Google

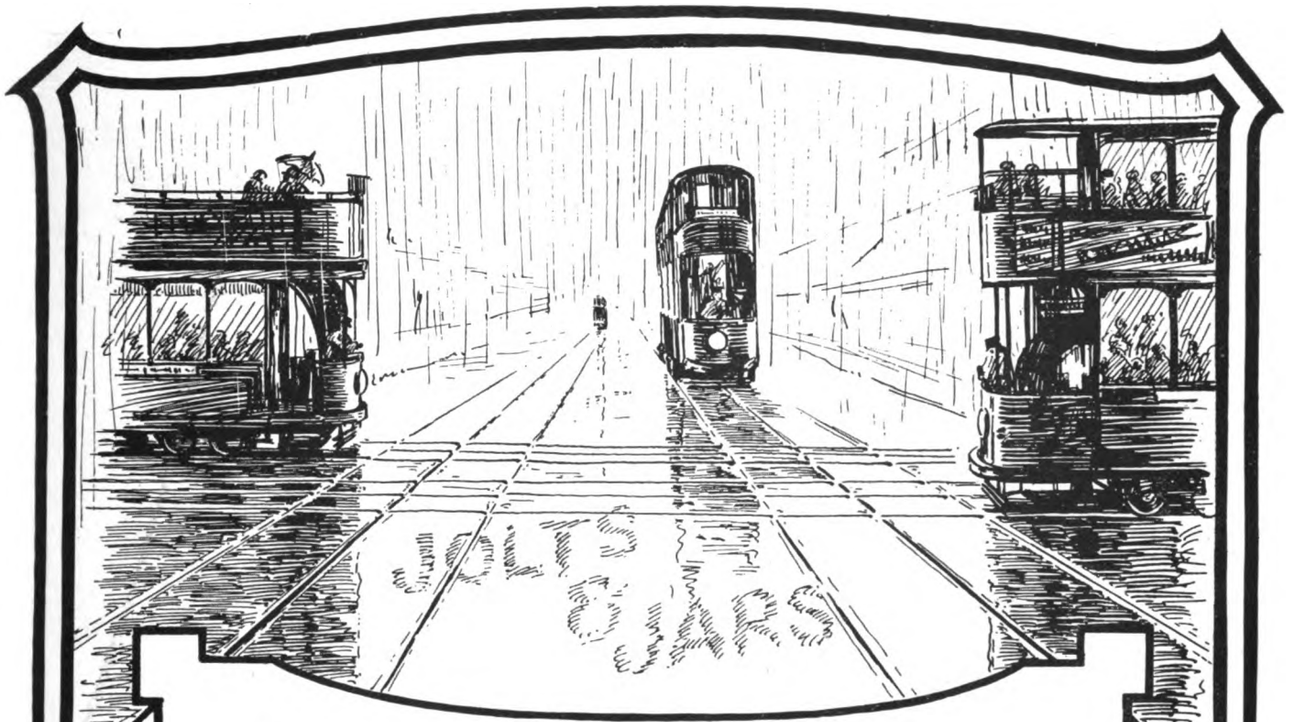

The CROSSOVER

imposes a maximum Strain on your Car-Lighting LAMPS.

Even though speed may be reduced, bumps, jolts, jars and shocks cannot be avoided. The alternative is to use Lamps which are designed to resist the inevitable stress of traction conditions.



WOTAN

Drawn Wire

TRACTION TYPE LAMPS

combine the high efficiency of the Tungsten filament with greatest possible strength.

Glance at the accompanying illustration of the Lamp, and consider the strength of design. Note the short lengths of helical filament—the adequate method of support. No chance of neighbouring lengths of filament becoming short-circuited, no sharp bends.

Price Lists on Application:—

SIEMENS BROTHERS DYNAMO WORKS LIMITED, 38 & 39, Upper Thames Street, London, E.C.

Digitized by Google

Turbo-Alternator Set

in Power Station of Lancashire & Yorkshire Railway

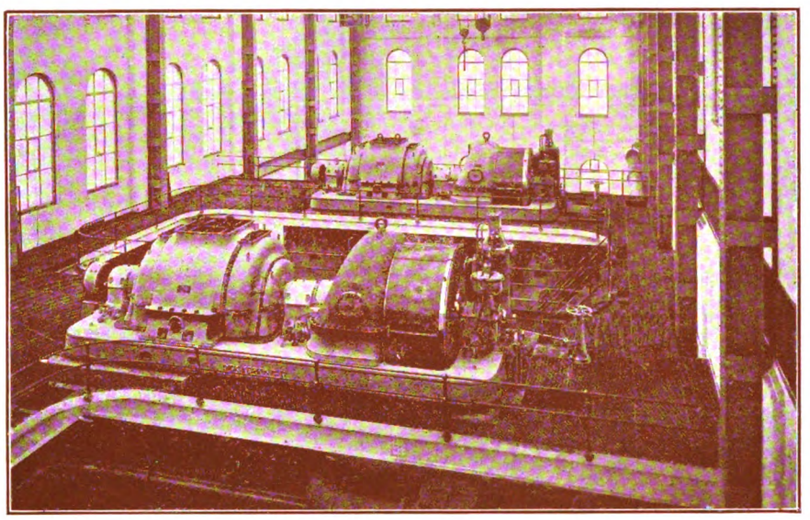

Two 5,000 K.W., 1,500 R.P.M., Dick, Kerr Turbo-Alternator Sets in Clifton Junction Power Station, Lancashire & Yorkshire Railway.

WHERE continuous operation and low running costs are essential, Dick, Kerr Machinery is unequalled. Our long and extensive experience in the design and manufacture of all classes of Electrical Machinery has produced for us a world-wide reputation for the quality of our products.

DICK, KERR

& CO., LIMITED.

Head Office: ABCHURCH YARD, CANNON ST., LONDON, E.C.

Branch Offices: Manchester, Newcastle, Tokyo, Sydney, Johannesburg, Buenos Aires, Rio de Janeiro, and Milan.

Digitized by Google

Railway Equipments

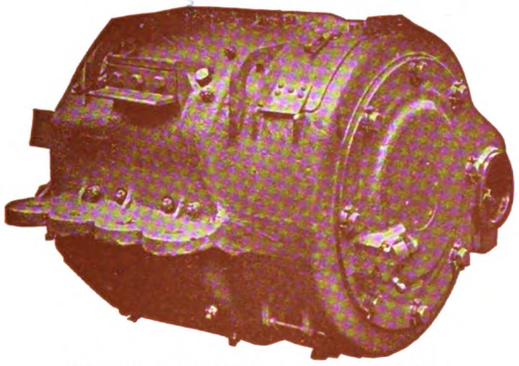

Dick, Kerr 250 B.H.P. Railway Motor, view from commutator end.

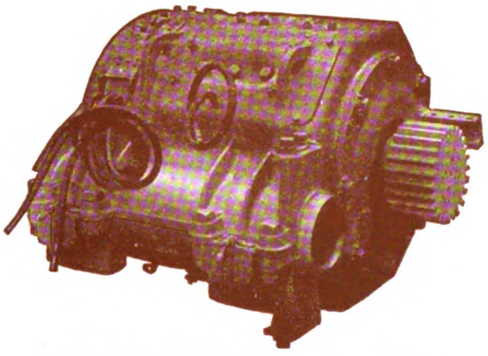

Dick, Kerr 250 B.H.P. Railway Motor, view from pinion end.

BOX FRAME MOTOR

THE D.K. Box Frame Motor as illustrated has been designed and specially constructed for Electric Railway Service, and the efforts we have made, combined with our wide experience, have enabled us to place on the market a motor which, while ensuring Safety and Reliability, is at the same time Economical in operation.

DICK, KERR

& CO., LIMITED.

Head Office: ABCHURCH YARD, CANNON ST., LONDON, E.C.

Branch Offices: Manchester, Newcastle, Tokyo, Sydney, Johannesburg, Buenos Aires, Rio de Janeiro, and Milan.

Digitized by Google

The United Electric Car Co. Ltd.

Telegrams "Prescar, Preston." **WORKS: PRESTON, ENGLAND** Telephone No. — 219. —

MANUFACTURERS of Carbodies and Trucks for Steam and Electric Railways, Street Tramways and Light Railways; also of bodies for Motor Buses, Petrol Rail Motor Cars and Railless Electric Traction Cars.

SPECIALITIES: Preston Flexible Axle Truck, Preston Patent Destination Indicator, "Triumph" Reversible Seat, "Leatheroid," "Duroid," and Cotton Duck Blinds.

SPARE PARTS for both Carbodies and Trucks supplied.

WAR TIME ECONOMY

PHONO-ELECTRIC TROLLEY WIRE

LASTS 2½ TO 3 TIMES
THE LIFE OF
HARD DRAWN COPPER

THEREFORE IT IS THE CHEAPEST

THE EQUIPMENT AND ENGINEERING CO.
2 and 3, Norfolk Street, Strand
LONDON, W.C.

Telephone— CITY 1088 (2 lines)

Telegrams— Kharparts, Estrand, London

Digitized by Google

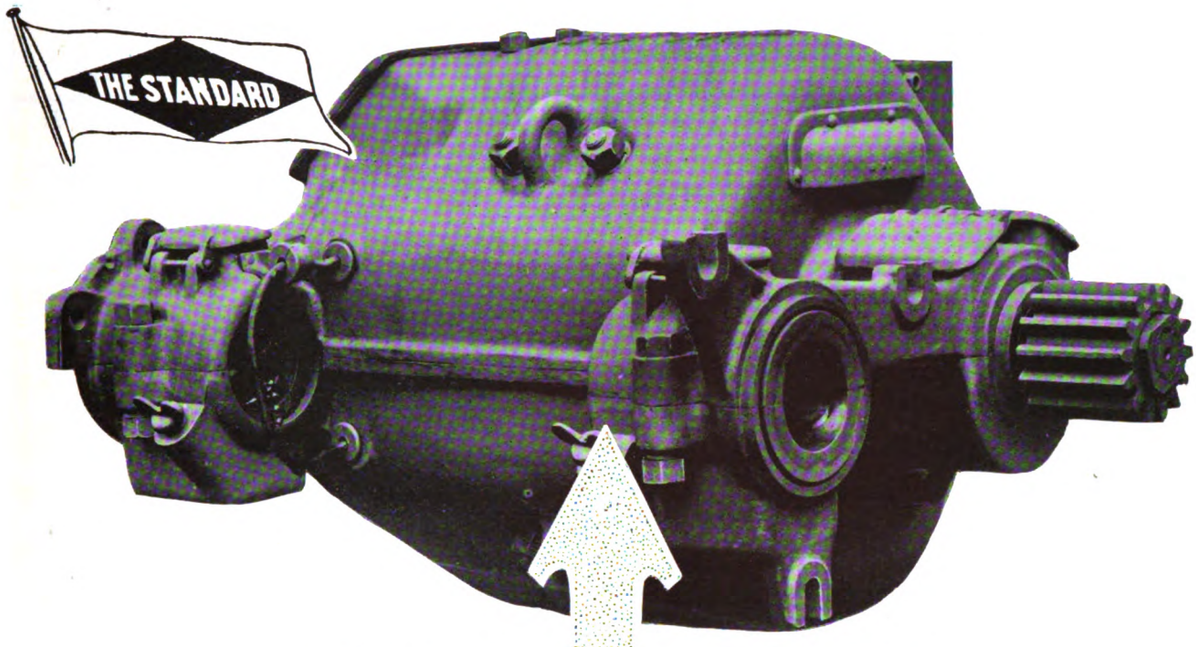

TRACTION MOTORS

don't break down through faulty insulation when the windings are periodically treated with STANDARD VARNISH.

This attention carried out regularly prevents the deleterious penetration of moisture, oils, acids, etc., to delicate parts, cuts out heavy repair bills and costly delays that follow a "hold-up."

CATALOGUE AND EXPERT ADVICE WHERE NECESSARY FROM PINCHIN, JOHNSON AND COMPANY, LTD. 26 BEVIS MARKS, LONDON, E.C.

STANDARD VARNISHES are used *regularly* by the principal Tramways of the U.K., by the leading Electrical Manufacturing Firms, Lighting and Power Stations, etc., so you are not experimenting with unknown and unproved materials when using

The STANDARD INSULATING VARNISHES & COMPOUNDS

Digitized by Google

HADFIELDS Ltd.

Workmen employed—over 6,000.

Hecla & East Hecla Works, **Sheffield,** England.

Works area 125 Acres.

This Catalogue:—

Will show you why 'ERA' MANGANESE STEEL is superior to any other material for certain parts of Tramway Trackwork. - - - -

Describes HADFIELD'S PATENT UNIVERSAL TRAMWAY POINT MECHANISM; the simplest on the market. - - - - - -

Contains scores of illustrations showing JUNCTIONS and other SPECIAL WORK that HADFIELDS have manufactured and supplied to some of the most important TOWNS and CORPORATIONS in the WORLD. - - - - - - -

May we send you one?

Digitized by Google

CONTENTS

	Page
Centre Door Electric Cars (Illus.)	407
One-Man Cars	409
Efficiency in Car Operation (Illus.)	410
Protection from Trolley Boom (Illus.)	413
Rail Traffic and Air Raids	413
Petrograd Electric Tramways (Illus.)	414
A Rotary Converter Traction Equipment in Barcelona (Illus.)	415
Car Traffic in Mexico City	415
Editorial Comments—"Safety First"	416
Tramways and Town Planning	416
The London Tramway Problem	417
Goods Traffic on Tramways	418
Special Car Traffic may be Prohibited	418
Trade after the War	419
The late Sir George White	420
Motormen's Gallantry under Fire	420
Spare Plant in Generating Stations	421
Garcke's Manual	421
Tramways and Insurance	421
The Prevention of Street Accidents	422
Private Bill Notices	423
Excess Profits Tax	423
Restricted Lighting and Services	424
Revision of Certified Occupations	424
Omnibuses on New Routes	424
Financial Reports and Meetings	424
Contracts and Orders	425
New and Prospective Work	426
Personal (Illus.)	426
Tramway Chairmen for 1916-17	428
Tramway and Light Railway Notes	428
Patent List	431
MOTOR TRAFFIC SECTION	435
Manning of the "Tanks" (Illus.)	437
Napiers in the Air Service (Illus.)	437
Omnibuses on Rural Roads	438
Motor Vehicles for Municipalities	439
Women in Motor Works (Illus.)	440
Pneumatic Tired Stretcher Carrier (Illus.)	440
Motor Traffic Notes (Illus.)	442
Traffic Returns	431-432
Directories of Electric Tramways and Railways	xxiii-xxx
Municipal Tramways	xxiii-xxiv
Company Tramways	xxiv-xxvi
Particulars of Track and Equipment	xxvii-xxx
Buyer's Guide	xvi-xx
Index to Advertisements	xiii

WE ARE ADDING ALL THE TIME TO OUR LIST OF TRAMWAYS WHICH USE

TOOL STEEL GEARS and PINIONS

but most of our orders are now from systems which have used T. S. material for some time. Experience is better than statements, and to-day we offer records and not promises

SCHOLEY & CO. LIMITED
56, Victoria Street
WESTMINSTER **LONDON, S.W.**

Digitized by Google





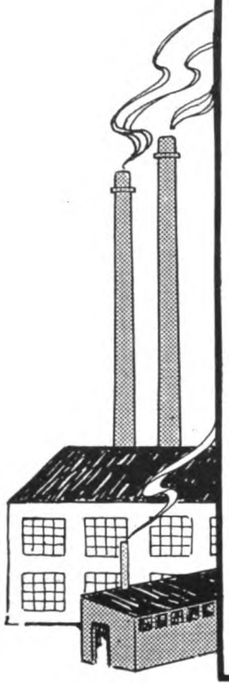

On the tramway or the railroad,

in the power station or the workshop, SKEFKO SKF Ball Bearings hold first place for efficiency, economy and length of service.

SKEFKO.SKF
PATENTED MADE IN ENGLAND

SELF-ALIGNING DOUBLE ROW **BALL BEARINGS**

are so designed that they are entirely unaffected by conditions under which other types invariably fail. They automatically counteract all forms of shaft flexure, thus reducing friction to the lowest possible point, and ensuring smooth running all the time.

Write for free illustrated catalogue to:—

THE SKEFKO BALL BEARING CO. LTD.
Head Office and Works - LUTON, ENGLAND.
London Office - - - - - - 28, Victoria Street, S.W.
Glasgow Office - - - - - - - 45, Bothwell Street.



FLOWER BRAND.



MAGNOLIA METAL

THE D. H. STOLL COMPANY, INC.
MANUFACTURERS OF PRESSES, SHEARS, DIES AND SPECIAL SHEET METAL WORKING MACHINERY.

Buffalo, N.Y., April 7, 1914

Gentlemen:—We have used your metal for the past few years in all our Power Presses and Shears, both large and small, with the most satisfactory results.

This applies both to the equipment, which we have manufactured here for our own use, and the many carloads shipped to some of the largest manufacturers in both the United States, Canada and abroad, in which was the entire plant equipment for many large plants.

As above stated, we have used this metal in both large and small machines and some machines running as high as 60 to 70 tons for heavy sheet metal drawing work.

Yours very truly,
THE D. H. STOLL COMPANY.

MAGNOLIA ANTI-FRICTION METAL COMPANY OF GREAT BRITAIN, LTD.

Tel. No.: City 6596. *49, Queen Victoria Street, LONDON, E.C.* Teleg.: "Magnoller, London."

Tel. No.: 254-01. **LA MAGNOLIA,** *21, Rue de Petrograd, PARIS.* Teleg.: "Metamagne, Paris."

Digitized by Google

INDEX TO ADVERTISEMENTS.

	PAGE
Albion Motor Car Co. Ltd., Scotstoun, Glasgow ...	129
Allen, Edgar, & Co., Ltd., Sheffield	146
André Sleigh & Anglo Ltd., London, W.C. ...	xxxvi
Auto-Ticket Printing Co., Ltd., Liverpool	—
Avon India Rubber Co., Ltd., Melksham	125
Baker, John, & Co. (Rotherham), Ltd., Rotherham	xxii
Beckett, Laycock & Watkinson, Ltd., Willesden ...	xx
Belliss & Morcom, Ltd., Birmingham	xxxiv
Bell Punch & Printing Co., Ltd., London, E.C. ...	132
Brill Company, J. G., London, E.C.	xxxv
Britannia Lamp & Accessories Co., Ltd., London, E.C.	xiv
British Hele-Shaw Patent Clutch Co., Ltd., Oldham	144
British Insulated & Helsby Cables, Ltd., Prescot...	xxxi
British Thomson-Houston Co., Ltd., Rugby ...	xxxvi
British Westinghouse Electric & Manufacturing Co., Ltd., Manchester	xix
Brockhouse, J., & Co., Ltd., West Bromwich ...	136
Byles, William & Sons, Ltd., Bradford	—
Clayton & Co. (Huddersfield), Ltd., Huddersfield...	129
Cleveland Metal Co., Stockton-on-Tees	xvi
Coan, R. W., 219, Goswell Road, London, E.C. ...	xvi
Commercial Cars, Ltd., Luton	138
Courtenay, J. W., Ltd., London, W.C.	143
Coventry Chain Co., Ltd., Coventry	136
Daimler Co., Ltd., Coventry	433
Dennis Bros., Guildford	124
Dick, Kerr & Co., Ltd., London, E.C. ... vi, vii,	148
Docker Brothers, Ltd., London, E.C.	132
Dunlop Rubber Co., Ltd., Aston Cross, Birmingham	137
Edison Swan Electric Co., Ltd., Ponders End ...	xxi
Electrical Press Ltd., The, London, W.C.	142
Electro-Mechanical Brake Co. Ltd., West Bromwich	xxxviii
Equipment & Engineering Co., London viii, xxxii,	xxxiii
Fodens, Ltd., Sandbach	140
General Electric Co., Ltd., London, E.C.	i
General Seating Co., Ltd., London, E.C.	ii
General Vehicle Co., Ltd., London, W.C.	—
Glasgow Numerical Ticket Printing Co., Glasgow...	147
Glyco Metal Co., Ltd., South Parade, Manchester ...	—
Goodyear Tyre and Rubber Co., Ltd., London, W.C.	139
Green, Geo. W., & Co. (Feltham), Ltd., Feltham ...	144
Grover & Co., Ltd., Stratford, London, E.	147
Hadfields, Ltd., Sheffield	x
Halley's Industrial Motors, Ltd., Glasgow	126
Henley's Telegraph Works Co., Ltd., London xix,	141
Herbert Frood Co. Ltd., Chapel-en-le-Frith ...	135
Hurst, Nelson & Co., Ltd., Motherwell	xxxvii
International Truck and Car Co., Ltd., London ...	xviii
Johnson & Phillips, Ltd., London, S.E. ...	xxxviii
Lacre Motor Car Co., 78, York Road, London ...	131
Leyland Motors (1914), Ltd., Leyland	127
"L'Industrie des Tramways et Chemins de Fer," Paris	xiv
London General Omnibus Co. Ltd., Broadway, Westminster, S.W.	136
Lorain Steel Co., London, E.C.	iv
Macintosh, Chas., & Co., Ltd., Manchester	—
Magnolia Anti-Friction Metal Co., London, E.C. ...	xii
Maudslay Motor Co., Ltd., 4, Parkside, Coventry ...	126
Mirrlees Watson Co., Ltd., Glasgow	430
"Motor Traction," 20, Tudor Street, London, E.C.	xvi
Napier, D., and Son, London, W.	434
Oriental Tube Co., Ltd., West Bromwich	—
Pease & Partners, Ltd., Middlesbrough	xxii
Peckham Truck & Engineering Co., Ltd., London...	xv
Pinchin, Johnson & Co., Ltd., London, E.C. ...	ix
R.E.T. Construction Co., Ltd., London, E.C. ...	144
Scholey & Co., Ltd., London, E.C.	xi
Shepherd's Parging Block Co., Milkstone, Rochdale	xiii
Shrewsbury & Challiner Tyre Co., Ltd., Manchester	134
Siemens Bros. Dynamo Works, Ltd., London, S.W.	v
Skefko Ball Bearing Co., Ltd., Luton	xii
Smith, Frederick, & Co., Ltd., Salford, Manchester	—
Spencer-Moulton & Co. Ld., Deansgate, Manchester	130
Standard Underground Cable Co., London, E.C. ...	xvi
Stewarts & Lloyds, 41, Oswald Street, Glasgow ...	xxxvi
Straker & Squire, Ltd., London, S.E.	128
Thermit, Ltd., London, E.C.	iii
Thornycroft, John I. & Co., London, S.W.	135
Tilling-Stevens, Ltd., 26, Victoria Street, S.W. ...	123
Titan Trackwork Co., Ltd., Sheffield	xv
"Tramway and Railway World"	xviii
Tramway Supplies, Ltd., Leeds	147
Tudor Accumulator Co., Ltd., London, S.W. ...	132
Tyne Metal Co., Ltd., Newcastle-upon-Tyne ...	147
Underground Electric Railways Co., Ltd., London	—
United Electric Car Company, Preston, Lancs. ...	viii
Vandervell, C. A. & Co. Ltd. London, W.	—
Walter Scott, Ltd., Leeds Steel Works, Leeds ...	145
Waygood-Otis, Ltd., London, S.E.	—
White Motors and Accessories, Ltd., London, S.W.	xvii
Williamson, Alfred, Ashton-under Lyne	xiv
Wilson Rolling Shutter Co. (1914) Ltd., London, S.W.	xviii
Wood-Milne, Ltd., Preston	133
Zenith Carburetter Co., London, W.	135

Digitized by Google

The BRITANNIA LAMP & ACCESSORIES CO. Ltd.

Telegrams: "Aetnaco, Barb., London" Telephone: City 1257 (2 lines)

"Britannia House"
48, Milton Street
LONDON, E.C.

Supply all Material for the
— complete equipment of —

Electric Railway, Tramway, and Transmission Lines



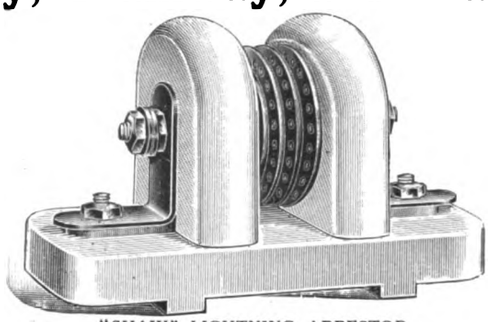

"SHAW" LIGHTNING ARRESTOR



SPECIFY "AETNA" INSULATION

Large Stock of Line Material, Porcelain Insulators, "Shaw" Lightning Arrestors, Fuses, Tools, and Accessories for Traction and Transmission Lines

ALFRED WILLIAMSON

TRAMWAY & RAILWAY TICKET PRINTER,
ASHTON-UNDER-LYNE.

THE 'WILLIAMSON' REGISTERING TICKET BELL PUNCH

TICKETS & PUNCHES
Supplied on the Very Best Terms.

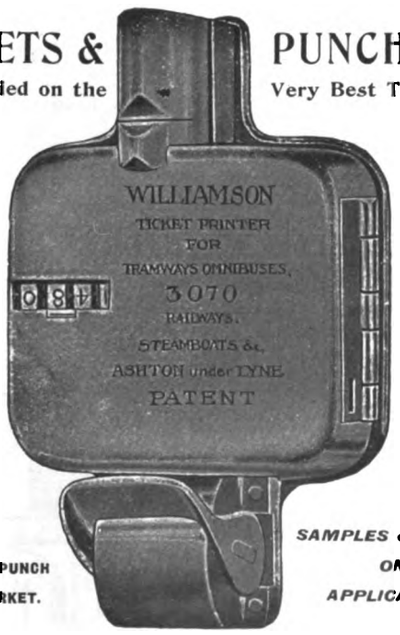

ESTABLISHED 1835.

Telephone: 320 Ashton-under-Lyne.

THE STRONGEST PUNCH ON THE MARKET.

SAMPLES & PRICES ON APPLICATION.

PUNCHES ON SALE OR HIRE.

L'INDUSTRIE DES TRAMWAYS
et
CHEMINS DE FER.

Monthly Publication (Illustrated).
Technical. Administrative. Commercial.
Subscriptions 20 fr. (16s.) per annum.

For Advertising rates and other information, application should be made to

The Manager,
L'INDUSTRIE DES TRAMWAYS ET CHEMINS DE FER,
15, rue de Madrid, PARIS.

Digitized by Google

ALL TYPES OF TRAMWAY POINTS

Made of
"TITAN"
MANGANESE STEEL

TITAN TRACKWORK CO.
Rutland Works, Rutland Road, SHEFFIELD LTD.

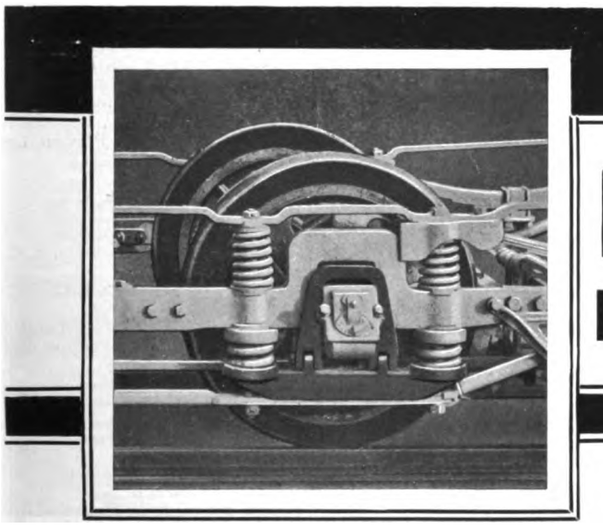

THE
PECKHAM
PENDULUM GEAR

THE
PECKHAM
TRUCK AND ENGINEERING CO. LTD.
26, BUDGE ROW, CANNON ST., LONDON, E.C.

Telegrams: TRUXENPECK, CANNON, LONDON
Telephone: CITY 3294

The Automobile and the Ox Cart both "get there," but what a *difference* in *service* and *satisfaction*.

Likewise there's a vast difference in the *service* and *satisfaction* rendered by the *PECKHAM Pendulum Gear* and the imitations of it that have been and are being offered as "just as good." *Beware of those imitations;* get the *genuine*.

In use on over *35 TRAMWAYS* in this country.

Digitized by Google

WIRE & RODS

COPPER
BRASS
COPPER CLAD
PHOSPHOR BRONZE
SILICON BRONZE
TROLLEY WIRE

Standard Underground Cable Co.
DOCK HOUSE, BILLITER ST., LONDON

Telegrams: KRANKASES, ISLING-LONDON. Telephones: 4879 CENTRAL. 3846 CITY.

ALUMINIUM CASTINGS

COAN CASTS CLEAN CRANK CASES

MADE AND REPAIRED.

FOR ALL TRADES.
LARGE AND SMALL.
PURE AND HARDENED

Inquiries invited.
Estimates given.

Contractor to Admiralty and War Office.

R. W. COAN, THE ALUMINIUM FOUNDRY,
219 Coswell Road, London, E.C.

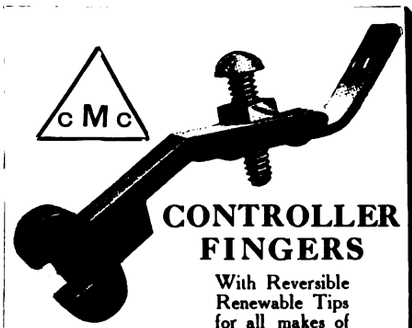

CONTROLLER FINGERS

With Reversible Renewable Tips for all makes of - Controllers. -

Cleveland Metal Co. Ltd.
Bridge Works, Stockton-on-Tees.

Agents:
London: A. & A. Electrical Co., 51, Whitcomb Street, W.C.
Scotland: Horton, King & Smith, 8, Wellington Street, GLASGOW.

MOTOR TRACTION

DEALING WITH MOTOR VEHICLES for BUSINESS PURPOSES

GIVES

Practical information and reliable data regarding all types of Motor Vehicles for the transport of passengers or goods, municipal purposes, etc.

Every Wednesday. *One Penny.*
Specimen Copy Post Free.
ILIFFE & SONS Ltd., 20, Tudor St., London, E.C.

BUYER'S GUIDE

The Names of Advertisers whose announcements appear in consecutive issues of THE TRAMWAY AND RAILWAY WORLD are inserted free of charge, under such headings as may be desired.

ACCUMULATORS, ELECTRICAL.
Edison Accumulators, Ltd., London.
Tudor Accumulator Co., London, S.W.

ADVERTISING, TRAMWAY AND RAILWAY.
J. W. Courtenay, Ltd., London.

AIR BRAKES. (See Brakes.)

ALUMINIUM.
British Aluminium Co., Ltd., London, E.C.

AMMETERS. (See Voltmeters.)

ANCHOR CHAIRS.
Blackwell & Co., London.

ANGLE IRON BUFFERS.
Brill Company, J. G., London, S.W.

ANTI-FRICTION METAL.
Magnolia Anti-Friction Metal Co., Ltd., E.C.

AUTOMATIC BRAKE ADJUSTERS. (See Brake Adjusters.)

AXLE BOXES.
Brill Company, J. G., London, E.C.
Peckham Truck and Eng. Co., London, S.W.

AXLES AND TYRES.
Anger Mfg. & Supply Co., Ltd., Preston, Lancs.
Baker, John, & Co., Rotherham.
Equipment & Engineering Co., London, W.C.

BALL BEARINGS.
Skefko Ball Bearing Co., Ltd., Luton.

BATTERIES, STORAGE. (See Accumulators.)

BEARINGS.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
Skefko Ball Bearing Co., Ltd., Luton.
Watlington & Co., Ltd., London, E.C.

BELLS AND GONGS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Watlington & Co., Ltd., London, E.C.

BLINDS AND CURTAINS.
Beckett, Laycock & Watkinson, Ltd., London.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.

BOILERS.
Babcock & Wilcox, Ltd., London, E.C.

BOLTS.
Allen, Edgar & Co., Ltd., Sheffield.
Bayliss, Jones, & Bayliss, Wolverhampton.
Brockhouse, J., & Co., Ltd., West Bromwich.
Hadfields, Ltd., Sheffield.
Peckham Truck and Eng. Co., London, S.W.
"The Coventry" Repetition Co., Coventry.
Titan Trackwork Co., Ltd., Nottingham.

BOND PAINTS.
Ruberoid Co., Ltd., London, E.C.

BOXES, JOURNAL.
Anger Mfg. & Supply Co., Ltd., Preston, Lancs.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
Watlington & Co., Ltd., London, E.C.

BRACKETS AND CROSS ARMS. (See Poles.)

BRAKE ADJUSTERS.
Anger Mfg. & Supply Co., Ltd., Preston, Lancs.

BRAKES, CAR.
Brill Company, J. G., London, E.C.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Electric Co.
Dick, Kerr, & Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peacock Brake Co., London, E.C.
Peckham Truck and Eng. Co., London, S.W.

BRAKE HANDLES.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peacock Brake Co., London, E.C.
United Electric Car Co., Ltd., Preston.

BRAKE SHOES.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
Hadfields, Ltd., Sheffield.
Hurst, Nelson & Co., Ltd., Motherwell.
Peacock Brake Co., London, E.C.
Peckham Truck and Eng. Co., London, S.W.
Tyne Metal Co., Ltd., Newcastle-on-Tyne.
United Electric Car Co., Ltd., Preston.

BROOMS, TRACK.
Brush Elec. Engineering Co., Ltd.
Hurst, Nelson & Co., Ltd., Motherwell.
Watlington & Co., Ltd., London, E.C.

BRUSHES, DYNAMO AND MOTOR.
British Westinghouse Co., Ltd., London.
Electric Construction Co., Ltd., London.
Watlington & Co., Ltd., London, E.C.

CABLES, ELECTRIC TRAMWAY AND LIGHTING.
British Aluminium Co., Ltd., London, E.C.
British Westinghouse Co., Ltd., London.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.
Henley's Telegraph Works Co., Ltd., London
Macintosh & Co., Ltd., Chas., London, E.C.

CABLE PULLEYS.
Tyne Metal Co., Ltd., Newcastle-on-Tyne.

CABLE TRAMWAYS.
Dick, Kerr & Co., Ltd., London, E.C.

CARBON BRUSHES. (See Dynamo & Motor Brushes.)

CARBURETTORS.
Green, Geo. W., & Co., Ltd., Feltham.

CAR CURTAINS.
Beckett, Laycock & Watkinson, Ltd., London.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.

CAR JACKS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.
Watlington & Co., Ltd., London, E.C.

CAR ROOF COVERINGS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

CAR SEATS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
United Electric Car Co., Ltd., Preston, Lancs.

CAR STEPS. (See Movable Car Steps.)

CAR STOVES.
Brill Company, J. G., London, E.C.

CAR TRIMMINGS.
Brill Company, J. G., London, E.C.
General Seating Co., Ltd., London, E.C.

CARS, TRAMWAY.
Brill Company, J. G., London, E.C.
Dick, Kerr & Co., Ltd., London.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

CAR TRUCKS.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
United Electric Car Co., Preston.

CASTINGS.
Allen, Edgar & Co., Ltd., Sheffield.
Hadfields, Ltd., Sheffield.
Hurst, Nelson & Co., Ltd., Motherwell.
Stewarts & Lloyds, Glasgow.
Titan Trackwork Co., Ltd., Nottingham.

CHAINS.
Coventry Chain Co., Ltd., Coventry.

CHARS-A-BANCS.
Commercial Cars, Ltd., Luton.
Clayton & Co. Huddersfield, Ltd., Huddersfield.

CIRCUIT BREAKERS.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Electric Construction Co., Ltd., London.
Watlington & Co., Ltd., London, E.C.

COLOURS. (See Paint.)

COMMERCIAL MOTORS.
Clayton & Co. Huddersfield, Ltd., Huddersfield.

COMMERCIAL VEHICLES.
Commercial Cars, Ltd., Luton.

COMMUTATORS & COMMUTATOR SEGMENTS.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

Digitized by Google

BARRETT TRUCK JACKS FOR TRAMCARS AND MOTOR VEHICLES

ALL MODELS DELIVERED FROM STOCK

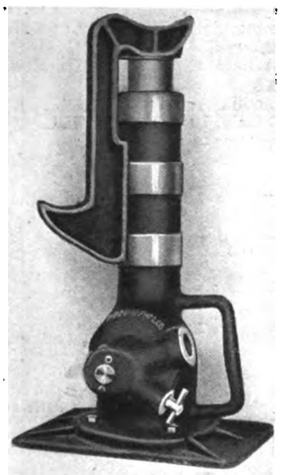

"Barrett" Ball Bearing Screw Jack
Capacity - 10 Tons £4 15 0 each

The Barrett Jack is the best designed, most carefully made, and the safest jack known to the tramway and industrial world to-day. The fact that nearly . . . . . .

ONE MILLION BARRETT JACKS

have been placed with American steam and street railways is substantial evidence of their worth.

We specialise in repairs to all Models.

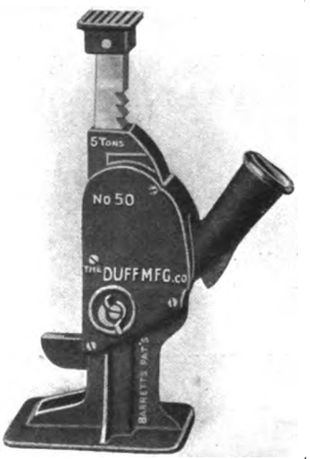

"Barrett" Automatic Lowering Jack, fitted with Toe Lift 1½ inches from the ground
Capacity - 5 Tons £2 5 0 each

SOLE BRITISH AGENTS

White Motors and Accessories, Limited

Concanon Works, Concanon Road, Acre Lane, Brixton
(Close to Lambeth Town Hall)
LONDON, S.W.

Telephones: 565 & 566 Brixton
Telegrams: Yenisean, London
Cables: Yenwalt, London

DIRECTORY OF MANUFACTURERS OF AND DEALERS IN SUPPLIES (*continued*).

CONDENSING PLANT.
Belliss & Morcom, Ltd., Birmingham.
Mirrlees Watson Co., Ltd., Glasgow.

CONDUITS.
Doulton & Co., London.

CONTROLLER FINGERS.
Anger Mfg. & Supply Co., Ltd., Preston, Lancs.
Equipment & Engineering Co., London, W.C.

CONTROLLERS, ELECTRIC CAR.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Dick, Kerr, & Co., Ltd., London.

CONVERTIBLE CARS.
Brill Company, J. G., London, E.C
Hurst, Nelson & Co., Ltd., Motherwell.

CONVEYING AND ELEVATING MACHINERY.
Allen, Edgar, & Co., Ltd., Sheffield.
Hadfields, Ltd., Sheffield.

CROSSINGS. (See Points and Crossings).

CRUCIBLES.
Doulton & Co., Ltd., London

DESTINATION INDICATORS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.

DESTINATION SCREENS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.

DESTINATION SIGNS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.

DOG SPIKES.
Bayliss, Jones & Bayliss, Ltd., Wolverhampt'n

DROP FORGINGS.
Smethwick Stamping Co., Smethwick.

DYNAMOS.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Dick, Kerr & Co., Ltd., London.

ECONOMISERS.
Green, E., & Son, Ltd., Wakefield.

ELECTRIC BRAKES.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Electric Co., Ltd., Manchester.

ELECTRIC CABLES.
Henley's Telegraph Works Co., Ltd., London.
Macintosh & Co., Ltd., Chas., London, E.C.

ELECTRIC HEATERS.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.
Watlington & Co., Ltd., London, E.C.

ELECTRIC LAMPS.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.
Watlington & Co., Ltd., London, E.C.

ELECTRIC TRAMWAY SUPPLIES.
Allen, Edgar, & Co., Ltd., Sheffield.
Brill Company, J. G., London, E.C.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Co., Ltd., London.
Consolidated Accessories Co., London.
Dick, Kerr, & Co., Ltd., London.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.
Hadfields, Ltd., Sheffield.
Henley's Telegraph Works Co., Ltd., London.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
Titan Trackwork Co., Ltd., Nottingham.
United Electric Car Co., Ltd., Preston, Lancs.
Watlington & Co., Ltd., London, E.C.

ELECTRIC TRAMWAYS.
Allen, Edgar, & Co., Ltd., Sheffield.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd
Dick, Kerr, & Co., Ltd., London.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

ELECTRICAL ACCESSORIES.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.

ENGINES.
Belliss & Morcom, Ltd., Birmingham.

FANS, ELECTRIC
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.

FARE REGISTERS.
Bell Punch & Printing Co., Ltd., London.
Brill Company, J. G., London, E.C.

FENCES AND GATES.
Bayliss, Jones, & Bayliss, London, E.C.

FENDERS, TRAMCAR.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

FISHBOLTS.
Allen, Edgar, & Co., Ltd., Sheffield.
Bayliss, Jones & Bayliss, Ltd., Wolverhampt'n

FISHBOLTS AND PLATES.
Anger Mfg. & Supply Co., Ltd., Preston, Lancs.

FOLDING GATES.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.

FORGINGS.
Baker, John, & Co., Rotherham.
Brill Company, J. G., London, E.C.
Brockhouse, J., & Co., Ltd., West Bromwich.
Hurst, Nelson & Co., Ltd., Motherwell.
Smethwick Stamping Co., Smethwick.

FUEL ECONOMISERS.
Green, E., & Son, Ltd., Wakefield.

GEAR CASES.
British Thomson-Houston Co., Ltd., Rugby.
Equipment & Engineering Co., London, W.C.
Peckham Truck and Eng. Co., London, S.W.
Watlington & Co., Ltd., London, E.C.

GEARS.
British Thomson-Houston Co., Ltd., Rugby.
Hadfields, Ltd., Sheffield.
Scholey and Co., Ltd., London, E.C.
Watlington & Co., Ltd., London, E.C.

GEARS AND PINIONS.
British Thomson-Houston Co., Ltd., Rugby.
Equipment & Engineering Co., London, W.C.
Peckham Truck and Eng. Co., London, S.W.
Watlington & Co., Ltd., London, E.C.

GEAR WHEELS.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

GENERATORS. (See Dynamos.)

GLASSWARE.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.

GRINDING MACHINES.
Equipment & Engineering Co., London, W.C.

GRINDING MACHINES, CAR WHEEL.
Thermit, Ltd., London, E.C.
Watlington & Co., Ltd., London, E.C.

GUARD WIRE.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

Digitized by Google

THE
INTERNATIONAL
TRUCK & CAR
CO. LTD.

MANUFACTURERS OF

ROLLING STOCK FOR
ELECTRIC RAILWAYS
AND TRAMWAYS

PATENT RADIAL AXLE TRUCKS
FOR SHARP CURVES a Speciality

59-61, New Oxford Street, LONDON

WILSON
ROLLING SHUTTER CO. (1914) LTD.



SHUTTERS of every description in Steel, Bronze, Wood

66, VICTORIA ST., LONDON, S.W.
'PHONE 104 VICTORIA.

"To all engaged upon track construction and even to those engaged in road engineering we can strongly recommend this work."—*The Surveyor.*

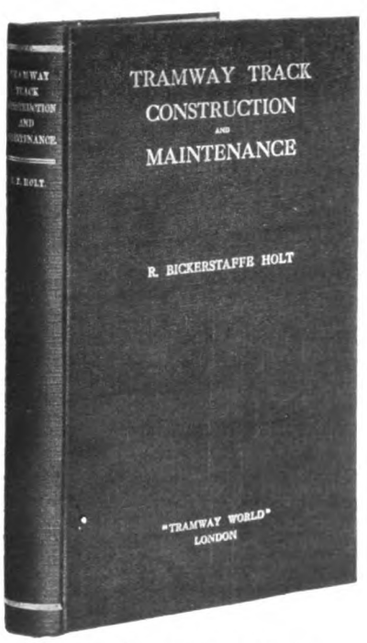

250 pages, 10 × 6½ × 1 in., with over 150 illustrations—Price 10s. 6d.

TRAMWAY & RAILWAY WORLD OFFICES
Amberley House, Norfolk Street, London, W.C.

DIRECTORY OF MANUFACTURERS OF AND DEALERS IN TRAMWAY AND RAILWAY SUPPLIES (*continued*).

GUARDS.
Brill Company, J. G., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.

HEADLIGHTS.
Brill Company, J. G., London, E.C.
Watlington & Co., Ltd., London, E.C.

HEATERS, ELECTRIC.
Watlington & Co., Ltd., London, E.C.

HYDRAULIC PRESSES.
Hadfields, Ltd., Sheffield.

IGNITION LEADS (FOR MOTOR CARS).
Henley's Telegraph Works Co., Ltd., London.

INDICATORS.
Brill Company, J. G., London, E.C.
Consolidated Accessories Co., London.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

INSTRUMENTS.
Edison & Swan United Electric Light Co.

INSULATING MATERIAL.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

INSULATING VARNISHES.
Equipment & Engineering Co., London, W.C.

INSULATORS, TRAMWAY.
Blackwell, R. W., & Co., Ltd., London, E.C.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Co., Ltd., London.
Consolidated Accessories Co., London.
Doulton & Co., Ltd., London.
Equipment & Engineering Co., London, W.C.
Henley's Telegraph Works Co., Ltd., London.
Watlington & Co., Ltd., London, E.C.

IRONWORK FOR CAR BODIES.
Brockhouse, J., & Co., Ltd., West Bromwich.

JACKS.
Equipment & Engineering Co., London, W.C.
White Motors and Accessories, Ltd.

JAPANS.
Kearsley & Co., Ripon.

JOINT BOXES.
Henley's Telegraph Works Co., Ltd., London.

JOINT PLATES.
Allen, Edgar, & Co., Ltd., Sheffield.
Hadfields, Ltd., Sheffield.

JOINTS, RAIL.
Allen, Edgar, & Co., Ltd., Sheffield.
Thermit, Limited, London, E.C.

JOURNAL BOXES.
Brill Company, J. G., London, S.W.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.
United Electric Car Co., Ltd., Preston, Lancs.

JOURNAL BOX PACKING.
Beckett, Laycock & Watkinson, Ltd., London.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.
Peckham Truck and Eng. Co., London, S.W.

LAMPS, ELECTRIC.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Electric Construction Co., Ltd., London.
Watlington & Co., Ltd., London, E.C.

LEATHERS (UPHOLSTERY).
General Seating Co., Ltd., London, E.C.

LIFE GUARDS.
Hurst, Nelson & Co., Ltd., Motherwell.

LIFTING JACKS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Glasgow.

LIGHTNING ARRESTERS.
Blackwell, R. W., & Co., Ltd., London, E.C.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

LINCRUSTA WALTON.
General Seating Co., Ltd., London, E.C.

LINE MATERIAL, ELECTRIC TRAMWAY
British Thomson-Houston Co., Ltd., Rugby.
Clough, Smith, & Co., Ltd., London, E.C.
Consolidated Accessories Co., London.
Dick, Kerr, & Co., Ltd., London.
Electro-Mechanical Brake Co., West Brom.
Equipment & Engineering Co., London, W.C.
Henley's Telegraph Works Co., Ltd., London.
Tramway Supplies, Ltd., Leeds.
Watlington & Co., Ltd., London, E.C.

LOCK WASHERS (Fainut Patent).
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

LOCOMOTIVES.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Co., Ltd., London.
Dick, Kerr, & Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.

LORRIES.
Clayton & Co. Huddersfield, Ltd., Huddersf'ld.
Commercial Cars, Ltd., Luton.

LUBRICANTS.
Wakefield, C. C., & Co., London, E.C.

METALS.
Magnolia Anti-Friction Metal Co. of Great Britain, Ltd., London, E.C.

MILLBOARDS—"PANELLIUM."
General Seating Co., Ltd., London, E.C.

MOTOR OMNIBUSES.
Clayton & Co. Huddersfield, Ltd., Huddersf'ld.
Commercial Cars, Ltd., Luton.

MOTOR TRUCKS (See Trucks).

MOTOR VANS.
Clayton & Co Huddersfield, Ltd., Huddersf'ld.
Commercial Cars, Ltd., Luton.

MOTOR VEHICLES.
Clayton & Co Huddersfield, Ltd., Huddersf'ld.
Commercial Cars, Ltd., Luton.

MOVABLE CAR STEPS.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.

MUNICIPAL VEHICLES.
Clayton & Co. Huddersfield, Ltd., Huddersf'ld.
Commercial Cars, Ltd., Luton.

OILS.
Wakefield, C. C., & Co., London, E.C.

OILSKINS.
Ailsa Oilskin and Rubber Co., Dalry.

OVERHEAD TROLLEY EQUIPMENT. (See Line Mat'l.

OVERHEAD LINE MATERIAL.
British Thomson-Houston Co., Ltd., Rugby.
Green, Geo. W., & Co., Ltd., Feltham.
Watlington & Co., Ltd., London, E.C.

OVERHEAD LINE TOOLS.
M. & G. Truck & Engineering Co., Ltd.
Watlington & Co., Ltd., London, E.C.

PAINT.
Kearsley, Robert, & Co., Ltd., Ripon, Yorks.

PAINTS, INSULATING.
Ruberoid Co., Ltd., London, E.C.

PANELS, ALUMINIUM.
British Aluminium Co., Ltd., London, E.C.

PANELS, MAHOGANY, etc.
Brill Company, J. G., London, S.W.

PANELS, 3-PLY, etc.
General Seating Co., Ltd., London, E.C.

PERMANENT WAY TOOLS.
Allen, Edgar, & Co., Ltd., Sheffield.

POINTS AND CROSSINGS.
Allen, Edgar, & Co., Ltd., Sheffield.
Dick, Kerr, & Co., Ltd., London.
Hadfields, Ltd., Sheffield.
Lorain Steel Company, London.
Titan Trackwork Co., Ltd., Sheffield.

POINT CONTROLLERS.
Clay & Atkinson, Bradford.
Equipment & Engineering Co., London, W.C.

POLES, METAL.
Clough, Smith, & Co., Ltd., London, E.C.
Dick, Kerr, & Co., Ltd., London.
Equipment & Engineering Co., London, W.C.
Peckham Truck and Eng. Co., London, S.W.
Stewarts & Lloyds, Ltd., Glasgow.
Watlington & Co., Ltd., London, E.C.

PORTABLE RAILWAYS.
Hurst, Nelson & Co., Ltd., Motherwell.

PRESSES, HYDRAULIC.
Youngs, Ryland St. Works, Birmingham.

PUBLIC SERVICE VEHICLES.
Clayton & Co Huddersfield, Ltd., Huddersf'ld.

PULLEY BLOCKS.
Youngs, Ryland St. Works, Birmingham.

PULLEYS, CABLE.
Dick, Kerr, & Co., Ltd., London.
Hadfields, Ltd., Sheffield.
Tyne Metal Co., Ltd., Newcastle-on-Tyne.

PULLEYS, SHAFTING, COUPLINGS, etc.
Allen, Edgar, & Co., Ltd., Sheffield.
Brown Bayley's Steel Works, Ltd., Sheffield.
Hadfields, Ltd., Sheffield.

PUNCHES, TICKET.
Auto-Ticket Printing Co., Ltd., Liverpool.
Bell Punch & Printing Co., Ltd., London.
Ticket Punch & Register Co., Ltd., London.
Williamson, Alfred, Ashton-under-Lyne.

RAIL BENDERS.
Equipment & Engineering Co., London, W.C.
Hadfields, Ltd., Sheffield.

(*Continued on page xx.*)

Digitized by Google

Over 4500 Westinghouse
Tramway Motors

have been supplied to the London County Council and the Glasgow Corporation. These motors are famous for their efficiency and low maintenance costs. All renewable parts made to jigs, ensuring accurate fitting of spare parts.

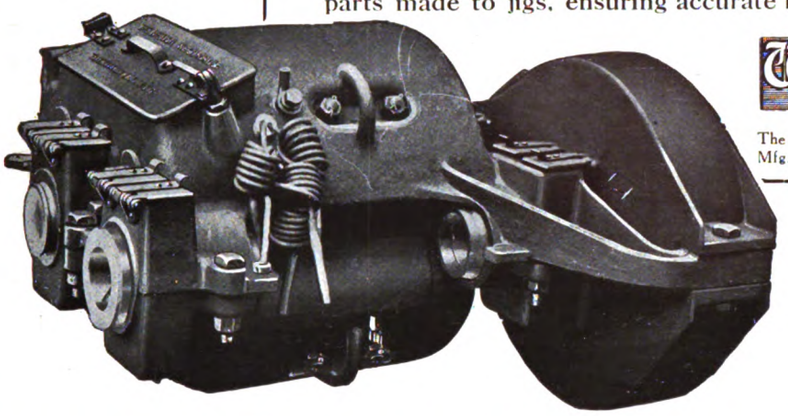

Westinghouse
Manchester

The British Westinghouse Electric and Mfg. Co Ltd., Trafford Park, Manchester

Henley's Solid Rubber Cables

Also known as "Cab Tyre Sheathed." ***Patent 3996/11.***

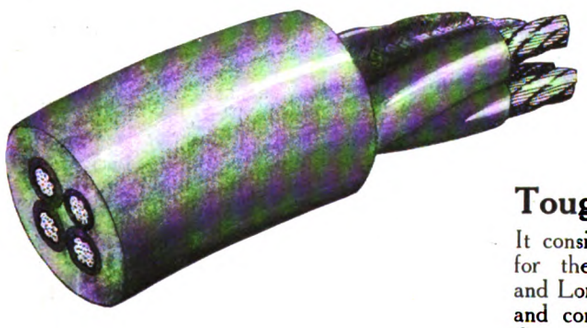

HENLEY'S tough, resilient, SOLID Rubber Cables will resist destructive action over periods covered by several replacements of cables having other forms of protection.

THE sheathing used on these Cables is that referred to in the Wiring Rules of the Institution of Electrical Engineers, Seventh Edition, March, 1916, page 14, Section 65, as

Tough Rubber Compound Protection

It consists of tough, resilient, *solid* rubber of the type used for the tyres of heavy motor vehicles, such as 'Buses and Lorries. We are manufacturers of Solid Band Tyres, and consequently know the type of Rubber Compound that will withstand the greatest amount of rough usage.

Therefore we can recommend our Solid Rubber Protection for Trailing Cables in Collieries, Wharves, Docks, Shipbuilding Yards, Manufactories, Railway Sheds and Tunnels, and all situations in which a wear-resisting sheathing is necessary; and for general wiring in Chemical Works, Breweries, Bleach and Dye Works, &c.

ASK FOR A SAMPLE.

W. T. HENLEY'S TELEGRAPH WORKS CO., LTD.,
Blomfield Street, London, E.C.

Digitized by Google

DIRECTORY OF MANUFACTURERS OF AND DEALERS IN SUPPLIES (*continued*).

RAIL BONDS.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

RAIL CLEANERS.
Brill Company, J. G., London, E.C.
Consolidated Accessories Co., London.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Watlington & Co., Ltd., London, E.C.

RAIL GRINDERS.
Consolidated Accessories Co., London, E.C.
Equipment & Engineering Co., London, W.C.
Thermit, Ltd., London, E.C.

RAIL JOINTS.
Bayliss, Jones & Bayliss, Ltd., Wolverhampton
Continuous Rail Joint Co., Ltd., London, E.C.
Hadfields, Ltd., Sheffield.
Thermit, Limited, London, E.C.

RAILLESS ELECTRIC SYSTEMS.
R.E.T. Construction Company, London, E.C.
Watlington & Co., Ltd., London, E.C.

RAIL LIFTERS
Equipment & Engineering Co., London, E.C.

RAIL PLANES.
Thermit, Ltd., London, E.C.

RAILS, TURNOUTS, CURVES, etc.
Allen, Edgar, & Co., Ltd., Sheffield.
Dick, Kerr, & Co., Ltd., London.
Hadfields, Ltd., Sheffield.
Lorain Steel Company, London.
M. & G. Truck & Engineering Co., Ltd.
Titan Trackwork Co., Ltd., Sheffield.
Walter Scott, Ltd., Leeds.

RAILWAY AND TRAMWAY MOTORS, ELECTRIC.
Brill Company, J. G., London, S.W.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Co., Ltd., London.
Dick, Kerr, & Co., Ltd., London.
Electric Construction Co., Ltd., London.

RAILWAY STORES.
General Seating Co., Ltd., London, E.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.

RATTAN.
Brill Company, J. G., London, E.C.
General Seating Co., Ltd., London, E.C.

ROLLER BEARINGS.
Hurst, Nelson & Co., Ltd., Motherwell.

SANDING DEVICES.
Equipment & Engineering Co., London, W.C.
Taylor, John, Liverpool.

SAND BOXES.
Brill Company, J. G., London, S.W.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

SEATS AND SEATING MATERIALS.
Brill Company, J. G., London, E.C.
Equipment & Engineering Co., London, W.C.
General Seating Co., Ltd., London, E.C.

SIDE GUARDS.
Equipment & Engineering Co., London, W.C.

SIMPLEX TACKS.
Equipment & Engineering Co., London, W.C.

SLACK ADJUSTERS.
Peckham Truck and Eng. Co., London, S.W.

SLEEPING BERTHS.
Beckett, Laycock & Watkinson, Ltd., London.
General Seating Co., Ltd., London, E.C.

SNOW PLOWS.
Brill Company, J. G., London, S.W.
Hurst, Nelson & Co., Ltd., Motherwell.

SPRINGS.
Allen, Edgar, & Co., Ltd., Sheffield.
Brill Company, J. G., London, E.C.
Hadfields, Ltd., Sheffield.
Hurst, Nelson & Co., Ltd., Motherwell.
M. & G. Truck & Engineering Co., Ltd.
United Electric Car Co., Ltd., Preston, Lancs.

SPRINGS (LAMINATED AND SPIRAL.)
Brockhouse, J., & Co., Ltd., West Bromwich.

SPRINGS (UPHOLSTERY, etc.).
General Seating Co., Ltd., London, E.C.

SPRINKLING CARS.
Brill Company, J. G., London, S.W.
Hurst. Nelson & Co., Ltd., Motherwell,
M. & G. Truck & Engineering Co., Ltd.
United Electric Car Co., Ltd., Preston, Lancs.

STEAM TURBINES.
Belliss & Morcom, Ltd., Birmingham.
British Thomson-Houston Co., Ltd., Rugby.
British Westinghouse Elec. & Mfg. Co., Ltd.
Dick, Kerr, & Co., Ltd., London.

STEEL.
Allen, Edgar, & Co., Ltd., Sheffield.
Baker, John, & Co., Rotherham.

STEEL FORGINGS.
Allen, Edgar, & Co., Ltd., Sheffield.
Baker, John, & Co., Rotherham.
Brill Company, J. G., London, E.C.
Brockhouse, J., & Co., Ltd., West Bromwich.
Hadfields, Ltd., Sheffield.

STEEL STRUCTURAL WORK.
Allen, Edgar, & Co., Ltd., Sheffield.

STEPS. (See Movable Car Steps.)

STONEBREAKERS.
Allen, Edgar, & Co., Ltd., Sheffield.
Hadfields, Ltd., Sheffield.

STRAIN WIRE
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

SWEEPERS.
Brill Company, J. G., London, S.W.
Hurst, Nelson & Co., Ltd., Motherwell.

SWITCHBOARDS AND GEAR.
British Thomson-Houston Co., Rugby.
British Westinghouse Co., London.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.
Tramway Supplies, Ltd., Leeds.

SWITCHES, ELECTRICAL.
British Thomson-Houston Co., Ltd., Rugby.
Edison & Swan United Electric Light Co., Ltd., Ponders End, Middlesex.
Watlington & Co., Ltd., London, E.C.

TANK AND GIRDER WORK.
Allen, Edgar, & Co., Ltd., Sheffield.

THIRD-RAIL INSULATORS.
Doulton & Co., Ltd., London.
Watlington & Co., Ltd., London, E.C.

THREE-PLY VENEER.
Equipment & Engineering Co., London, W.C.

TICKET PUNCHES. (See Punches).

TIME INDICATORS.
General Seating Co., Ltd., London, E.C.

TIRES.
Allen, Edgar, & Co., Ltd., Sheffield.
Baker, John, & Co., Rotherham.
British Griffin Co., Ltd., London, E.C.
Equipment & Engineering Co., London, W.C.
Hadfields, Ltd., Sheffield.
Macintosh & Co., Ltd., Chas., London, E.C.
Peckham Truck and Eng. Co., London, S.W.

TOP COVERS.
Hurst, Nelson & Co., Ltd., Motherwell.
United Electric Car Co., Ltd., Preston, Lancs.

TOWER WAGONS.
Clayton & Co. Huddersfield, Ltd., Huddersf'ld.
Commercial Cars, Ltd., Luton.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

TRACK BRAKES.
Brill Company, J. G., London, S.W.
Equipment & Engineering Co., London, W.C.
Hurst, Nelson & Co., Ltd., Motherwell.
Peckham Truck and Eng. Co., London, S.W.

TRACK SANDERS.
Brill Company, J. G., London, S.W.
Hurst, Nelson & Co., Ltd., Motherwell.

TRACK TOOLS AND APPLIANCES.
Allen, Edgar, & Co., Ltd., Sheffield.
Watlington & Co., Ltd., London, E.C.

TROLLEY CORD.
Anger Mfg. & Supply Co., Ltd., Preston, Lancs.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

TROLLEY HANGERS.
British Westinghouse Co., Ltd., London.
Consolidated Accessories Co., London.
Equipment & Engineering Co., London, W.C.
Watlington & Co., Ltd., London, E.C.

TROLLEY STANDARD EARTHING DEVICE.
Consolidated Accessories Co., London.

TROLLEY TENSION INDICATOR.
Consolidated Accessories Co., London.

TROLLEY WHEELS AND HEADS.
British Aluminium Co., Ltd., London, E.C.
British Thomson-Houston Co., Ltd., Rugby.
Tramway Supplies, Ltd., Leeds.
Watlington & Co., Ltd., London, E.C.

TROLLEY WIRE.
Equipment & Engineering Co., London, W.C.
Frederick Smith & Co., Salford, Manchester.
Watlington & Co., Ltd., London, E.C.

TRUCK BRAKES.
Brill Company, J. G., London, E.C.
Peckham Truck & Eng. Co., London, S.W.

TRUCKS, CAR.
Brill Company, J. G., London, S.W.
Dick, Kerr, & Co., Ltd., London.
Hurst, Nelson & Co., Ltd., Motherwell.
Lorain Steel Company, London.
Peckham Truck and Eng. Co., London, S.W.
United Electric Car Co., Preston.

VARNISHES.
Pinchin, Johnson, & Co., Ltd., London, E.C.

WELDED JOINTS.
Thermit, Limited, London, E.C.

WHEELS AND AXLES.
Allen, Edgar, & Co., Ltd., Sheffield.
Baker, John, & Co., Rotherham.
Brill Company, J. G., London, S.W.
British Griffin Co., Ltd., London.
Equipment & Engineering Co., London, W.C.
Hadfields, Ltd., Sheffield.
Hurst, Nelson & Co., Ltd., Motherwell.

WHEELS WITH WROT IRON CENTRES.
Baker, John, & Co., Rotherham.
Hurst, Nelson & Co., Ltd., Motherwell.

WHITE METAL FOR BEARINGS.
Magnolia Anti-Friction Metal Co., London.

WIRE, COPPER.
Henley's Telegraph Works Co., Ltd., London.
Smith, Frederick, & Co., Salford, Manchester.
Watlington & Co., Ltd., London, E.C.

WIRE ROPES.
Watlington & Co., Ltd., London, E.C.

BECLAWAT

(Reg. Trade Mark).

Balanced Frameless Window

The window illustrated is a plain polished plate running in our Silent Window Channel and operated by Window Balance.

Weatherproof.
. No Rattling .

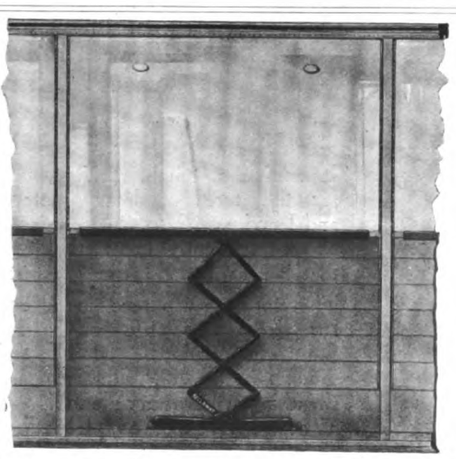

BECKETT, LAYCOCK & WATKINSON, Ltd.

Patentees and Manufacturers,

—AGENTS ALL— OVER THE WORLD.

Willesden, LONDON, N.W.

Tel. No. 1558 Willesden.

Tel. Add. "BECLAWAT"

Digitized by Google

Of National Necessity - No 4.

WE appreciate that Railways in war-time are absolutely vital necessitics—and bearing this in mind, we suggest you light all your Sheds, Yards, etc., with

ROYAL

EDISWAN

DRAWN WIRE FILAMENT

HALF-WATT TYPE LAMPS

Because **they give satisfaction** to the men working under them—**eliminate accidents** on account of their powerful light—**do not need attention—do not flicker,** and give **more light for less cost**

—Full particulars from—

THE EDISON SWAN ELECTRIC CO. LTD.
PONDERS END, MIDDLESEX

'Phone - - - 520 Enfield (6 lines)

ROYAL EDISWAN HALF WATT TYPE LAMPS IN LOCOMOTIVE SHOPS & RAILWAY SIDINGS.

Digitized by Google

JOHN BAKER & CO.

(ROTHERHAM), LTD.

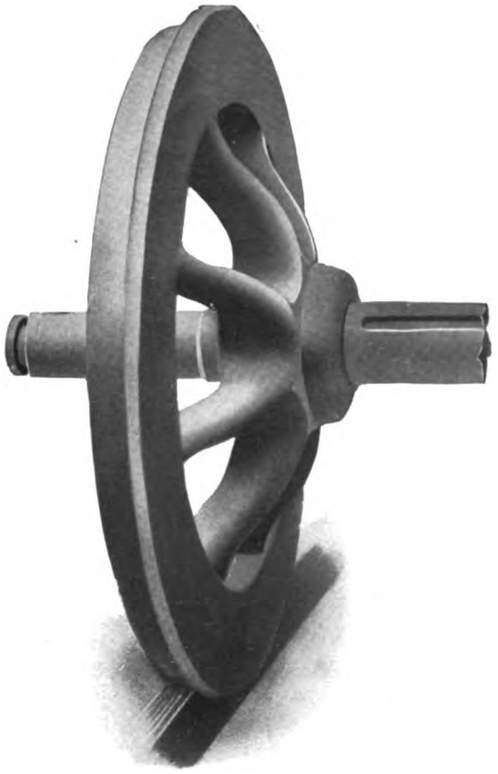

Brinsworth Iron & Wheel Works, ROTHERHAM
Kilnhurst Steel Works, near SHEFFIELD.

WHEELS WITH WROUGHT-IRON CENTRES.

AXLES TO BRITISH STANDARD SPECIFICATION FOR ORDINARY SERVICE.

Special (T) Brand Axles
— for Heavy Service. —

If you are troubled with Axle Breakages, try our Special Steel.

Tyres of Chrome Steel for High Mileage Results.

PEASE & PARTNERS, LTD.

WORKS:

TEES IRONWORKS, MIDDLESBRO'.

LICENSEES

OF THE

STEEL BACK

BRAKE BLOCK

FOR

RAILWAYS AND TRAMWAYS.

SOLE ENGLISH AGENTS:

ALFRED INGRAM & CO., Queen Annes Chambers, Westminster.

Digitized by Google

DIRECTORIES OF ELECTRIC TRAMWAYS

IN THE UNITED KINGDOM.

NAMES OF PRINCIPAL OFFICERS,

POSTAL ADDRESS, TELEGRAPHIC ADDRESS, AND TELEPHONE NUMBERS.

MUNICIPAL TRAMWAYS, pp. xxiii-xxiv. COMPANY TRAMWAYS, pp. xxiv-xxvi. PARTICULARS OF TRACK AND EQUIPMENT, pp. xxvii-xxx.

TRAMWAY ASSOCIATIONS, p. xxvi.

Aberdare Urban District Tramways, Gadlys Estate, Aberdare. [T.A., Tramways, Aberdare: T.N., 17.] *Gen. Manager and Elec. Engineer*, A. J. Abraham; *Traffic Supt.*, H. King; *Chairman Try. Com.*, Coun. E. Stonelake.

Aberdeen Corporation Tramways, Municipal Buildings, Union Street, Aberdeen. [T.A., Trams, Aberdeen: T.N. 826.] *Gen. Manager and Eng.*, R. S. Pilcher; *Per. Way Eng.*, J. Gordon (*Burgh Surveyor*); *Chairman Try. Com.*, Coun. Robertson.

Accrington Corporation Tramways, Market Hall, Accrington. [T.A., Trams, Accrington; T.N., 2212.] *Gen. Manager and Eng.*, H. Pilling; *Per. Way Eng.*, W. J. Newton; *Chairman Try. Com.*, Ald. T. E. Higham; *Vice-Chairman*, Coun. Morley.

Ashton-under-Lyne Corporation Tramways, Tramway Depot, Mossley Road, Ashton. [T.A., Tramways, Ashton; T.N., 325.] *Gen. Manager*, Ernest Holt; *Elec. Eng.*, N. Appelbee; *Chairman Try. Com.*, Ald. R. S. Oldham; *Vice-Chairman*, Ald. Waterhouse.

Ayr Corporation Tramways, Town Building, Ayr. [T.A., Trams, Ayr; T.N., 123.] *Gen. Manager and Eng.*, William Grant; *Burgh Elec. Eng.*, R. Marshall; *Per. Way Eng.*, John Young; *Rolling Stock Supt.*, Alf. Somerville; *Convener Try. Com.*, Coun. J. R. Learmont; *Vice-Chairman*, Bailie Murray.

Bacup Corporation Tramways.—Town Hall, Bacup, Lancs. [Lines leased to and worked by Rochdale Corporation.] *Town Clerk*, J. Entwistle; *Boro' Eng.*, W. H. Elce; *Chairman Try. Com.*, Ald. Sir H. Maden (Mayor); *Vice-Chairman*, Coun. J. H. Lord.

Barking Town Urban District Tramways, East Street, Barking. [T.N., 156 East Ham.] *Eng. and Manager*, W. Holmes; *Acting Engineer and Manager*, W. E. Kidner; *Chairman Try. Com.*, Coun. D. Gordon.

Barton-upon-Irwell District Council Light Railways, Barton-upon-Irwell.

[Line leased to and worked by the Lancashire United Tramways Co., *q.v.*]

Batley Corporation Tramways, Batley, Yorks. *Engineer*, S. D. Jones; *Chairman Try. Com.*, Coun. F. W. H. Auty; *Vice-Chairman*, Coun. J. E. Oldroyd.

[Lines leased to and worked by the Yorkshire (Woollen District) Electric Tramways, Ltd., *q.v.*]

Belfast City Tramways, Tramways Office, Sandy Row, Belfast. [T.A., Nance, Tramway, Belfast; T.N., 2444.] *Gen. Manager*, J. S. D. Moffet; *Traffic Manager*, R. McMaster; *City Elec. Eng.*, T. W. Bloxam; *Per. Way Eng.*, E. S. Pinkerton; *Chief Eng.*, A. A. Blackburn; *Chairman Try. Com.*, Coun. J. McCaughey; *Vice-Chairman*, Coun. J. Warwick.

Bexley Urban District Council Tramways, Car Sheds, Bexleyheath, Kent. [T.A., Stokes, Tramways, Bexleyheath; T.N., 79.] *Gen. Manager and Elec. Eng.*, H. P. Stokes; *Rolling Stock Supt.*, A. Williams; *Chairman Try. Com.*, Coun. G. Sheldon.

Birkenhead Corporation Tramways, Laird Street, Birkenhead. [T.A., Tramways Manager, Birkenhead; T.N., 1110.] *Gen. Manager*, C. Clarke; *Borough Sur. and Eng.*, C. Brownridge; *Rolling Stock Supt.*, R. Chadwick; *Chairman Try. Com.*, Coun. H. Halsall; *Vice-Chairman*, Coun. R. Frame.

Birmingham Corporation Tramways, The Council House, Congreve Street, Birmingham. [T.A., Trams, Birmingham; T.N., Central 7,000.] *Gen. Manager*, A. Baker; *City Elec. Eng.*, R. A. Chattock; *Traffic Supt.*, J. McDonnell; *Per. Way Eng.*, C. E. S. Bill; *Rolling Stock Supt.*, R. H. Dickinson; *Chairman Try. Com.*, Coun. H. Barrow, J.P.; *Vice-Chairman*, Coun. Fryer.

Blackburn Corporation Tramways, Tramways Office, Blackburn. [T.A., Tramways, Blackburn; T.N., 547.] *General Manager*, J. H. Cowell; *Elec. Eng.*, P. P. Wheelwright; *Traffic Manager*, E. Greek; *Car Shed Supt.*, H. W. Seymour; *Chairman Try. Com.*, Ald. W. Thompson; *Vice-Chairman*, Coun. C. Higham.

Blackpool Corporation Tramways, West Caroline Street, Blackpool. [T.N., 67.] *Gen. Manager*, C. Furness; *Traffic Supt.*, C. J. Baker; *Resident Eng.*, F. Field; *Chairman Try. Com.*, Ald. J. Brodie, J.P.; *Vice-Chairman*, Coun. R. Holt (Deputy Mayor).

Bolton Corporation Tramways, Bradshawgate, Bolton. [T.A., Manager, Tramways, Bolton; T.N., 490.] *General Manager*, J. Barnard; *Elec. Eng.*, W. J. H. Wood; *Per. Way Eng.*, E. Ll. Morgan; *Rolling Stock Supt.*, C. Beech; *Chairman Try. Com.*, Ald. J. Miles; *Vice-Chairman*, Coun. P. Higson.

Bootle Corporation Tramways, Electricity Works, Pine Grove, Bootle. [T.N., 424.] *Elec. Eng.*, T. D. Clothier; *Chairman Try. Com.*, Ald. Booth; *Vice-Chairman*, Coun. Pennington.

[Lines worked by Liverpool Corporation Tramways.]

Bournemouth Corporation Tramways, Tramways Offices, Lansdowne Crescent, Bournemouth [T.A., Tramways, Bournemouth; T.N., 1701.] *General Manager*, I. Bulfin; *Chief Assistant & Elec. Eng.*, H. Vickers; *Traffic Supt.*, R. O. Baldwin; *Chairman Try. Com.*, Coun. Bell; *Vice-Chairman*, Coun. McCabe.

Bradford Corporation Tramways, Central Office, 7, Hall Ings, Bradford. [T.A., Tramways, Bradford; T.N., 2381 and 2382.] *Gen. Manager*, C. J. Spencer; *Asst. Elec. Eng.*, J. W. Dawson; *Traffic Supt.*, T. Stirk; *City Elec. Eng.*, T. Roles; *Chairman Try. Com.*, Coun. Enoch Priestley; *Vice-Chairman*, Coun. J. F. Akeroyd.

Brighton Corporation Tramways, Lewes Road, Brighton. [T.A., Tramways, Brighton; T.N., 353 P.O.] *Eng. & Manager*, William Marsh; *Traffic Supt.*, W. N. Brooks; *Rolling Stock Supt.*, W. Orchard; *Per. Way Eng.*, F. N. Hudson; *Chairman Try. Com.*, Coun. Martin.

Burnley Corporation Tramways, Queen's Gate, Burnley. [T.N., 46.] *Gen. Manager*, Henry Mozley; *Boro. Elec. Eng.*, J. E. Starkie; *Boro. Surveyor*, G. H. Pickles; *Chairman Try. Com.*, Coun. E. Heap; *Vice-Chairman*, Coun. Irving.

Burton-on-Trent Corporation Tramways, Guild Street, Burton-on-Trent. [T.N., 202.] *Manager*, A. B. Slater; *Engineer*, T. Hall; *Chairman Try. Com.*, Ald. J. S. Rowland (Deputy Mayor); *Vice-Chairman*, Ald. Metcalfe.

Bury Corporation Tramways, Market Place, Bury. [T.N., 26.] *Gen. Manager*, William Clough; *Boro. Elec. Eng.*, S. J. Watson; *Chairman Try. Com.*, Ald. T. S. Collinge; *Vice-Chairman*, Coun. Hargreaves.

Cardiff Corporation Tramways, Central Offices, The Hayes, Cardiff. [T.A., Tramways, Cardiff; T.N., 1211, 1240, 1350, and 377.] *Gen. Manager and Elec. Eng.*, A. Ellis; *Deputy Manager*, C. G. M. New; *Traffic Manager*, H. David; *Per. Way Eng.*, W. Harpur; *Rolling Stock Supt.*, Jas. Preston; *Chairman Try. Com.*, Ald. Sir J. W. Courtis, J.P. (Deputy Mayor); *Vice-Chairman*, Coun. A. J. A. Stone.

Chester Corporation Tramways, Station Road, Chester. [T.N., 166.] *Traffic Supt.*, W. H. Ellis; *Elec. Eng.*, S. E. Britton; *Per. Way Eng.*, W. M. Jones; *Chairman Try. Com.*, Ald. J. Jones; *Vice-Chairman*, Coun. A. S. Dutton.

Chesterfield Corporation Tramways, Chatsworth Road, Chesterfield. [T.A., Tramways, Chesterfield; T.N., 78.] *Gen. Manager and Elec. Eng.*, R. L. Acland; *Traffic Manager*, F. Root; *Per. Way Eng.*, C. E. Crossley; *Chairman Try. Com.*, Ald. E. Shentall (Mayor); *Vice-Chairman*, Coun. Woodhead.

Colchester Corporation Tramways, Magdalen Street, Colchester. [T.A., Tramways, Colchester; T.N., 92.] *Gen. Manager and Engineer*, R. C. Bullough; *Chairman Try. Com.*, Coun. A. M. Jarmin; *Vice-Chairman*, Coun. J. T. Bailey.

Colne Corporation Tramways, Colne, Lancashire. *General Manager and Engineer*, T. G. Richardson; *Chairman Try. Com.*, Coun. R. Knight (Mayor).

Coventry Corporation Tramways, Priestley's Bridge, Coventry. [T.A., Tramways, Coventry; T.N., 1014.] *Engineer and General Manager*, T. R. Whitehead; *Assistant Engineer*, W. M. Milnes; *Chairman*, Coun. C. V. Pugh; *Vice-Chairman*, Coun. H. W. Wale.

Croydon Corporation Tramways, Tramways Office, Thornton Heath, Surrey. [T.A., Tramways, Croydon; T.N., 406, Croydon.] *Tramways Manager*, T. B. Goodyer; *Chairman Try. Com.*, Ald. G. J. Allen; *Vice-Chairman*, Coun. A. A. Thomson.

Darlington Corporation Tramways, Haughton Road, Darlington. [T.A., Tramways, Darlington; T.N., 2435.] *General Manager and Elec. Eng.*, J. R. P. Lunn; *Traffic Supt.*, J. Fraser; *Chairman Try. Com.*, Ald. C. W. Starmer.

Dartford Urban District Council Tramways, Dartford. *Chairman Try. Com.*, Coun. R. Bennett; *Vice-Chairman*, Coun. W. H. D. King.

[Leased. See Dartford Tramways in list of Tramway Companies.]

Darwen Corporation Tramways, Lorne Street, Darwen. [T.N., 104.] *Gen. Manager and Eng.*, F. J. S. Hosken; *Boro. Elec. Eng.*, C. H. Garnett; *Chairman Try. Com.*, Ald. Jas. Tomlinson.

Derby Corporation Tramways, 4, Victoria Street, Derby. [T.N., 410.] *Gen. Manager*, F. Harding; *Elec. Eng.*, T. P. Wilmshurst; *Per. Way Eng.*, J. Ward; *Chairman Try. Com.*, Coun. J. Dean.

Doncaster Corporation Tramways, Grey Friar's Road, Doncaster. [T.A., Rayner, Doncaster, T.N., 43.] *Manager & Elec. Eng.*, E. S. Rayner; *Chairman Try. Com.*, Coun. S. Balmforth; *Vice-Chairman*, Coun. H. M. Marshall.

Dover Corporation Tramways, Town Hall, Dover. [T.A., Trams, Dover; T.N., 294.] *Gen. Manager*, E. Carden; *Per. Way Eng.*, W. C. Hawke (Boro. Surveyor); *Chairman Try. Com.*, Coun. Barwick; *Vice-Chairman*, Coun. Norman.

Dundee Corporation Tramways, Town House Buildings, Dundee. [T.N., 1340]; *Gen. Manager and Eng.*, Peter Fisher; *Elec. Eng.*, H. Richardson; *City Eng.*, J. Thomson; *Chairman Try. Com.*, Coun. G. A. Johnston.

East Ham (County Borough of) Corporation Tramways, Nelson Street, East Ham. [T.N., 611 and 100, East Ham.] *Gen. Manager and Elec. Eng.*, W. C. Ullmann; *Chairman Try. Com.*, Ald. M. Oakes.

Eccles Corporation Tramways, Eccles. *Elec. Eng.*, H. W. Angus; *Per. Way Eng.*, T. S. Picton; *Chairman Try. Com.*, Coun. Alexander; *Vice-Chairman*, Ald. Pearson.

[Lines worked by Salford Corporation.]

Erith Urban District Council Tramways, Tramway Depôt, Walnut Tree Road, Erith. [T.A., Tramways, Erith; T.N., 36.] *Gen. Manager and Elec. Engineer*, J. C. Williams; *Chairman Try. Com.*, Coun. G. C. Humphreys.

Exeter Corporation Tramways, Paris Street, Exeter. *Manager*, H. C. Bartlett; *Elec. Eng.* H. D. Munro; *Per. Way Eng.*, T. Moulding; *Chairman Try. Com.*, Ald. H. B. Varwell; *Vice-Chairman*, Coun. F. G. Towill.

Farnworth Urban District Council Tramways, Albert Road, Farnworth. *Chairman Try. Com.*, Coun. S. C. Steele; *Vice-Chairman*, Coun. Stanley.

[Lines leased to the South Lancashire Tramways Co.]

Glasgow Corporation Tramways, 46, Bath Street, Glasgow. [T.A., Trams, Glasgow; T.N., 1040, Douglas.] *Gen. Manager*, J. Dalrymple; *Traffic Supt.*, L. Mackinnon; *Chief Eng.*, J. Ferguson; *Elec. Eng.*, E. T. Goslin; *Sec.*, J. N. Wilson; *Chairman Try. Com.*, Coun. Montgomery; *Vice-Chairman*, Bailie Kelly.

Gloucester Corporation Light Railway, Bristol Road Depôt, Gloucester. [T.A., Tramways, Gloucester; T.N. 155.] *Gen. Manager and Elec. Eng.*, F. H. Corson; *Chairman Try. Com.*, Coun. J. O. Roberts; *Vice-Chairman*, Coun. C. J. Ramstedt.

Great Yarmouth Corporation Tramways, Caister Road, Great Yarmouth. [T.N. 265.] *Gen. Manager*, F. L. Turner; *Elec. Eng.*, Gordon Bryant *Per. Way. Eng.*, J. W. Cockrill (Borough Surveyor); *Chairman Try. Com.*, Coun. J. T. C. Salmon.

Halifax Corporation Tramways, Skircoat Road, Halifax. [T.N., 36 and 382.] *Traffic Manager*, Jas. D. Caird; *Try. Eng.*, J. W. Galloway; *Per. Way Eng.*, J. Lord (Boro. Eng.); *Chairman Try Com.*, Ald. C. F. Spencer; *Vice-Chairman*, Ald. A. Fawcett.

Haslingden Corporation Tramways, John Street, Haslingden. *Gen. Manager and Elec. Eng.*, Barnes Kay; *Per. Way Eng.*, J. S. Green (Borough Surveyor); *Chairman Try. Com.*, Coun. Waddington; *Vice-Chairman*, Coun. Haworth.

Herne Bay Pier Tramway (owned and worked by Herne Bay U.D.C.), Herne Bay. [T.N., 22.] *Res. Eng. and Manager*, H. C. Dufton.

Heywood Corporation Tramways, Heywood, Lancs. [T.N., 47.] *Gen. Manager*, D. H. Davies; *Per. Wa Eng.*, J. B. Nuttall; *Chairman Try. Com.*, Coun. J. Ashworth; *Vice-Chairman*, Ald. T. Popple, J.P.

Huddersfield Corporation Tramways, Northumberland Street, Huddersfield. [T.N., 698 and 398.] *Gen. Manager & Elec. Eng.*, R. H. Wilkinson; *Assist. Engineer*, A. P. Quilliam; *Traffic Supt.*, T. Hartley; *Borough Eng.*, K. F. Campbell; *Chairman Try. Com.*, Coun. E. H. Sellers; *Vice-Chairman*, Coun. T. Canby.

Hull Corporation Tramways, Alfred Gelder Street, Hull. [T.N., 444, Corporation.] *Manager*, Wm. J. McCombe; *Try. Elec. Eng.*, J. Wilkinson [T.N. 443, Corporation]; *Per. Way Eng.*, F. W. Bricknell (*City Engineer*) [T.N. 943, Corporation]; *Chairman Try. Com.*, Coun. W. Wheatley; *Vice-Chairman*, Coun. Hakes.

Ilford Urban District Council Tramways, Ley Street, Ilford. [T.N., 684.] *Manager and Engineer*, L. E. Harvey; *Chairman Try. Com.*, Coun. O. Waters; *Vice-Chairman*, Coun. J. Lowe.

Ilkeston Corporation Tramways, Park Road, Ilkeston. [T.A., Bellamy Ilkeston; T.N., 26.] *Manager and Elec. Eng.*, L. C. F. Bellamy; *Chairman Try. Com.*, Coun. J. E. Bestwick; *Vice-Chairman*, Coun. Kane.

Ipswich Corporation Tramways, Constantine Road, Ipswich. [T.A., Ayton, Tramways, Ipswich; T.N., 354.] *Gen. Manager and Elec. Eng.*, Frank Ayton; *Traffic Supt.*, A. Butler; *Rolling Stock Supt.*, W. A. Fairhead; *Chairman Try. Com.*, Coun. E. C. Ransome; *Vice-Chairman*, W. P. Burton.

Kearsley Urban District Council Tramways, Council Office, Kearsley, Farnworth, S.O. *Clerk U. D. C.*, H. Martin.

[Lines leased to and worked by the South Lancashire Tramways Co.]

Keighley Corporation Tramways, South Street, Keighley. [T.A., Tramways, Keighley; T.N., 17.] *Gen. Manager and Elec. Eng.*, H. Webber; *Chairman Try. Com.*, Coun. A. Smith.

Kilmarnock Corporation Tramways Electricity Works, Kilmarnock. [T.N., 95.] *Elec. Eng. and Manager*, W. C. Bexon; *Consulting Engineers*, Kennedy and Jenkin; *Convener Try. Com.*, Coun. Lorimer.

Digitized by Google

ELECTRIC TRAMWAYS IN THE UNITED KINGDOM.

Kirkcaldy Corporation Tramways, Electricity Works Victoria Road, Kirkcaldy. [T.A., Tramways, Kirkcaldy. T.N., 124, 174, and 175.] *Manager & Elec. Eng.*, O. F. Francis; *Traffic Manager*, Jas. Fisher; *Chairman Try. Com.*, Coun. G. Fergusson.

Lancaster Corporation Tramways, Electricity Works, Lancaster. [T.A., Milnes, Tramways, Lancaster; T.N., I, L.] *Gen. Manager & Elec. Eng.*, G. C. Milnes; *Traffic Manager*, W. T. Charlton; *Chairman Try. Com.*, Coun. T. Wilkinson.

Leeds City Tramways, Swinegate, Leeds. [T.A., Tramways, Leeds; T.N., 1230; *General Manager*, J. B. Hamilton; *Traffic Supt.*, A. Daggett; *Elec. Eng.*, John Burbridge; *Highways and Per. Way Eng.*, R. B. Holt; *Car Works Supt.*, G. E. Watmough; *Chairman Try. Com.*, Ald. R. A. Smithson; *Vice-Chairman*, Ald. H. Brown.

Leicester Corporation Tramways, 20 and 22, Humberstone Gate, Leicester. [T.N., 2177.] *Manager & Sec.*, A. F. Lucas; *Boro. & Try. Eng.*, E. G. Mawbey; *Boro. Elec. Eng.*, T. R. Smith; *Cons. Engs.*, Kincaid, Waller & Manville; *Chairman Try. Com.*, Ald. S. Flint, J.P.; *Vice-Chairman*, Ald. G. Banton, J.P.

Leith Corporation Tramways, 165, Leith Walk, Leith. [T.N., 415.] *Gen. Manager*, F. A. Fitzpayne; *Per. Way Eng.*, J. R. Findlay (*Burgh Eng.*); *Chairman Try. Com.*, Judge Hall.

Leyton District Council Tramways, Car Depot, Lea Bridge Road, Leyton, E. [T.A., Tramways, Leyton; T.N., 17 Walthamstow.] *Manager*, F. Schofield; *Elec. Eng.*, F. Harman Lewis; *Per. Way Eng.*, E. H. Essex; *Chairman Try. Com.*, Coun. F. M. Read.

Lincoln Corporation Tramways, Brayford Side North, Lincoln. [T.A., Stanley Clegg, Lincoln; T.N., 109]. *General Manager and Elec. Eng.*, Stanley Clegg; *Chairman Try. Com.*, Ald. W. S. White; *Vice-Chairman*, Coun. M. A. Ashley.

Liverpool Corporation Tramways, 24, Hatton Garden, Liverpool. [T.A., Tramways, Liverpool; T.N., 6054 and 7701, Central.] *General Manager*, C. W. Mallins; *Per. Way Eng.*, J. A. Brodie (*City Engineer*); *City Electrical Engineer*, Harold Dickinson; *Rolling Stock Supt.*, T. Ridyard; *Chairman Try. Com.*, Coun. E. Russell Taylor; *Vice-Chairman*, Ald. F. Smith, J.P.

London County Council Tramways, 62, Finsbury Pavement, London, E.C. [T.A., Lotram Ave, London; T.N., 3321, 3322, and 3323 London Wall.] *Chief Officer*, A. L. C. Fell; *Deputy Chief Officer*, J. K. Bruce; *Traffic Assist.*, ————; *Rolling Stock Supt.*, W. E. Ireland; *Per. Way Eng.*, J. Welling; *Chairman Highways Com.*, G. H. Hume; *Vice-Chairman*, T. Prestige.

Lowestoft Corporation Tramways, Norwich Road, Lowestoft. [T.N., 87.] *Gen. Manager*, H. H. Saunders; *Elec. Eng.*, W. R. May; *Chairman Try. Com.*, Coun. F. Spashett (Mayor).

Maidstone Corporation Tramways, Tramway Offices, Tonbridge Road, Maidstone. [T.A., Lambert, Tramways, Maidstone; T.N., 448] *Gen. Manager and Elec. Eng.*, A. T. Lambert; *Chairman Try. Com.*, Coun. D. T. J Lyle; *Vice-Chairman*, Coun. Green.

Manchester Corporation Tramways, 55, Piccadilly, Manchester. [T.A., Tramways, Manchester; T.N., 7800 City.] *Gen. Manager*, J. M. McElroy; *Traffic Sup.*, J. T. Oakes; *Elec. Eng.*, J. J. McMahon; *Chief Civil Eng.*, H. Mattinson; *Rolling Stock Supt.*, G. R. Blackburn; *Chairman Try. Com.*, Ald. J. Bowes; *Vice-Chairman*, Ald. A. W. Chapman.

Middlesex County Council Light Railways, Middlesex Guildhall, Westminster, London, S.W. *County Eng.*, H. T. Wakelam, M.I.C.E.; *Chairman of Light Railways Com.*, County Ald. H. Burt; *Vice-Chairman*, County Coun. F. Goodyear.

Middleton Corporation Tramways. *Consulting Engs.*, Lacey, Sillar, and Leigh; *Chairman Try. Com.*, Ald. W. Wood, J.P. (Mayor); *Vice-Chairman*, Ald. Bentley, J.P.
[Worked by Manchester Corporation Tramways.]

Nelson Corporation Light Railways, Charles Street, Nelson. [T.N., 115.] *Manager and Elec. Eng.*, G. F. Nayler; *Per. Way Eng.*, W. Shackleton; *Chairman Try. Com.*, Coun. W. F. Cooke.

Newcastle-upon-Tyne Corporation Tramways, Manors, Newcastle. [T.A., Traction, Newcastle; T.N., 913 and 914 Central.] *Gen. Manager & Engineer*, Ernest Hatton; *Traffic Supt.*, T. Chalder; *Per. Way Eng.*, W. J. Steele; *Chairman Try. Com.*, Coun. R. Mayne; *Vice-Chairman*, Coun. A. M. Sutherland.

Newport (Mon.) Corporation Tramways, Town Hall, Newport, Mon. [T.A., Dynamo, Newport, Mon.; T.N., 990 L., Nat.] *Gen. Manager*, N. J. Young; *Boro. Elec. and Per. Way Eng.*, A. Nichols Moore; *Chairman Try. Com.*, Coun. J. Moxon; *Vice-Chairman*, Coun. F. Phillips.

Northampton Corporation Tramways. St. James', Northampton. [T.N., 279 & 280.] *Gen. Manager and Elec. Eng.*, J. F. Cameron; *Chairman Try. Com.*, Coun. T. D. Lewis; *Vice-Chairman*, Coun. W. Beale.

Nottingham Corporation Tramways, Beastmarket Hill, Nottingham. [Tramways, Nottingham; T.N., 225.] *General Manager & Elec. Eng.*, John Aldworth; *Traffic Supt.*, H. Morley; *Per Way Eng.*, Arthur Brown (*City Eng.*); *Rolling Stock Supt.*, W. Boot; *Chairman Try. Com.*, Coun. R. H. Swain, J.P.; *Vice-Chairman*, Ald. F. R. Radford, J.P.

Oldham Corporation Tramways, Wallshaw Depot, Oldham. [T.A., Tramways, Oldham; T.N., 1495.] *Gen. Manager & Eng.*, P. Priestly; *Traffic Supt.*, J. Brierley; *Chairman Try. Com.*, Coun. Cheetham; *Vice-Chairman*, Coun. Stanbury.

Perth Corporation Tramways, 128, High Street, Perth. [T.N., 226 & 101.] *Tramways Manager*, W. G. Snell; *Elec. & Tramways Eng.*, John Lambert; *Per. Way Eng.*, R. McKillop (*Burgh Surv.*); *Chairman Try. Com.*, Coun. Calderwood.

Plymouth Corporation Tramways, 15, Ebrington Street, Plymouth. [T.N. 518, Plymouth.] *General Manager*, C. R. Everson; *Elec. Eng.*, E. J. Okell; *Chairman Try. Com.*, Ald. S. H. Phillips, J.P.; *Vice-Chairman*, Coun. J. Moon.

Pontypridd Urban District Tramways, Generating Station, Treforest, Pontypridd. [T.N. 33.] *Gen. Manager and Elec. Eng.*, J. E. Teasdel; *Traffic Inspector*, W. May; *Per. Way Eng.*, W. E. Lowe (*Surveyor*); *Chairman Try. Com.*, Coun. M. L. Jones.

Portsmouth Corporation Tramways, Town Hall, Portsmouth. [T.N., 110 Corporation.] *Gen. Manager*, W. R. Spaven; *Elec. and Per. Way Eng., and Rolling Stock Supt.*, V. G. Lironi; *Traffic Supt.*, W. Munford; *Chairman Try. Com.*, Coun. J. Timpson; *Vice-Chairman*, Ald. R. Payne.

Preston Corporation Tramways, Holmrook Road, Preston. [T.A., Corporation Tramways, Preston; T.N., 278.] *Gen. Manager and Elec. Eng.*, J. F. Simpson; *Traffic Supt.*, C. H. Manning; *Chairman, Try. Com.*, Ald. J. Ormrod; *Vice-Chairman*, Coun. T. Parkinson.

Radcliffe Urban District Council Tramways, Council Offices, Radcliffe, Lancs. *Res. Eng.*, H. Wilkinson; *Per. Way Eng.*, W. L. Rothwell; *Clerk*, S. Mills; *Chairman Try. Com.*, Coun. Walker Allen, J.P.
[These tramways are worked as part of the Bury system.]

Rawtenstall Corporation Tramways, Bacup Road, Rawtenstall. [T.N., 81 and 85.] *Gen. Manager and Elec. Eng.*, C. L. E. Stewart; *Chairman Try. Com.*, Ald. H. Coupe, J.P.; *Vice-Chairman*, Coun. J. W. Stansfield.

Reading Corporation Tramways, Mill Lane, Reading. [T.A., Tramways Manager, Reading; T.N., 330.] *Gen. Manager & Elec. Eng.*, G. F. Craven; *Chairman Try. Com.*, Ald. C. G. Field, J.P.

Rochdale Corporation Tramways, Mellor Street, Rochdale. [T.A., Tramways, Rochdale; T.N., 48.] *Gen. Manager & Eng.*, G. Webster; *Traffic Manager*, R. Bentley; *Per. Way Eng.*, S. S. Platt; *Rolling Stock Supt.*, E. Sidgwick; *Chairman Try. Com.*, Ald. Taylor.

Rotherham Corporation Tramways, Rawmarsh Road, Rotherham. [T.A., Cross, Rotherham; T.N., 138, 152, and 241.] *General Manager & Elec. Eng.*, E. Cross; *Deputy Elec. Eng.*, J. R. Lilleker; *Traffic Superintendent*, H. Jagger; *Per. Way Eng.*, T. P. Collinge; *Rolling Stock Supt.*, C. A. Walker; *Chairman Try. Com.*, Ald. D. L. Winter; *Vice-Chairman*, Coun. T. Reeves.

St. Helens Corporation Tramways, Town Hall, St. Helens, Lancs. *Chairman Try. Com.*, ————; *Vice-Chairman*, Coun. W. N. Pilkington.
[Lines worked by the New St. Helens and District Tramways Co.]

Salford Corporation Tramways, 32, Blackfriars Street, Salford. [T.A., Tramways, Salford; T.N., 5367 and 5368 Central.] *Gen. Manager*, Geo. W. Holford; *Elec. Eng.*, J. A. Robertson; *Traffic Supt.*, J. W. Blakemore; *Per. Way Supt.*, E. B. Martin; *Rolling Stock Supt.*, R. Chadwick; *Chairman Try. Com.*, Ald. H. Linsley, J.P.; *Vice-Chairman*, Coun. W. H. Barrett.

Sheffield Corporation Tramways, 8, Division Street, Sheffield. [T.A., Tramways, Sheffield; T.N., 4600.] *General Manager*, A. R. Fearnley; *Traffic Supt.*, A. Handford; *Per. Way Eng.*, W. J. Hadfield; *Rolling Stock Supt.*, J. Smith; *Chairman Try. and Motors Com.*, Ald. Sir W. E. Clegg, J.P.; *Vice-Chairman*, Ald. W. C. Fenton.

Shipley Urban District Tramway, Dockfield, Shipley. [T.A., Electricity Works, Shipley; T.N., 190.] *Elec. Eng.*, Wm Redman; *Chairman Try. Com.*, H. Pitts.
[Lines leased to Bradford Corporation.]

Southampton Corporation Tramways, 161, Above Bar, Southampton. [T.A., Tramways, Southampton; T.N., 301.] *Gen. Manager*, W. T. Robson; *Boro. Elec. Engineer*, H. F. Street; *Traffic Manager*, C. G. Simpson; *Chairman Try. Com.*, Ald. F. A. Dunsford, J.P.

Southend-on-Sea Corporation Tramways, London Road, Southend-on-Sea. [T.N., 96.] *Gen. Manager and Elec. Eng.*, R. Birkett; *Traffic Manager*, J. Daniells,; *Per. Way Eng.*, E. J. Elford (*Boro. Surveyor*); *Rolling Stock Supt.*, J. Dobson; *Chairman Try. Com.*, Coun. G. Radford.

Southend Pier Electric Railway, (owned and worked by Southend-on-Sea Corporation). [T.A., Piermaster, Southend; T.N., 91.] Southend-on-Sea. *Elec. Eng.*, C. R. Norton; *Piermaster*, Capt. N. E. Hucker; *Chairman*, Coun. H. Dowsett.

Southport Corporation Tramway, 44, Chapel Street, Southport. [T.N., 116.] *Gen. Manager*, T. J. Kendrew; *Boro' Elec. Eng.*, A. S. Black; *Chairman Try. Com.*, Ald. Griffiths, J.P.; *Vice-Chairman*, Coun. Clayton.

South Shields Corporation Tramways. Dean Road, South Shields. [T.A., Tramways, South Shields; T.N., 157.] *Gen. Manager & Elec. Eng.*, J. C. Whiteley; *Boro. Elec. Eng.*, H. S. Ellis; *Chairman Try. Com.*, Ald. W. G. Wylie; *Vice-Chairman*, Ald. J. W. Henderson.

Stalybridge Hyde, Mossley, and Dukinfield Tramways and Electricity Board, Waterloo Road, Stalybridge. [T.N., 311.] *Commercial Manager*, F. Schofield; *Chief Eng.*, R. Blackmore; *Chairman Try. Com.*, Ald. R. Wood; *Vice-Chairman*, Coun. S. C. Homer.

Stockport Corporation Tramways, Mersey Square, Stockport. [T.N., 232 and 237.] *Manager*, A. T. Eardley; *Elec. Eng.*, R. Lomax; *Chairman Try. Com.*, Ald. Chas. Sharples; *Vice-Chairman*, Ald. W. E. Hamnett.

Sunderland Corporation Tramways, Tramway Offices, Monkwearmouth, Sunderland. [T.A., Trys. Manager, Sunderland; T.N., 948.] *Gen. Manager and Elec. Eng.*, A. R. Dayson; *Chairman Try. Com.*, Coun. G. New, J.P.; *Vice-Chairman*, Coun. W. Walker, J.P.

Swindon Corporation Tramways, Electricity Works, Swindon. [T.A., Tramways, Swindon; T.N., 4.] *Manager*, T. Medcalf; *Elec. Eng.*, A. Dimmack; *Consulting Engs.*, Lacey, Sillar, & Leigh; *Chairman Try. Com.*, Coun. A. D. Richards; *Vice-Chairman*, Coun. A. Bull.

Wallasey Corporation Tramways, Seaview Road, Wallasey. [T.A., Tramways, Liscard; T.N., 1431, Liscard.] *General Manager*, R. R. Greene; *Elec. Eng.*, J. H Crowther; *Per. Way Eng.*, W. H. Travers; *Chairman Try. Com.*, Coun. F. E. Howse; *Vice-Chairman*, Coun. H. W. Griffin.

Walsall Corporation Tramway, St. Paul's Buildings, The Bridge, Walsall. [T.A., Tramways, Walsall; T.N., 238 & 559.] *Gen. Manager*, R. L. Horsfield; *Elec. Eng.*, H. A. Howie; *Per. Way Eng.*, J. Taylor (*Boro. Surveyor*); *Chairman, Try. Com.*, Ald. J. Cope; *Vice-Chairman*, Ald. J. Williams.

Walthamstow Urban District Council Tramways, Chingford Road, Walthamstow. [T.A., Tramways, Walthamstow; T.N., 20.] *Tramways Manager*, W. Murray; *Elec. Eng.*, G. R. Spurr (Priory Avenue, Walthamstow); *Per. Way Eng.*, G. W. Holmes; *Chairman Trys. Com.*, Coun. Clarke.

Warrington Corporation Tramways, Mersey Street, Warrington. [T.N., 196] *Gen. Manager*, J. Telfer; *Elec. Eng.*, F. V. L. Mathias; *Chairman Try. Com.*, Coun. Dr. G. W. Joseph; *Vice-Chairman*, Coun. J. Wilkinson.

West Bromwich Corporation Tramway, Electricity Works, West Bromwich. [T.N., 100.] *Boro. Eng.*, A. D. Greatorex; *Boro. Elec. Eng.*, W. A. Jackson; *Chairman Try. Com.*, Ald. A. G. Turley, J.P.; *Vice-Chairman*, Coun. G. Garrett.
[These tramways are leased to the South Staffs. (Lessee) Co., Ltd.]

West Ham Corporation Tramways, Greengate Street, Plaistow, London, E. [T.A., Trameurs, Plais., London; T.N., 868 East.] *General Manager*, L. Slattery; *Boro' Elec. Eng.*, J. W. Beauchamp; *Chairman Try. Com.*, Coun. Kensett.

West Hartlepool Corporation Tramways, Cleveland Road, West Hartlepool. [T.N., 6073.] *Gen. Manager & Eng.*, Chas. Burgess; *Chairman Try. Com.*, Ald. Martin; *Vice-Chairman*, Coun. Charlton.

Wigan Corporation Tramways, Market Place, Wigan; [T.N., 226.] *Gen. Manager*, F. Buckley; *Per. Way Eng.*, A. T. Gooseman; *Chairman Try. Com.*, Ald. R. T. Fletcher; *Vice-Chairman*, Coun. J. Walkden.

Wolverhampton Corporation Tramways, Municipal Tramway Offices, Cleveland Road, Wolverhampton. [T.N., 324.] *Gen. Manager and Engineer*, C. O. Silvers; *Boro. Elec. Eng.*, S. T. Allen; *Per. Way Eng.*, George Green; *Chairman Try. Com.*, Ald. Sir C. T. Mander, Bart., J.P.; *Vice-Chairman*, Ald. S. Craddock, J.P.

York Corporation Tramways, 8, Clifford Street, York. [T.N., 302]. *Gen. Manager and Elec. Eng.*, J. W. Hame; *Traffic Supt.*, J. W. Horton; *Per. Way Eng.*, F. W. Spurr (City Surveyor); *Chairman Try. Com.*, Ald. S. W. Meyer; *Vice-Chairman*, Coun. W. H. Sessions.

COMPANY TRAMWAYS.

Aberdeen Suburban Tramways Company, 15, Golden Square, Aberdeen. [T.A., Judicial, Aberdeen; T.N., 447.] *Manager & Per. Way Eng.*, A. Wilkie; *Sec.*, G. Duncan; *Chairman*, James Mearns; *Directors*, W. Jackson, Dr. Christie, Jas. Sellar.

Airdrie and Coatbridge Tramways Company, Tramway Depôt, Main Street, Coatbridge [T.N., 105], and Electrical Federation Offices, Kingsway, London, W.C. *Gen. Manager*, A. Robertson; *Sec.*, P. N. Gray; *Chairman*, W. L. Madgen; *Directors*, H. S. Day, A. C. Miles, G. J. Somerville.

Barnsley and District Electric Traction Company, Ltd., Car Depot, Sheffield Road, Barnsley. [T.A., Tramways, Barnsley; T.N., 159.] *Acting Manager*, W. E. Nicoll; *Acting Sec.*, P. N. Gray; *Chairman*, E. Garcke; *Directors*, Col. Sir Thomas Pilkington, Bart., E. A. Paris.

Barrow-in-Furness Tramways, Salthouse Road Depot, Barrow, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Barrow; T.N., 125.] *Manager*, W. F. Bladon; *Sec.*, F. J. Cursons; *Acting Sec.*, J. S. Bowker; *Chairman*, H. S. Day; *Directors*, J. V. Kitchener, E. R. Soames.

Bath Electric Tramways Company, Ltd., Walcot Street, Bath, and 119-125, Finsbury Pavement, London, E.C. [T.A., Trams, Bath; T.N., 1214.] *Gen. Manager and Eng.*, W. E. Hardy; *Traffic Supt.*, E. Seckington; *Sec.*, H. J. Almond; *Chairman*, Hon. Sir J. Sivewright, K.C.M.G.; *Directors*, H. F. Clutterbuck, E. H. R. Trenow, A. A. C. Swinton, E. Callaird.

Bessbrook and Newry Tramway Company, Bessbrook, Co. Armagh. [T.A., Tramways, Bessbrook.] *Manager*, Robert Caven; *Elec. Eng.*, J. L. D. Meares; *Chairman*, J. N. Richardson; *Directors*, C. H. Richardson, R. T. Scott, T. W. Richardson, T. McGreggor Greer.

Birmingham District Power and Traction Company, Power Station, Downing Street, Smethwick, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Power Station, Smethwick; T.N., 65 Smethwick.] *Gen. Manager*, W. G. Bond; *Secretary*, B. Kingsford; *Chairman*, C. Shirreff Hilton; *Directors*, J. A. Lycett, W. L. Madgen, S. R. Blundstone, R. J. Howley.

Digitized by Google

ELECTRIC TRAMWAYS IN THE UNITED KINGDOM.

Blackpool and Fleetwood Tramroad Company, Ltd., Bispham, near Blackpool. [T.A., Cameron, Blackpool; T.N., 121.] *General Manager and Secretary*, J. Cameron; *Elec. Eng.*, A. Cameron; *Chairman*, John Greenwood; *Directors*, R. H. Prestwich, R. B. Barningham, R. S. Boddington, G. Richardson, G. Readman.

Blackpool and Fylde Light Railway Company, 5, Clifton Street, Blackpool. (No appointment of engineer or officials yet made.) *Secretary*, R. Bibby; *Chairman*, John Greenwood; *Directors*, T. Fisher, J.P., John Platt, J.P., W. Hardman, J.P., R. H. Mabbott.

Blackpool, St. Anne's, and Lytham Tramways Company, Ltd., Squires Gate, and 30, Birley Street, Blackpool. [T.N., 327 and 22]. *Gen. Manager and Elec. Eng.*, H. W. Laing; *Traffic Manager*, G. W. Wood; *Rolling Stock Supt.*, J. Partington; *Secretary*, Chas. E. Riding; *Chairman*, G. Nicholson; *Directors*, T. M. Smith, T. Preston.

Bray and Enniskerry Railway Company, 52, Westland Row, Dublin. *Sec.*, M. F. Keogh; *Chairman*, A. Killingley; *Director*, F. M'Crea.

Brighton Beach Electric Railway, Madeira Road, Brighton. [T.A., Volk, Brighton; T.N., 14 P.O.] *Manager and Eng.*, Magnus Volk; *Traffic Superintendent*, H. Sheppard; *Per. Way Eng.*, J. Barker; *Secretary*, A. Volk; *Chairman*, Magnus Volk; *Directors*, M. H. Volk, B. W. Symonds, A. Volk.

Bristol Tramways and Carriage Company, Ltd., Clare Street House, Bristol. [T.A., Cab, Bristol; T.N., 74 & 3074 Nat.] *Manager*, Chas. Challenger; *Assist. Manager*, S. E. Smith; *Electrical Engineer*, W. H. Munton; *Permanent Way Engineer*, G. T. C. Edwards; *Secretary*, H. F. Cooper; *Chairman*, ——————; *Directors*, W. G. Verdon Smith (*Managing*), S. White, J.P., J. H. Howell, J.P., G. Stanley White.

British Electric Traction Company, Ltd., Electrical Federation Offices, Kingsway, London, W.C. E. Garcke (*chairman*); *Directors*, C. Shirreff B. Hilton, W. L. Madgen, Sir Charles Ollivant, A. Shepherd, G. T. Symons, C. G. Tegetmeier, P. D. Tuckett; *Joint Managers*, C. H. Dade and R. J. Howley; *Acting Secretary*, T. Bower; *Accountant*, C. Walmsley.

This company is interested in the following tramways, particulars of which are given under their respective names:

Airdrie & Coatbridge.
Barnsley & District.
Barrow-in-Furness.
Birmingham & District Power & Traction Co.:
Birmingham & Midland
Dudley, Stourbridge, & District.
South Staffordshire.
Wolverhampton Dist.
Devonport & District.
Gateshead & District.
General Elec. Tramways.
Gravesend & Northfleet.
Greenock & Port Glasgow.
Jarrow & District.
Kidderminster & District.
Merthyr.
Middleton.
Oldham, Ashton, & Hyde.
Peterborough.
Potteries.
Rothesay.
Sheerness & District.
South Metropolitan.
Southport.
Swansea.
Taunton.
Tynemouth & District.
Weston-super-Mare & District.
Worcester.
Wrexham & District.
Yorkshire (Woollen Dist.)

Burton and Ashby Light Railways, Power Station, Swadlincote, nr. Burton-on-Trent. [T.A., Toulmin, Swadlincote; T.N., 1.] *Manager and Eng.*, Jas. Toulmin; *Secretary*, A. L. Charles; *Chairman*, G. Murray Smith.

[The line is owned and worked by the Midland Railway Company.]

Camborne and Redruth Tramways, Elec. Works, Carn Brea, R.S.O., Cornwall. [T.N., 8, Camborne.] (Owned by Urban Elec. Supply Co.) *Manager and Eng.*, L. A. Hards; *Sec.*, C. H. Jones; *Chairman*, P. D. Tuckett; *Directors*, E. Charrington, H. B. Grotian, Douglas Owen.

Carlisle Tramways Company, Ltd., City of, Depot and Offices, London Road, Carlisle. [T.A., Tramways, Carlisle; T.N., 0180.] *Engineer and Manager*, R. L. McCulloch.

Chatham and District Light Railways Company, Luton Road, Chatham, and 83, Cannon Street, London, E.C. [T.A., Tramways, Chatham; T.N., 51.] *General Manager*, W. Jensen; *Assist. Manager*, A. J. Bousfield; *Traffic Manager*, ——————; *Secretary*, A. Clements; *Chairman*, A. R. Monks; *Directors*, H. C. Levis, J. F. Nauheim, W. B. H. Martindale.

Cheltenham and District Light Railway Company, Cheltenham. [T.N., 341.] *Directors*, A. H. Beatty (*Chairman*), W. Shearer, H. L. Williams, A. S. Guinness, H. J. McCormick; *Sec.*, Wm. C. Bryden, C. A., 66, Queen Street, London, E.C.; *Local Eng. and Manager*, Henry J. McCormick, St. George's Road, Cheltenham.

Clontarf and Hill of Howth Tramroad Company, 39, Dame Street, Dublin. [T.A., c/o Railways, Dublin; T.N., 917.] *Secretary*, J. P. Chapman; *Chairman*, W. L. Murphy; *Directors*, E. Anderson, J. J. Dudley.

Cork Electric Tramways and Lighting Company, Ltd., Albert Street, Cork. [T.A., Tramways, Cork; T.N., 78 and 535.] *Manager and Engineer*, H. H. Nalder; *Traffic Manager*, H. G. Whiting; *Per. Way Engineer*, H. Mack; *Secretary*, A. Clements; *Chairman*, A. R. Monks; *Directors*, E. Anderson, W. M. Murphy, Capt. W. Martindale, H. C. Levis.

Dartford Urban District Council Light Railways. Car Depot, Priory Road, Dartford. [T.N., 31 Dartford.] (Leased to and worked by Balfour, Beatty, & Co., Ltd., 66, Queen Street, London, E.C.) *Acting Manager*, F. A. Kincaid Fergusson.

Devonport and District Tramways Company, Electrical Federation Offices, London, W.C. [T.A., Head Office, Devonport c/o Tramway, London; T.N., Head Office, Holborn 2686. *Manager and Eng.*, George Cardwell; *Secretary*, S. M. Wright; *Acting Sec.*, P. N. Gray; *Chairman*, C. S. B. Hilton; *Directors*, J. S. Raworth, E. R. Soames, C. G. Tegetmeier, R. J. Sutcliffe.

[The Company's undertaking has been sold to Plymouth Corporation.]

Dewsbury, Batley, and Birstall Tramways Company, Ltd., Electrical Federation Offices, Kingsway, London, W.C.

[Lines worked by Yorkshire (Woollen District) Electric Tramways, Ltd., *q.v.*]

Dewsbury and Ossett Corporation and Soothill Nether Urban District Council Tramways, (Lessees: The National Elec. Construction Co., Ltd., 3, Laurence Pountney Hill, London, E.C.) [T.A., Overhauled, London; T.N., 5329 and 5330 Bank.] *Manager*, W. MacGibbon.

Douglas—Ramsey. (The Manx Elec. Rly. Company), 1, Strathallan Crescent, Douglas. (See Manx Electric Railway Company).

Douglas Southern Electric Tramways, Ltd., Marine Drive, Douglas, Isle of Man, and 24, Brazennose Street, Manchester. [T.A., Traffic, Douglas.] *Manager and Eng.*, R. Orton; *Sec.*, J. E. Sharples; *Chairman*, T. J. Hutchinson; *Directors*, I. E. Winslow, E. A. Hopkins.

Dublin and Lucan Electric Railway Company, 15, Conyngham Road, Dublin. [T.A., Lucan Tramway, Dublin; T.N. 2282 and 4006 Dublin, and 5 Lucan.] *Manager, Elec. Eng., and Sec.*, D. McDowall Grosart, J.P.; *Chairman*, J. W. Hill, J.P.; *Directors*, E. Anderson, A. B. Coyle, J.P., G. N. Murphy.

Dublin United Tramways Company (1896), Ltd., 9, Upper Sackville Street, Dublin. [T.A., Tramways, Dublin; T.N., 58 and 59.] *Gen. Manager*, G. Marshall Harriss; *Elec. Eng.*, R. Tanham; *Con. Eng.*, H. F. Parshall; *Per. Way Eng.*, P. F. O'Sullivan; *Secretary*, W. McHugh; *Chairman*, W. M. Murphy, J.P.; *Directors*, W. F. Cotton, J.P., J. Mooney, Rt. Hon. L. A. Waldron, P.C.

Dudley, Stourbridge and District Electric Traction Company, Ltd. (Section of The Birmingham and Midland Tramways Joint Committee), Power Station, Downing Street, Smethwick, Brierley Hill, Staffs., and Electrical Federation Offices, Kingsway, London, W.C. [T.N., 65 Smethwick.] *General Manager*, W. G. Bond; *Secretary*, E. H. Woodhall; *Chairman*, S. R. Blundstone; *Directors*, J. A. Lycett, R. J. Howley.

Dumbarton Burgh and County Tramways Company, Tramway Depot, Dumbarton, and 23, Rutland Street, Edinburgh. [T.A., Tramways, Dumbarton; T.N., 119.] *Gen. Manager and Elec. Eng.*, J. P. McMahon; *Secretary*, A. Dishart; *Chairman*, G. Balfour; *Directors*, K. Sanderson, K. A. Scott Moncrieff.

Dundee, Broughty Ferry & District Tramways Company, Milton, Monifieth, N.B. [T.N., 24 Monifieth.] *Gen. Manager & Engineer*, Daniel Fisher; *Secretary*, E. Cowan; *Chairman*, George Balfour; *Directors*, Edward Cowan, David Hynd.

Dunfermline and District Tramways Company, Tramway Depot, Cowdenbeath, Fife, and 8, New Row, Dunfermline. *Manager and Engineer*, J. H. Shepherd; *Secretary*, G. A. Nicolson; *Cons. Engs.*, Hawtayne & Zeden; *Directors*, Wm. Low, G. Balfour (*managing*), K. Sanderson, D. Hynd.

Falkirk & District Tramways Company, Larbert Road, Larbert, Stirlingshire. [T.A. Tramways Co., Falkirk; T.N., 154 Falkirk.] *Gen. Manager and Engineer*, D. Hays; *Chairman*, G. M. Brown; *Directors*, A. W. Tait, R. Hunter, G. Balfour, C. D. Geddes.

Felixstowe Pier Railway, Felixstowe. (The Coast Development Corporation, Ltd.) *Elec. Eng.*, E. A. Lambert.

Gateshead and District Tramways Company, Tramway Depôt, Sunderland Road, Gateshead, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramway Depôt, Gateshead; T.N., 125 & 408 Gateshead.] *General Manager*, William Morrison; *Secretary*, H. W. Davis; *Chairman*, H. S. Day; *Directors*, H. A. Stagg, C. R. Greene, Judge L. A. Atherley-Jones, K.C.

Giant's Causeway and Portrush Electric Tramway Company, Portrush. *Manager & Sec.*, W. McCurdy; *Elec. Eng.*, W. A. Traill; *Chairman*, F. J. S. Moore; *Directors*, C. M'D. Stuart, W. A. Traill.

Glossop Tramways, Electricity Works, Glossop (owned by the Urban Electric Supply Co.) [T.N., 34, Glossop.] *Manager and Res. Eng.*, C. E. Knowles; *Rolling Stock Supt.*, A. W. Bullough; *Secretary*, C. H. Jones; *Chairman*, P. D. Tuckett; *Directors*, E. Charrington, F. E. Gripper, H. B. Grotrian, D. Owen.

Gosport and Fareham Tramways, Tramways and Lighting Office, Gosport, Hants., and Moorgate Station Chambers, London, E.C. [T.A., Tramways, Gosport; T.N., 3, Post Office, Gosport.] *Eng. and Manager*, J. Fereday Glenn; *Sec.*, J. Barber Glenn; *Chairman*, A. Beattie, J.P., D.L.; *Directors*, J. Barber Glenn (*managing*), S. Hern.

Gravesend & Northfleet Electric Tramways, Ltd., Tramway Depot, Northfleet, Kent, and Electrical Federation Offices, Kingsway, London, W.C. [T.N., 958, Gravesend.] *Manager*, J. R. Groves; *Sec.*, H. C. Walter; *Chairman*, W. L. Madgen; *Directors*, P. N. Gray, W. S. Wreathall.

Great Crosby Tramways, 31, James Street, Liverpool.

[This tramway is worked by the Liverpool Overhead Railway Company.]

Great Grimsby Street Tramway Co., Southampton House, Cleethorpes, and Moorgate Station Chambers, London, E.C. [T.A., Blanco, Cleethorpes; T.N., 16.] *Manager and Eng.*, H. L. White; *Elec. Eng.*, H. O. White; *Managing Director and Secretary*, J. B. Glenn; *Chairman*, A. Beattie, J.P., D.L.; *Director*, S. Hern.

Greenock and Port Glasgow Tramways Company, Ladyburn, Greenock, and Electrical Federation Offices, Kingsway, London, W.C. [T.A. Tramways, Greenock; T.N., 562]. *Manager*, A. Robertson; *Secretary*, P. N. Gray; *Chairman*, W. L. Madgen; *Directors*, G. J. Somerville, A. C. Miles, H. S. Day.

Guernsey Railway Company, Ltd., Hougue-à-la-Perre, Guernsey. *Manager and Elec. Eng.*, Arthur G. Bird; *Sec.*, J. de Mouilpied; *Chairman*, G. F. Peek; *Directors*, W. D. Murdoch, E. Valied, J. B. Collings, Q. Le Pelley.

Hampshire Light Railway (Electric) Company, Ltd., Moorgate Station Chambers, London, E.C. *Secretary*, J. B. Glenn; *Chairman*, A. Beattie, J.P.; *Directors*, J. Barber Glenn (*managing*), S. Hern.

[This company works the Portsdown and Horndean Light Railway.]

Hastings Tramways Company, Ltd., Beaufort Road, Silverhill, St. Leonards-on-Sea, and 1, Queen Victoria Street, London, E.C. [T.A., Tramways, Hastings, and Enshrine, London; T.N., 90 Hastings, and 3465, City]. *General Manager and Elec. Eng.*, W. Vincent Edwards; *Secretary*, W. R. Elston; *Cons. Engs.*, Kincaid, Waller, Manville, and Dawsen; *Chairman*, G. Kitchen; *Directors*, E. C. Morgan, J. C. Williamson, Dr. Moody.

Imperial Tramways Company, Ltd., Clare Street House, Bristol. *Secretary*, W. G. Verdon Smith; *Manager*, F. Freshwater; *Chairman*, ——————; *Directors*, H. C. Godfray, J. H. Howell, S. White.

Isle of Thanet Electric Tramways and Lighting Company, Ltd., St. Peter's, Kent, and Moorgate Station Chambers, London, E.C. [T.A., Tramways, St. Peters, Kent; T.N., 29 Broadstairs]. *Gen. Manager and Elec. Eng.*, J. A. Forde; *Traffic Supt.*, ——————; *Secretary*, J. Barber Glenn; *Chairman*, A. R. Monks; *Directors*, Lord Arthur Butler, W. M. Murphy, H. Brown.

Jarrow and District Electric Traction Company, Ltd., Electrical Federation Offices, Kingsway, London, W.C. [T.A., Jarrow, c/o Tramway, London; T.N., 2686 Holborn.] *Traffic Manager*, G. McClelland; *Secretary*, C. W. Francis; *Acting Sec.* H. A. Stagg; *Chairman*, G. J. Somerville; *Directors* W. Morrison (*managing*), H. S. Day.

Kidderminster & District Electric Lighting and Traction Co., Ltd., Kidderminster and Electrical Federation Offices, Kingsway, London, W.C. [T.N., 108]. *General Manager*, W. G. Bond; *Secretary*, B. Kingsford; *Chairman*, E. Garcke; *Directors*, J. A. Lycett, H. S. Day, W. L. Madgen.

Kinver Tramway, Kinver, and Electrical Federation Offices, Kingsway, London, W.C., *q.v.*, Dudley, Stourbridge, and District Elec. Traction Co., Ltd.

Lanarkshire Tramways Company, Edinburgh Road, Motherwell, N.B., and 83, Cannon Street, London, E.C. [T.A., Tramways, Motherwell; T.N., 64.] *Gen. Manager and Eng.*, G. F. Moller; *Elec. Eng.*, E. H. Glennie; *Per. Way Eng.*, R. Foster; *Traffic Supt.*, J. L. White; *Sec.*, A. Clements; *Chairman*, A. R. Monks; *Directors*, Sir B. Cunard, H. C. Levis, W. H. Whaite, G. Franklin, J. F. Nauheim.

Lancashire United Tramways Limited, Atherton, Lancs. [T.A., Tramways, Atherton; T.N., 36, Atherton.] *Gen. Manager and Engineer*, E. H. Edwardes; *Secretary*, H. P. Conibear; *Chairman*, Hon. A. Stanley M.P.; *Directors*, J. M. Henderson, M.P., R. Watson, J.P., A. Adam, J. S. Austen.

Liverpool and Prescot Light Railway.—This line, which with the St. Helens Tramways forms the connecting link between the City of Liverpool and South Lancashire Tramways, is owned and worked by the Lancashire United Tramways, Ltd.

Liverpool Overhead Railway Company, 31, James Street, Liverpool. [T.A., Motor, Liverpool; T.N., 5463 Central.] *Gen. Manager and Eng.*, E. J. Neachell; *Secretary*, W. H. Alexander; *Chairman*, H. C. Woodward; *Directors*, J. E. Anderson, G. D. Killey J. U. Hodgson, M. H. Maxwell.

Llandudno and Colwyn Bay Electric Railway, Limited, Tramway Depôt, Rhôs-on-Sea, Colwyn Bay, and Basildon House, Moorgate Street, London, E.C. *Gen. Manager*, Alex. G. Balfour; *Secretary*, A. W. R. Lovering; *Directors*, G. Balfour, A. W. Tait, T. Stoker.

Llanelly and District Electric Lighting and Traction Company, Ltd., Llanelly, and 66, Queen Street, London, E.C. *Engineer and Manager*, J. E. Stewart; *Secretary*, G. D. Prince; *Chairman*, A. R. Holland; *Directors*, A. V. Anderson, M. A. Edwards, A. H. Beatty.

London United Tramways Ltd., Electric Railway House, Broadway, Westminster, London, S.W. [T.N., 6800, Victoria.] *Managing Director*, J. Devonshire; *Secretary*, A. L. Barber; *Gen. Manager and Eng.*, A. H. Pott; *Chairman*, W. M. Acworth; *Directors*, Rt. Hon. Viscount Knutsford, Sir A. H. Stanley, F. V. Schuster.

Luton Corporation Tramways (leased to and worked by Balfour, Beatty & Co., Ltd., 22a, College Hill, London, E.C.), Tramway Offices, Park Street, Luton. [T.N., 230.] *Engineer and Manager*, A. E. Wray.

Mansfield & District Light Railway Co., Sutton Road, Mansfield. [T.A., Cars, Mansfield, T.N., 107.] *Gen. Manager and Sec.*, Stanley Dudman, *Chairman*, A. R. Holland; *Directors*, W. J. Chadburn, A. H. Beatty, G. Balfour.

Digitized by Google

ELECTRIC TRAMWAYS IN THE UNITED KINGDOM.

Manx Electric Railway Company, Ltd., 1, Strathallan Crescent, Douglas, Isle of Man, and 3, Finch Lane, London, E.C. [T.A., Electric, Douglas, Man.; T.N., 61.] *Gen. Manager & Eng.*, F. Edmondson; *Secretary*, C. A. Huni; *Chairman*, Col. Sir A. Griffith Boscawen; *Directors*, Sir W. H. Vaudrey, B. E. Greenwell, E. Remnant.

Merthyr Electric Traction and Lighting Company, Ltd., 53, Pontmorlais Circus, Merthyr, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramway Company, Merthyr; T.N., 0180, Merthyr Tydfil.] *Managing Eng.*, L. W. Dixon; *Secretary*, S. J. Clements; *Chairman*, G. J. Somerville; *Directors*, C. G. Tegetmeier, W. L. Madgen, E. R. Soames.

Metropolitan Electric Tramways, Limited, Electric Railway House, Broadway, Westminster, London, S.W. [T.A., Metrolito, London; T.N., 6800, Victoria.] Manor House Offices, Seven Sisters Road, N. [T.A., Lentiscus, London; T.N., 77 Tottenham.] *Gen. Manager and Eng.*, A. H. Pott; *Traffic Manager*, W. E. Hammond; *Secretary*, A. L. Barber; *Chairman*, E. Garcke; *Directors*, Sir E. Spencer, W. L. Madgen, C. G. Tegetmeier, J. Devonshire (*Managing Director*).

Mexborough and Swinton Tramways Company, Electricity Works, Rawmarsh, Yorks. [T.N., 266], and 3, Laurence Pountney Hill, Cannon Street, London, E.C. *Manager and Eng.*, G. H. Browne; *Cons. Elec. Eng.*, F. E. Stanley; *Commercial Manager*, Wm. T. Mitchell; *Traffic Supt.*, M. McLeod; *Secretary*, L. D. H. Jacobs; *Chairman*, L. B. Schlesinger; *Director* (*Managing*), W. B. Cownie, C.A.

Middlesbro, Stockton, and Thornaby Electric Tramway, Bridge Road, Stockton-on-Tees, and Clare Street House, Bristol. [T.A., Tramways, Stockton; T.N., 129.] *Manager*, F. Freshwater; *Secretary*, W. G. Verdon Smith; *Chairman*, ; *Directors*, H. C. Godfray, S. White, H. C. Doggett.

Middleton Electric Traction Company, Ltd., Hiltonfold Lane, Middleton, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramway Depot, Middleton; T.N., 37 Middleton.] *Gen. Manager*, W. F. Endean; *Secretary*, G. R. Oliphant; *Acting Secretary*, J. S. Bowker; *Chairman*, Lord Vaux of Harrowden; *Directors*, J. V. Kitchener, W. S. Wreathall.

Morecambe Tramways Company, Heysham Road, Morecambe, and 62, Market Street, Lancaster. [T.N. 1, Morecambe and 71, Lancaster.] *Secretary and Manager*, G. H. Petty; *Chairman*, W. H. Pickles; *Directors*, J. Stott, S. Wright, O. Carr.

Musselburgh and District Electric Light and Traction Co., Ltd., High St., Musselburgh, N.B. [T.A., Tramways, Musselburgh; T.N., 115.] (Registered Office, 3, Laurence Pountney Hill, London, E.C. [T.N., 5329 and 5330, Bank.]) *Manager*, E. J. Walsh; *Resident Engineer*, E. J. Walsh; *Traffic Inspector*, W. Mittell; *Secretary*, L. D. H. Jacobs; *Chairman*, L. B. Schlesinger; *Directors*, B. Burnham, J. Anderson, W. B. Cownie, R. Watson.

New General Traction Company, Ltd., 8, Crosby Square, London, E.C. *Managing Director*, E. A. Hopkins; *Secretary*, J. G. Mills; *Chief Engineer*, I. E. Winslow; *Chairman*, Baron E. B. d'Erlanger. [This company controls the Norwich and the Douglas Southern Electric Tramways Companies.]

New St. Helens and District Tramways Company, Ltd., Atherton, Lancs. [T.A., Tramways, Atherton; T.N., 36 Atherton.] *Engineer and Manager*, C. D. Stanley; *Secretary*, H. P. Conibear; *Chairman*, Hon. Arthur Stanley, M.P.; *Directors*, J. Hunter, J.P., H. Martin, J.P., J. M. Henderson, M.P., J. S. Austen, and E. H. Edwardes (*Managing*).

North Shields Tramway Company owned and worked by Tynemouth and District Elec. Trac. Co. *q.v.*

Norwich Electric Tramway Company, 5, Orford Hill, Norwich, and 8, Crosby Square, London, E.C. [T.A., Tramways, Norwich; T.N., 475.] *Manager and Engineer*, F. W. Ketley; *Consulting Eng.*, I. E. Winslow; *Sec.*, J. G. Mills; *Directors*, E. A. Hopkins, Hon. A. G. Brand, F. FitzGerald, G. M. Chamberlin, and C. Pakeman.

Nottinghamshire and Derbyshire Tramways Company, Tramway Depot, Langley Mill, Derbyshire, and 66, Queen Street, London, E.C. [T.A., Tramways, Langley Mill; T.N., 53, Langley Mill.] *Manager*, C. R. Walker; *Secretary*, Wm. C. Bryden; *Directors*, A. R. Holland, A. H. Beatty, A. V. Anderson, and M. A. Edwards.

Oldham, Ashton and Hyde Electric Tramway, Ltd., Tramway Depot, Denton, Lancs., and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Denton; T.N., 265 Ashton.] *Supt.*, A. Anderson; *Secretary*, F. J. Cursons; *Acting Secretary*, J. S. Bowker; *Chairman*, E. Garcke; *Directors*, Judge L. A. Atherley Jones, K.C., W. S. Wreathall, J. V. Kitchener (*Managing Director.*)

Paisley District Tramways Company, Tramway Depôt, Paisley, and 83, Cannon Street, London, E.C. [T.N., 218 Paisley.] *Gen. Manager and Elec. Eng.*, Fred Coutts; *Traffic Supt.*, E. Jeffs; *Secretary*, A. Clements; *Con. Eng.*, H. F. Parshall; *Chairman*, O. H. Smith; *Directors*, Lord Arthur Butler, D. Johnston Smith, John Young.

Peterborough Electric Traction Company, Ltd., Lincoln Road, Peterborough, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Peterborough; T.N., 224.] *Gen. Manager*, T. G. Clabburn; *Secretary*, S. M. Wright; *Actiug Sec.*, P. N. Gray; *Chairman*, Lord Vaux of Harrowden; *Directors*, E. A. Paris, R. J. Howley.

Plymouth, Stonehouse and Devonport Tramways Co., 16, Edgcumbe Street, Stonehouse, Devon, and Moorgate Station Chambers, London, E.C. [T.N. 53.] *Manager*, G. H. Moreton; *Elec. Eng.*, J. Graham Pearce; *Sec.*, J. Barber Glenn; *Chairman*, Andrew Beattie, J.P., D.L.; *Directors*, S. Hern, J. B. Glenn (*Managing*).

Portsdown and Horndean Light Railway, Cosham, Hants.; Tramways and Lighting Office, Gosport, Hants., and Moorgate Station Chambers, London, E.C. [T.A., Tramways, Gosport; T.N., 3, Post Office, Gosport.] *Engineer and Manager*, J. Fereday Glenn; *Secretary*, J. Barber Glenn; *Chairman*, A. Beattie, J.P., D.L.; *Directors*, J. Barber Glenn (*Managing*), S. Hern.

Potteries Electric Traction Company, Tramway Depôt, Stoke-on-Trent, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Stoke-on-Trent; T.N., 141.] *Gen. Manager and Eng.*, W. Thom; *Power and Rolling Stock Supt.*, F. J. Chapple; *Traffic Manager*, F. Hatch; *Secretary*, B. Kingsford; *Chairman*, R. J. Howley; *Directors*, F. W. Chanter, S. Mear, J. V. Kitchener.

Rhondda Tramways Company, Ltd., Tramway Depot, Porth, Rhondda, and Laurence Pountney Hill, Cannon Street, London, E.C. [T.A., Tramways, Porth; T.N., 118.] *Manager and Engineer*, H. Holliday; *Secretary*, L. D. H. Jacobs; *Chairman*, L. B. Schlesinger; *Directors*, J. C. Saunders, W. B. Cownie, J. T. Jervis, H. T. Barnett.

Rothesay Tramways Company, Ltd., Point House, Rothesay, and Electrical Federation Offices, Kingsway, London, W.C. *Manager*, A. Robertson; *Sec.*, P. N. Gray; *Chairman*, A. C. Miles; *Directors*, W. L. Madgen, H. S. Day.

Ryde Pier Company, Ryde, Isle of Wight. *Manager*, W. D. Stanney; *Elec. Eng.*, C. Harrison; *Chairman*, G. E. Mears.

Scarborough Tramways Company, Scalby Road, Scarborough. [T.A., Electric Tramways, Scarborough; T.N., 294.] *Gen. Manager and Elec. Eng.*, J. V. Moinet; *Chairman*, F. E. Gripper; *Directors*, V. Fowler, M. T. Whittaker, J. C. Wigham.

Sheerness and District Electric Power and Traction Company, Ltd., Electricity Works, Sheerness East, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Sheerness; T.N.,45.] *Manager & Eng.*, A. Charlton; *Sec.*, H. A. Stagg; *Chairman*, G. J. Somerville; *Directors*, R. J. Howley, E. R. Soames.

Snaefell Mountain Railway (See Manx Electric Railway Company).

South Metropolitan Electric Tramways and Lighting Company, Ltd., 114, Church Street, Croydon, 30, High Street, Sutton, and Electric Railway House, Broadway, Westminster, London, S.W. [T.N., 304 Croydon, 14 Sutton and 6800, Victoria.] *Gen. Manager and Engineer*, A. V. Mason; *Secretary*, W. M. Wright; *Chairman*, C. G. Tegetmeier; *Directors*, J. Devonshire (*managing*), E. Garcke, A. L. Barber.

Southport Pier Co., Ltd., Southport. [T.A., Pier, Southport; T.N., 174.] *Manager*, A. T. Faiers; *Chairman*, A. Skinner; *Directors*, J. R. Haworth, S. J. Fane, G. Duckworth, J. Duckworth.

Southport Tramways Company, Ltd., The Depôt, Churchtown, Southport, and Electrical Federation Offices, Kingsway, London, W.C. *Manager*, J. Lloyd; *Secretary*, H. A. Stagg; *Chairman*, C. S. Hilton; *Directors*, J. S. Raworth, Lord Vaux of Harrowden, J. V. Kitchener, G. R. Hulme.

South Staffordshire Tramways (Lessee) Company, Ltd., Electrical Federation Offices, Kingsway, London, W.C. [T.N., 65 Smethwick.] *General Manager*, W. G. Bond; *Secretary*, E. H. Woodhall; *Chairman*, W. S. Schuster; *Directors*, J. A. Lycett, S. R. Blundstone, R. J. Howley, B. Kingsford.

Sunderland District Electric Tramways, Ltd., Fence Houses, co. Durham. [T.A., Trams, Philadelphia, Shiney Row; T.N., 21, Houghton-le-Spring.] *Resident Manager and Engineer*, G. Stratton; *Traffic Manager*, E. A. Pearman; *Secretary*, H. J. Almond; *Directors*, H. R. Hogg, Hon. R. Parker, R. Tayler, A. Counter, C. Eves.

Sutton and Howth Electric Tramway Company (owned by the Great Northern Railway, Ireland), Sutton, county Dublin, and Amiens Street Station, Dublin. [T.A., Railroad, Dublin; T.N., 171, Dublin, and 16 Sutton.] *Gen. Manager*, John Bagwell; *Elec. Eng.*, A. W. Whieldon; *Chief Eng.* F. A. Campion; *Locomotive Eng.*, G. T. Glover; *Sec.*, T. Morrison; *Chairman*, F. Vernon; *Directors*, W. P. Cairnes (*Deputy Chairman*), W. B. Carson, H. S. Guinness, J. T. Reade, Capt. W. L. A. Goulding, Lt.-Col. J. C. W. Madden, R. A. Gradwell, J. Milne Barbour, T. F. Cooke, W. H. B. Moorhead, Lt.-Col. H. Plews, G. S. Clark.

Swansea Improvements and Tramways Company, 2, Rutland St., Swansea, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramway, Swansea; T.N., 268 Swansea.] *Gen. Manager*, D. James; *Elec. Eng.*, A. Johnston; *Secretary*, S. J. Clements; *Chairman*, C. G. Tegetmeier; *Directors*, G. J. Somerville, S. E. Garcke, E. R. Soames.

Taunton Electric Traction Company, Ltd., East Reach, Taunton, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Taunton, c/o "Tramways," London.] *Manager*, B. H. Griffith; *Acting Manager*, L. Marshall; *Secretary*, S. M. Wright; *Acting Sec.*, P. N. Gray; *Chairman*, G. J. Somerville; *Directors*, E. Garcke.

Torquay Tramways Co., Ltd., St. Marychurch Road, Torquay. [T.A., Carsheds, Torquay; T.N., 167 Torquay.] *Registered Office*, 3, Laurence Pountney Hill, Cannon Street, E.C. *Manager and Eng.*, H. J. Nisbett; *Secretary*, L. D. H. Jacobs; *Managing Director*, W. B. Cownie.

Trafford Park Company (Tramways), Trafford Park, Manchester. [T.A., Developing, Manchester; T.N., 61, Trafford Park.] *Secretary*, C. A. Grundy; *Chairman*, Marshall Stevens; *Directors*, Sir J. Lyons, H. McNiel, J. H. Balfour Browne, K.C.

[Lines worked by the Manchester and Salford Corporations.]

Tynemouth and District Electric Traction Company, Limited, John Street, Cullercoats, Northumberland, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tram Co., Cullercoats; T.N., 17 Whitley.] *Gen. Manager*, H. J. Smith *Sec.*, C. W. Francis; *Acting Sec.*, H. A. Stagg; *Chairman*, H. S. Day; *Directors*, J. H. Robinson, J. B. Williamson, R. J. Howley, Geo. J. Somerville.

Tyneside Tramways and Tramroad Company, Ltd., Neptune Bank, Wallsend. [T.A., Tramways, Wallsend; T.N., 84.] *Secretary & Res. Manager*, J. C. Little; *Elec. Eng.*, F. H. Briggs; *Cons. Eng.*, W. McLellan; *Chairman*, J. T. Merz; *Directors*, Lord Armstrong, J. H. Armstrong, G. E. Henderson, S. Hunter.

Wakefield and District Light Railway Company, Belle Isle, Wakefield.

[This company has been amalgamated with the Yorkshire (West Riding) Electric Tramways Co., Ltd.]

Walton-on-the-Naze Pier Tramway (Coast Development Corporation, Ltd.), The Pier, Walton-on-the-Naze. [T.A., Electricity Works, Walton-on-Naze.] *Eng.*, E. A. Lambert, A.M.I.E.E.

Wemyss and District Tramways Company, Ltd., Car Depot, Aberhill, Methill, N.B. [T.A., Tramways, Methill; T.N., 38 Leven.] *Gen. Manager*, W. T. Dawson; *Sec.*, J. O. Shepherd; *Chairman*, G. Balfour; *Directors*, W. Shepherd, G. Balfour, J. H. Guild.

Weston-super-Mare and District Electric Supply Co., Ltd., Locking Road, Weston-super-Mare, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Weston-s.-Mare; T.N., 79 & 181.] *Manager and Elec. Eng.*, G. Charlton; *Sec.*, H. A. Stagg; *Chairman*, G. J. Somerville; *Directors*, C. G. Tegetmeier, E. R. Soames.

Wolverhampton District Electric Tramways, Limited, Tramway Depot, Bilston, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Bilston; T.N., 56, Bilston.] *General Manager*, W. G. Bond; *Sec.*, E. H. Woodhall; *Chairman*, S. R. Blundstone; *Directors*, J. A. Lycett, R. J. Howley, B. Kingsford.

Worcester Electric Traction Company, Ltd., St. John's, Worcester, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Worcester; T.N., 81.] *Engineering Manager*, R. Simpson; *Secretary*, C. W. Francis; *Acting Sec.*, H. A. Stagg; *Chairman*, H. S. Day; *Directors*, J. A. Lycett, B. Kingsford, W. S. Wreathall.

Wrexham and District Transport Co., Ltd., 6, Lord Street, Wrexham, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Wrexham; T.N., 182, Wrexham.] *Manager*, A. A. Hawkins; *Sec.*, J. R. Oliphant; *Acting Sec.*, J. S. Bowker; *Chairman*, J. V. Kitchener; *Directors*, G. J Somerville, W. S. Wreathall.

Yorkshire (West Riding) Electric Tramways Co., Ltd., Belle Isle, Wakefield. [T.A., England, Belle Isle, Wakefield; T.N., 213.] *Gen. Manager and Sec.*, H. England: *Elec. Engs.*, C. J. Jewell and E. A. Wood; *Traffic Supt.*, W. J. McDonald; *Chairman*, Sir Herbert S. Leon, Bart.; *Directors*, B. Newgass, G. E. Leon, E. Remnant, W. Murray.

Yorkshire (Woollen District) Electric Tramways, Limited, Frost Hill, Liversedge, and Electrical Federation Offices, Kingsway, London, W.C. [T.A., Tramways, Heckmondwike; T.N., 8 Heckmondwike.] *Secretary*, P. N. Gray; *Chairman*, E. Garcke; *Directors*, Sir Thos. Pilkington, E. A. Paris (*managing*).

TRAMWAY ASSOCIATIONS.

MUNICIPAL TRAMWAYS ASSOCIATION.

President:
HENRY MOZLEY
(General Manager, Burnley Corporation Tramways).

Vice-President:
Alderman JOHN MILES, J.P.
(Chairman, Bolton Corporation Tramways).

Hon. Secretary and Treasurer:
C. J. SPENCER
(General Manager, Bradford Corporation Tramways), 7, Hall Ings, Bradford.

TRAMWAYS AND LIGHT RAILWAYS ASSOCIATION.

President:
The Rt. Hon. VISCOUNT CHILSTON.

Chairman:
The Hon. ARTHUR STANLEY, M.P.

Vice-Chairman:
HARRY ENGLAND.

Hon. Solicitor: W. MORRIS, Junr.
Hon. Auditor: A. W. CHAMBERS, A.S.A.A.

Secretary:
A. DE TURCKHEIM.

Offices: Caxton House, Westminster, London, S.W
Telephone No. 2110 Victoria.

Digitized by Google

LIST OF ELECTRIC TRAMWAYS & RAILWAYS.

PARTICULARS OF TRACK AND EQUIPMENT.

TRAMWAYS, pp. xxvii-xxx. RAILWAYS, p. xxx.

Location of Line and Name of Operating Company.	Date of Opening of First Section.	Length of Route.	Total length of Track.	Gauge.	Weight and Type of Rail.	Maximum Gradient.	Sharpest Curve.	No of Motor Cars.	No of Dynamos	No. of Engines	Type of Engines	Total Capacity Traction, kw.	Principal Contractors for Electrical Equipment.
TRAMWAYS.				ft. in.	lbs.	1 in	ft. rad.						
Aberdare Urban District Trys. ..	Oct., 1913	2·9	3·3	3 6	96 G	13	45	14	2	2	V. Cp. C.	400	Lanc. Dynamo Co.
Aberdeen Corporation	Dec., 1899	14·4	27·75	4 8½	96 G	13	42·5	83	*14	14	V. Cp. C.	4,610	British T-H. Macartney & Co.
Aberdeen Suburban Trys. Co. ..	June, 1905	5	5	4 8½	95 G	28	90	9	..	..	..	..	J. G. White & Co. Brush Co.
Accrington Corporation	Aug., 1907	7·53	10·53	4 0	95 G	14	..	32	*8	8	..	1,888	Brush Co.
Airdrie & Coatbridge Tramway Co.	Feb., 1904	3·63	4·94	4 8½	94 G	14	210	15	..	..	..	..	Brush Co.
Ashton-under-Lyne Corporation ..	Aug., 1902	7	8·15	4 7¾	96 G	10	40	25	5	5	..	400	Dick, Kerr, & Co. Siemens Bros.
Ayr Corporation	Sept., 1901	6	7·612	4 8½	90 G	21	45	24	*8	8	..	400	British T-H.
Bacup Corporation	1910	1·50	2	4 8½	103 G	9	40	..	..	..	..	..	
Barking Town Urban District ..	Dec., 1903	2·6	3·125	4 8½	100 G	25	44	9	4	3	V. Cp. C.	200	Blackwell & Co.
Barnsley & Dist. Elec. Traction Co.	Nov., 1902	3·06	4·25	4 8½	97 G	10	60	13	*	..	..	..	J. G. White & Co. Brush Co.
Barrow-in-Furness	Feb., 1904	6·9	10·32	4 0	90 G	13	50	24	*8	..	..	..	Brush Co. Dick, Kerr, & Co.
Bath Electric Tramways, Ltd. ..	Jan., 1904	14·7	19·3	4 8½	95 G	10·7	38	40	4	4	H.T. Cp.	675	Westinghouse
Batley Corporation	Aug., 1903	6·536	10·47	4 8½	104 G	9	40	15	6	4	H. Cp.	240	B. I. W. Co. British Elc. Cr. Co
Belfast City	Dec., 1905	49·65	98·54	4 8½	105 G	15	35	291	3	3	Tri. Exp.	3,000	J. G. White & Co. Westinghouse
Bessbrook—Newry (1)	Oct., 1885	3	3	3 0	41 V	80	55	2 M 2 T	2	1	Hyd. Turb.	..	Mather & Platt
Bessbrook and Newry Try. Co.													
Bexley Urban District	Oct., 1903	5·25	6·5	4 8½	90 G	14	40	21	3	3	V. Cp.	600	Dick, Kerr, & Co.
Birkenhead Corporation	Feb., 1901	13·8	24·09	4 8½	100 G	13½	40	65	6	6	V. Cp.	..	Blackwell & Co. British T-H.
Birmingham Corporation	Jan., 1904	65·56	114·55	3 6	105 G	13	40	586	..	..	..	1,475	Dick, Kerr, & Co.
Birmingham and Midland Trys. Co.	Nov, 1904	10·32	16·45	3 6	85 & 94 G	15	31	62	6	6	Cp.	..	Brush Co.
Blackburn Corporation	March, 1899	14·67	24·75	4 0	92 G	15	30	61	*4	4	V. Cp. C.	..	British T-H. Blackwell & Co.
Blackpool Corporation	Oct., 1885	14·75	21·38	4 8½	96 G	20	36	84	5	..	Turb.	3,250	Elwell-Parker British T-H.
Blackpool & Fleetwood Tramrd. Co.	July, 1898	7·9	15	4 8½	70 V 98 G	26	80	41	5	5	V. Cp.	600	Mather & Platt D.K.&Co.-B.T-H.
Blackpool and Fylde Light Ry. Co.	Under cons.	14	14·5	4 8½	..	..	..	..	..	..	..	..	
Blackpool—St. Anne's & Lytham ..	May, 1903	7·47	14·03	4 8½	92 G	22	35	40	..	..	..	..	British T-H.
Bolton Corporation	Nov., 1899	26	47·21	4 8½	90 G	14	35	112	*12	12	V. Cp. C.	3,800	Dick, Kerr, & Co. Blackwell & Co.
Bootle Corporation	May, 1900	4·125	7·75	4 8½	95 G	20	40	55	*8	8	..	4,000	Blackwell & Co.
Bournemouth Corporation	July, 1902	21·66	31·75	3 6	100 G 66 slot	10	40	91	5	4	V. Cp.	1,200	J. G. White & Co.
Bradford Corporation	July, 1898	59	108·75	4 0	102 G	9·8	40	‡272	11	11	V. Cp. C.	..	Westinghouse Blackwell & Co.
Bray and Enniskerry Railway Co.	Under cons.	3·25	5	3 6	..	..	..	..	..	..	..	..	Macartney & Co.
Brighton Corporation	Nov., 1901	9·48	17·18	3 6	105 B.S. No. 4	9	40	53	5	5	Turb.	1,000	Westinghouse Blackwell & Co.
Brighton Beach (1)	Aug., 1883	1·75	2	2 8½	35 V	100	80	9	2	..	..	..	Siemens Bros.
Bristol—Bristol Trys. Co.	Oct., 1895	31	57·5	4 8½	92½ G	10	30	232	6	4	V. Cp. C.	..	British T-H. and Blackwell & Co.
Burnley Corporation	Dec., 1901	12·50	22·16	4 0	102 & 107 G	9·8	35	67	*8	6	H. Cp. C.	1,500	British T-H.
Burton and Ashby Light Railway..	July, 1906	10·2	12·3	3 6	90 G	11	51	20	2	2	Diesel	330	Dick, Kerr & Co. Brush Co.
Burton-on-Trent Corporation ..	Aug., 1903	6·67	9·75	3 6	90 & 100 G	11·7	40	20	3	3	V. Cp.	400	Dick, Kerr, & Co. Blackwell & Co.
Bury Corporation	June, 1903	22·5	34·42	4 8½	102¾ G	12	40	54	6	6	..	1,500	Westinghouse
Camborne and Redruth	Nov., 1902	3·75	4	3 6	83 G	15	40	8	7	7	Cp.	1,525	Dick, Kerr, & Co British T-H.
Cardiff Corporation	May, 1902	17·25	31·82	4 8½	100 G	23	35	130	9	9	V. Cp. C&T	2,200	British T-H. Dick, Kerr, & Co.
Carlisle, City of, Elec. Try. Co. ..	June, 1900	7·25	8·5	3 6	83 G	14	23	12	..	..	..	..	D.K.& Co.-B.T-H.
Cavehill & Whitewell Try. Co...	Feb., 1906	3·29	4·31	4 9	105 G	31	75	10	..	..	..	..	J. G. White & Co.
Chatham & District Light Rly. Co.	June, 1902	14·98	26	3 6	92½ & 105 G	9	35	50	5	4	H. Cp.	675	British T-H. Co. Brush Co.
Cheltenham and District ..	Aug., 1901	10·22	12·25	3 6	80 & 90 G	8·9	37	20	2	2	V. Cp.	..	Westinghouse
Chester Corporation..	April, 1903	3·59	6·4	3 6	94 & 100 G	23	40	18	*7	6 1	V. Cp. C. V. Tri. ExC	240	Blackwell & Co. British T-H.
Chesterfield Corporation	Dec., 1904	3·6	5·1	4 8½	96 & 101 G	20	40	17	4	4	V. Cp. C.	800	Milnes & Co. Westinghouse Brush
Clontarf and Hill of Howth ..	July, 1900	5·5	6·5	5 3	90 & 60 G	13	34	12	..	..	..	..	W.M. Murphy & Co.
Colchester Corporation	July, 1904	6	7·94	3 6	95 G	12	43	18	8	8	V. Cp.	1,140	Dick, Kerr & Co. J. G. White & Co.
Colne Corporation Tramways ..	Nov., 1903	5·2	6·7	4 0	102 G	13	60	13	*	..	..	..	Blackwell & B.T-H. Glover & Co.
Cork Elec. Try. & Lighting Co. ..	Dec., 1898	10	15	2 11½	83 G	14	26	35	*9	9	H. Cp. C.	570	British T-H. Blackwell & Co.
Coventry Corporation Tramways..	Dec., 1895	12·88	15·81	3 6	65 G 81 G	16	35	51	5	3	H. & V. Cp.	1,500	Westinghouse Blackwell & Co.
Croydon Corporation	Sept., 1901	11·87	19·12	4 8½	96·5 G	16	40	75	*13	13	..	2,000	British T-H. Co.
Darlington Corporation	June, 1904	4·875	8·88	3 6	90 G	14	52·8	18	1	..	..	250	Westinghouse

* Current from combined lighting and traction station. (1) Third rail system. † Includes 1·25 miles railless trolley line. ‡ Includes 20 railless cars.
M—Motor Cars. T—Trail Cars.

Digitized by Google

ELECTRIC TRAMWAYS & RAILWAYS.—Particulars of Track and Equipment.

Location of Line and Name of Operating Company.	Date of Opening of First Section.	Length of Route.	Total Length of Track.	Gauge.	Weight and Type of Rail.	Maximum Gradient.	Sharpest Curve.	No. of Motor Cars	No. of Dynamos	No. of Engines	Type of Engines.	Total Capacity Traction, kw.	Principal Contractors for Electrical Equipment.
TRAMWAYS—*continued.*				ft. in.	lbs.	1 in	ft. rad.						
Dartford U. D. C.	Feb., 1906	6·5	8·5	4 8½	100 G	12	35	12	4	..	..	..	British I. W. / British T-H.
Darwen Corporation	Oct., 1900	4·36	7·16	4 0	95 G	9	35	19	*4	4	H. Cp.	..	
Derby and Ashbourne	..	14·5	..	4 8½									
Derby Corporation	July, 1904	13	22·06	4 0	95 G	14	46	50	3	3	Turb.	..	J. G. White & Co. / Brush & B.T-H.
Devonport Corporation	June, 1901	..	7	3 6	97 G	10	50	12	..	..	..	..	Blackwell & Co.
Doncaster Corporation	June, 1902	8·25	12·52	4 8½	94 G	16	45	32	8	8	..	1,000	Blackwell & Co.
Dover Corporation	Sept., 1897	4·75	7	3 6	87 & 90 G	10	44	24	*2	2	H.CC.	..	D. K. & B. T-H
Douglas—Port Soderick .. / Douglas Southern Elec. Trys. Co.	Aug., 1896	3·25	3·75	4 8½	65 V	12	45	8 M / 8 T	2	2	H. Cp.	200	Westinghouse / British T-H.
Dublin & Lucan Elec. Railway Co.	March, 1900	6·5	7	3 6	50 V	20	27	9 M / 5 T	2	2	H. Cp. C.	240	Dick, Kerr, & Co.
Dublin United Tramways Co.	May, 1896	49·8	95·26	5 3	105 G	12·3	22	365	8	8	Cp & Tur	5,500	Dick, Kerr, & Co. / Blackwell & Co. / British T-H.
Dudley and Stourbridge Trys. / British Electric Traction Co.	July, 1899	22·88	30·97	3 6	90 G	11	50	59	4	4	H. Cp.	..	British T-H. / Blackwell & Co.
Dumbarton	Feb., 1907	13	17	4 7¾	90 & 96	14	60	30	3	3	..	..	Dick, Kerr, & Co. / White & B.T-H.
Dundalk	Under cons.	6	6·25	3 6	97 G	10	50	12					
Dundee, Broughty Ferry, and District	Dec., 1905	4·125	7·25	4 8½	90 G	16·5	30½	14	3	3	V. Cp. C.	..	J. G. White & Co. / British T-H. Co.
Dundee Corporation	July, 1900	16·3	30·25	4 8½	90 & 100 G	10	35	76	5	5	..	..	Blackwell & Co.
Dunfermline (Fife Try. & Power Co.)	Nov., 1909	14·6	17·4	..	90 G	10	25	28	..	..	..	..	British T-H.
East Ham Corporation	June, 1901	7·58	14·20	4 8½	90 & 105 G	25	40	45	*5	5	H. Cp.	750	Dick, Kerr, & Co.
Eccles Corporation	May, 1902	5	7·75	4 8½	100 G	..	..	..	..	..	..	..	
Edinburgh and District	June, 1910	1·25	1·5	4 8½	100 G	21	54	4	..	..	..	..	Dick, Kerr, & Co.
Erith Urban District Council	Aug., 1905	4·7	8·4	4 8½	100 G	17	40	17	3	5	..	..	Brush Co. / Westinghouse Co.
Exeter Corporation	April, 1905	4·875	7	3 6	90 G	11·5	35	24	*4	4	H. Cp.	..	Dick, Kerr, & Co.
Falkirk and District	Oct. 1905	7·81	10·5	4 0	90 G.	11·3	48	18	*	..	..	..	Bruce-Peebles / British T-H.
Farnworth Urban District	Jan., 1902	4·33	7·16	4 8½	98 G	29	36	..	..	..	..	..	
Felixstowe Pier	Aug., 1905	0·5	0·5	3 6	36	..	..	3	..	..	..	..	
Gateshead and District	May, 1901	12·38	20·02	4 8½	90 G	8	35	55	*	..	..	..	Dick, Kerr, & Co. / Blackwell & Co.
Giant's Causeway Elec. Try. Co.	Sept., 1883	8	9	3 0	42 V / 75 G	24	30	5 M / 21 T	2	2	Hyd. Turb.	..	Siemens Bros. / British T-H.
Glasgow Corporation	Oct., 1898	99·26	198·13	4 7¾	110 G	11·93	30¾	857	8	8	V. Cp. & T	21,700	British T-H. / Westinghouse
Glossop Urban District	Aug., 1903	4·56	5·6	4 8½	90 G	13	40	8	4	4	V. Cp.	200	British T-H.
Gloucester Corporation Light Rly.	May, 1904	9	15	3 6	90 G	25	40	30	*2	2	Cp.	750	Brush Co. / Dick, Kerr, & Co.
Gosport & Fareham Trys. Co.	Jan., 1906	7·5	11·5	4 7¾	96 G	16	37½	22	3	3	V. Cp. C.	750	Dick, Kerr, & Co. / Brush Co.
Gravesend and Northfleet	Aug., 1902	6·5	9	4 8½	87 G	11	45	18	*				
Great Crosby	June, 1900	2·5	2·5	4 8½	92½ G	..	40	14	*7	7	H. & V. Cp.	160	Dick, Kerr, & Co. / Blackwell & Co.
Great Grimsby	Dec., 1901	6	11	4 8½	90 G	15	26	32 M / 6 T	3	3	..	400	Dick, Kerr, & Co.
Greenock and Port Glasgow	Oct., 1901	7·425	14·05	4 7¾	90 G	11	60	42	*	..	..	..	
Guernsey Railway Co.	Nov., 1892	3	3	4 8½	74 V / 84 G	60	60	9 M / 8 T	2	1	H. & V. Cp.	160	Siemens Bros. / British T-H.
Halifax Corporation	June, 1898	37·53	55·5	3 6	95½ G	9·5	38·6	101	*7	7	H. & V. Cp. & T.	3,000	Electric Cons. Co. / British T-H.
Hampshire Light Railway (Elec.) Co.	March, 1903	6	9	4 8½	..	..	..	10	*	..	..	..	
Haslingden Corporation	July, 1908	3	3.	4 0	100 G	10	30	..	..	..	..	45	Dick, Kerr, & Co.
Hastings and District	July, 1905	19·33	34	3 6	90 G	8	30	65	6	6	V. Cp.	2,100	Dick, Kerr, & Co.
Herne Bay Pier (1)	March, 1899	·75	·75	3 0	60	..	..	3	1	1	Gas	50	British T-H.
Heywood Corporation	Dec., 1905	4·25	4·25	4 8½	90 G	17	..	..	1	1	..	300	Blackwell & Co. / B.I. & H.C. Co.
Houghton-le-Spring (See Sunderland Dist. Elec. Trys.)													
Huddersfield Corporation	Feb., 1901	34·50	56	4 7¾	98 G	11	35	106	4	4	V. Cp. C.	2,200	British T-H.
Hull Corporation	July, 1899	13·46	30·5	4 8½	94 G	20	30	180	7	7	V. Cp. C.	2,560	British T-H. / Westinghouse
Ilford Urban District	Mar., 1903	7·42	12·62	4 8½	95 G	13	33·3	28	*7	7	..	1,600	British T-H. / Dick, Kerr, & Co.
Ilkeston Corporation	May, 1903	3·8	4·3	3 6	90 G	12	28	13	..	..	..	..	Dick, Kerr, & Co.
Ipswich Corporation	Nov., 1903	10·8	14·87	3 6	90 G	11·5	40	36	*10	10	Enclos'd	1,175	Westinghouse
Isle of Man—													
Manx Elc. Rly. Co. Douglas to Ramsey	July, 1893	18	35·75	3 0	62½ V	24	90	34 M / 29 T	8	9	H. Cp.	1,300	Mather & Platt
Manx Elc. Rly. Co. Snaefell Mountain	Aug., 1895	4·5	9·5	3 6	56 V	12	90	6	5	4	H. Cp.	390	
Isle of Thanet Trys. & Ltg. Co.	April, 1901	11	20·67	3 6	90 & 100 G	11	38	59	*6	6	3 V. Cp. / 3 H. Cp.	800	British T-H. / Blackwell & Co.
Jarrow and District	Nov., 1906	2·54	3·42	4 8½	95 G	12·5	50	10	..	..	..	..	Brush Co. / B.I. & H.C. Co.
Kearsley Urban District	Jan., 1902	1·75	1·75	4 8½	95 G	20	..	..	..	..	..	..	Westinghouse
Keighley Corporation	Oct., 1904	3·5	6·11	4 0	95 G	25	60	12	*4	4	V.	200	Blackwell & Co. / Brush & B.T-H.
Kidderminster—Stourport / British Electric Traction Co.	May, 1898	4·6	4·87	3 6	75 G	14	45	13	*5	5	Stm Turb.	..	Brush Elc. Eg. Co.
Kilmarnock Corporation	Dec., 1904	4·18	5·5	4 8½	90 G	24	45	14	*3	3	..	250	Blackwell & Co.
King's Norton & Northfield U. D.	May, 1904	5·25	8·25	3 6	105 G	15&21	100&145	..	..	..	..	..	Blackwell & Co.
Kinver	April, 1901	4·25	6	3 6	63 & 90 G	..	..	6					
Kirkcaldy Corporation	Feb., 1903	6·11	8·56	3 6	100 G	11	40	26	*10	6	Cp. H.T.	2,290	British T-H. Co.
Lanarkshire Tramway Co.	July, 1903	28·431	43·120	4 7¾	96 & 101 G	9·4	37	76	4	4	3 H. Cp. / 1 V. Cp.	825	British T-H. Co.
Lancashire United Tramways Co.	Oct., 1902	39	54	4 8½	90 G	15	50	82	*8	8	V. Cp. C&T	7,000	B. I. W. Co.
Lancaster Corporation	Jan., 1903	4	4·81	4 8½	90 G	8	30	12	4	4	V. Cp.	200	Greenwood & Batley, Ltd.
Leamington & Warwick Elec. T. Co.	July, 1905	3·04	6·1	3 6	65 G	12	47	12	3	3	Cp.	..	Brush Co.
Leeds City	Aug., 1897	69·02	114·62	4 8½	105 & 111 G	8·4	32	345	5 / 3	5 / 3	H Cp C. / Stm. Tur	6,150	Elec. Con. Co. / Greenwood & Batley, British T-H. / Blackwell & Co.

* Current from combined lighting and traction station. (1) Third Rail system. M—Motor Cars. T—Trail Cars.

Digitized by Google

ELECTRIC TRAMWAYS & RAILWAYS.—Particulars of Track and Equipment.

Location of Line and Name of Operating Company.	Date of Opening of First Section.	Length of Route.	Total length of Track.	Gauge.	Weight and Type of Rail.	Maximum Gradient.	Sharpest Curve.	No. of Motor Cars.	No. of Dynamos	No. of Engines.	Type of Engines.	Total Capacity Traction, kw.	Principal Contractors for Electrical Equipment
TRAMWAYS—*continued.*				ft. in.	lbs.	1 in	ft. rad.						
Leicester Corporation	May, 1904	20·25	38	4 8½	100 G	16	35	160	7	7	V.Cp.C&T	9,250	Dick, Kerr, & Co. Blackwell & Co.
Leith Corporation	Aug., 1905	9·08	17·9	4 8½	106·7 G	19	54	37	*11	11	..	1,600	Brush & B.T-H.
Leyton Urban District	Dec., 1906	8·95	17·694	4 8½	105 & 111 G	24	45	60	*4	4	Cp.T.E&T	2,040	..
Lincoln Corporation (1)	Nov., 1905	1·75	2·96	4 8½	100 G	..	36	8	*9	9	..	120	Blackwell & Co.
Liverpool Corporation	Nov., 1898	70	127	4 8½	95, 123 & 134 G	13	30	599	*42	42	Trip.Ex.	44,600	British T-H. Dick, Kerr, & Co. Westinghouse
Liverpool Overh'd Ry. (Trol.Ln.Ex.)	June, 1900	2·5	2·5	4 8½	92½ G	Nil	40	14	7	7	H.&V.Cp.	160	Dick, Kerr, & Co.
Llandudno and Colwyn Bay ..	Oct., 1907	8·37	13·60	3 6	90 G	11·5	45	18	*	..	..	..	Bruce-Peebles.
Llanelly and District	July, 1911	6·25	6·75	4 8½	90 G	11·2	60	12	*2	2	Trip.Ex.	..	British T-H.
London County Council (2) ..	May, 1903	148·56	287·35	4 8½	105 G	10·6	45	1725M 150T	8	8	V.Cp.C. Turbine	43,000	Dick, Kerr, & Co. Westinghouse
London United Tramways Co. ..	April, 1901	55·25	102·45	4 8½	92½ & 100 G	18	28	339	7	5	V. Cp.	3,500	British T-H. Westinghouse. Blackwell & Co.
Lowestoft Corporation	July, 1903	4·75	5·07	3 6	100 G	27	36	19	*5	5	Cp.	..	Blackwell & Co.
Luton Corporation Tramways .. (Leased to J. G. White & Co., Ltd.)	Feb., 1908	5·25	6·25	4 8½	95 G	11	35	12	*1	1	..	..	J. G. White & Co. British T-H.
Maidstone Corporation	July, 1904	5·5	7·04	3 6½	96 G	9	35	19	3	3	..	750	Dick, Kerr & Co.
Manchester Corporation	June, 1901	120·05	244	4 8½	105 G	14·9	35	685	*22	22	Turb'nes	45,300	British T-H. Dick, Kerr, & Co
Mansfield and District Co. ..	July, 1905	10	12·25	4 8½	90 G	17	50	24	*3	3	..	..	
Merthyr	April, 1901	3·69	4·81	3 6	96 G	11	66	16	*4	4	H.S.V.	..	D. K. & B. T-H
Metropolitan Electric Trys., Ltd.	July, 1904	56·25	112·5	4 8½	100 G	12	40	312	5	5	1 Stm. Tur	..	British T-H. Brush Co.
Mexborough & Swinton Trys. Co.	Feb., 1907	7·75	10·75	4 8½	90 G	8·5	55	20	4	4	Turb.	700	Brush & B.T-H.
Middlesbro', Stockton, & Thornaby Electric Tramways Co.	July, 1898	10·5	15·825	3 6	92½ G	17	35	60	3	4	H.&V.Cp.	900	British T-H. Blackwell & Co.
Middlesex County Council.. ..	Aug., 1904	25·5	51	4 8½	..	..	..	..	..	..	..	..	
Middleton Corporation	March, 1902	2·5	5	4 8½	..	..	..	..	..	..	..	..	
Middleton Electric Traction Co. ..	March, 1902	8·5	10·53	4 8½	90 G	15	49½	28	3	3	..	500	Glover & Co.
Morecambe	Jan., 1912	1·20	..	4 8½	96 G	18	..	4	..	..	..	..	
Musselburgh and District ..	Dec., 1904	6·5	8·125	4 8½	90 G	34	45	16	4	3	..	400	B. T-H. Co., Nat. Elec. Cons. Co.
Nelson Corporation	Feb., 1903	2·74	3·86	4 0	106 G	11	41	11	*4	4	..	400	Blackwell & Co. British T-H. Co. Brush Co.
New St. Helens & District Trys. Co.	July, 1899	18	20	4 8½	95 G	13	35	36	*4	4	V. Cp. C.	..	Westinghouse British T-H.
Newcastle Corporation	Dec., 1901	32·75	62·875	4 8½	101 G	11	37	220M 2 T	6	6	V.Cp.Trip. Ex.&Turb.	11,000	Westinghouse British T-H.
Newport (Mon.) Corporation ..	April, 1903	7·5	14·35	4 8½	98 G	10·5	40	44	5	5	V. Cp.	1,750	Westinghouse
Northampton Corporation	July, 1904	6·5	11·16	3 6	90 & 96 G	18	50	33	4	4	V.C.C.&T	1,020	Dick, Kerr, & Co.
North Shields Tramways Co. ..	March, 1901	..	7·75	3 6	90 G	10	36	22					Brush Co.
North Staff. Trys. (*vide* Potteries)													
Norwich Electric Tramways Co. ..	July, 1900	14·5	19·25	3 6	65½ & 90 G	12·6	38	42	6	5	H.TCp&T	1,000	Westinghouse Blackwell & Co.
Nottingham Corporation	Jan., 1901	21·5	41·5	4 8½	107 G	11·5	40	155	*3	3	..	..	British T-H. Dick, Kerr, & Co.
Nottinghamshire & Derbyshire Tramways Co.	Aug., 1913	12·8	16·10	4 8½	G	..	..	24	*	..	..	..	British T-H.
Oldham, Ashton & Hyde Trys. Co.	June, 1899	9·12	11·75	4 8½	97 G	11	28	46	*3	3	V.Cp.C.	..	British T-H.
Oldham Corporation	Dec., 1900	24	37	4 8½	100 & 105 G	10·5	40	109	*4	4	..	2,220	Dick, Kerr, & Co.
Paisley & District Tramways Co.	June, 1904	18·25	32·50	4 7½	90 G	10	34	60	..	..	..	..	British T-H.
Perth Corporation	Oct., 1905	4·846	6·75	3 6	90 G	16	25	12	5	5	Cp.	500	Blackwell & Co.
Peterborough Elec. Traction Co...	Jan., 1903	5·33	6·71	3 6	94 G	31	35	14	..	..	..	..	Blackwell & Co. Dick, Kerr, & Co
Plymouth Corporation	Sept., 1899	7·75	15	3 6	92 G	9	35	42	3	3	V. Cp.	..	Elec. Cons. Co. Westinghouse
Plymouth, Stonehouse, and Devonport	Nov., 1901	1·5	3·62	3 6	84 G	11	34	15	..	..	..	..	Blackwell & Co. Dick, Kerr, & Co
Pontypridd Urban District ..	March, 1905	5·5	8·6	3 6	96 & 100 G	10	27·6	26	4	5	V.C.Cp.	450	B.I.W. & B.T-H. Blackwell & Co.
Portmadoc & South Snowdon Rly.	Under cons.	13·25	15	1 11½	41	28	200	6	..	..	..	..	
Portsdown & Horndean Tramway	March, 1903	6	7·5	4 7½	96 G	16	40	16	2	2	Oil	200	Dick, Kerr, & Co. Brush Co.
Portsmouth Corporation	Sept., 1901	17·65	34·63	4 7½	96 & 100 G	17	35	100	5	4	V.& H.Cp.	2,075	Macartney & Co. Dick, Kerr, & Co.
Potteries Electric Traction Co. ..	May, 1899	31·67	41·48	4 0	87, 90, 100, & 110 G	11	45	110	8	8	H.Cp. V.Cp.	2,275	Dick, Kerr, & Co. Blackwell & B.T-H.
Preston Corporation..	June, 1904	10·54	17·2	4 8½	B.S.S.No.2	16	28	39	2	2	H. Cp.	600	Dick, Kerr, & Co.
Radcliffe Urban District ..	April, 1905	5	6·5	4 8½	100 G	15	40	..	*4	4	V. Cp.	600	Mather & Platt
Rawtenstall Corporation	May, 1909	12	15·9	4 0	100 G	15	38	24	*3	3	..	850	Westinghouse
Reading Corporation	July, 1903	7·44	13·175	4 0	96 G	16	35	36	4	4	V. Cp.	400	Blackwell & Co. Dick, Kerr, & Co. Westinghouse
Rhondda Tramways Co.	July, 1908	21	28·75	3 6	95 G	9	38½	54	7	4	Trip.Ex.	1,230	British T-H. Brush
Rochdale Corporation	May, 1902	19·58 (A)	22·74 (A)	4 8½	103½ G	11·7	30	69	*	..	..	..	British T-H. Dick, Kerr, & Co Brush Co.
Rotherham Corporation	Jan., 1903	10	12	4 8½	100 G	9·5	45	36	*6	6	H.S.Cp.	1,485	Dick, Kerr, & Co.
Rothesay	June, 1902	4·81	9·68	3 6	94 G 77 G	24	34	20	3	3	V. & Oil	350	Dick, Kerr, & Co. Westinghouse
Ryde Pier, Isle of Wight Ryde Pier Co. (3) ..	March, 1886	·5	1	4 8½	30 & 34 V	..	..	4	2	2	Gas	..	Siemens Bros.
Salford Corporation	Oct., 1901	41·90	75·79	4 8½	103 G	20	42·5	220	*7	7	C. & Turb.	3,000	Westinghouse Mather & Platt
Scarborough Tramways Co. ..	May 1904	5	7·75	3 6	90 G	10·5	35	22	2	2	Stm.Turb.	..	Brush & B.T-H.
Sheerness and District	April, 1903	2·5	2·704	3 6	94 G	43	40	8	6	5	V.Cp.C.	100	Siemens & Halske Brush Co.
Sheffield Corporation	Sept., 1899	40	77·84	4 8½	110 & 120	9·5	35	339	..	..	..	..	British T-H

* Current from combined lighting and traction station. (1) G.B. surface contact system. (2) Mainly Conduit system, but there are now several Trolley lines.
Besides the electric lines the London County Council has also 4·45 route miles of horse tramways. (3) Third rail system. (A) Not including 17·1 miles track leased.
M—Motor Cars. T—Trail Cars.

Digitized by Google

ELECTRIC TRAMWAYS (contd.).	Date of Opening of First Section.	Length of Route.	Total Length of Track.	Gauge.	Weight and Type of Rail	Maximum Gradient.	Sharpest Curve.	No. of Motor Cars.	No. of Dynamos	No. of Engines	Type of Engines.	Total Capacity Traction, kw.	Principal Contractors for Electrical Equipment.
				ft. in.	lbs.	1 in	ft. rad.						
Shipley Urban District	May, 1902	6	10	4 0	98 G	15	..	..	6	6	Turbine	1,800	British T-H.
Soothill Nether U.D.C. & Dewsbury & Ossett Corporations ..	Nov., 1908	3·125	4·45	4 8½	90 G	13	50	8	*	..	..	..	Nat. Elec. Cons. Co.
Southampton Corporation	Jan., 1899	10·25	18·75	4 8½	{96 G & 105 B.S. No. 4}	13	40	73	6	6	H. Cp. C.	1,000	Westinghouse
Southend Corporation	July, 1901	7·01	13·52	3 6	90 G	18	48	42	*6	7	V. Cp.	2,075	British T-H.
Southend Pier (1) Southend Corp.	Aug., 1890	1·25	1·25	3 6	60 G	Lev.	..	28	..	..	..	..	British T-H.
South Metropolitan Elec. Try. Co.	Feb., 1906	13·09	26	4 8½	95 G	16	42	51	*8	6	Stm Tbs	1,650	{Dick, Kerr & Co. / Brush Co.
Southport Corporation (5)	July, 1900	13·5	10·75	4 8½	87 & 90 G	25	45	30	*3	3	H. Cp.	600	Dick, Kerr, & Co.
Southport Electric Tramway Co...	July, 1901	8·17	12·52	4 8½	87 G	Nil	40	21	*				
Southport Pier	1905	...	·75	4 0	..	..	..	1 M 2 T	..	..	..	..	Westinghouse
South Shields Corporation ..	March, 1906	5·7	10·25	4 8½	95 G	15	35	49	2	2	V. Cp. C.	1,100	Dick, Kerr & Co.
South Staffordshire	Jan., 1893	16·90	26·87	3 6	97 & 90 G	17	46	46	3	3	C.H. Cp.	..	{Blackwell & Co. / E. C. C.
Stalybridge, Hyde, Mossley, and Dukinfield	May, 1904	21·186	27·75	4 8½	99 G	9	27½	59	8	..	Turb.	1,000	Dick, Kerr, & Co.
Stockport Corporation	Aug., 1901	16	27·62	4 8½	96 G	10·8	35	50	*5	5	Cp.	1,000	Dick, Kerr, & Co.
Sunderland Corporation	Aug., 1900	10·92	20·35	4 8½	96 G	12	36	70	*	..	..	936	Dick, Kerr, & Co.
Sunderland District Electric Trys.	June, 1905	14·27	15·97	4 8½	90 G	11	40	33	*	..	..	..	British T-H.
Sutton & Howth (G.N.R., Ireland)	June, 1901	5·3	6	5 3	72 B	16·7	300	11	3	3	V. Cp.	500	{British T-H. / Westinghouse
Swansea Tramways Company ..	June, 1900	13·02	20·38	4 8½	84 & 86 G	14	45	75	3	3	H. Cp. C.	620	British T-H.
Swindon Corporation	Sept., 1904	3·7	4·4	3 6	105 G	14	37	12	5	4	..	600	Dick, Kerr & Co.
Taunton Electric Traction Co.	Aug., 1901	1·66	2	3 6	90 G	25	35	6	*	..	..	..	Blackwell & Co.
Torquay Tramways	April, 1907	9·76	17·04	3 6	90 G	10	31	33	*	..	..	..	British T-H.
Trafford Park Estates, Ltd. (Trys.)	July, 1903	2·5	2·75	4 8½	100 G	Nil	35	..	..	..	..	..	
Tynemouth and District	March, 1901	4·21	7·83	3 6	90 G	10	30	21	*3	3	..	..	Blackwell & B.T-H.
Tyneside Tramways & Tramroads Co.	Sept., 1902	10·97	16·23	4 8½	95 G	10	40	24	*				
Wallasey Corporation	March, 1902	12	20	4 8½	98 G	11	40	67	*1	1	Turbine	1,000	Blackwell & Co.
Walsall Corporation	Jan., 1904	13·5	19·5	3 6	90 & 92 G	18·5	32	39	*7	7	V & Tur.	2,490	British T-H.
Walthamstow U.D.C. Light Rly...	June, 1905	9·14	12·53	4 8½	100 G	18	40	38	*15	12	{Gas & Turb's}	1,560	Westinghouse
Walton-on-Naze Pier	Aug., 1898	·5	·5	3 6	36 V	..	..	3	3	2	..	100	{Blackwell & Co.
Warrington Corporation	April, 1902	6·5	9·6	4 8½	90 G	27	50	21	*6	6	V.C.	500	{British T-H.
Wemyss and District	Aug., 1906	7·5	13	3 6	{95 & 97 G}	18	85	17	3	3	2 V.Cp.	..	BrucePeebles&Co
West Bromwich Corporation ..	Dec., 1902	7	12·5	3 6	98 G	20	49	29	8	8	Turb'nes	750	{Dick, Kerr, & Co. / B. I. W. Co.
West Ham Corporation	Feb., 1904	16·8	30·0	4 8½	100 G	18	40	118	*3	3	V.C.Cp.	1,500	Brush & B.T-H.
West Hartlepool Corporation ..	May, 1896	6·72	8.3	3 6	87 & 90 G	15	35	25	*	..	..	..	{Elec. Cons. Co. / Dick Kerr & Co.
Weston-super-Mare	May, 1902	2·92	3·53	4 8½	90 G	25	40	12	5	4	Cp. & T.	..	{Blackwell & Co. / British T-H. / Brush Co.
Wigan Corporation	Jan., 1901	30·9	45·42	{3 6 / 4 8½}	105 G	12	45	73	*8	8	..	740	Blackwell & Co.
Wolverhampton Corporation (3) ..	April, 1902	13·5	22	3 6	91 G	15	37·5	52	*10	10	{H.&V.C. & Turb's}	2,900	{British T-H. / Electric Cons. Co.
Wolverhampton District	Oct., 1900	15·51	22·72	3 6	90 G	20	40	30	*4	..	..	..	B.I.W. & B.T-H.
Worcester Electric Traction Co. ..	Feb., 1904	5·86	8·58	3 6	94 G	13	45	15	*3	3	..	..	{Westinghouse / Brush Co. / Dick, Kerr, & Co.
Wrexham and District	April, 1903	4·44	6·16	3 6	96 G	9·11	50	10	*6	..	..	..	British T-H.
Yarmouth Corporation	June, 1902	10	14·4	3 6	90 & 95 G	27	48	35	3	3	Comp.	..	{Brush Co. / B.I.W. Co.
York Corporation	Jan., 1910	6	9·9	3 6	100	18	40	3 M. 4 T.	*8	8	V.C.	..	{Dick, Kerr, & Co.
Yorkshire (West Riding)	Aug., 1904	24·69	40·382	4 8½	96 G	15·5	40	69	9	6	..	1,800	{Brush & B.T-H. / Dick Kerr & Co.
Yorkshire Woollen District ..	Feb., 1903	22·25	36	4 8½	{94 & 100 G}	8	30	69	*	..	..	..	{Brush Co. / Dick, Kerr, & Co.
RAILWAYS.													
LONDON AND VICINITY:													
Central London Rly. Co. (1) ..	July, 1900	6·5	13	4 8½	100 V	30	..	68 M. 172 T.	6	6	H. Cp. C.	..	British T-H
City & South London Rly. Co. (1	Dec., 1890	7·25	14·75	4 8½	{60 V / 80 V}	30	120	52 L. 142 T.	(a)	..	..	..	{Mather & Platt. / Elec. Cons. Co. / British T-H.
East London Railway (2) ..	April, 1913	5·75	11·5	4 8½	90 B	..	..	(c)	..	..	..	..	
Gt. Northern & City Rly. Co. (2)	Feb., 1904	3·5	7·75	4 8½	85 V	52	660	35 M 45 T	6	..	..	..	British T-H.
Great Western Railway .. (Hammersmith and City line.)	Nov., 1906	4·9	10·5	4 8½	97½ B	60	400	46 M. 80 T	10	10	V.Cp.	..	{British T-H. / Elec. Con. Co.
London & North Western Rly. (Euston-Watford line in progress) (2)	May, 1914	41·5	80	4 8½	..	..	..	..	..	..	Turbine	..	{Siemens Works / Westinghouse
London & South Western Rly.	Nov., 1915	47	150	4 8½	..	..	168	84	..	..	Turbine	..	{Dick, Kerr & Co. / British T-H. / Westinghouse
London, Brighton, and South Coast Railway (4) .. .. (Extensions in progress)	Dec., 1909	22	70	4 8½	..	..	..	16 M. 8 T.	*(d)	..	..	..	{British T-H. / Blackwell & Co.
London Electric Railway Co.:													
Baker St. & Waterloo Ry. (2)	March, 1906	7	14·0	4 8½	90 B	60	330	86 M. 72 T.	(a)	..	..	..	{Westinghouse / British T-H.
Charing Cross—Hampstead Railway (2)	June, 1907	8	16·5	4 8½	90 B	33	330	60 M. 90 T	(a)	..	..	..	{Westinghouse / British T-H.
Great Northern, Piccadilly & Brompton Rly. (2)	Dec., 1906	9·25	18·5	4 8½	90 B	33	330	72 M. 144 T.	(a)	..	..	..	{Westinghouse / British T-H.
Metropolitan Railway (2) ..	Jan., 1905	26	59	4 8½	86 B	44	363	86 M. 172 T	4	4	Turbine	..	{Westinghouse / British T-H.
Metropolitan District Railway (and running powers) (2)	July, 1905	41	80·46	4 8½	86 B	40	330	234 M. 286 T.	(a)	..	Turbine	..	{British T-H. / Westinghouse
Waterloo and City Rly. (1) ..	Aug., 1898	1·5	3	4 8½	87 B	30	321	17 M. 12 T.	6	6	V. C.	..	{Siemens Bros. / Dick, Kerr & Co.
PROVINCES:													
Lancashire and Yorkshire (2) .. (Extensions in progress)	March, 1904	43	85	4 8½	86 B	85	840	38 M. 52 T.	6	5	{1 V.C. / 4 H.C.}	..	Dick, Kerr, & Co.
Liverpool Overhead Rly. Co. (1)	March, 1893	6·5	13·05	4 8½	60 V	40	429	46 M 7 T	7	7	{H. Cp. / V. Cp.}	..	{Electric Cons. Co. / Dick, Kerr, & Co.
Mersey Railway (1)	April, 1903	4·5	9	4 8½	86 B	27	528	24 M. 37 T.	5	5	V.Cp.	..	Westinghouse
Midland Rly.—Morecambe and Heysham Branch (4)	June, 1908	9·75	19·5	4 8½	..	..	..	8 M. 6 T.	4	4	Gas.	..	{Westinghouse / Siemens Bros.
North Eastern Railway (1) ..	March, 1904	..	..	4 8½	90 B	..	..	..	(b)	..	..	..	British T-H. Co.

*Power from combined lighting and power station. (1) Third rail system. (2) Third and fourth rails system. (3) Lorain surface contact system. (4) Single phase.
(5) Not including 9 miles owned but leased. (a) Power supplied by Chelsea Power Station (80,000 H.P.) (b) Power purchased from the Newcastle-upon-Tyne Electric Supply Company, Limited.
(c) Rolling stock supplied by Metropolitan Railway. (d) Power supplied by London Electric Supply Corporation
M—Motor Cars. T—Trail Cars.

Digitized by Google

PRESCOT INSULATORS

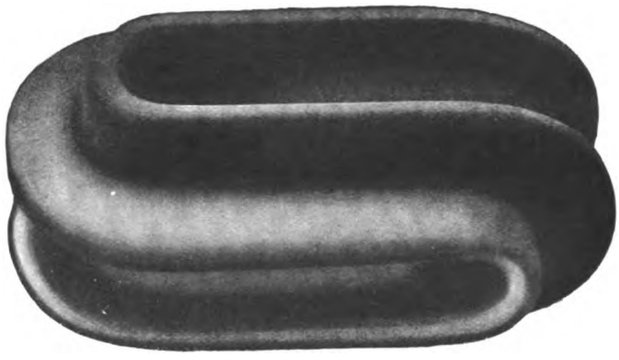

Regd. No. 639667/14.

These Insulators are insulators all through and do not depend on the attractive green glaze for their insulating qualities.

They are designed to maintain their alignment when erected, and their mechanical and electrical factors of safety are high.

The following are particulars of the sizes stocked:

	D 4411	D 4412
Working Load	500 lbs.	2,500 lbs.
Breaking Load	2,000 lbs.	10,000 lbs.
Flash over Voltage (dry)	20,000 A.C.	30,000 A.C.
Flash over Voltage (wet)	2,000 A.C.	10,000 A.C.

BRITISH INSULATED & HELSBY CABLES

LIMITED

CABLEMAKERS & ELECTRICAL ENGINEERS
PRESCOT, LANCASHIRE, and HELSBY, nr. WARRINGTON

Home Branches in : London, Manchester, Glasgow, Birmingham, Newcastle, Cardiff, Dublin, Belfast, and Leeds.

Overseas Branches in : Melbourne, Johannesburg, and Calcutta.

Agencies in : Amsterdam, Bombay, Buenos Ayres, Christiania, Hong Kong, Rangoon, Shanghai, Singapore, and Lisbon.

5

Digitized by Google

THE EQUIPMENT & ENGINEERING CO.

2 & 3, Norfolk Street, Strand

LONDON, W.C.

Telephone
City 1088 (2 lines)

Telegrams
Kharparts, Estrand, London

Digitized by Google

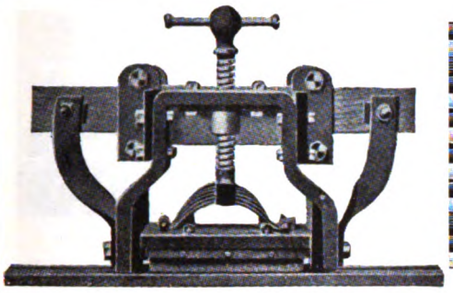
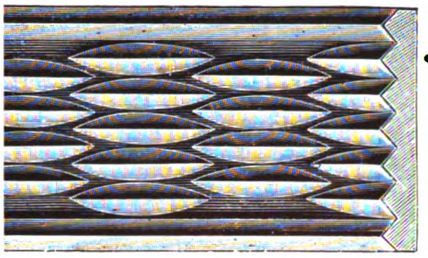


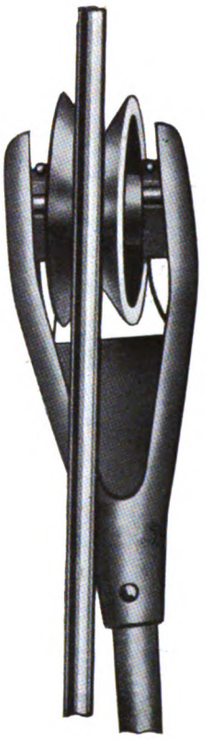
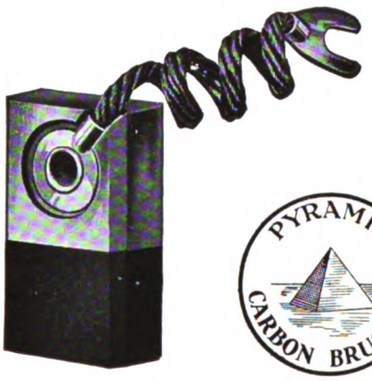

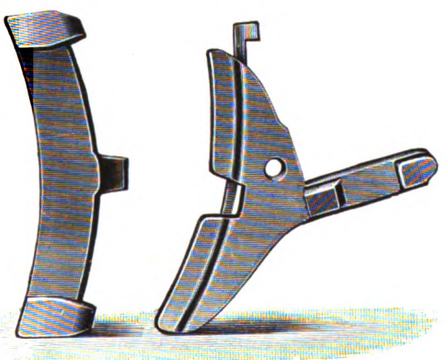
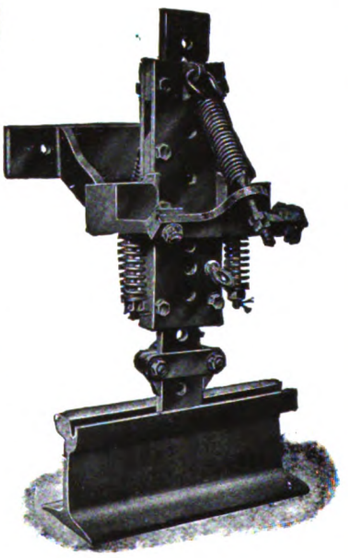

THE EQUIPMENT & ENGINEERING CO.

2 & 3, Norfolk Street, Strand

LONDON, W.C.

Telephone
City 1088 (2 lines)

Telegrams
Kharparts, Estrand, London

Digitized by Google

SELF-LUBRICATING

ENGINES & STEAM TURBINES

The Most Economical Plant
for
ELECTRIC TRAMWAY

POWER
and
LIGHTING
STATIONS

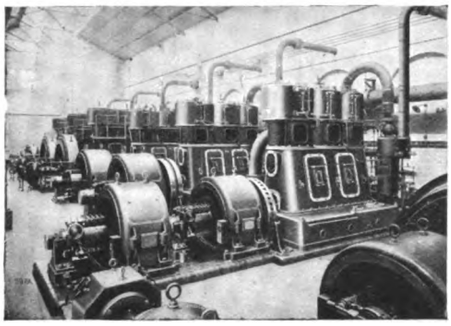

Worcester Corporation Electricity Works.
Total 2,750 B.H.P.

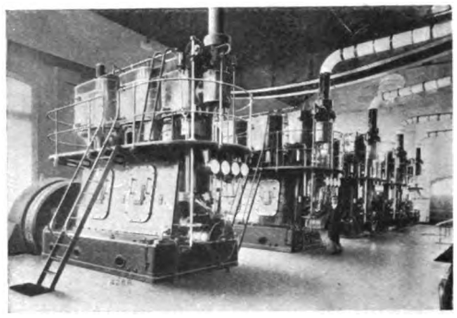

Montevideo Tramway Power Station.
Total 8,000 B.H.P.

ENGINES from
10 to 3,000 B.H.P.

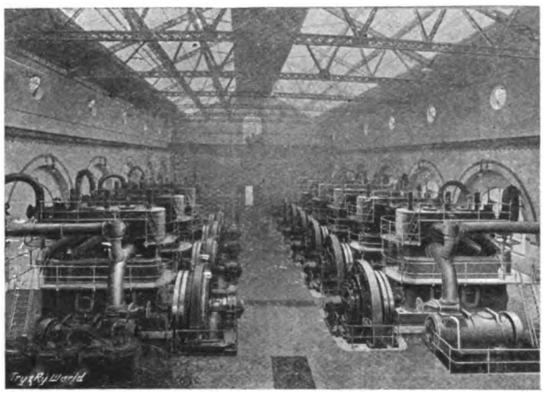

Birmingham Corporation Tramway
and Power Station.
Total 35,000 B.H.P.

TURBINES from
200 KW. upwards.

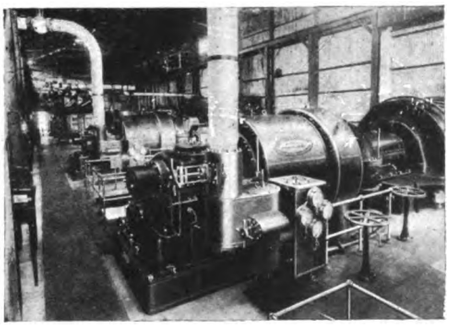

Johannesburg Municipal Tramway Station.
Total 11,750 B.H.P.

6,000 ENGINES BUILT,
representing
more than
1,300,000 B.H.P.

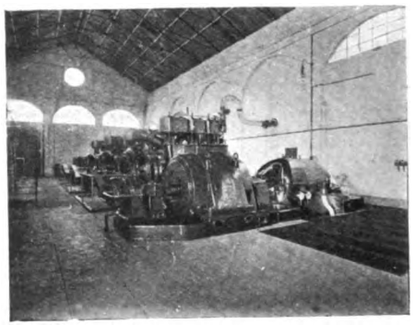

Rand Water Board, South Africa.
Total 3,140 B.H.P.

Telegrams: "BELLISS, BIRMINGHAM." Estab. 1852. London Office: 8, VICTORIA ST., S.W.

BELLISS & MORCOM, LIMITED

Engineers BIRMINGHAM ENGLAND

Digitized by Google

THE Tramway & Railway World
WITH MOTOR TRAFFIC SECTION

Founded 1892. LONDON, DECEMBER 7, 1916. VOL. XL.

CENTRE DOOR ELECTRIC CARS.

TYPES IN WESTERN AND EASTERN AMERICAN STATES.

For several years there has been notable activity among American tramway companies in the search for types of electric cars which most efficiently meet the various traffic conditions that are found in different localities. The car with centre doors has been found to possess certain advantages, and this arrangement, combined with a low entrance platform giving easy access, is now being largely adopted. As typical of the movement to which we refer two cars are illustrated in these notes; one comes from the Pacific coast and the other from a busy town in the central part of New York State and the traffic centre of a populous district. The car illustrated on this page is one owned by the Southern Pacific Company. Similar cars are being used by the Stockton Electric Railroad Company, the San José Railroads, and the Fresno Traction Company, operating in the same vicinity. Cars of the centre-entrance type constitute quite a departure on the Pacific Coast, inasmuch as the California type has for years been the standard in many of the coast cities, especially those in Southern California, where, in view of the climate, its combination open and closed features have made it very popular.

The new cars present a very handsome appearance, both inside and out, are thoroughly convenient for the near-side stops required in most California cities and have achieved even greater popularity with the public than the California type. This should be particularly true in the case of Los Angeles, where traffic congestion and sharp curves make a car of the new type particularly adaptable.

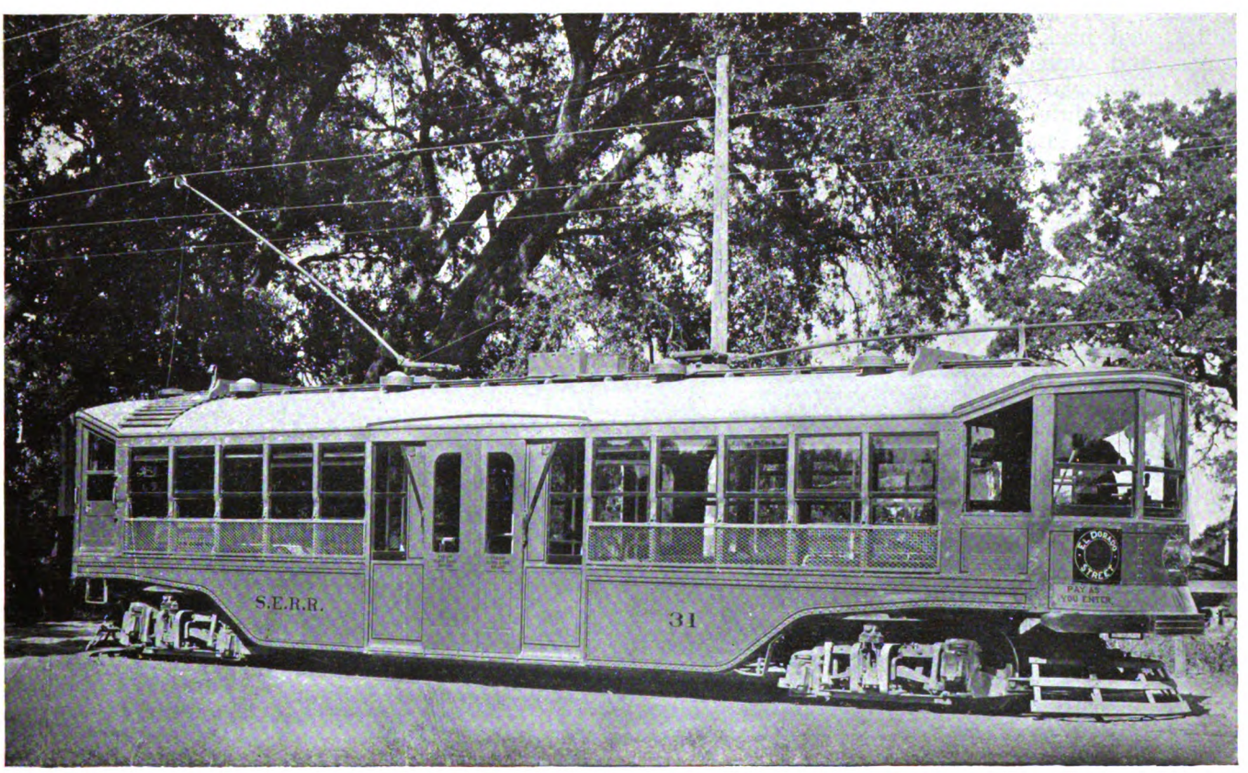

Centre-entrance Car used by Southern Pacific Company.

The new cars have all-steel underframes made up of plates and structural shapes, and the construction throughout is of considerable interest. Side sill and belt rail are formed of angles to which the side plate is riveted, the whole forming a girder which is broken on either side at the centre doorway. The strain is carried over the doorway by means of channel sections, the top of the frame being curved to conform to the shape of the roof, which considerably increases the stiffness and resistance to compression. Centre stringers are formed of angles, and the crossings consist

Digitized by Google

of 3-in. channels riveted together. The bolsters are made up of Z bars, reinforced by angles and rectangular bars. The longitudinal members extending from bolsters to end sills are formed of 3-in. Z bars and support the centre plate. The load of the car is transmitted to the centre plate partly by the bolsters and partly by a steel girder, forming a bulkhead between the body of the car and the motorman's cab at each end. The floor is supported on angles riveted to the inner side of the side girders. Side and door posts are formed of T iron of suitable dimensions. The plain arch roof is supported on composite carlines.

save those on either side of the centre doors. The usual push-button signal system is installed in each side post. The motorman's cab at either end of the car is raised above the main floor level and is completely separated from the body of the car by the steel bulkheads, in which there are two windows arranged to drop into pockets. The cabs are provided with three front windows and one on the brakestaff side, all of which drop into pockets. On the controller side is a single door, which swings in against the bulkhead.

The photograph on this page shows a type of car with centre doors of which a number of specimens have

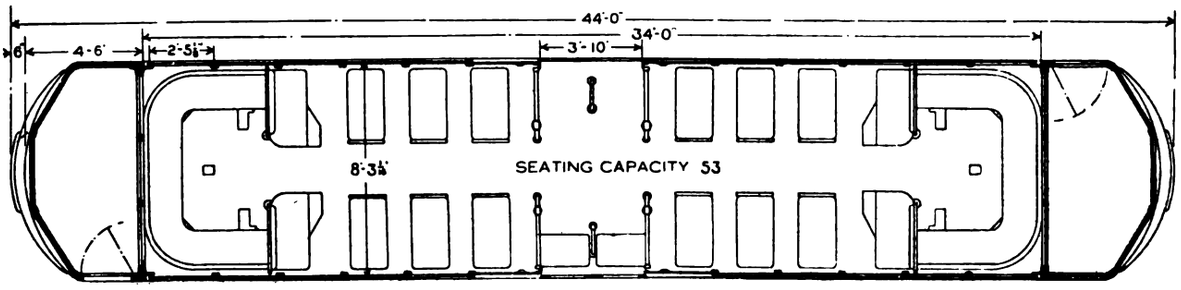

Plan of Car used by Southern Pacific Company.

The interior of the cars is neatly finished. Steel posts are covered with mahogany to correspond with the doors and window frames. The hinges, door handles, seat back grab-handles, window and shade fixtures, and similar hardware are of solid bronze heavily nickel-plated, and the pipe stanchions and railings are white enamelled. The seats are upholstered in rattan and are reversible, with the exception of one on either side of the aisle at each end. These are stationary, and the backs are surmounted by brass grilles. Rattan-upholstered benches run round each end, and the backs are fitted with brass grilles which separate them from the steel bulkheads.

A notable feature is that the centre doors are air-actuated, with electric control at the conductor's

been built for the Syracuse lines of the New York State Railways. An extended description of this car has been given by Mr. F. L. Hinman, master mechanic of the Syracuse lines.* The following are leading dimensions, etc., of these cars :—

Length over bumpers	...47 ft. 7 in.
Width over side plates	... 8 ft. 2 in.
Height from rail to step	... 13¼ in.
Height from step to floor at centre	... 11⅞ in.
Ramp of floor from bolster to centre	... 5½ in.
Truck centres	... 25 ft.
Seating capacity	... 53

The cars are mounted on Baldwin Locomotive Company arch-bar trucks, having 26-in. cast-iron wheels and are equipped with four Westinghouse 506-A motors and K-6 controller.

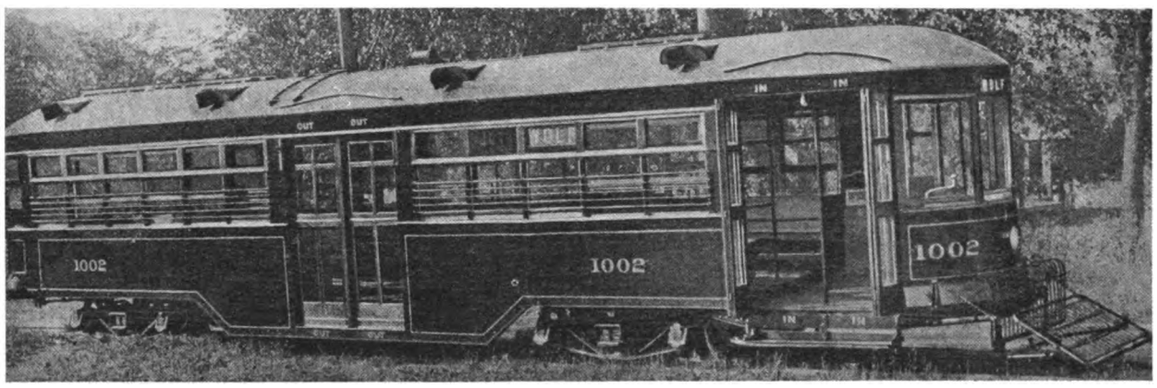

Car with Front Doors for Entrance and Centre Doors for Exit.

position. The doors are of the double-sliding type, moving on outside steel sheaves. The conductor's position is directly opposite the entrance exit, and he is provided with a seat and foot-rest, which may be folded back against the panels marking the doorway. By this arrangement the conductor is above the level of the passenger's heads and is permitted a clear view of the interior of the car. The centre door connection is such that the motorman cannot receive the starting signal until all doors are closed. Windows are of the double-sash type, the upper sashes being stationary, while the lower ones are arranged so that they can be raised to the height of the lower edge of the upper sash.

Wire mesh screens are placed outside all side windows,

In designing this car particular attention was given to the elimination of all weight possible without detracting from the strength of the structure or the general appearance, especially of the interior. The car completely equipped ready for service weighs approximately 33,000 lb. without passengers.

The exterior of the car is painted the standard green recently adopted by this company, and ornamented by a single gold stripe on the side plates and dashers. The numbers on the sides and dashers are also done in gold. The sash and doors are finished in natural cherry, the small upper sash being continuous and applied outside of the posts.

* In *Electric Traction*, Chicago.

Digitized by Google

The interior of the car is also finished in natural cherry with white enamel head lining which carries no ornament, the joints between the sections being covered by a cherry batten. The seats are covered with canvas-lined seat cane and are arranged longitudinally along both sides and round the semi-circular portion of the rear end. On account of the ramp in the car floor it was necessary to provide a break in the elevation of the seats of $2\frac{3}{4}$ in., which is taken care of by terminating the different sections at a small dividing panel extending slightly above the higher section.

The conductor's position is just forward of the centre-door opening and on the same side of the car, a slightly raised platform being provided in this place. A special type of folding seat has been installed for the use of the conductor. A railing is mounted on the platform which is arranged to carry the fare box, change table, door control handles and motorman's signal button. A small steel locker has been installed to provide a place for the conductor to lock up articles found on the car, extra transfers, change, etc.

Westinghouse straight-air brake equipment is used, air being supplied by type D-1-H compressor with Lord screenless air cleaner used in connection with this equipment. The cooling coil for the compressed air consists of two lines of 1-in. pipe arranged in such manner that the air divides, passing through both pipes to the reservoir simultaneously. This has the effect of reducing the velocity of the air in the discharge pipe, and it is believed that more complete cooling will result.

Great care has been exercised in piping these cars to see that no pockets in the piping are left. The supply pipe for the brake valve, as well as the brake cylinder pipe, are carried from the reservoir and brake cylinder respectively up through the floor of the car and along the side of it to the front platform. The object of this installation is to prevent, if possible, condensation and freezing during the winter months. PV-2 brake valves and S-6-A governors are supplied.

The headlining material is of Agasote and is put up in four sections. The sections extend from the advertising rack on one side of the car to the advertising rack on the opposite side. Additional sections of the same material are applied behind the advertising racks. The seats are of a type in which no cushion springs are used, the seats themselves being shaped in such a manner as to create a natural tendency for the passengers to keep their feet out of the aisle space. The seat height ranges from $17\frac{1}{4}$ in. minimum at the bolster to a maximum of $19\frac{1}{2}$ in. at the centre opposite the exit doors.

The centre doors are operated by two National Pneumatic Company's type G-M $2\frac{5}{8}$ × 6 in. door engines, which also contain the door signal switches. The front entrance doors are operated by National Pneumatic Company's manual door device of a special design. The door signal system consists of a Consolidated Car-Heating Company's signal light box, together with the necessary resistance. Switches for operating these lights are part of the door engine.

The illumination of the car body is taken care of by five 94-watt tungsten lamps provided with holophane shades, a sixth unit being arranged to be cut into the circuit to replace a defective lamp, by means of a Nichols-Lintern selector switch placed convenient to the conductor's position.

The heating is provided for by a Peter Smith forced-ventilation heater having a special intake damper allowing the air to be taken from outside of the car body through an opening in the vestibule sash behind the heater, or from inside of the front vestibule In addition to the ventilation secured by the use of the above heater, eight sets of automatic ventilators have been provided.

A Crouse-Hinds focussing type headlight is provided on the front dash and is equipped with a 94-watt concentrated filament lamp arranged with a special two-section resistance which makes it possible to dim the lamp sufficiently to operate in city service and by turning a switch in front of the motorman a bright light can be had for use on the suburban portions of the line.

ONE-MAN CARS.

Now that military tribunals are granting only temporary exemption to eligible motormen under a certain age, and are even asking why women cannot be employed to drive tramcars on steep gradients, further experiments with one-man cars seem opportune. There are a number of tramways whereon single-deck cars are run. These vehicles have platforms with open sides, and the passengers could enter and leave by the motormen's end, the rear platform being closed until the return journey. Payment could be made on entry, and, as in the case of the single-deck payment-on-entry cars at Gateshead, no objection would be raised by the Board of Trade to the use of the front platform as an exit. Possibly the only opposition would arise from the employees' union, but their views must be subordinated to the national welfare, just as trade union usages have had to be temporarily abandoned in other departments of labour. At Ballarat and Bendigo one-man car operation was introduced before the war, and it has not only been the salvation of those tramways in a financial sense, but has enabled the company to release a large percentage of men for military service, viz., 29 per cent. at Ballarat and 32 per cent. at Bendigo. Tramways in Australia generally have not experienced the almost general increase of traffic that has fallen to the home tramways during the greater part of the war period. Lately, however, there has been an improvement, although the majority of the undertakings are still considerably less favourably situated than in normal times. The dry season is responsible for some of the depression. A great drawback in Australia is the trouble caused by industrial matters, the managers of tramway and other undertakings having to give a great deal of time to avoiding the constantly-recurring claims of new legislation. In our issue of December 18, 1915, we gave an account of the working of one-man cars on the Ballarat and Bendigo tramways, the innovation being introduced by Mr. P. J. Pringle, chief engineer and general manager to the Electric Supply Company of Victoria, Limited.

In the United States last year there was a noteworthy development of one-man car operation, and to a lesser extent in Canadian cities. In order successfully to meet the jitney competition one of the developments was the use of one-man cars as the means of reducing maintenance cost due to the extra service demanded, and the development of an extremely light-weight and inexpensive, yet reliable, motor with the rating of $17\frac{1}{2}$ H.P. and 24 H.P. These motors weigh approximately 850 lb. The jitney service, which attained such popular prominence during the summer of 1915, has declined almost as rapidly as it developed, and in some cities has entirely disappeared. Short and spasmodic as it was, however, it has served in many cases as a means of urging railway companies toward greater economies and efficiencies, enabling them to provide better and more continuous accommodation for the travelling public.

Digitized by Google

EFFICIENCY IN CAR OPERATION.*

By J. F. Layng

There are certain fundamental economies that can be obtained in the operation of electric motor cars. These are dependent upon the running time, number of stops per mile, length of stop, rate of acceleration and deceleration, and equipment weights. A careful study of each of these elements is necessary to determine whether any road is operated at the minimum cost, or at the maximum efficiency. The points which will be brought out can be demonstrated by the "efficiency engineer" in the same way as are other items of expense that are entered on the books of an electric railway or tramway. The increase in the cost of producing transportation will cause the future successful management to study thoroughly the conditions of operation of each particular section of an undertaking.

It is a regrettable fact that the number of stops per mile and the length of stop is a phase of operation that has received but scant consideration. How many managers know how many stops their cars make per mile? As a matter of record I am sorry to say that during an investigation of requirements for the purchase of new equipments the manufacturers found that the answers to the requests for these data from managers sometimes vary 100 per cent. from the actual conditions. It is almost invariably the belief that a car makes more stops than is shown by actual check.

In order to show just what these points mean in service, a number of calculations have been made and the results plotted in the form of curves. These calculations have been made on the fundamental laws of gravity, speed, and time, from which there is no appeal. This discussion is not based on a theory; it is a condition which, if we accept, leads to truly scientific management. The curves show energy consumption for different rates of acceleration, braking, and length of stops when maintaining the same schedule, extending coasting with allowable increase in schedule speeds, effect of length of stops on schedule speeds, and effect of the number of stops per mile on schedule speeds and power consumption.

Since the early days of electric traction, it has been well known that on test runs there are great differences in the power used, even when the service conditions are the same. With a given car over a given route, with the same number and length of stops, the power consumption will vary more than 30 per cent. when operated by different motormen. This emphasises the differences which it is possible to obtain by operating the car at different rates of acceleration and deceleration; the difference being, of course, in the amount of coasting which is obtained by the different methods of operation. A few years ago a number of investigations were made to determine some systematic method of securing the maximum amount of coasting at all times, and as a result the coasting clock was designed. In other instances wattmeters and ampere-hour meters were used, the idea being to obtain in each case the maximum amount of coasting, which necessarily will give the minimum of energy consumption.

* The increase in the cost of labour and materials make imperative the utmost economy in tramway operation. The writer of the article, here reprinted from the American *General Electric Review*, points out several factors in the working of electric lines by which economies may be effected. The text and curves bring out certain points very clearly and forcibly. The conditions on American electric railways, on which the article is based, differ largely, of course, from those prevailing in Great Britain and in many foreign lines, but Mr. Layng's study is nevertheless suggestive to those who are not satisfied that the greatest possible efficiency has been obtained from our tramways as a whole.

To illustrate these points, calculations and curves have been made on cars weighing 18 tons complete with load, and equipped with two motors. It is assumed throughout the calculations that the car is geared to have a free running speed of 22 miles per hour, a 1,000 ft. run schedule speed of 10·65 miles per hour, 7-second stops, and 20 lb. per ton friction.

Fig. 1 shows the car accelerating at ¾, 1, 1¼, 1½, and 2 miles per hour per second. The watthours per ton

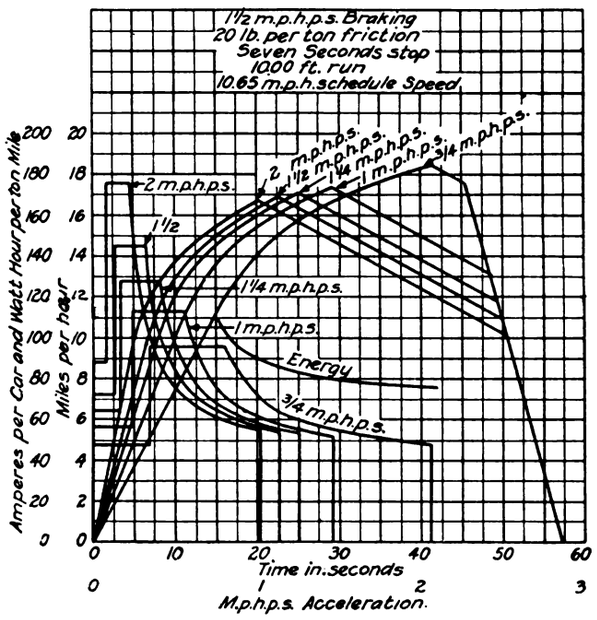

Fig. 1. Showing Decrease in Energy as Rate of Acceleration is Increased.

mile obtained with these different rates of acceleration are 110, 90, 83, 79, and 76 respectviely. From this it can be seen that the percentage of difference of energy used from 110 to 90 watthours per ton mile is 18 per cent., while the saving between 90, 83, 79, and 76 will be 7½, 5½, and 3·8 per cent. respectively. This analysis shows that low rates of acceleration are exceedingly wasteful and inefficient, and the difference in power consumption at the higher rates of accelera-

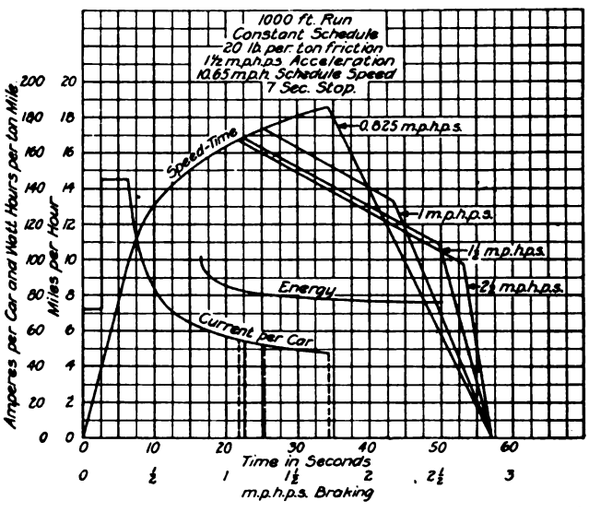

Fig. 2. Showing Decrease in Energy Consumption as Rate of Braking is increased.

tion, while material, are not nearly so great. It will be noted that the total difference in power consumption of 110 watthours per ton mile for accelerating at ¾ miles per hour per second and 76 watthours per ton mile for accelerating at 2 miles per hour per second is 31 per cent. This is a larger figure than can be obtained in normal operation, and this point will be explained later.

Digitized by Google

In reviewing these figures, it will readily be appreciated that a control, automatic in operation, will enable the management to select a pre-determined economical rate of acceleration that will always be maintained in service.

The next thing which we have to consider is different rates in braking. Fig. 2 shows curves braking at 0·825, 1, 1½, and 2½ miles per hour per second. With these values, and under the same conditions as are outlined for acceleration at 1½ miles per hour per second, the power consumption will be 100, 85, 79, and 76 watthours per ton mile respectively. The percentage of differences between these figures is 15, 7, and 4 per cent., and the total difference between 100 watthours per ton mile and 76 watthours per ton mile obtained with the maximum and the minimum braking is 24 per cent. It will be well to explain that the savings shown by these two sets of curves for different rates of acceleration and braking are not additive in every case, but it is possible to obtain either of the savings separately. With the lowest rate of braking and accelerating there is a point where the lines cross, which would make it impossible to keep the schedules as outlined.

With a given car there are two other features which enter into the question of power consumption, viz., the effect of the length of stops, and also the question of

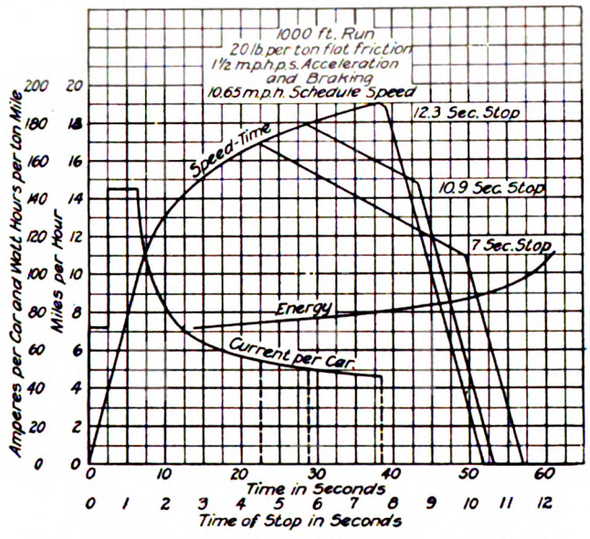

Fig. 3.—Showing Increase of Energy Consumption for a Given Run and Schedule as the Time of Stop is Increased.

extending the running time. In Fig. 3 is illustrated the effect on power of lengthening the stop from 7 to 10·9 and 12·3 seconds, and still maintain the same schedule. With the 7-second stop the energy required will be 74 watthours per ton mile, and with the 10·9-second stop it will be increased to 81 watthours; with a 12·3-second stop the energy will be increased to 105 watthours per ton mile. These figures indicate the advisability of doing everything possible to facilitate the rapid loading and unloading of the passengers, and it brings in the consideration of the method of fare collection, low step, and general efficiency of the trainmen.

Fig. 4 illustrates the amount of energy which may be saved by extending a given schedule. This curve, while interesting, shows savings in power which will in all probability be offset by the greater expenditure for platform wages. The tendency among all progressive operators has been to do everything possible to facilitate the making of high schedule speeds, and the analysis shows that in nearly every case it is advisable to sacrifice power and maintenance savings for platform wages, since the platform wages represent such a large portion of the operating ratio. However, there are lines operating that have large leeway in the schedules, but conditions are such that changes in running time and service conditions will not allow a reduction in the cars to give required service. In this case the maximum amount of coasting can be procured effectively.

One of our problems is to determine how to secure the maximum number of car miles per hour. In order to establish a ready check as to what schedule speeds are possible with a given number of stops per mile,

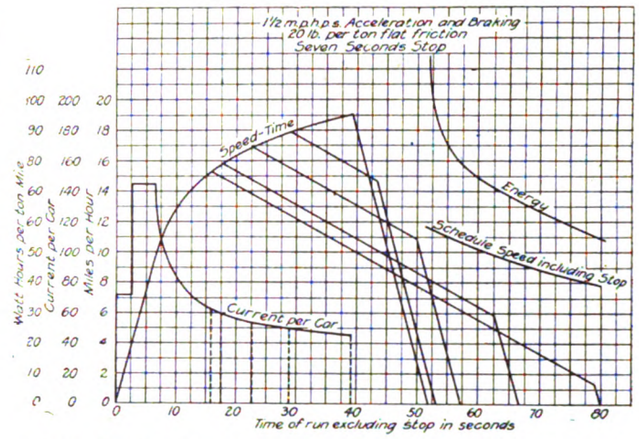

Fig. 4.—Showing Decrease in Energy Consumption, Current Input, and Schedule Speed by increasing the Coasting in a 1,000 Ft. Run.

and also the general effect on power consumption, curves 5, 6, and 7 are presented.

Length of stops has a great influence on the general efficiency of a system. In securing data for new equipments, it is found in different cities that the average length of stop varies from five to ten seconds. The importance of shortening the stop to a minimum from a power consumption standpoint, is shown in

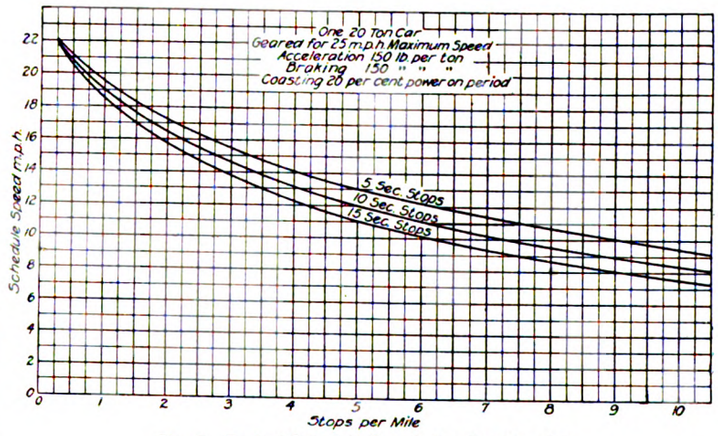

Fig. 5.—Typical Schedule Speeds for One-Ton Car.

Fig. 3, for different lengths of stop when the same schedule is to be maintained. However, there are conditions where instead of maintaining the schedule the running time is extended. To explain this latter condition the curves shown in Fig. 5 are given. With a car geared to a free running speed of 25 miles per hour, making seven stops per mile, it will be noted that it is possible to make a scheduled speed of 10 miles per hour with 10-second stops, while with 5-second stops the schedule speed will be increased to 11·2 miles per hour, or 11·2 per cent.

Fig. 6 shows a 20-ton car geared for a free running speed of 15, 20, 25, and 30 miles per hour, and the

Digitized by Google

watthours per ton mile at the car are also shown with each of these variables. Curve 7 gives the same information for a 40-ton interurban car, geared for 30, 40, 50, and 60 miles per hour, free running speed. It is interesting to note the effect of stops per mile on schedule speed and power consumption. Take a 20-ton car, geared for a free running speed of 25 miles per hour, and comparing the services of seven and nine stops per mile, it will be noted that with seven stops per mile it is possible to make 11·2 miles per hour

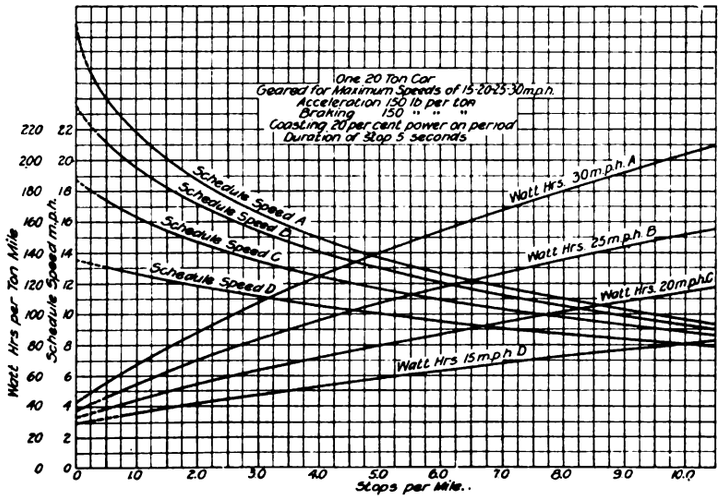

Fig. 6.—Typical Schedule Speeds and Energy Consumption for 20-Ton Car.

schedule, and that the power consumption will be 2·52 watthours per car mile, while with nine stops per mile a schedule of 9·8 miles per hour can be made, and the power consumption will be increased to 2·88 KW. hours per car mile. When comparing the 7 and 9-stop per mile services it should be noted that with nine stops the energy has been increased 14·25 per cent., and what is more important the schedule speed has been decreased practically 10 per cent.

An example of the power and schedule savings that can be made will be illustrated by a car making 40,000 car-miles per year. Assuming that the power costs one half-penny per kilowatt hour delivered at the car, the difference between seven and nine stops per mile would be a saving of about £29 per year per car in power. On the assumption that the car makes 40,000 miles per year and maintains a schedule speed of 11·2 miles per hour, the car would be in operation 3,571 car-hours, while if making a schedule speed of 9·8 miles per hour, the car would be in service 4,081 car-hours. These figures illustrate the advisability of cutting down and eliminating all useless stops, and show the necessity of inaugurating skip stop, nearside stop, and every other means which we have at hand to reduce the number of stops per mile. It may be said that on some lines, even though the schedule speed were increased from 5 per cent. to 10 per cent., it would not be possible to decrease the number of cars actually required for the service, but still there are a larger number of other cases where it is possible to take the full advantage of the savings which are obtained by operating at the maximum schedule speed.

The advantages accruing from reducing the number of stops and thereby increasing schedule speeds is not by any means all with the railway company, but is also shared in even larger proportion by the patrons. Assume that operating conditions have been changed so that it is possible to shorten a schedule five minutes, and that the car carries 50 passengers, it is reasonable to assume that at least half of these passengers benefit to the full extent of the saved time. On this basis the total time saved for half of the passengers would be 125 minutes. The total aggregate time saved to a community would be stupendous. Some of the large progressive companies have different schedule speeds to economically meet the varying conditions of traffic. I know of one company that operates four different schedules, which apply to the morning rush, mid-day service, evening rush, and the evening service. During the non-rush hours schedules are speeded up and every possible advantage taken to decrease the number of cars needed, and to speed up the remaining cars so as to give the proper interval between the cars.

In using curves 6 and 7, it should be borne in mind that they apply only to tangent level track, without curves, and do not include any traffic delays. In ordinary practice, adding 10 per cent. to the schedule speed will enable the theoretical values to be applied to actual conditions.

So far we have been discussing the savings which it is possible to obtain in operation. There is one other feature which was recently called very strongly to our attention, that is, the substituting of trucks and motors arranged for 24-in. wheels where 33-in. wheels are now used.

In the particular case to which I refer a pair of trucks for these cars weigh 14,000 lb., the cars being equipped with two motors weighing 3,370 lb. each. By substituting four motors which weigh 900 lb. each, the total weight savings when substituting four small motors for the two large motors was 3,140 lb. The saving in weight by substituting 24-in. wheel trucks was a further weight saving of 5,400 lb., making

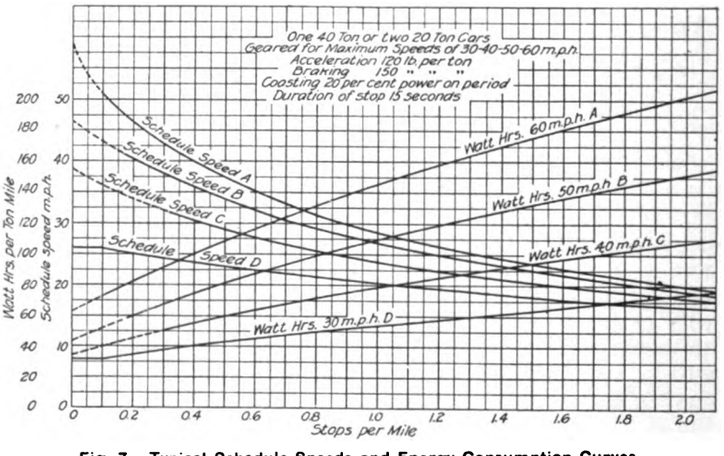

Fig. 7.—Typical Schedule Speeds and Energy Consumption Curves for One 40-Ton or Two 20-Ton Cars.

a total reduction in car weight of 8,540 lb. This weight reduction amounted to 20 per cent. of the weight of the car, and the figures show that it much more than pays for the investment.

There are other substitutions on the car body and car equipment which can frequently be made to considerable advantage. In nearly all cars which were built some time ago there are certain elements which are extremely heavy, and lighter weight material could be substituted at a small cost. Recently the new

Digitized by Google

management of a road were discussing why it was necessary to have large heavy drawbars on the cars, which were never used. This is merely taken as an illustration to show that there are many cases where there is apparatus on a car having considerable weight, which is being hauled around year after year, when the weight could easily be saved and the power expense and other expenses incident thereto eliminated to advantage.

During the past year there has been a large growing tendency to apply light weight, one-man cars to many services. This feeling is not confined to any particular district, but is growing more and more general. On nearly every property which I have visited recently there has been a tendency to place small, light weight, one-man cars in stub-end service. An analysis of the number of passengers carried throughout the day in many instances shows that a car having a seating capacity of approximately 30 passengers would be sufficient for practically all needs.

In analysing the traffic on city lines, there are usually found several cases where the receipts per car mile are far below normal. These lines are the ones which drain the net earnings and are a necessary evil. The small car, in many cases, will transform a deficit to an earning.

Recently we had occasion to analyse a service where two cars were required. At the present time cars weighing 56,500 lb., operated by two men, are employed. This particular company buys power, paying two cents per kilowatt-hour for current. In going over the conductors' reports it was found that with the exception of one trip a day never more than 15 passengers were carried. However, these cars were used to transport the workmen of a particular factory, which always closed at a particular hour, and at this period 80 passengers would have to be carried. During the remainder of the day the load would vary from two to 15 passengers. The management of this company have practically decided to purchase four 10,000 lb. one-man cars seating 30 passengers. The power will be reduced to approximately one-fifth of that which is now being obtained, and the labour saving will be reduced to slightly more than half.

One of the most progressive managements that I know of is at present analysing the service of a large representative city to determine just what can be done with extremely light weight one-man cars. Their preliminary analysis shows that there will be, first, a saving of wages ; second, a saving in power ; third, a saving in maintenance ; fourth, the development of traffic, due to more frequent service ; and, fifth, a reduction in accidents. Of course, it is not intended that these light weight one-man cars shall be substituted for every class of service. There are certain classes of work, such as the congestion in the down-town city streets, which would make it inadvisable to ever attempt, or even seriously consider, the use of small cars. However, there are certain lines which can be picked out in every city, where the small car can be substituted for the large car and enormous savings made. From present indications it would seem that a large number of places can be found where the installation of the small cars would pay 50 per cent. or more on the investment.

The small one-man car should be equipped with all possible safety and time-saving devices, which should include air brakes, control with dead man's release, which automatically cuts off power, applies brakes, sands track, and opens car door. When these features are properly applied they are time-savers, and in case of accident put the railway in the position of having provided the greatest possible protection.

With the rising cost of producing transportation, and the increased competition of the privately owned automobile, it is apparent that it will be necessary to introduce the new forms of light weight one-man cars for many places, and it will merely be a question of analysis to determine just how many applications can be made of this recent addition to transportation.

PROTECTION FROM TROLLEY BOOM.

From Mr. D. McDowall Grosart, engineer and manager of the Dublin and Lucan Electric Railway Company, we have received the photograph reproduced below, showing a car on which arched rails have been erected with the object of protecting passengers in case of an accident to the trolley boom. Mr. Grosart remarks

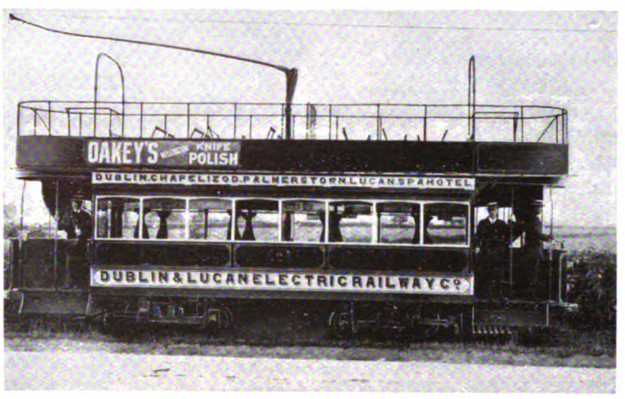

Car with Arched Rail, as a Protection from the Trolley Boom.

that the idea was applied to the Dublin and Lucan cars 15 years ago. In addition to the value in earth protection, the arched bar is covered with solid white rubber canvas hose, so that the rail is prevented from becoming alive in the event of a wire falling on the bar. In some rebuilt cars the arched bar has been combined with the hand rail, as shown in the photograph, which improves the appearance of the car.

RAIL TRAFFIC AND AIR RAIDS.

The Field-Marshal Commanding-in-Chief the Home Forces has issued a statement with regard to suggestions made by local authorities that there is danger during aircraft raids from tramways and railways. Lord French says :—" It is confidently believed that it is only necessary to assure the public that the continuance of railway and tramway traffic does not serve as a guide to hostile aircraft, and is of vital importance for the successful prosecution of the war, for them to accept the decision and co-operate in carrying it out with loyalty and patriotism."

In reply to a communication from the Southwark Council, Major-General Sir Francis Lloyd has stated that all possible steps are taken for protecting life and property in London on occasions of attack by hostile aircraft, and only such lights are permitted on railways and tramways as are absolutely necessary to ensure the continuance of traffic which is of the greatest national importance. From observation made it is interesting to note that sparking from electric trains and tramways tends rather to confuse than to assist hostile aircraft in finding their way over London, and, further, it is not considered desirable to issue public warnings of impending air raids or to notify the public when the danger is past.

Digitized by Google

PETROGRAD ELECTRIC TRAMWAYS

Before the war the Petrograd tramways were on the eve of important developments. The city has a population of about 2,000,000, and is situated mainly on a peninsula formed by a curve in the River Neva just before it enters the Gulf of Finland. The river subdivides into several branches, forming islands which are ten or eleven feet above the average level of the gulf. A ship canal, with a harbour capable of accommodating 50 sea-going ships, makes the city a seaport. For nearly five months of the year the river is frozen to a depth of two or three feet. The larger part of the city is located on the left bank of the river, and includes the best streets, bazaars, markets, the palaces, cathedrals, and theatres, and all the railway stations except that of the Finland Railway. A granite embankment extends along the river at this part, and is bordered by palaces and large private houses. Midway of the embankment, behind a line of fine residences, stands the Admiralty, the very centre of the capital, surrounded by a broad square on three sides. On one side is the monument to Peter the Great, backed by the cathedral of St. Isaac, and on the other side are the Ministry of War and the Imperial Winter Palace, the latter of huge dimensions. The topography of the city is simple; three long streets, the main arteries, radiate from the Admiralty, and are intersected by three girdles of canals, with which a number of streets run parallel. The Prospekt Nevski, extending from the Admiralty to the Moscow railway station and on to the Neva, is the principal shopping thoroughfare, and always presents an animated scene. The centre of commercial activity is at the eastern end of Vasilyevski Island. The stock exchange and the quays and store-houses are in this section, and on the rest of the island, facing the Neva, are scientific and educational institutions. The fortress of St. Peter and St. Paul, now a state prison, occupies another of the islands, while still others have a great botanical garden, public gardens and parks, and summer residences. They are also covered in part with dwellings.

The tramways of Petrograd were acquired by the municipality from British owners in 1907, and in that year the electrification of the system was commenced, and when the war broke out it had so far proceeded that there were over 400 motor cars and about 200 trailers of which all but a small proportion were in daily service. The motor cars, which are of the single-deck type, weigh about 12 tons and provide seating places for 24 passengers inside, and 16 standing passengers can be accommodated on the platforms. Trailer cars of both single and double-deck types are used. The motor trucks are of the radial single-axle design, known as the Nuremburg type, in which the weight of the car body is taken on segmental plates and the pivotal point over the centre of the axle. The maximum speed is 16 miles per hour, including stops. The cars are in operation for 16 hours per day, and the average car duty is 80 miles per car per day. Three-phase current at 6,600 volts, 25 periods, is generated at the central power station, and is delivered by an underground cable to sub-stations, where it is transformed by means of rotary converters and used at 600 volts.

The present position of the Petrograd tramways, according to the *Novoie Vremya*, is becoming rapidly worse. The manager to the tramway committee, A. Y. Brafman, reports that complete paralysis is threatened. The rolling stock is becoming worn, and as there are no means of repairing the cars, the number in service is being gradually reduced. There is a scarcity of workmen for the repair shops: repair parts are wanting, and the Corporation's orders are not being filled at the factories. The Town Duma has applied to the Government to allow workmen to serve on the tramway system as a work of national defence.

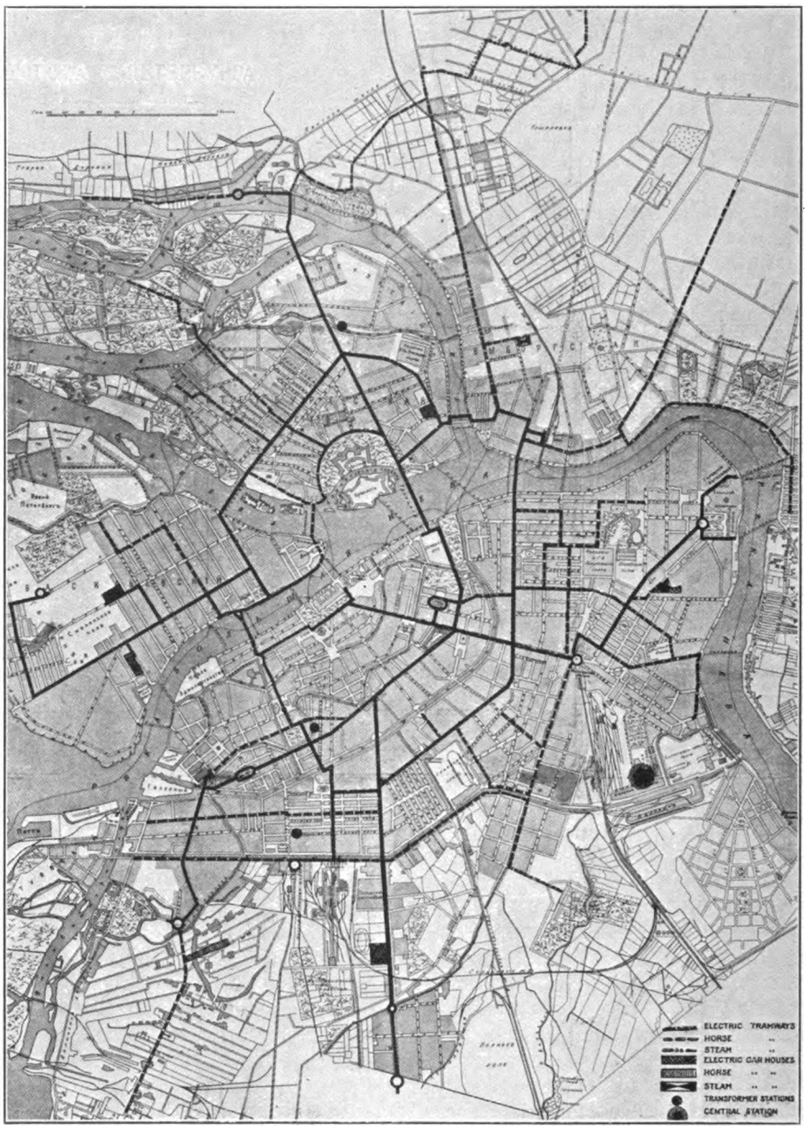

Map of Petrograd Tramways. *(Brill Magazine.)*

The management have made an experiment recently on one route, with two conductors to a car. The results were not satisfactory. The collection of the fares for that day on the experimental route did not increase, and the disorder in the car was just as great as before. The conclusion has consequently been reached that putting two conductors on one car does not pay.

Digitized by Google

A ROTARY CONVERTER TRACTION EQUIPMENT IN BARCELONA.

In view of the fact that electrical enterprise in Spain has until recently been in the hands of the Germans, and latterly of the Americans, it is interesting to learn that important traction equipment has been installed by the General Electric Company, Limited, of Witton, Birmingham, and 67, Queen Victoria Street, London, E.C., for the Barcelona Tramways Company.

The installation in question, which is depicted in the accompanying illustrations, comprises the electrical equipment of the Coello sub-station, aggregating 1,500 KW. Three-phase power is received at 6,000 volts, being reduced to 450 volts by oil-insulated air-cooled transformers located in the basement and situated between the machines. To gain access to each transformer a removable checker plate is let into the floor which can be lifted when the transformer needs attention or inspection. The converting equipment comprises three 500-KW. shunt-wound Witton rotary converters running at a speed of 750 revolutions per minute, fitted with interpoles, and generating continuous current at 600 volts. The energy so produced is used entirely for traction purposes.

Each rotary converter is provided with a slip-ring starting motor for running up speed, synchronising being effected by operating the rotor rheostat of the slip-ring motor. The motor is carried on an extension of the converter shaft. Suitable pillars for controlling the regulators are mounted near the switchboard as shown in Fig. 2. In addition, each rotary may be run up from the continuous current side by means of a change-over switch and starting resistance, which is similarly operated from a hand-wheel pillar. For the front of the board a double-pole change-over switch is also provided to reverse the shunt coil of the reverse-current trip when starting in this way.

In the illustrations, Fig. 1 shows the c.c. side of the rotaries. That portion of the main switchboard controlling the low-tension side of the station is seen in Fig. 2, where all the regulating pillars can also be discerned. In Fig. 3 a view of the a.c. side of the rotaries and feeder switchboard is shown.

On the controlling switchboard shown in Fig. 2, each rotary converter a.c. panel is fitted with ammeter, power-factor meter, and switch and fuses for the starting motor. Adjacent to each a.c. panel is the corresponding c.c. panel, on which is mounted a circuit-breaker having overload trips as well as a tripping coil operating in conjunction with an over-spread device for each converter, in addition to the change-over switch and the single-pole main switch for starting from the continuous current side.

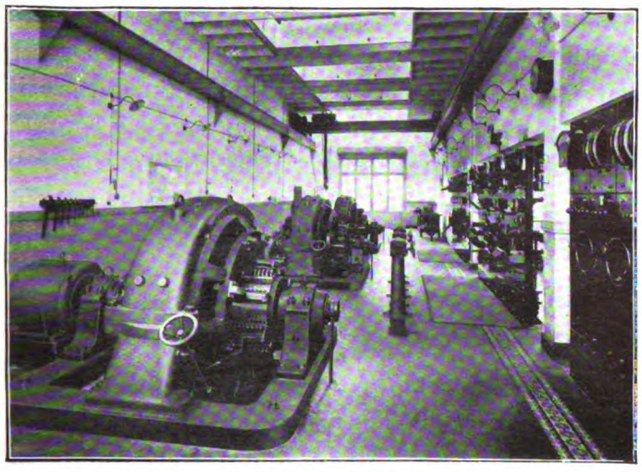

Fig. 1.—Three 500-kw. Witton Rotary Converters from the C.C. side.—Barcelona Tramways.

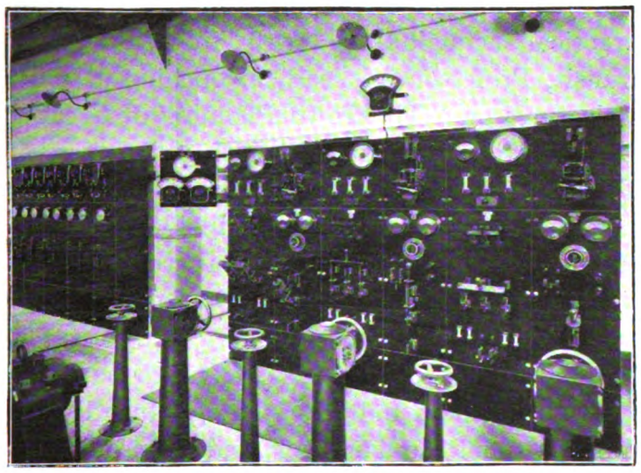

Fig. 2.—Witton Low-tension Switchboard for Controlling A.C. and C.C. of the Rotary Converters.

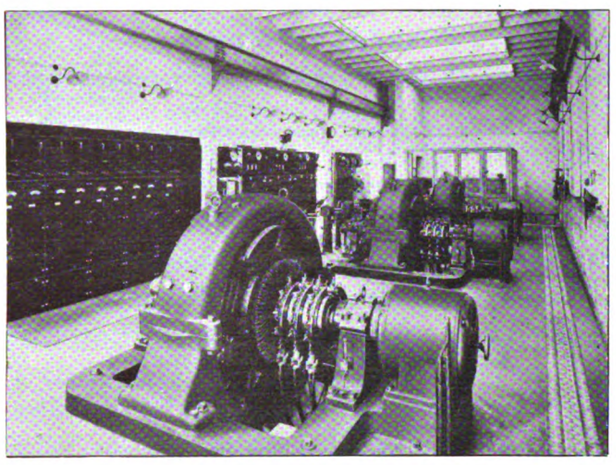

Fig. 3.—A.C. Side of Rotary Converters Showing the Witton Feeder Switchboard.

A synchroscope with machine and busbar voltmeters is carried on a swinging bracket at the end of the board. The feeder panels are each fitted with a single-pole circuit-breaker main switch and ammeter.

The complete installation, as described, was supplied by the General Electric Company, Limited.

CAR TRAFFIC IN MEXICO CITY.

Front End Exit and other Features.

The difference in the manner in which street car passengers are treated in Mexico and in the United States is remarked by every one who has had personal experience in this direction. In too many American cities conductors of surface, subway, and elevated cars or trains are as a rule brusque, to say the least, in their manners. Passengers are ordered in most peremptory manner to "move up in front," "step lively there," "get off the platform," etc. They are often, too, man-handled in a manner to which men and women would not submit in any other portion of the world. Platform guards at stations hurl themselves with all their weight and strength upon passengers, and literally drive them into the already overcrowded vehicles, the while using exclamations and even epithets of the most unpleasant and annoying character.

But how different in Mexico. Here, although the inflexible and admirable rule is that all passengers must leave the car by the front door and only enter by the rear, and that no one may stand on the front platform, the conductors are exceedingly polite and gentlemanly in handling the crowds, even when they attempt to violate the rules noted. They do not lift their voices in harsh orders, but when it is necessary, in the most polite and deferential manner, call the attention of passengers to the necessity for obeying the rules in order to accommodate other passengers. Many times the passengers do not appear to appreciate the necessity for co-operation with the officials, and not infrequently the rear portion of a car is seen to be crowded to the limit, while there is abundance of space in the forward end.

A novel plan pursued in the operation of street cars in Mexico city is the attachment of a mirror to one of the standards on the front platform, so that it reflects a full view of the rear platform on the side devoted exclusively for the entrance of passengers. The motorman, by watching the mirror, is enabled to see the moment all the passengers have boarded the car, and to start immediately without waiting for a signal from the conductor, who is frequently engaged in collecting fares inside the car and in a position where delay is involved should he be required to investigate before giving the signal to go ahead. The amount of time saved by this device is very considerable.—*Mexican Review.*

Digitized by Google

THE
Tramway and Railway World

FOUNDED IN 1892 AND PUBLISHED BY
THE TRAMWAY AND RAILWAY WORLD PUBLISHING COMPANY, LIMITED,
AMBERLEY HOUSE, NORFOLK STREET, LONDON, W.C.

SUBSCRIPTION:

THE TRAMWAY AND RAILWAY WORLD can be obtained, post free, at the following rates:

FOR THE UNITED KINGDOM—Twenty-five Shillings per annum.

THE ANNUAL SUBSCRIPTION INCLUDES 64 ISSUES, OF WHICH 12 ARE ILLUSTRATED NUMBERS.

FOR ALL PLACES ABROAD—Thirty Shillings per annum.

Single Copies—One Shilling (Postage, 2 pence—Abroad, 5 pence).

THE EDITORIAL AND PUBLISHING OFFICES OF
THE TRAMWAY AND RAILWAY WORLD
ARE AT AMBERLEY HOUSE, NORFOLK STREET,
LONDON, W.C.

Telephone No.: GERRARD 2048.
Telegraphic Address: "TRAMIGRO, ESTRAND, LONDON."

LONDON, DECEMBER 7, 1916.

"Safety First."

All parties concerned are to be congratulated on the formation of a new body to be full of beneficent activities and called the London Safety First Campaign Council. A report appears on another page of the proceedings of the conference of local authorities and other bodies, at which it was determined to constitute a council that will carry on educative and other work for the purpose of so instructing and cautioning vehicle drivers and the public in the metropolitan area that street accidents may be reduced to a minimum. Owing to the darkened streets such accidents have shown a large increase, and it was more than time that something was done. To Mr. H. E. Blain, operating manager of the London General Omnibus Company, belongs the credit of calling the conference and devising machinery and a programme for a safety first campaign which is likely to have very good results. That the anticipation is reasonable is proved by the fact that while all street accidents in London show a large increase, those in which London General omnibuses were involved show a reduction of 25 per cent. since the company's own safety first campaign was inaugurated in the beginning of the year. The borough councils, both of London proper and of the area around it, have responded warmly, and they, together with tramway, railway, and automobile authorities, parcel delivery companies and firms, and not least the police authorities will all appoint representatives to the new council. A remarkable fact is that the London County Council has declined to take part in the movement, not because of want of sympathy, it was reported, but from diffidence. It may be hoped that it will join in the movement when the new council gets to work with its advertising, cinematograph pictures, instruction of school children, education of drivers of vehicles, and an adequate general scheme of street refuges. Experience will no doubt suggest additional methods, and we hope the Campaign Council will speedily get to work. Similar campaigns have done much good in America, and some British railway companies have found the benefit of them as regards their own servants. Judging from the tone of the conference the new venture is marked out for success.

Tramways and Town Planning.

Although there are some subjects in regard to which a university professor may be allowed to base his discourses solely upon theoretical knowledge, the question of town planning in relation to transit is not one of them. Owing to a lack of practical acquaintance with the subject of transit, Professor Adshead, in opening a series of lectures on "The Town Planning of Greater London after the War," fell into serious errors. To a University College audience he held the London County Council, and incidentally the engineers of the electric traction world, up to ridicule for having lacked foresight in not anticipating the motor omnibus. Yet he stated that at the same time they ought to have invested the eleven millions sterling expended on tramways in inaugurating and improving a suburban electric railway, while also improving the road surfaces and encouraging the motor omnibus. We are not aware of the number of years during which the professor has honoured the Metropolis with his presence, but whatever the period may be he lacks the information on this matter of an elementary school pupil. The latter is aware that the greater part of the tramways undertaking was opened for traffic

Digitized by Google

at least half a dozen years before the omnibus became a reliable machine. It is to be feared that the real reason of the professor's objection to tramways is to be found in a subsequent remark that they were exceedingly obstructive, and that with motor traffic rapidly increasing, their obstructiveness was becoming more marked. Now, as regards foresight, the electrification of one suburban railway system in the south-eastern and south-western districts was not accomplished until varying periods of years after the conversion to electric traction and extension of the horse tramways, and it is only during the present year that a partial electrification of a railway in the Thames Valley suburbs has been effected. With such an example of dilatory action by two railway companies who depend upon their earnings for a dividend, the governing authority of London can hardly be accused of lack of foresight. That charge is to be laid rather at the door of their critic in imagining that London traffic of the busy hours could be dealt with by omnibuses. No expert has asserted that it could be so carried; an attempt to do so would fill the streets with a never-ending line of omnibuses and render the roads impassable to other traffic and pedestrians. Equally weak reasoning marks the professor's concern that the Council should spend their money in the improvement of road surfaces. In the past it has been almost entirely due to the construction of tramways that the thoroughfares in which they are laid have been surfaced with material fit to stand the strain of heavy motor traffic. The borough councils have had to lay the portion of the roadway outside of the rails with material more akin to the durability of the track, for the laying and maintenance of which the County Council are alone responsible. Incidentally the local and central authorities have provided the omnibuses with a track for which they pay nothing beyond the rates levied on their depots. If London were being laid out afresh in the light of the present day traction facilities, there would be something to say in support of Prof. Adshead's contention that the best use of the tramway is as a light railway with a separate track, so arranged that it has a 30-mile speed limit, only entering main roads for short distances to set down passengers at important points. The cars, however, would have to be run in trains or the system would be unable to carry the mass of passengers dealt with by the suburban railways and the tramways combined. The popularity of tramways and omnibuses arises from the convenience they afford on the main roads, and this aspect of the matter will have to be considered in town planning schemes.

The London Tramway Problem.

The question what is to be done with the London County Council tramways grows more urgent week by week. We do not doubt that it is receiving the unremitting attention of the committee of the Council charged with the direction of the undertaking. But that could have been said with truth at any time since the Council began to direct the tramway policy of London. The present condition is not the result of neglect either on the part of the committee or the management. The amount of organised work devoted to the undertaking by members of the Council has never been stinted; and it has been loyally led and seconded by the management. Yet a real success has never been achieved. The tramways have proved an immense boon to the people; but it is doubtful whether the maximum of service of which they are capable has been obtained from them, and it is indisputable that the financial results are unsatisfactory. It is true that the tramways have been constructed at great expenditure, but the ratepayers have obtained good value for their money. There have been some mistakes in equipment, but many of these could not in the circumstances have been avoided. In fact, they were not mistakes, but are made to appear so only by improvements in design and construction of later date. On the whole, the engineering and constructional work will bear any scrutiny that may be given to it. The chief difficulties that have always confronted the operators of the system have been its configuration and the pressure on financial policy exercised by political influence. The latter is not easily discernible, but it has been specially responsible for injudicious arrangements as regards fares. Earnings are, in fact, the crux of the whole matter. Operating expenses are not unsatisfactory; considering the conditions that now prevail in London, to work large double deck cars at an

Digitized by Google

average cost per mile of 7·85d. is excellent. What is needed is an increase of revenue; and when it is remembered that the Council has the best tramway area in the world, the conclusion can hardly be resisted that this area has not been worked to the best advantage. Clearly the ratepayers of London are justified in demanding that the undertaking shall be put on a better financial basis. We believe that it can be done as soon as the Council treat the undertaking in the same way as a board of directors would treat a business for which they are responsible. The members of the latter might have various views as to the subsidiary aims of their company, but they would be unanimous in their determination first of all to put their undertaking on a satisfactory basis. Because the Council and not a company own the tramways is no excuse for granting unremunerative fares. "Let every passenger pay for his ride and get full value for his money" was the maxim of one of our most successful municipal tramway administrators, and that sound and simple rule, wisely acted upon, would of itself materially relieve the situation in London. More thorough study of traffic requirements and greater attention to the convenience of the public in various parts of the tramway area would undoubtedly also help the revenue. To enable this to be done to the best advantage, some changes in the working of the tramway department will probably be necessary. Decentralisation and devolution are the watchwords of success in all large modern businesses. Wisely to divide responsibility is to awaken new power and to bring fresh effort to any enterprise. London transportation is an industry so complicated and so diversified that no official charged with general supervision can have any time for routine duties. His work should be to organise and to instil driving force into the whole undertaking. General lines of policy having once been determined by the committee, the responsibility and authority for carrying out that policy should be left with the executive head; and references to full committees should be confined as far as possible to important departures. The war is teaching us many important lessons, and it is time that the Council's tramways shared in the advantage that is being derived from them.

GOODS TRAFFIC ON TRAMWAYS.

To the Editor of THE TRAMWAY AND RAILWAY WORLD.

Sir,—We are all too busy to go into much detail on controverted questions, but you will perhaps allow me a word on Mr. Sellon's reference in his letter in your issue of November 9 to my part in the discussion.

He says: "The power to make sidings into any depot or warehouse other than those belonging to the undertaker does not exist under the general law. The authors are quite correct and Mr. Mozley is wrong."

Mr. Sellon suffers from the disability of not being a municipal tramways manager, otherwise no such idea would have crossed his mind. There is no power under the general law for a Corporation to work tramways at all, hence the power to make sidings could only be present in our minds in connection with special Acts, which all of us must obtain before we can work either passenger or goods traffic—clearly I was referring only to our special Act here which gives the power to make sidings to private works—it would be absurd to obtain power to carry goods traffic without means to carry it into effect.

I think it is quite fair to quote against Mr. Sellon a recent criticism in *The Times*:—"Refutation of statements attributed to an antagonist but never made by him."

I can only say one more word, and that is to recommend him to study the psychology of Local Authorities from the inside, without which he will always be unable to understand why municipal and company associations cannot coalesce.—Yours faithfully,

HENRY MOZLEY.

Burnley.

SPECIAL CAR TRAFFIC MAY BE PROHIBITED.

The *London Gazette* of November 24 contained the following addition to the Regulations made under the Defence of the Realm Act:—

RAILWAYS AND TRAMWAYS.

"9F.—(1) The Board of Trade, or, in Ireland, the Chief Secretary, may by order prohibit on any railways (including tramways) any traffic named in the order, being excursion traffic or traffic for special purposes, and the provision of any special facilities for any such traffic.

"If any person, in respect of any traffic so prohibited, acts in contravention of any such order, he shall be guilty of a summary offence against these regulations.

"(2) Any such order may be made so as to apply generally, or to any special railway, or any special traffic.

"(3) This regulation shall not apply to any railways over which His Majesty has control by virtue of a warrant under Section 16 of the Regulation of the Forces Act, 1871."

The Board of Trade on November 28 issued a communication in which they state that the increasing demands made by the war on the resources of the railway companies necessitate that every person who proposes to travel should consider whether it is really necessary that the journey should be undertaken. The Board desire to impress upon all traders the urgent importance of taking every step in their power to avoid delays to wagons, both in loading and unloading. The saving of a day all round means in effect a substantial addition to the rolling stock of the country. Economy and despatch in the use of sheets for covering wagons is also of great importance.

L. & N.W. Railway Electrification.—By an oversight the name of the makers of the main switchgear was omitted from the article on the electrification of the suburban lines of the London and North Western Railway which appeared in our issue of November 9. The main station switchgear for controlling the turbo-alternator plant in the Wembly power-station, six 1,000-KW. and twenty-five 750-KW. rotary converters for use in sub-stations, was supplied by the British Thomson-Houston Company, Limited.

Digitized by Google

TRADE AFTER THE WAR.

The Government continue merely to mark time so far as any action for organising and promoting trade after the war is concerned. They profess still to be waiting for reports of various Committees. But some members of the Government have practically admitted that they will not take action until forced by public opinion, and in this matter public opinion needs to be formulated by the nation's leaders. Unless those leaders make up their own minds, and have the strength of their convictions, it is to be feared that no effective action will be taken. It is true that opinion among the manufacturing, producing, and commercial community is very strong, but to be effective it must be organised much more effectively than it is at present, if it is to be applied to the Government with good results.

Mr. Asquith, in reply to a question in the House of Commons in the latter part of November, stated that an interim report by Lord Balfour's Committee has been received by the Government. This, it will be remembered, is the general Committee, as compared with the sectional ones dealing with individual industries. The duty laid on Lord Balfour's Committee is to report what industries are essential to the future safety of the nation, and what steps should be taken to maintain or establish them ; how to recover home and foreign trade lost during the war and to secure new markets ; to what extent the resources of the Empire can be developed ; and how the sources of supply within the Empire can be prevented from falling under foreign control. Presumably the findings of the sectional Committees will be at the disposal of Lord Balfour's Committee. Meantime it has been stated that the interim report of the latter body recommends as a temporary measure the prohibition of imports from enemy countries for a short period after the end of the war. This does not carry matters very far, and the Committee have evidently a long way to travel—meaning more time. It has been alleged by some of the political writers in the daily Press that the Committee have been blocked in all their efforts to get materials for discussing a positive fiscal policy by the opposition of the permanent officials of the Government departments. Official obstruction to change is a well-known feature of public life, but it would be very strange if a large and influential Committee appointed by the Government for a specific purpose cannot get over difficulties of this kind. But the trouble is that time is passing. The war is not going to last for ever, and it is of the first importance that proper schemes for action should be drawn up and ready for operation. Indeed, we should be ready for effective action in various directions before the end of the war. Much could be done even now.

It must further be recalled that according to the Government programme their consideration of the final report of Lord Balfour's Committee is only to be a preliminary step. After that an Imperial Conference representing Great Britain and the Dominions is to be called, when it is hoped that an Imperial policy—based, there is reason to hope, on the principles laid down in the resolutions of the Paris Conference—will be arrived at. In fixing such a policy the opinions of our Allies will no doubt have to be taken into consideration. It can thus be seen how great is the need for a driving force of public opinion behind the Government if we are not once more to find ourselves in the position of being too late.

The British Empire Producers' Organisation, of which the Right Hon. W. M. Hughes, Prime Minister of Australia, is president, is one of the bodies to which we may look for driving force. Its monthly reports, to which we have alluded in previous issues, indicate that much useful work is being accomplished. The number of associations affiliated to the organisation continues to grow. More work has so far been done in connection with the sugar industry than with some others, as the first start was made in connection with sugar production and refining. The Council have decided that provincial committees should be formed with such centres as Birmingham, Manchester, Liverpool, Glasgow, etc., and that committees should also be formed for the Dominions. We notice with satisfaction that among recent additions to the Council is Mr. W. R. Rutherford, who will represent British engineering. Preliminary negotiations have been opened for the formation of a chemical manufacturers' section. Inquiries in regard to the organisation should be addressed to the General Secretary, Sir George Makgill, Bart., 2, Hatton Court, Threadneedle Street, London, E.C.

In reference to the meeting at the Mansion House, London, on September 20 last, organised by the British Electrical and Allied Manufacturers' Association, the report to which we are referring says :—

> As an outcome of this meeting, negotiations have been instituted with a view to closer co-operation between several associations there represented. The feeling of the Executive Committee of the organisation is that the time is ripe for an effort towards unification of the various attempts to organise different provinces of industry and trade. It is clearly to the advantage of the nation and the Empire that overlapping should be avoided, and that the work of various bodies with similar aims should be co-ordinated with a view to their showing a united front, now and after the war, not only to enemy countries but to opponents of a national trade policy in the United Kingdom.

This puts tersely and forcibly the immediate duty which we have frequently urged upon those who are concerned with the progress of trade and industry, and we are glad to see the attitude now taken by the Producers' Organisation. A wise co-ordination would possibly be even more valuable than a complete unification. It is no unusual thing to see in the case of new movements the formation of a number of overlapping agencies, followed by a co-ordination or consolidation. We hope to see the same process here.

By way of a footnote to the action of Manchester Chamber of Commerce in discarding its old free trade theories and coming into line with other Chambers, we may put on record here that the Manchester Chamber has since decided that no German, Austrian, Bulgarian, or Turk who has been naturalised since August, 1904, shall be eligible for membership of the Chamber.

The Marquis of Crewe announced on December 1 to a deputation from the Board of Scientific Societies that the Government have decided to institute a new and separate Department for Scientific and Industrial Research. Two members of the Institution of Mechanical Engineers have given a handsome donation to be devoted to industrial research, and it is hoped their example will be followed by others. The Government propose to devote a large sum for the next five years to the aid of research work carried on by various industries. Associations will be formed for the purpose. Expenditure by manufacturers on research will be reckoned as working expenses, and so will not be subject to income-tax. In order that funds may be held by the new Department a Royal Charter of Incorporation has been granted to the official members of the Committee of the Privy Council for Scientific and Industrial Research, under the title of the Imperial Trust for the Encouragement of Scientific and Industrial Research. Mr. H. Frank Heath, C.B., has been appointed secretary of the new Department. This is a very large and important permanent scheme and as such it will doubtless take time to develop.

Digitized by Google

THE LATE SIR GEORGE WHITE.

It is with deep regret that we record the death of Sir George White, Baronet, which occurred suddenly at Bristol on November 22. His multifarious activities endured to the end, but it may truly be said that his great enterprises had come to fruition and he could see of the travail of his soul and be satisfied. Born in Bristol in 1854, he began life as a boy in a solicitor's office, rose considerably in the legal profession, abandoned it for that of a stockbroker, then was financially interested in railways and tramways, became a pioneer of electric traction in this country, developed great tramway undertakings, and in later years founded and developed a great aeroplane construction establishment which has been of much value in the present war. Add to these things the fact that he was a prominent citizen of Bristol, taking an active part in local philanthropic work, and we have an all-round example of beneficent activity coupled with a business ability which amounted to genius.

Here we can refer only to Sir George White's achievements in matters relating to traction. It was while he was still concerned with the law that he became interested in tramway business. Between 1872 and 1874 he was a legal representative of the Bristol promoters of Bills for the construction of the first tramways in that city. There was, of course, opposition before the Parliamentary Committees, but the Bills got through, and the first tramcar, drawn by horses of course, was soon an actuality in his native town. The success of his work was marked by his appointment as secretary of the tramway company, and after that he abandoned the law and became a stockbroker in addition to his tramway business. His continued interest in the stockbroker's profession was marked many years afterwards when he devoted a part of the fortune he had made to the erection of a new Bristol Stock Exchange building, which he handed over as a gift to the Exchange authorities.

The Imperial Tramways Company, mainly a "holding" concern, was the instrument through which Sir George White chiefly worked for the development of his schemes. It held shares in the Bristol Tramways Company—whose capital has risen from £7,000 to about a million and a quarter sterling—and in many other tramway companies then in a more or less rudimentary or moribund condition. His connection with the Imperial Tramways Company dates from 1890. He and his friends acquired a controlling interest in the company about 1893, and soon a revolution began. The moving spirits were Sir George White, his brother Mr. Samuel White, and the late Sir J. Clifton Robinson. The latter had been traffic manager of the old horse lines, but had left for the United States. He spent a few years there during that fruitful period when electric traction was beginning to develop rapidly. Returning to this country about 1892, full of enthusiasm for the new development, he placed his views before Sir George White. Then came the pioneer work of electrification of various line in which the Imperial Company was interested. The progress can in brief be best indicated by the dates when the first electric routes on each system were opened. There were :—Bristol, October, 1895 ; Dublin, May, 1896 ; Middlesbrough, July, 1898 ; and London United, April, 1901. These systems taken together extend to about 150 route miles and carry the enormous traffic of which our readers well know.

The results were not attained without strenuous work. Apart from the financial arrangements, Sir George and his colleagues had to overcome a sea of prejudice and the opposition of local authorities and of various other interests. It cannot be doubted that it was the success of these undertakings which hastened the action of municipalities in coming into the field. In the development especially of the Bristol and London United systems Sir George White took a leading part on the boards of directors. In recent years the Bristol undertaking has been augmented by extensive services of motor omnibuses and chars-a-bancs.

In 1902 a fusion of interests took place between the London United Tramways Company and the Underground Electric Railways Company of London so as to secure a free interchange of traffic. Sir George White relinquished the chairmanship of the London United Company in 1903. In the following year a baronetcy was conferred on him. The title descends to his only son, Mr. George Stanley White.

Mention should be made of Sir George's activities in connection with railways. He took a prominent part in reforming the Taff Vale undertaking in 1889. He also took a lead in the arrangements for the acquiring of the Bristol and North Somerset Railway by the Great Western Railway in 1885, of the Bristol Port Railway and Pier by the Great Western in 1890, and of the Severn and Wye and Severn Bridge Railway by the Midland Railway in 1894.

Mr. Charles Challenger, well known in the traction field as traffic manager of the Bristol Tramways and Carriage Company, who was for many years associated with Sir George White, in giving some reminiscences to the *Western Daily Press* of his late chief, bore emphatic testimony to the fact of Sir George's solicitude at all times for the welfare of the Bristol Tramways employees and those of other undertakings with which he was associated. In his death the tramways employees had lost a sympathetic friend and benefactor.

MOTORMEN'S GALLANTRY UNDER FIRE.

Apparently the occupation of a motorman constitutes a good training for the field of battle. Certainly the motorman has to exercise alertness and promptitude of decision and action. These attributes are conspicuous in the gallant deeds for which two motor men are recorded as receiving military decorations under our heading "With the Forces." Their deeds were so markedly brave that we set them forth here individually, though no doubt the recipients of the decorations would disclaim having done anything beyond discharging the soldier's duty.

The deeds that secured the Military Cross for Regimental Sergt.-Major J. R. Jones, who enlisted from the West Ham Corporation motormen, are thus described in the *London Gazette* :—"When the battalion was heavily shelled at Richebourg L'Avone on January 4, 1916, during which R.S.M. Jones's batman, who was standing next to him, was killed, he showed great coolness in going round the lines steadying the men. Again, at Festubert, on March 24, 1916, when one of the companies was subjected to a sharp bombardment by 5·9 howitzers, R.S.M. Jones rushed from battalion headquarters to the scene. He found that a Lewis gun emplacement had been destroyed and some of the team killed and wounded. He quickly cleared the area of our men, and had the wounded brought out of danger, the Lewis gun being also brought out undamaged. His conduct under fire has been a fine example to all ranks on several occasions."

Sergt. T. Jones, of Cardiff Corporation Tramways, is the other hero referred to. He was introduced to the City Council on November 9 by Sir John Courtis, chairman of the Tramways Committee, as an old employee who had served both as a conductor and a motorman. In handing the military medal with bar to the gallant sergeant, the Lord Mayor expressed the pride that he felt in starting his year of office by helping to honour a brave man. Sergeant Jones had twice distinguished himself, and had now not only the Military Medal, but also the bar. One of his gallant acts was to reorganise his platoon, which had become scattered, and to continue an assault, and afterwards to help bring in wounded under heavy fire. They were proud of Sergeant Jones.

London Electric Railway Extension.—It is expected that the running of through electric trains between the Baker Street and Waterloo Railway and Watford on the London and North Western Railway will be begun early in the new year. Owing to the war, there is delay in the completion of the joint rolling stock, but pending this some of the London underground electric railway companies will give the use of some of their spare stock for the purpose.

Digitized by Google

SPARE PLANT IN GENERATING STATIONS.

The unfortunate experience of the Birmingham Corporation Tramways department in having to curtail the service daily for a considerable period, owing to the inability of the electricity undertaking to supply sufficient energy, has an interest for other tramway authorities who are dependent upon one station for the two departments. In consequence of the increased demand due to war work that has arisen in most towns, and the difficulty of obtaining extra plant during the present crisis, the question of the amount of spare plant available has become one of great importance. The position of some of the leading municipalities and companies is indicated in the appended table :—

	Maximum demand.	Plant capacity, kw.	Spares, kw.	Percentage of spares.
Glasgow	50,000	54,550	4,550	9%
Birmingham ...	33,000	41,505	8,500	25%
Edinburgh	11,400	20,390	8,990	80%
Dundee	7,014	16,500	9,486	120%
Leeds	16,700	26,600	9,900	60%
Liverpool	23,511	44,600	21,089	90%
Manchester	49,897	57,300	7,403	17%
Sheffield	23,618	26,000	2,382	10%
Companies.				
Charing Cross ...	12,664	26,480	13,816	100%
Central	10,443	19,695	9,252	90%
Chelsea	19,739	30,000	10,261	50%
City of London ...	13,700	20,300	6,600	50%

The above figures were included in a report presented to the Glasgow Electricity Committee by Mr. Lackie, their electrical engineer, in connection with a recommendation that an extension of the plant should be carried out. The committee decided to proceed with the fourth part of the Dalmarnock scheme, representing an addition of about 40,000 H.P. of plant. It should be noted that Glasgow is one of eighteen places that have separate stations for the tramways and electric supply departments.

A New Station for Sheffield.

Sheffield Electric Supply Committee recommend that Sir Alexander Kennedy be asked to advise on a proposal for a new generating station. As the result of the continuously increasing demands for energy for the tramways, the committee have resolved to acquire land in the east district and to erect thereon a sub-station. Contracts will be placed for two rotary converters, switch gear, cables, etc., the total cost (including the buildings) being estimated at £8,000. The Corporation have adopted the foregoing proposals.

Critical Outlook at Belfast.

Belfast Corporation on November 3 authorised the Tramways and Electricity Committee to take up the matter of extending the electricity works and to submit a complete scheme, part of which could be put in hand as soon as the Treasury sanction the expenditure. This decision was arrived at in consequence of Mr. T. W. Bloxam, the city electrical engineer, having reported that the lighting, power, and tramways demand during the coming winter, when the whole of the 13,300 KW. plant installed is running simultaneously at its full normal rating, would leave a margin of about 11 per cent., distributed over the three systems. He considered that the margin should be at least 25 per cent. The largest generators had a capacity of 1,500 KW., so that the margin disappeared if one of these required to be laid off during the evening load. Conditions favourable to allow of getting full normal rating from every engine simultaneously seldom obtained in central stations. These circumstances led him to anticipate a shortage of energy during November or December of this year, and a more pronounced shortage next year, as he saw very little possibility of increasing the plant by then. The effect of this shortage would be a diminished brilliancy of the lighting, motors giving less power, and tramcars slowing down between the hours of 4 and 5.30 p.m., unless the shortage was sufficiently serious to stop the cars altogether. The Corporation also approved of a circular being sent to users of electricity, thanking them for the manner in which they had met the committee last year in reducing their demands between the hours of 4 o'clock and 5.30 in the afternoons of November and December, and asking them to make a similar reduction this year.

Board of Trade and Fuel Economy.—Mr. F. Ayton, borough electrical engineer and tramways manager at Ipswich, in his annual report on the working of the electricity department, refers to the ash contents of the coal as amounting to the high figure of 20 to 23 per cent., and he suggests that as the ashes use up railway accommodation and fuel for haulage, the Board of Trade Committee dealing with coal saving might be better employed in looking into the working of the collieries rather than adjuring electric supply undertakings to reduce their consumption by methods that will not produce the result aimed at.

GARCKE'S MANUAL.*

"Bigger than ever, better than ever," must be the verdict of every man in the electrical industry when he turns over the pages of the new volume of the familiar "Garcke." Owing to the difficulties attending the production of industrial records in present circumstances, there has been some delay in the production of the book this year, but advantage has been taken of the extended period to include accounts and other particulars to a later date than was possible in former volumes. It has been found possible to include nearly all the statistical tables which summarise the progress of the electrical industry. The main fact which they reveal is the largely increased service which the electrical industry has rendered, although only a moderate amount of fresh capital has flowed into it. In fact, the marginal capacity of supply undertakings has been encroached on by the necessities of war.

The main portions of the manual are as usual occupied by the full essential particulars of all the electric supply, traction, telegraph, telephone, manufacturing, and miscellaneous electrical undertakings in the British Empire. The directory now includes over 20,000 names and addresses of officials connected with electrical undertakings and others concerned in the industry.

Among the special articles grouped under the "Progress of the Year" section are those dealing with the Underground Railways pooling scheme, the report of the Advisory Committee of the Board of Trade on "Electrical Trade after the War," electrical imports and exports for the years 1910 to 1914, the report of the Home Office Committee on the "Lighting of Factories and Workshops," a list of electrical and allied firms ordered to be wound up under the Trading with the Enemy Amendment Act, 1916, and the highest and lowest prices of electrical investments for several years. A special summary of electrical exports to various countries for the year 1913, and particulars of the capital, profits, etc., of all the leading German electrical and allied companies have been included. These two last-named items have been prepared by the export department of the British Electrical and Allied Manufacturers' Association.

This year the supplements include a large map (36 in. by 20 in.), issued separately, showing the location of the lighting, power, and traction undertakings in the United Kingdom, a large map of the areas of electric supply undertakings in and around Greater London, a large map of the electric railways in London and district, and maps of nearly fifty traction and supply systems.

By way of illustrating the growth of the industry, a few comparative figures may be quoted. The first volume of the manual, published in 1896, contained particulars of 200 undertakings; the present volume deals with 2,650. In the former year the aggregate capital issued by electrical companies registered in Great Britain, together with the amounts borrowed by municipalities for electrical undertakings, was in round figures £61,000,000; this year it is £481,000,000.

The usual interesting statistical tables showing tramway development over a period of years are given, but as the issue of the Board of Trade tramway returns has meantime been suspended, it has not been possible to give the figures for last year.

Speaking generally, the compilers of the manual are again to be congratulated on the success of their arduous task. The work of the printers and of the engravers of the maps has again been excellently done. Convenience of reference, accuracy, and fullness of information make "Garcke" indispensable for all concerned in the great and growing electrical industry.

TRAMWAYS AND INSURANCE.

An announcement was made at the annual meeting of the Provincial Tramways Company, Limited, by Mr. Andrew Beattie, the chairman, that insurance against raids had cost £732. He also called attention to an item of £12,000, which was the reserve account for third party insurance or other purposes. They started that account three years ago, and had added to it year after year. At the time when they opened that fund the directors considered, having regard to the excellent position of the company and the good management, that later on they might be in the position of undertaking their own insurance, but now, although they had that money, they had, if he might say so, scarcely the heart to carry out their own insurance. They had had one or two accidents—by no means alarming accidents—but still the directors considered that, from a prudential standpoint, it was probably better that they should wait for another year or two before beginning to undertake their own insurance.

* Manual of Electrical Undertakings and Directory of Officials, 1916–1917. With which is incorporated the Imperial Directory, and statistics of electric lighting, power, and traction works in operation or projected in Great Britain and Ireland, India, and all British Colonies. Compiled under the direction of Emile Garcke, M.I.E.E., F.S.S Volume XX., 2,000 pages, demy octavo. London: Electrical Press Limited, 13–16, Fisher Street, Southampton Row, W.C.

Digitized by Google

THE PREVENTION OF STREET ACCIDENTS.

"Safety First" Council Formed for London.

On December 1, in the Caxton Hall, Westminster, an important conference of London local authorities and other bodies was held, and it agreed to the formation of a "Safety First" Campaign Council for the purpose of carrying on propaganda and educative work among the public, with the object of reducing the number of street accidents to pedestrians. The conference was called by Mr. H. E. Blain, operating manager of the London General Omnibus Company, whose work during the past year in promoting the safety movement in connection with the company is well known. The interest which is taken in Mr. Blain's proposal was shown by the fact that representatives of no fewer than 44 local authorities in the metropolitan area attended, and numerous other bodies also took part.

The following were the metropolitan boroughs, each represented by several delegates, in many cases including the mayor:—Camberwell, Deptford, Greenwich, Hackney, Hammersmith, Hampstead, Islington, Kensington, Lambeth, Lewisham, Paddington, St. Marylebone, St. Pancras, Shoreditch, Stepney, Stoke Newington, Westminster, and Woolwich.

The extra-metropolitan boroughs represented were:—Bromley (Kent), Ealing, West Ham, Croydon, and Richmond.

The urban district councils were:—Barking, Beckenham, Bexley Heath, Bushey, Chislehurst, Chiswick, East Barnet Valley, Edmonton, Enfield, Esher and the Dittons, Finchley, Heston and Isleworth, Ilford, Leyton, Loughton, Sidcup, Sutton, Teddington, Watford, Walthamstow, and Willesden.

The following railway companies were represented by the gentlemen mentioned:—Midland Railway, Mr. J. Pepper; London, Brighton and South Coast Railway, Mr. White; London and South Western Railway, Mr. F. V. Milton; Metropolitan Railway, Messrs. W. Holt and J. Wardle; Great Northern, Great Eastern, and Great Central Railways, Mr. F. Saward; Underground Electric Railways Company of London, Mr. W. E. Mandelick.

The omnibus and cab companies were:—Associated Omnibus Company, Mr. F. Willing Tibbs; Thos. Tilling, Mr. F. Duke; National Steam Car Company, Mr. Clarkson and Mr. D. Smith; British Motor Cab Company, Mr. T. W. Ashwood.

The tramway authorities and their representatives were:—South Metropolitan Tramways, Mr. A. V. Mason, manager; London United Tramways, Mr. J. B. Mackinnon, traffic superintendent; Walthamstow Council Tramways, Mr. W. Murray, manager; Ilford Council Tramways, Mr. L. E. Harvey, manager and engineer; East Ham Corporation Tramways, Mr. E. C. Ullman, manager; Croydon Corporation Tramways, Mr. T. B. Goodyer, manager; Metropolitan Electric Tramways, Mr. W. E. Hammond, traffic manager.

The following associations were represented:—Automobile Association, Commercial Motor Users' Association, Tramways and Light Railways Association (Mr. W. Tuke Robson and Mr. A. de Turckheim), Roads Improvement Association, London and Provincial Union of Licensed Vehicle Workers, Amalgamated Association of Tramway and Vehicle Workers, National Union of Vehicle Workers, and the London Cartage Contractors' Association.

The Metropolitan Police were represented by Superintendent Bassom, and the City of London Police by Inspector John James. Mr. Maxwell attended for the Local Government Board. Twelve firms and companies carrying on parcel delivery work, etc., in London, also sent representatives.

Mr. Blain, who presided, in opening the proceedings expressed his great appreciation of the exceedingly representative character of the gathering. It had been with some diffidence that he and his colleagues had ventured to convene this conference, and he could have desired that it might have been convened by representatives of the local authorities. Before venturing to send out the circular of invitation he had interviewed a number of the mayors and leading municipal officials in the metropolitan area, partly to enlist their sympathy and partly to consult them with regard to the proper person to convene this conference. It was on their representations that he had taken the liberty to call this meeting. He was connected with companies who conveyed 971,000,000 passengers per annum and who were deeply concerned in anything affecting street safety. They had a hope and belief that by co-operative effort something might be done to assist the general public in the problems arising from the darkened streets and war conditions. They would have noticed with great regret the alarming increase in the number of fatal street accidents in London. In the first nine months of 1914 these reached 411. That number had grown to 577 for the corresponding period of this year. The street accidents of all descriptions in the latter period totalled 34,575. These figures were very serious and necessitated the careful consideration of everybody concerned with the administration of public thoroughfares and street traffic in London. His company had for some time, by announcements in the public Press, by legends on the omnibuses, and by displayed advertisements in the railway stations, endeavoured to direct the attention of the public to "safety first," and to awaken the minds of the public to the fact that precautions which were ample in normal times were quite insufficient now. As the result of that campaign, both among their own employees and the general public, they had succeeded in reducing the number of accidents in which their omnibuses were involved by no less than 25 per cent. as compared with last year. (Applause.) He was sure that all present were at one in the desire to co-operate in anything which might be done to improve public safety. In the circular convening this conference his company suggested that the time was ripe for the formation of a Council whose sole duty would be to endeavour by educative and other means to do something to improve the present conditions. It was suggested that if a council were formed with various sub-committees it might be able to undertake definite educative and publicity work. The circular also suggested several means of awakening public attention. The first was courses of instruction for traffic and transport employees. He did not want that to be misunderstood. So far as public vehicles were concerned, the drivers had to be trained. The majority of them had to be passed and licensed by the police. That did not apply, however, to many who were operating, perhaps for the first time, carts and other vehicles. He thought that if there could be established a common centre in some hall where these men might have an opportunity of seeing films showing the dangers of the streets, of being impressed with the necessity of observing more closely the rule of the road, etc., very distinct good would result. The next paragraph in the circular referred to street traffic. Some boroughs had done a great deal in the provision of refuges in the centres of the streets. All had not done so, and it was thought a common survey of this important matter by a committee of surveyors and others experienced in the subject would be of distinct usefulness. Street lighting they must probably refer to with bated breath, but there were people who believed that even there a scientific consideration of the lighting problem might do something to improve the conditions. (Applause.) Then if there were an educational and publicity committee, that also would assist in bringing the problems to the minds of the public—of the school children as well as of the other users of the highways. Pictorially and by Press advertisements and by many other means, it was possible to direct public attention to this very important matter. Then it was thought that to supply free to cinema theatres for exhibition a few short films showing street dangers would produce that graphic grasping of the mind of the public and of children which any amount of talk failed to achieve. There was a suggestion that there might be held a safety first exhibition, admission to which would be free and at which the subject could be further pursued. Thus there was a great deal that could be done, and if the local authorities on the one hand and street users on the other would co-operate he was certain that the results would be for the common weal. With regard to the financial side, he understood there was an idea from the wording of the circular that this was an ambitious programme which would require a large financial contribution from the local authorities and others. That was not so. Co-operation more than cash was what was needed. The resolutions to be submitted did not involve the raising of any funds from this gathering. That matter would be dealt with later by a circular.

The Mayor of Westminster (Sir George E. Welby) moved the first resolution:—

"That this conference approves of the organisation of a safety first campaign in the metropolitan area."

He said that his Council had for some time been occupied in increasing the number of refuges. The people could move about in the daytime with considerable safety, but it was a very different thing at night. Much could be done by the means now proposed.

Mr. W. Joynson-Hicks, M.P., chairman of the Automobile Association, in seconding the motion, said that the war had put back civilisation for a centrury or more so far as street lighting was concerned. Civilisation in our cities meant light and rapidity of traffic. Through street accidents not only individuals but the body politic suffered. He was one of those who did not believe in the necessity for the extreme darkness of the streets. (Applause.) He had discussed the matter with many flying men, and he did not believe that the extreme darkness was of any real use in keeping off those wretched visitors who sometimes tried to attack us. He hoped that those who were responsible would reconsider the question and see whether there could not be a little more light, so that the safety of the lieges might be more pronounced. In attempting to secure safety there should be a partnership between the vehicle driver and the pedestrian. It was with the utmost difficulty that the traffic of London was carried on, and vehicle drivers were entitled to ask foot passengers to exercise the utmost possible care. There was much to be said for women wearing white hats at night, and all kerbs should be whitened. The education authorities should join in the campaign, as many hints could be given to children as to the mode of crossing the street. They should also be instructed not to hang on to vehicles.

Mr. J. C. Hammond, chairman of Walthamstow Urban District Council, in supporting the motion urged that there should be uniformity in the lighting all over the metropolis.

Mr. Ben Smith, organising secretary of the London and Provincial Union of Licensed Vehicle Workers, urged the necessity for

Digitized by Google

uniformity in the system of lighting vehicles. The brilliant lights allowed on private motor cars blinded the drivers of other vehicles.

The resolution was carried unanimously.

The MAYOR OF DEPTFORD (Mr. W. A. Weyland) moved:—"That a London Safety First Campaign Council be now elected, with power to co-opt additional members, to establish an adequate organisation and to take all necessary steps, by the appointment of committees and any other means to bring the scheme into prompt operation."

He hoped the council would make suggestions as to the lighting of the streets, which was in a chaotic state. When they considered the great number of people killed and injured in street accidents they might ask themselves whether the game was worth the candle.

Mr. H. GORDON SELFRIDGE, of Selfridge and Company, seconded the motion and it was unanimously adopted.

The CHAIRMAN said that he would suggest a basis for the council something on the following lines:—Two representatives of each local authority, one being a public representative and one an officer, a representative of each tramway and omnibus undertaking, a representative of each association, a representative of the railway companies having street goods vans, etc., a representative of the Metropolitan Police, a representative of the City of London Police, a representative of the motor cab industry, and several representatives of private firms.

It was pointed out that the members of local authorities present had no power to appoint representatives of those bodies, and on the motion of Alderman J. J. Bisgood, Richmond, it was agreed to refer to the bodies represented at the conference the appointment of their representatives to the council. It was also decided that associations of teachers should be approached with a view to their joining in the movement.

On the motion of Mr. THOMAS WATSON, chairman of Marylebone Electric Supply Committee, it was agreed that the following should act as hon. secretaries of the new council *pro tem.*:—Mr. H. E. Blain, representing the traffic authorities; Mr. A. P. Johnson, town clerk of Hampstead, representing the civic authorities; and Mr. A. E. Cave, editor of the *Municipal Journal*, representing publicity interests.

The CHAIRMAN, in reply to a question, said that the London County Council had not taken part in the conference, the clerk having written that while the County Council were in sympathy with the object in view, they felt diffidence as an executive body in sending representatives.

The proceedings closed.

PRIVATE BILL NOTICES.

Only two notices of Private Bills relating to traction matters for the ensuing session of Parliament appeared in the *London Gazette* of November 21. Particulars are appended.

EBBW VALE COUNCIL OMNIBUS BILL.—To provide and run motor omnibuses and to establish a garage, etc. Parliamentary agents, Messrs. Lees and Company, Palace Chambers, Westminster.

BEDWAS AND MACHEN COUNCIL OMNIBUSES.—A bill containing similar provisions to those contained in the notice of the Caerphilly Council. Solicitor, Mr. C. Davies Jones, Bedwas, Mon.; Parliamentary Agents, Messrs. Lees and Company, Palace Chambers, Bridge Street, Westminster.

ASHTON-UNDER-LYNE CORPORATION TRAMWAYS AND OMNIBUSES.—To purchase the undertaking of the Oldham, Ashton, and Hyde Tramways, to provide and run motor omnibuses within and without the borough, and to acquire lands and erect buildings therefor. Parliamentary Agents, Messrs. Sharpe, Pritchard and Company, Palace Chambers, Westminster.

CAERPHILLY COUNCIL OMNIBUS SERVICES.—To provide and work omnibuses worked by mechanical or animal power in Caerphilly and with consent in the Urban Districts of Bedwas and Machen, and to enable the Council and the Bedwas Council to enter into agreements with reference to working, leasing, etc., with any authorities, companies, or persons providing or running omnibuses in any district of Glamorganshire and Monmouthshire. Solicitor, Mr. W. Speckett, clerk to the Council; Parliamentary Agents, Messrs. Rees and Freres, 5, Victoria Street, Westminster.

NOTTINGHAMSHIRE AND DERBYSHIRE TRAMWAYS COMPANY.—To empower the company (1) to purchase and acquire and to sanction and confirm the transfer to and vesting in the company of the Ilkeston Corporation Tramway undertaking, together with all the powers, rights, duties, authorities, and privileges conferred or imposed by the Ilkeston Corporation Tramways Order, 1899; (2) to make provision for the payment by the company of the purchase price and for the application thereof by the corporation; (3) to constitute the tramways and works part of the undertaking of the company, to extend and apply thereto all or some of the powers conferred upon the company by the Nottinghamshire and Derbyshire Tramways Acts, 1903, 1906, 1908, and 1911, and the enactments incorporated therewith respectively; (4) to extend the time limited by section 43 of the Tramways Act, 1870, for the re-purchase by the Corporation of the tramways and undertaking authorised by the Order of 1899; and (5) to empower the company and any local authority, company, body, or person owning or working any tramways or light railways which can be worked in connection with the tramways of the company to enter into and carry into effect agreements for the sale or transfer to the company of such undertaking.—Parliamentary Agent, Mr. J. Kennedy, W.S., 25, Abingdon Street, S.W.

MYNYDDISLWYN COUNCIL OMNIBUS SERVICES.—To empower the Mynyddislwyn Urban Council, with the consent of the Bedwellty, Abercarn and Risca Urban Councils, and of any other local and road authorities affected, to (1) provide and run omnibuses worked by mechanical and or animal power; (2) to take fares and charges in respect of passengers, parcels, animals, and goods, to purchase lands and construct depots, sheds, garages, to lop trees along the routes, to provide shelters and waiting-rooms, and for that purpose to use any part of any street, park, or open space, to demise to any person, company, corporation, or authority their omnibus undertakings, or any part thereof; (3) to empower the several councils or any of them to enter into agreements with respect to the provisions of the intended Act, and to authorise the council and any authorities, companies, or persons providing or running omnibuses in any other district adjoining or adjacent to the district to enter into agreements for or with reference to the working, running, leasing, management, and maintenance of any omnibus service of the contracting parties, etc.; and (4) to authorise the council to borrow money for any of the purposes of the intended Act.—Solicitor, Mr. T. C. Griffiths, Blackwood, Monmouthshire; Parliamentary Agents, Lees and Company, Palace Chambers, Westminster.

EXCESS PROFITS TAX.

INCREASE OF STATUTORY PERCENTAGE GRANTED.

The Board of Referees have issued the following Order, dated October 26, 1916, on the application of the Tramways and Light Railways Association for an increase in the statutory percentage of profit before the Excess Profits Tax becomes payable on the business of tramways and light railways in Great Britain and Ireland:

The Tramways and Light Railways Association, whose place of business is at Caxton House, in the City of Westminster, having by Alfred de Turckheim, its Secretary, made application under this Act to the Commissioners of Inland Revenue for an increase of the statutory percentage as respects the trade or business of tramways and light railways in Great Britain and Ireland, where such tramways or light railways are running wholly or in large part over public roads or streets, viz.:—

(1) Tramways authorised by Act of Parliament or of some other mode of authorisation having statutory force to which tramways a power of purchase at stated intervals, as a whole or by sections, by some public authority or authorities is attached;

(2) Light railways authorised under the Light Railways Act, 1896, or any statutory modification or extension thereof, to which light railways a power of purchase at stated intervals, as a whole or by sections, by some outside authority or authorities is attached; and

(3) Tramways or light railways leased or agreed to be worked on the terms that the leasing or working company shall provide the whole or part of the rolling stock, plant, or apparatus necessary for working the tramways or light railways, and that such rolling stock, plant, or apparatus may be sold to the owning authority on the termination of the lease or working agreement or left in the hands of the lessee or person working under the agreement.

And the Commissioners of Inland Revenue having referred the case to the Board of Referees appointed for the purpose of Part 3 of this Act by the Treasury and the Board having heard the applicants and the Commissioners of Inland Revenue by their duly appointed representatives, and having dealt with the case,

The Board doth order that as from the commencement of this Act the statutory percentage as respects the trade or business hereinbefore defined shall be increased to 7½ per cent. in the case of a trade or business carried on or owned by a company or other body corporate and to 8½ per cent. in the case of any other trade or business.

The Order is signed by C. Bine Renshaw, chairman, J. K. F. Cleave and D. du B. Davidson, joint registrars.

Mr. E. F. Vesey Knox, K.C., and Mr. W. Allen, instructed by Mr. Sidney Morse, appeared on behalf of the association.

In our issue of November 9 was published the Order of the Board of Referees increasing the statutory percentage in the case of motor omnibus undertakings to 8 per cent. for a company or other body corporate, and to 9 per cent. in the case of any other trade or business.

British electrical manufacturing companies have received an increase to 7 per cent.

For electrical supply and traction companies in India the percentage is increased to 7 per cent., for companies in Victoria, Australia, to 7½ per cent., and to 8½ per cent. for private firms.

Digitized by Google

RESTRICTED LIGHTING AND SERVICES.

REQUESTS FOR LESS DANGEROUS CONDITIONS.

Reports of fatal and non-fatal accidents caused by public service and other vehicles come from all parts of the country during those portions of the month when the moon is not visible. Most of the cases occur on Saturday nights. At Glasgow on November 18 eleven persons were injured by tramcars and four by motor cabs.

Complaints continue to be made all over the country of the danger entailed by the restricted lighting, and at Halifax the Tramways and Watch Committees early in November made representations to the military authorities to secure permission for better car headlights or more light in the streets. On November 16 the Yorkshire Association of Tramway Managers discussed the same question, and resolved to ask the military authorities to receive a deputation. In an effort to secure sanction to a diffused light being thrown on to the road from the headlights of the tramcars, Mr. A. Baker, the general manager of the Corporation Tramways at Birmingham, has drawn the attention of the chief constable to the anomaly of the poor light allowed on the cars and that on motor cars and cycles.

As the result of the attention devoted to the matter at Halifax it is announced that between the rigid darkening of the cars and compliance with the order there seems to be a margin which will allow a slight improvement in tramcar illumination. The outcry has been very pronounced at Manchester, where the chief constable has issued a warning to drivers of vehicles that their speed must not exceed ten miles an hour, and that five miles an hour may be dangerous in many circumstances. As a result of the agitation, the tramways and other committees of Manchester Corporation, on November 22, agreed to have a white band painted on tramway standards and boxes, lamp-posts, trees, and telegraph posts. The kerbs and angles of walls and buildings are to be whitened. Remedial measures as to street lighting have been agreed upon at York, where all lamps, except at a few dangerous corners, have been extinguished during the past two months. Cardiff, Salford, and other towns have also asked for improved lighting. In the metropolitan area there is little complaint, although the public lamps serve now only to mark the division between road and footpath, and the whereabouts of refuges. After 9 p.m. there is little or no traffic citywards, but the outward flow is brisk for two hours later.

In a number of towns the strain thrown upon the motormen night and morning during the weeks when there is no moon, combined with the shortage of drivers, has led to the restriction of the services. Other places are now following suit. On November 15 the Bradford management began to curtail the services by half an hour, and the restriction will be gradually extended to every route. Following a conference between the Newcastle-on-Tyne management and the managers of the places of amusement, the Tramways Committee have altered the time of the last cars leaving the centre of the city to about ten o'clock. At Portsmouth the public have accepted without complaint the innovation of the last cars leaving the temini an hour and a half earlier. With the cars now set free a new service has been put on between the Town Hall and Copnor. The Sunderland car services from November 13 cease at 10.30 p.m. until April 1 next, while Derby has suspended the Sunday running until after the war. Curtailments have also taken place in Leeds, Halifax, Sheffield, etc.

REVISION OF CERTIFIED OCCUPATIONS.

HIGHER EXEMPTION AGES FOR MOTORMEN AND OMNIBUS DRIVERS.

The Press Bureau issued on November 17 a revised List of Certified Occupations (R. 105) and ages of exemption from military service. The reservations contained in the list will be reduced early in 1917 by a further raising of the age limits. At present men in certified occupations, who are under the age limits stated in the list are entitled to be treated as covered by the list if found by a Recruiting Medical Board to be unfit for General Service (Category A). In the next list this arrangement will be altered so as to make available for the army men found fit for Garrison Duty Abroad (Category B, i.). The conditions as to age and marital condition, where applicable, are indicated in the list opposite the several occupations. When an age limit for exemption is stated, the age referred to is the age at April 4 last. Subjoined are the alterations affecting certain public and public utility services :—

	Age at which Reservation begins— Single	Married
Omnibuses—		
Head of department, foreman	30	25
Motor driver	41	25
Tramways—		
Traffic inspector, chief storekeeper, parcel superintendent	30	25
Driver	41	25

Workmen in electrical generating stations (including those for tramways and electric railways) are not affected.

Railway service, including workshops and sheds :—Men to be treated as in a certified occupation in respect of whom the Railway Company have furnished to the Recruiting Officer of the area in which the man resides a certificate stating that he is indispensable to the Company.

OMNIBUSES ON NEW ROUTES.

West Sussex County Council have refused to accept a lower rate than 3d. per omnibus-mile from the Southdown Motor Services, Limited, and the Aldershot and District Traction Company for new services which the companies desired to introduce on county main roads. The latter company wished to extend to Chichester their route now ending at Midhurst. The Southdown Company had asked the Council to reconsider the matter, while the Aldershot Company wrote to the effect that they could not make any payment. A report presented by the Roads Committee stated that at a conference of representatives of the Council with the local authorities of Medhurst, Chichester, etc., it was agreed that 3d. per omnibus-mile be charged for one year, subject to the fares and services proposed being satisfactory, the charge to be subject to revision at the expiration of twelve months, according to the advice of the surveyors after ascertaining the expenses incurred in connection with the maintenance and repair of the highways used by the omnibuses. At the meeting of the West Sussex County Council on November 17, when this recommendation of the conference was adopted, Lord Leconfield said that the omnibuses ran in opposition to the railway companies, who were very large ratepayers and were helping with the upkeep of the roads. There was no question that the vehicles did a very considerable amount of damage to the roads, and the committee had decided that it would be wise to charge 3d. a mile. He had gone into the matter with the surveyor, and found that that charge would not pay for the damage ; they would still have to bear a considerable expense in consequence of this form of traffic. Other counties had, he knew, acted differently. Surrey charged 1d., and Hampshire had not made any charge at all ; but the feeling of the committee was that this was no reason why Sussex should not make the charge.

The Road Board have refused to arbitrate upon a proposal by Camberwell Borough Council that a payment should be made by the London General Omnibus Company for the use of a rural road over which eleven empty omnibuses would proceed morning and night in connection with a new service run to Woolwich at the request of the Ministry of Munitions.

FINANCIAL REPORTS AND MEETINGS.

United Electric Tramways of Caracas.—The accounts for the year ended June 30 show a disposable balance of £14,328, against £15,750. The directors recommend a dividend for the year of 7 per cent. (less tax) ; £2,428 forward. Last year the dividend was the same, but a bonus of 1½ per cent. was paid, with £1,300 forward. The percentage of operating expenses to gross receipts is 53·10, or 1·72 per cent. more than the previous year, due to the larger mileage run and higher cost of material and working.

Ayr Corporation Tramways.—The annual report prepared by the general manager, Mr. W. Grant, shows that the revenue totalled £19,285, an increase of £1,300. The number of passengers was 4,352,113, an increase of 332,342. The working expenses, including power costs, amounted to £11,828, or 6·20d. per car-mile. There has been increased expenditure resulting from allowances to dependants of employees on active service, war bonuses, and higher charges for electrical energy. The result of the year's working is a deficit of £16, which was paid out of the reserve fund. The reserve fund stands at £4,632, and depreciation and renewals fund at £14,571. The total number of employees who have joined the various branches of His Majesty's forces is 52, being 70 per cent. of the staff.

Double Income-tax and British Trade.—Speaking at the meeting of the Auckland Electric Tramways recently, the chairman alluded to the manifest inequity of the present system of double income-tax within the Empire. The matter had been receiving a good deal of attention lately, and an influential association is in existence with the object of using every possible endeavour to rectify the present unjust system. The Government have publicly admitted the grievance, and some measure of relief has been provided in the Imperial Finance Act of 1916, under which a proof of payment of colonial income-tax of not less than 1s. 6d. in the £, repayment can be claimed on the difference between the rate of 3s. 6d. in the £ imposed for the second half of 1915 and the rate of 5s. imposed for this year. The injustice is so glaring and the injurious effect on British trade so serious that the payment cannot be long continued.

East Ham Corporation Tramways.—The report of the East Ham Corporation Tramways (of which Mr. W. C. Ullmann is engineer and manager) for the year ended March 31, 1916, shows a marked

Digitized by Google

improvement in the position. The total revenue amounted to £66,884, as compared with £60,232 for the previous year; the operating costs were £53,485, as compared with £51,619, while the gross profit was £13,399, compared with £8,613. After providing for repayment of interest and principal, there was a profit of £1,952, as compared with a deficit of £3,524 in the previous year. The total operating costs per car-mile amounted to 7·89d., the ratio of operating costs to revenue being 79·9 per cent., as compared with 85·7 per cent. The total revenue per car-mile was 9·87d., and the average energy consumption 1·50 units. No less than 51·39 per cent. of the passengers were carried for a halfpenny fare, the percentage of receipts from this source amounting to 32·35.

Cape Electric Railways Company.—At the annual meeting held in London on November 15, Mr. L. Breitmeyer, who presided, moved the adoption of the directors' report, which appeared in the issue of this journal of November 9. He stated that while the expenditure had increased in almost every item the traffic receipts showed an addition of £6,669 until March last, when the military forces left Cape Town for German East Africa. The increase in the receipts was exceeded by the extra cost of materials and labour, the latter being due to war allowances to employees and the payment of a bonus. There was an increase of £2,168 in colonial income-tax, while the London expenses had risen owing to the excess profits duty and the higher income-tax. Some of the additional sum paid on the latter account might be recoverable under the decision of the Treasury to grant relief to companies that were paying income-tax both in this country and in the colony. While the directors regretted that they could not maintain the former rate of dividend, they could not prudently reduce the amount to be carried forward, especially as the returns so far this year were below those of the corresponding period of last year. The report was adopted, and a dividend of 3¾ per cent. was declared on the ordinary shares, carrying forward £7,983.

Edison Swan Electric Company.—The net profits for the year ended June 30 total £24,146, and £4,879 was brought forward. It is proposed to transfer to the reserve £25,000, and carry forward £4,025. No dividend is recommended, in order that capital may be available for the extension of the business. Mr. C. J. Ford, who presided at the annual meeting on November 22, said that the turnover had been more extensive than since they started business. The profits increased from £56,000 to £65,000, while general expenses showed a reduction of £2,700. The net revenue increased from £14,000 to £24,000. The engineering side of the works had been almost wholly employed on Government work at moderately remunerative prices. They proposed to add £25,000 to the reserve, making that fund £40,000, and to carry forward £4,025. The board recommend the issue of £100,000 7 per cent. preference shares, having the right to participate in profits up to a further 3 per cent. after the ordinary shareholders had received a dividend, the rate of which had not yet been settled. Proprietors are to be offered a £1 preference share for every ordinary share now held. Debenture holders will be asked to allow the uncalled liability on the shares to be cancelled, and the two classes of debentures are to be consolidated into stock, bearing 5 per cent. interest. The report was adopted.

East India Tramways Company.—This company operates cars equipped on the "Simplex" petrol system, and its results are for that reason of special interest. The results of working for the year, compared with those of the previous year, are as follows:—

	1915–16.	1914–15.	Inc. or Dec.
Gross receipts	£27,104	£25,307	+ £1,797
Working expenses	£19,408	£16,832	+ £2,576
Net receipts	£7,696	£8,475	– £779
Reserve account	£400	£1,346	– £946
	£7,296	£7,129	+ £167
Brought forward	£104	£21	+ £83
Balance available for dividend	£7,400	£7,150	+ £250

This balance the directors recommend should be appropriated as follows:—5 per cent. dividend on the cumulative preference and ordinary shares, of which an interim dividend of 2½ per cent. was paid May 31, 1916, £2,045; 10 per cent. on the deferred shares (on which an interim dividend of 2½ per cent. was paid May 31, 1916), £5,000; total, £7,045, leaving a balance to be carried forward of £355. The directors record with great regret the death in August last of Mr. John Abbott, who had been chairman of the company since its commencement, and to whose engineering ability and experience the company is largely indebted for its present successful position. His son, Mr. John Dixon Abbott, who was for three years the company's engineer resident in Karachi, has been appointed to fill the vacancy on the board. Since his return to England Mr. Abbott has acted as consulting engineer in this country.

Provincial Tramways Company, Limited.—The annual report of this company, of which Mr. J. Barber Glenn is the managing director, recommended that from the balance of £27,376 remaining on the year's trading a dividend be paid on the £1 ordinary shares of 10d. per share, and a bonus of 6d., equal to 1s. 4d. per share. With 8d. per share paid in June last, these shares receive a dividend of 2s., equal to 10 per cent. for the year. Mr. Andrew Beattie, D.L. (chairman), in moving the adoption of the report at the annual meeting on November 24, stated that for many years the company had had a long run of prosperity, and the prosperity of the past two years was owing somewhat to the war. The past year had been the best in their history. In 1913 the net profit was £41,085, in 1914 £10,297, in 1915 £48,789, and this year £52,289. In the North of England business had been interfered with owing to the raids. The receipts generally showed an increase of £7,416. The working expenses had increased considerably, and insurance against raids meant a sum of £732. Some towns had been darkened to such an extent that during the winter services would have to be curtailed. Crude oil used for the Diesel engines now costs £7 7s. per ton, as against £3 16s. on the previous contract. £10,071 had been carried forward, as against £11,000. Mr. Samuel Hern (Cardiff), in seconding, said that a large sum would be required out of the reserve fund for the work of track reconstruction, which, owing to the war, was long overdue. Mr. Beattie was re-elected a director, and, on the proposition of Mr. J. Barber Glenn, seconded by Mr. H. H. Peters, the sum of £600 was voted to the directors as extra remuneration for the past year. The thanks of the meeting were accorded to the managers, staff, and employees of the local companies for their services.

CONTRACTS AND ORDERS.

Hadfields, Limited, have an order to supply special track work to Newcastle Tramways Committee.

Crompton and Company, Limited, are supplying a motor and starting panel to Ilford Electricity Committee.

Messrs. Cammell, Laird and Company, Sheffield, are supplying 200 tires to Hull Corporation Tramways at £41 10s. per ton.

The General Electric Company, Limited, have a contract to supply switchgear for a sub-station of the Bacup electricity works.

Shanghai Council have placed a contract with the General Electric Company of China for Osram lamps for street lighting for twelve months.

Sheffield Tramways Committee have placed a contract with Messrs. Meade-King, Robinson and Company for the supply of motor spirit for the omnibus department.

Sheffield Tramways Committee have accepted the tender of Dawson and Jones, Limited, for alterations and additions at the Townend tramway depot, at £3,619, in order to fit it for an omnibus garage.

Johannesburg Council have placed the following contracts:—10,000 lb. copper wire, and 10 miles of underwriters' wire, Telegraph Manufacturing Company, Limited, Helsby; 10,000 Edison metal filament traction lamps, Griffin Engineering Company, Bath; six 150 K.V.A. transformers, Sykes and Company.

Melbourne Car Lighting.—The Tramways Board offer a premium of £100 for the most suitable design for the lighting of 1,250 cars with lights of approximately 100 candle power each. Tenders recently sent in did not prove satisfactory, the fault in most cases being the expense of working, according to the "Australian Mining Standard."

Walthamstow Council have placed the following contracts:—Babcock and Wilcox, water-tube boiler, economiser, steel chimney, pipe work, hotwell tank, feed pump, and induced draught tank; Bruce, Peebles and Company, 1,000 KW. motor converter; British Thomson-Houston Company, and General Electric Company, L.T. switchgear.

Manchester Corporation have allotted contracts as subjoined:—Cable—British Insulated and Helsby Cables, Limited; Western Electric Company, Limited; Callender's Cable and Construction Company, Limited. Turbine feed pump—G. and J. Weir, Limited, Glasgow. Sub-station switchgear,—Ferranti, Limited, Hollinwood. Copper trolley wire—F. Smith and Company, Limited, Salford.

Sheffield Electricity Committee have placed the following contracts:—Two turbo-alternators, switchgear, and alterations to pipe work at Neepsend and Sheaf Street generating stations—C. A. Parsons and Company, Limited, £19,000, plus 5 per cent. for contingencies; 20 panels of H.T. two-phase sub-station switchboards—A. Reyrolle and Company, Limited, Hebburn-on-Tyne, £2,709; 10,000 3-in. cast-iron cable pipes—Staveley Coal and Iron Company, Staveley, at £7 10s. per ton.

Glasgow Tramways Committee have allotted six months' contracts as subjoined:—Car-wheel tires, Brown, Bayley's Steel Works, Limited; malleable castings, Alex. Shanks and Son, Limited; iron and steel bars, P. and W. MacLellan, Limited; springs, L. Sterne and Company, Limited; oils, J. Murray and Son, Limited, Messrs. Marks and Johnston, J. and D. Hamilton, Limited. Three months' contracts have been arranged with Miller and Company, Limited, for the supply of chilled brake blocks, and with Pilkington Brothers for glass. A six months' tender for glass by Chance Brothers, Limited, has also been accepted.

Digitized by Google

NEW AND PROSPECTIVE WORK.

The Tramways and Motors Committee of Sheffield Corporation have agreed to erect a new depot at the corner of Pickmere and Fitzgerald Roads.

The Halifax (Nova Scotia) Tramway Company intend to reconstruct their lines and to replace a large part of the equipment at a cost of about £300,000.

The Leicester County Council have decided to invite tenders from selected firms for the purchase of about 3,000 yards of trolley wire required for renewal purposes.

The Southampton Electricity Committee have authorised the electrical engineer to prepare a scheme for increasing the boiler installation at the electric generating station.

A report has been presented to the Dundee Corporation Tramways Committee stating that seven miles of single track will need renewal after the war, and that a portion of the work is urgent.

Plans have been submitted to Morecambe Council for the erection of a new tramway office and a shelter for passengers near the central pier. Lytham Urban Council are considering plans for a tramway shelter at Ansdell.

The chairman of the Works Committee of the Brighton Corporation and the borough surveyor have been authorised to make inspection of motor vehicles in use in other towns for street cleaning and refuse removal.

The electric lorry and an electric passenger car which Wolverhampton Corporation have agreed to purchase for the tramways department will be used for speedy conveyance to breakdowns, repairs and testing, also for supervision by the management.

The arrangement made by the Tramways and Light Railways Association with the manufacturers of steel tires in November, 1915, is to be continued for the quarter ending January 1, 1917, so that prices will remain the same as hitherto. A permit from the Ministry of Munitions (Priority Branch B.M. 3) is now required with each order.

Six new double-deck tramcars are being obtained for the Rotherham Corporation Tramways. The need for more cars is shown by the increase in the number of passengers. For the half-year ended September 30 they totalled 7,839,083, as compared with 4,159,824, for the corresponding period of 1912, while the receipts have risen from £19,299 to £34,343.

With a view to prevent a recurrence of the recent accident on the curve at Clifton Place, Newport, Mr. Nichols Moore, borough electrical and permanent way engineer, has obtained the sanction of the Board of Trade to doubling the track and interlacing the track between Charles Street and the curve. The latter improvement would do away with the facing points. The Tramways Committee have decided to defer for the present the carrying out of this portion of the alterations.

The Board of Trade have extended for one year from September 6 the time limited by the Birmingham Corporation Light Railways Order, 1912, for the completion of works, and by the Birmingham Corporation (Quinton) Light Railway Order, 1913, for compulsory purchase of lands and completion of works. Manchester Corporation are applying for an extension of time for the construction of the authorised tramways in the districts of Barton-upon-Irwell, Northenden, Sale, Stretford, and Urmston, and in the city.

In response to the inquiry of a Government department as to work that will require to be executed after the war the borough engineer of West Hartlepool has included in his report the relaying of the Foggy Furze section and the proposed line at the south side of the municipal buildings. Dewsbury Corporation have included tramway extensions of an estimated cost of £2,015 in the programme of work required to be executed after the war. Leeds Tramway department has intimated that at least £150,000 must be spent on tramway repairs after the war.

The value of the stores in the tramway department of the London County Council at March 31, 1916, amounted to £198,611, representing an increase of £48,611 over the amount (£150,000) voted under standing order No. 217. The Highways Committee reported that the excess was due to a variety of causes, but mainly to the increased prices of materials, particularly metals and timber, and to other conditions arising out of the war. In view of the extent (147 route miles) of the Council's tramways and of the necessity for providing parts and equipment for two systems of electric traction, the committee do not anticipate that any reduction can be made at present in the value of the stock of stores, and they recommend that the amount to be voted under the standing order should be increased to £220,000, which was agreed to.

L. & S.W. Suburban Electrification.—The electrification of the Claygate section of the London and South Western Railway Company's suburban lines has been completed, and a half-hourly service of electric trains between Claygate and Waterloo, covering the journey in 29 minutes, will begin next Monday. Rail motors will run every half-hour in connection with the electric service between Claygate and Guildford. The electric service from Waterloo to Hampton Court will now comprise four trains an hour.

PERSONAL.

Mr. John Christopher Mitchell, who has recently been elected president of the Chartered Institute of Secretaries, is a native of Birmingham and was educated at St. Albans Grammar School. Practically all his business life has been spent in the passenger transport trade of London; he was appointed to the staff of the London Road Car Company, Limited, in 1886, by the late Archibald Grierson, C.A. (Glasgow), then secretary of the company, with whom he was associated for nearly 20 years. In less than three years was appointed accountant to the Road Car Company, succeeding to the secretaryship in 1905 on the death of Mr. Grierson. In 1908, on the amalgamation of the omnibus undertakings in London, he was appointed secretary of the London General Omnibus Company, Limited, and in 1912, upon the consummation of the scheme for the combination of the interests of the London General with those of the Underground Electric Railways Company of London, Limited, he was made comptroller of the latter company. Shortly afterwards he was appointed treasurer of the Underground Company and of all the allied companies, including the Metropolitan District Railway, the London Electric Railway, the Central London Railway, the City and South London Railway, the London General Omnibus Company, and others. Mr. Mitchell is an active freemason and has taken a keen interest in Church matters, and has been a member of the National Council of Church Bellringers. He is a freeman of the City of London, being on the livery of the Worshipful Company of Coachmakers and Coach Harness Makers. He resides in Norwood and has been a member of the Lambeth Borough Council since 1912.

Mr. J. C. Mitchell

(Treasurer of the London Underground and Allied Companies).

Mr. H. J. Hawkins, formerly electrical engineer to Salford Corporation, has been appointed chief engineer to a London firm at Karachi.

Sir William Clegg has again been re-elected chairman of Sheffield Tramways Committee, an office which he has held for many years. The vice-chairman is Alderman Fenton.

Mr. Robert Owen, deputy electrical engineer to Leeds Corporation, has been appointed borough electrical engineer at Wigan. One hundred and six applications were received.

Mr. F. Golding, assistant electrical engineer to the Commonwealth Postmaster-General, has been appointed electrical engineer for Victoria, in succession to Mr. A. A. Dircks, who has become electrical engineer of New South Wales.

Mr. W. Hopkins, chief assistant to the general manager, West Ham Corporation Tramways, has been granted an honorarium in consideration of the extra responsibility placed upon him during the recent change of management.

Mr. E. V. Hiley, town clerk of Birmingham, has tendered his resignation, having accepted a seat on the board of directors of the Metropolitan Carriage, Wagon, and Finance Company, Limited, of which Mr. Dudley Docker, C.B., is chairman.

Digitized by Google

Mr. W. H. Allen, who in August resigned the appointment of engineer and manager of Loughborough Corporation Electricity Department, joined Messrs. Chance and Hunt, Limited, at Oldbury, in an advisory capacity for the whole of their works at Oldbury and in various other parts of the country, and also the Government sites "A," "B," "C," and "D."

Mr. Peter Fisher, general manager, Dundee Corporation Tramways, at a meeting of the tramways committee on November 20, observed that at the Council meeting a member had asked whether he attended the meetings of the Municipal Tramways Association at the Council's expense. Mr. Fisher said he attended the conferences at great inconvenience, for he detested travelling, but he went because he considered he was doing most valuable and most important work as part of his duty. Mr. G. A. Johnston, chairman of the committee, said that from experience he knew that what Mr. Fisher had said was correct. As Mr. Fisher, as ex-president, is a member of the Executive for another three years, the committee unanimously agreed that he should attend their meetings.

Councillor Max Muspratt, the new Lord Mayor of Liverpool, is a member of the Tramways and Electricity Committee, and Councillor Harrison Jones, in proposing his election, remarked that his special knowledge had been of great service to that committee. Sir Charles Petrie, a former chairman of the committee, seconded the motion, which was supported by Alderman Harford, leader of the Irish party, who referred to Mr. Muspratt as a great chemist. His Lordship presided at the first meeting of the Tramways Committee for the new year, when Councillor Russell Taylor was re-elected chairman. Owing to his elevation to the position of chief magistrate, Councillor Muspratt has resigned his membership of the committee, but the members decided to keep the vacancy open for him to return in November next.

Mr. J. A. Barkley, general manager at Cape Town for the Cape Electric Tramways Company, resigned his position in November, 1915, owing to ill-health. **Mr. W. F. Long,** formerly municipal electric engineer of Cape Town, was appointed manager, and he began his duties at the beginning of February last. Shortly after his appointment labour troubles arose, which culminated in April with a strike on the part of a number of motormen and conductors. This continued for about four weeks, but during the whole of the time, with few exceptions, the system was kept running full time. Eventually many of the employees returned to work on the terms offered by the company. The directors remark, in their annual report, that there is every reason to hope that the company's relations with the employees are now established on a satisfactory basis, and they attribute the result to the energetic action and tact displayed by Mr. Long and the local directorate.

Mr. J. McMahon, general manager, Colombo Electric Tramways, died suddenly on September 14. At the funeral the hearse was drawn by employees of the tramways, and the inspectors carried the coffin to the grave. Mr. McMahon went to Ceylon in 1898 in connection with the construction of the Colombo Tramways, which were opened in January, 1899. Since then he had been in the service of the company, rising from the position of chief inspector to that of general manager. He was held in high esteem by the company and was beloved by his subordinates.

WITH THE FORCES.

Mr. P. A. M. Nash has been appointed a Deputy Director-General of Transportation at the War Office.

Mr. J. S. Pitkeathley, C.V.O., electrical engineer, Imperial Works, Delhi, has been gazetted as temporary major.

Lance-Corporal R. Munn, Scottish Rifles, a former employee on Glasgow Corporation Tramways, has gained the Military Medal.

Second Lieutenant C. P. Everson, son of the general manager of Plymouth Corporation Tramways, has been reported missing since he was wounded on October 2.

Lance-Corporal A. Smith, York and Lancaster Regiment, who has been awarded the Military Medal, before enlisting was a conductor on the Glasgow Corporation Tramways.

Mr. W. A. Cocking, engineer of the British Automobile Traction Company, Limited, has received a commission in the Royal Engineers, and has left London to undertake important work abroad.

Sergeant A. E. Irving, a Burnley Corporation tramway employee, who has been wounded, has won the D.C.M., and was also awarded the decoration of the third class of the Order of St. George of Russia.

Captain A. R. Smith, who has been awarded the Military Cross, was on the commercial staff of Edison Accumulators, Limited, at the outbreak of the war, and had previously held a commission in the old Volunteer Force.

Second Lieutenant A. R. Fyfe, R.E., son of Mr. Fyfe, works superintendent of Aberdeen Corporation Tramways, has sustained a gunshot wound on the right knee. Mr. Fyfe joined up from the engineering staff of the borough surveyor.

Staff-Sergeant F. Bryant, a motorman of the Torquay Tramways Company, who enlisted two years ago and is now in France, has in that period been promoted from private to his present rank. He is 25 years of age, and is serving in a Devonshire battalion.

Ex-Conductor W. J. Booth, of Wigan Corporation Tramways, who has been serving for some time in the army, has been recommended for commissioned rank. The distinction has been conferred, and 2nd Lieutenant Booth has received the congratulations of the tramways committee.

Corporal W. Scott, R.A.M.C., formerly a motorman on the Glasgow Corporation Tramways, has been decorated by the King of Serbia with the Serbian Silver Military Medal for conspicuous gallantry and services at the transport of the Serbian Army in the Dardanelles after the retreat from Serbia.

Sergeant T. Morgan, South Wales Borderers, a former conductor with Swansea Tramways Company, has gained the Military Medal for bravery in action. He has been in France for nearly two years, and on returning on a short period of leave he was presented with a gift by the Llandovery Reception Committee.

Regimental-Sergeant-Major J. R. Jones, London Battalion, Royal Welsh Fusiliers, has won the Military Cross for gallantry under shell fire on several occasions. He was formerly a motorman at West Ham, and his former comrades have presented him with a silver tea service. Mr. L. Slattery, the general manager, made the presentation.

Mr. H. P. Maybury, engineer and manager to the Road Board, recently visited France with Sir Eric Geddes, the Inspector-General of Transportation, and on Nov. 17 he was gazetted as a Deputy Director-General of Transportation and Principal Road Engineer, with the rank of temporary brigadier-general. The appointment is to date from October 20, and it is graded for purposes of pay as an assistant director of supplies and transport.

Lieutenant F. A. Robinson, late of the electrical department of the India-rubber and Telegraph Works Company, Limited, Silvertown, has gained the Military Cross for gallantry on two occasions while in charge of a "Tank." One machine was impeded by obstacles, and the officer and men were digging for fourteen hours under fire before they liberated it and returned. A shell disabled the other vehicle, but the crew entered a trench, where the lieutenant worked a machine gun.

Wounded Portsmouth Men.—An enthusiastic welcome was given to Sergeant J. Coates, R.E., Corporal Slater, and Privates A. Pack and E. Bartlett, at a meeting of the St. Mark's Tramway Brotherhood at St. Mark's Institute, Portsmouth, on November 12. The four ex-tramwaymen have been wounded in the war, the corporal having lost his right arm and been discharged. On behalf of the members, Corporal A. W. Saunders (inspector) expressed sympathy with the corporal, and wished him success in his return to civil life.

Sergeant T. Jones, 2nd Welsh Regiment, for many years a Cardiff Corporation Tramway employee, has gained the Military Medal and a bar for gallant conduct in continuing an assault and also for bringing in the wounded. The decorations were presented to him by the Lord Mayor at a meeting of the City Council, and on November 17 the gallant sergeant's former fellow employees entertained him at a smoking concert. Mr. A. Ellis, the general manager, presided, and on behalf of the employees presented Sergeant Jones with a silver epergne.

Honours for London County Council Tramway Employees.—At a recent meeting of the London County Council the chairman announced that the Military Medal had been awarded for bravery in the field to three tramway employees:—Rifleman J. A. Collier (clerical assistant, Finsbury office), London Regiment; Lance-Corporal G. Brickwood (ganger), Royal Engineers; and Private I. W. W. Powlesland (conductor, Holloway Depot), Grenadier Guards. He had conveyed the congratulations of the Council. Corporal J. Thompson (permanent way driller), East Kent Regiment, was awarded the Military Medal for gallant conduct and devotion to duty in the field in July; he regretted to say Corporal Thompson was killed in action on September 30 last. He had sent a letter to the relatives. At the same meeting the deaths of seventeen employees on active service were reported.

Sergeant S. Baron, King's Royal Rifles, killed in action, was an inspector on Darwen Corporation Tramways.

2nd Lieutenant T. F. Whimster, R.E., killed in action, was the head of the testing department in the Victoria Falls Electric Station, Germistown, near Johannesburg, before enlisting a year ago.

Corporal A. J. Pritchard, who was awarded the Military Medal for conspicuous bravery at Vimy Ridge, has been killed in action. He was formerly on the staff of Plymouth Corporation Electricity Committee.

Lieutenant T. Higgins, R.E., who died in France from wounds on November 15, received the Military Cross in September last. He was formerly an engineering assistant to the borough surveyor and tramway engineer of Leicester, and in October, 1914, he joined the engineering section of the Royal Naval Division. In April last he was given a commission in the Royal Engineers.

Corporal C. F. Bell, Royal Warwickshire Regiment, who was killed in action, joined the army in September, 1914, from the Birmingham Corporation Tramways. For many years he was with the Bristol Tramways and Carriage Company. In announcing his death to his parents at Bristol, his captain stated that he felt his loss enormously, and that the deceased was a favourite both with officers and men.

Digitized by Google

TRAMWAY CHAIRMEN FOR 1916-17.

Municipal Tramways Committees have now been constituted for the ensuing year, and we append a list of the chairmen and the vice-chairmen. An asterisk indicates that a new chairman or vice-chairman has been appointed.

Town.	Chairman.	Vice-chairman.
Aberdare	Coun. E. Stonelake ...	
Aberdeen	Coun. Robertson ...	
Accrington ...	Ald. Higham	Coun. Morley.
Ayr	Coun. J. R. Learmont	
Bacup	Ald. Sir H. Maden (Mayor)	Coun. J. H. Lord.
Barking	Coun. D. Gordon ...	
Batley	*Coun. F. W. H. Auty	*Coun. J. E. Oldroyd.
Belfast	Coun. J. McCaughey ...	Coun. J. Warwick.
Bexley	*Coun. G. Sheldon ...	
Birkenhead ...	Coun. H. Halsall ...	Coun. R. Frame.
Birmingham ...	Coun. H. Barrow ...	*Coun. Fryer.
Blackburn	Ald. W. Thompson ...	Coun. C. Higham.
Blackpool	Ald. Brodie	Coun. Holt (Deputy Mayor).
Bolton	Ald. J. Miles	Coun. P. Higson.
Bradford	Coun. E. Priestley ...	*Coun. I. F. Akeroyd.
Brighton	Coun. A. Martin ...	
Burnley	Coun. E. Heap	Coun. Irving
Burton-on-Trent	Ald. Rowland (Deputy Mayor)	*Ald. Medcalfe.
Bury	Ald. Collinge	Coun. Hargreaves.
Cardiff	Ald. Sir J. W. Courtis (Deputy Mayor)	Coun. A. J. A. Stone.
Chesterfield ...	Ald. E. Shentall ...	Coun. Woodhead.
Coventry	Coun. Pugh	Coun. Wale.
Croydon	Ald. Allen	Coun. Thomson.
Darlington ...	Ald. C. W. Starmer ...	
Dartford	Coun. R. Bennett ...	*Coun. W. H. D. King.
Derby	Coun. Dean	
Doncaster	*Coun. S. Balmforth ...	*Coun. H. M. Marshall.
Dover	Coun. Barwick	Coun. Norman.
Dundee	Coun. Johnston ...	
East Ham	Ald. M. Oakes	
Eccles	*Coun. Alexander ...	*Ald. Pearson.
Erith	Coun. G. C. Humphreys	
Farnworth ...	Coun. Steele	
Glasgow	Coun. M. W. Montgomery	Bailie T. Kelly.
Gloucester	Coun. J. O. Roberts ...	Coun. C. J. Ramstedt.
Halifax	Ald. C. F. Spencer ...	Ald. A. Fawcett.
Haslingden ...	Coun. Waddington ...	Coun. Haworth.
Heywood	Coun. J. Ashworth ...	Ald. Popple.
Huddersfield ...	Coun. E. H. Sellers ...	Coun. T. Canby.
Hull	Coun. W. Wheatley ...	Coun. W. Hakes.
Ilford	*Coun. O. Waters ...	*Coun. J. Lowe.
Keighley	Coun. A. Smith	
Kilmarnock ...	*Coun. Lorimer	
Lancaster	Coun. Wilkinson ...	
Leeds	Ald. R. A. Smithson ...	Ald. H. Brown.
Leicester	Ald. Flint	Ald. Banton
Leith	Judge Hall	
Leyton	Coun. F. M. Read ...	
Lincoln	Ald. W. S. White ...	
Liverpool	Coun. E. Russell-Taylor	Ald. F. Smith.
Lowestoft	Coun. Spashett (Mayor)	
Maidstone	Coun. Lyle	Coun. Green.
Manchester ...	Ald. J. Bowes	Ald. A. W. Chapman.
Middlesex C.C. ...	Ald. H. Burt	
Nelson	Coun. Cooke	
Newcastle on-Tyne	Coun. R. Mayne ...	Coun. A. M. Sutherland.
Newport	Coun. J. Moxon ...	Ald. F. Phillips.
Northampton ...	Coun. T. D. Lewis ...	Coun. W. Beale.
Nottingham ...	Coun. R. H. Swain ...	Ald. Radford.
Oldham	*Coun. Cheetham ...	*Coun. Stanbury.
Perth	Coun. Calderwood ...	
Plymouth	Ald. S. H. Phillips ...	Coun. J. Moon.
Pontypridd ...	Coun. M. L. Jones ...	
Portsmouth ...	Coun. J. Timpson ...	Ald. R. Payne.
Preston	Ald. J. Ormrod	Coun. T. Parkinson.
Rawtenstall ...	Ald. H. Coupe	Coun. J. W. Stansfield.
Reading	Ald. Field	
Rochdale	Ald. Taylor	
Rotherham ...	Ald. Winter	Coun. Reeves.
Salford	Ald. H. Linsley ...	Coun. W. H. Barrett.
Sheffield	Ald. Sir W. Clegg ...	*Ald. W. C. Fenton.
Shipley	Coun. H. Pitts ...	
Southampton ...	Ald. Dunsford ...	
Southend	*Coun. G. Radford ...	
Southport	Ald. Griffiths	Coun. Clayton.
Wallasey	Coun. F. E. Howse ...	Coun. Griffin.
Walsall	Ald. Cope	Ald. Williams.
Walthamstow ...	Coun. W. R. Clarke	
Warrington ...	Coun. Dr. Joseph ...	Coun. Wilkinson.
West Bromwich ...	Ald. Turley...	Coun. Garrett.
West Ham ...	Coun. Kensett	
West Hartlepool	Ald. Martin	Coun. Charlton.
Wigan	Ald. R. T. Fletcher ...	Coun. J. Walkden.
Wolverhampton	Ald. Sir C. T. Mander	
York	Ald. Meyer	Coun. Sessions.

TRAMWAY AND LIGHT RAILWAY NOTES.

BIRMINGHAM.

INADEQUATE SUPPLY OF ENERGY—SINGLE-DECK CARS AND TRAILERS' RESTRICTED LIGHTING.

The suspension of tramway traffic at Birmingham during the slack hours owing to the difficulties of the Electric Supply Department at the generating station is entailing great loss of traffic. Until the shortcomings are remedied the cars continue to be stopped at the less busy periods of the morning and afternoon, and there are also occasional stoppages at other periods. The Supply Department have not yet received any communication from the Ministry of Munitions in reply to their proposal to divert sufficient energy to the Tramway Department to enable it to run a modified service throughout the day. The present situation, in which the service is interrupted daily sometimes for several hours, is becoming intolerable. The Tramway Department is entirely dependent on the Electric Supply Department, and is powerless to improve matters. Following the recent experiment with a double-deck motor car and a single-deck trailer, Mr. Alfred Baker, the general manager at Birmingham, is now operating on the Washwood Road route two single-deck units. The new method is held to be more suitable for the 3 ft. 6 in. gauge, and it is reported to have been so successful that it will probably be extended to several busy routes. Expeditious loading and unloading is achieved owing to the absence of a top deck to the motor car. The general manager of the Birmingham Corporation Tramways has drawn the attention of the chief constable to the anomaly of the poor light allowed on the tramcars and that on motor cars and cycles. It is hoped to make an arrangement to allow a diffused light to be thrown on to the road from the headlights on the cars.

BRADFORD.

WOMEN CONDUCTORS AND THE SAND PEDAL—ADVANTAGE OF TICKET BOXES.

The Bradford Coroner held an inquiry on November 21 into the death of a woman who was injured in jumping off a tramcar while it was running back about 150 yards. The motorman had stopped to pick up a passenger in a loop, and on reaching the single line he saw a car coming. He therefore backed into the loop. After going about two car lengths the wheels began to slip, and he applied the hand brake, afterwards using the electric brake. He then called to the conductor for sand, and when he found the sand was not falling he went to the other platform and worked the pedal himself. As soon as the sand began to fall the car stopped. The woman conductor of the car stated that she called to the passengers to keep their seats, and at once put her foot on the lever, which she thought was working. The deceased followed the driver to the platform and jumped off. In reply to questions, the conductor said she was only shown once on the learners' car how to apply sand, but she knew what to do when the driver called for sand. The jury returned a verdict of accidental death. Mr. E. Priestley, chairman of the tramways committee, and Mr. C. J. Spencer, general manager, attended the inquest. As the result of placing used ticket boxes on the Bradford tramcars, the department recovers about 12 tons of tickets annually, and disposes of them at the rate of £2 per ton. The Corporation are now obtaining £9 per ton for old papers, account books, etc., which they formerly had to pay 30s. a ton to have taken away. The recovery of marketable constituents from the city's sewage is producing over £60,000 a year.

BLACKPOOL.

CONTRACT TICKETS.

In his annual report on the tramways undertaking, the general manager expresses regret that after consideration of lengthy reports and recommendations on the subject of annual contract tickets, no definite decision to revise the conditions was arrived at, the matter being deferred until after the war. In 1911 the number issued was 922, and the revenue £2,516. In 1915-16 the figures were 1,482 and £4,241.

CARDIFF.

CONDITION OF WOOD PAVING.

In view of the urgent need for repairs to the chief streets of Cardiff Sir John Courtis, chairman of the tramways committee, on November 2 asked for a declaration of the policy of the Public Works Committee. Alderman W. Roberts replied that to relay the roads

Digitized by Google

with timber at its present prices would be folly. Where they were able to do repairs without treating long lengths of road they were doing them. Alderman Sir John Courtis opposed the policy of waiting till the war was over. Although the price of timber was high, it was likely to remain high for some time after the war. Unless something was done they would soon have to start digging people and cars out of the roads.

CHESTERFIELD.

Cars Damaged by Fire at Depot.

As the result of a fire in the Chatsworth Road depot during the early morning of October 20, a double-deck car body was destroyed and six other cars were more or less damaged. The outbreak originated in the paint shop, which was burnt out, while a considerable portion of the remainder of the depot was damaged. Owing to the severance of the cables by the flames the cars had to be moved by men pushing them. The firemen prevented the flames attacking the adjoining motor omnibus depot. A claim for £3,000, the estimated amount of the damage caused by the fire, has been made on the insurance company by Chesterfield Tramways Committee. Two new car bodies and sets of electrical equipment have been ordered.

DONCASTER.

By-law Concerning Fares

The Board of Trade have provisionally approved the Doncaster Corporation's new tramway by-law as follows:—"Each passenger shall, either on demand or before leaving the car (whichever first happens), pay to the conductor or other duly authorised officer of the Corporation the fare legally obtainable for his journey, and shall accept a ticket therefor. Any person leaving a car shall be deemed to have completed his journey."

DOVER.

Higher Charge for Energy.

From April 1 next Dover Electricity Committee will increase the charge for energy supplied to the tramways by 20 per cent., in order to help to meet an anticipated deficit, more than half of which is due to additional interest on loans.

DUBLIN.

New Service Instituted.

On November 20 the Dublin United Tramways Company instituted a new service, the termini of which are Westland Row and Fairview. By the innovation the emergency line between O'Connell Street and Talbot Street *via* Upper Abbey Street and Gardiner Street is for the first time being generally utilised.

DUDLEY.

Fined for Giving a Starting Signal.

A passenger, 16 years of age, was summoned at Dudley for signalling a car at the terminus and was fined 40s., the presiding magistrate remarking that a serious accident might have happened. It appeared that the inspector on duty whistled for the car to start, whereupon the woman conductor rang the bell. Receiving an answering signal she released the back brake. At the time the motorman had taken a parcel to the parcels office, and when returning he heard the several signals. The car started, and he ran round to the front and got in, where he saw defendant holding the bell cord. The motorman brought the car to a standstill near the station. Mr. J. A. Shepherd, who appeared for the South Staffordshire Tramways Company, stated that an accident had happened under similar circumstances, resulting in loss of life and costing the company a sum exceeding four figures.

EDINBURGH.

Cable Car Accidents.

The remarkable immunity from accidents involving personal injuries that characterises the Edinburgh cable tramways was broken three times on November 9 and 11. On the first-mentioned date a car, proceeding eastwards along London Road, had reached the point where the cable is released and the vehicle makes its return journey from the end of Norton Place. Passengers had risen to leave the car, when suddenly it gathered speed and dashed along the rails leading on to the Portobello route. Here it ran into a Joppa car, which was stationary, with the result that occupants of both vehicles suffered badly. Sixteen persons received attention from doctors, two being taken to the infirmary. Two mishaps occurred on the second date. In one case a car, driven by a learner (accompanied by an inspector) struck the metal pawl under the cable slot at the east end of Princes Street, owing to the gripper not having been raised beyond the reach of the block. Six persons sustained cuts, shocks, or a shaking. The other accident was a collision between two cars at Pilrig terminus, when three persons were slightly injured.

HUDDERSFIELD.

Volunteer Motormen.

Mr. R. H. Wilkinson, general manager of the Corporation tramways, has obtained the sanction of the committee to train a number of men above military age to act as motormen early in the morning and evening. The men will be paid for their services. This step has become necessary owing to the number of motormen having been called up for military service.

HULL.

Women Drivers—Revision of Fares—Soldiers to Pay.

The Tramways Committee have authorised the management to introduce women drivers where advisable. It is estimated that for the year 1916-17 Hull tramways undertaking will show a deficit of £2,447. The chairman (Councillor W. Wheatley) has stated that the stages will have to be revised, and the penny fare for through rides from extreme points increased. While free rides will still be allowed to the wounded, other soldiers will be charged halfpenny fares. In order to effect economy and to relieve the strain on the staff, the services are to be curtailed by periods ranging from 15 to 40 minutes on weeknights and 58 minutes on Sundays.

ILFORD.

Car Traffic During Raids.

Ilford Council at their last meeting received a letter from the Commissioner of Police stating that any proposal to stop tramway traffic is not approved by the Field Marshal, and further that the competent military authority may feel it necessary to issue a specific order under the powers conferred by the Defence of the Realm Regulations. Subsequently the Council adopted a report by the Tramways Committee recommending that the service be continued at a reduced speed when warning is given of a raid, and in accordance with the regulations approved by the military authorities, who attach great importance to the point that the service should not be stopped. On the London County Council Tramways the warning will be given by means of a green light on the feeder pillars.

IPSWICH.

Opportunity to Abandon Unprofitable Sections.

The difficulty of obtaining rails and the need for repairing tracks give rise to the suggestion that there could not be a more favourable opportunity for doing away with any route that has proved hopelessly unprofitable and is not essential for the public convenience. In connection with the need for track renewals at Ipswich, Mr. F. Ayton, the general manager, has recommended that when the time arrives for relaying the Norwich Road line the question of abandoning the distant section running into Whitton should be considered, this having always proved a dead loss. Mr. Ayton makes a similar reference to Burrell Road and Bath Street, and he suggests that the rails of the three sections referred to should be taken up and used for repairs elsewhere.

LANARKSHIRE.

Wages Arbitration.

The Board of Trade have appointed Sheriff Mackenzie, K.C., as arbiter in the disagreement between the Lanarkshire Tramways Company and their employees. The matter for arbitration is a question of an advance of 6d. per day claimed by the conductors, and the levelling up of the recent advance to drivers of 9d. per day all round. In September last the drivers were granted an advance ranging from 5d. to 9d. per day.

LLANDUDNO.

Sunday Running and the Charge for Energy.

A sub-committee has been appointed by Llandudno Urban Council to consider an offer made by the Llandudno and Colwyn Bay Railway Company to pay a higher price for energy if the authority will waive their objection to Sunday traffic and rescind the by-law with reference thereto. The company have pointed out that it is only by the reciprocal measures suggested that the Council can escape a burden which is at present onerous, and may continue for some considerable time, as in the opinion of experts it is improbable that coal prices can return to normal for some years. The company's offer is made in reply to the Council's request that the agreement concerning the supply of energy should be varied, as under present conditions the Council is losing heavily. Unless they are given the opportunity of earning additional revenue the company state that they cannot respond to the request.

LONDON.

Traffic Impeded by Fog.

From an early hour on Monday evening, November 13, until past midnight the Metropolitan area was enshrouded in a fog more dense than has been experienced for a number of years. Railway and omnibus traffic was delayed, and in open spaces omnibuses and cabs had to be guided by policemen with lamps, or else by conductors of the former, for as soon as the vehicles were out of sight of the kerb the drivers lost their course. On tramway routes the rails, under the reflection of the headlights of motor vehicles, proved a guide to the latter, while tramcars accomplished their journeys with a little delay. For instance, a run that under normal conditions takes forty minutes required an extra twenty minutes. To achieve this result the motormen had to bring into use the banned headlight, throwing open the glass flap and in some cases freeing the lamp glass of the discolouring matter. On the Embankment motor cabs made their way only by running on the tramway route. Underground railways had a great accession of traffic. The crossing of the bridges was a difficult task for omnibuses, which were provided with an extra man on the front seat with an electric torch. In North London the omnibuses had to stop, and long lines of them were drawn up. Bristol also experienced a fog, which caused some of the omnibus services to be suspended.

Digitized by Google

LOWESTOFT.

EFFECT OF WAR ON TRAMWAY TRAFFIC.

An inquiry has been held at Lowestoft into an application by the Corporation for the issue of a Provisional Order to amend the Corporation Act so as to empower the Corporation to borrow temporarily for current expenses, and to empower them to borrow for the purposes of money previously borrowed by them, etc. The town clerk stated that the war had caused a complete loss of the visiting seasons, and almost a complete loss of fishing seasons, and, owing to the calling in of mortgages, and the increased rates of interest, the Corporation had had to call upon their bankers for considerable advances. The borough accountant observed that the Council had generally an overdraft with regard to the tramways, but if the war had not broken out there would have been a profit for the first time. The working expenses for 1915 were £7,053, and for the previous year £7,036. The loss in 1915 was £2,670, and the loss for last year was estimated at £3,500.

MANCHESTER.

THE TRAFFIC PROBLEM.

The various aspects of the congested traffic problem in Manchester were described to a Manchester audience by Mr. J. M. McElroy, general manager of the Corporation Tramways, at a lantern lecture on November 14, the subject being "The Manchester Tramways Service." The greatest volume of traffic came to the centre of the city by Oxford Road and London Road, and the question was how to relieve the congestion thereby created. He deprecated the idea of an underground railway chiefly because of its costliness. As to motor omnibuses, four times as many would be required in Rochdale Road, for example, in the busiest hours, as the present number of tramcars. The Tramways Committee were considering a proposal for the construction of parallel routes to those in Oxford Road and London Road, and terminals in Stevenson Square, Marsden Square, Cannon Street, Albert Square, and Peter Street. By this system a passenger would be able to transfer from one terminal to another and continue his penny stage. Adverting to the controversy on the question of the Piccadilly site, he suggested that the best solution of the problem would be to provide an open space, erect a public building, and allow the remainder to be used as a tramway centre. The tramway traffic in the centre of the city might be partially relieved if the cars were to turn round at Piccadilly instead of going down Market Street. The lecturer also observed that Manchester led the way in England in giving the longest penny ride, the average distance being nearly three miles.

NORWICH.

LINKING-UP POWER STATIONS.

In response to the Board of Trade's suggestion the Norwich Tramways Company have linked up their generating stations with that of the Corporation. Mr. F. W. Ketley, the manager and engineer of the company, in discussing the position of his technical staff with the local Military Tribunal, stated that by taking the step referred to the company were in a position to give the city a certain amount of energy, but the Corporation were not able to reciprocate because of the difference in tension. This could not be altered without an expenditure of about £2,000 for a rotary converter and other plant.

PLYMOUTH.

THE PENNY UNIVERSAL FARE.

The general manager has presented to the Tramways Committee the traffic returns for the period from October 23 to November 11, commencing with the beginning of the through running to Devonport and the introduction of universl penny fares. It showed that during the three weeks the cars carried 1,264,978 passengers, and earned £5,371, the mileage travelled being 98,670 miles, and the average receipts 13·06d. per car mile. In the corresponding period of last year, when the tramways were worked as separate sections, and the old fares were in vogue, the number of passengers was 1,011,525, and the receipts £4,385. Mr. S. H. Phillips, chairman of the committee, considers that the innovations have been highly successful. The employees had been worked up to the limit it was thought desirable they should work, and the undertaking lacked sufficient trained drivers.

PORTSMOUTH.

LOSS ENTAILED BY DECREASED SPEED.

When an order was issued at Portsmouth for the speed of all vehicles to be reduced after sunset to eight miles an hour, the Tramways Committee, as an additional precaution, decided to reduce the average speed of the cars to 6·45 miles per hour. Consequently more cars had to be placed in service, but as there has not been a compensating addition to the revenue, it is estimated that at the end of the financial year on March 31 next there will be a loss of £4,176 to set against the amount voted for the relief of the rates.

RAWTENSTALL.

ARBITRATION ON FARES AND STAGES.

As the arbitrator appointed by the Board of Trade, Mr. J. M. McElroy, general manager, Manchester Corporation Tramways, on November 20 and 29, heard evidence in the dispute between Bacup and Rawtenstall corporations on the proposal of Rawtenstall to alter the fares and stages. The latter Council propose to increase the number of stages between Bacup and Waterfoot, so that the fares would be 1½d. from Bacup to Stacksteads and 2½d. from Bacup to Waterfoot, instead of 1d. and 2d. respectively. The contention of Rawtenstall was that Bacup passengers were getting more than their due proportion as the stages exist at present, giving them undue advantage over passengers using the length between Waterfoot and Rawtenstall. Bacup Corporation contended that the increases proposed were in Bacup borough, and held that the existing fares of 1d. to Stacksteads and 2d. to Waterfoot should not be altered.

WALSALL.

CONTRIBUTORY NEGLIGENCE IN TROLLEY REVERSING.

A Walsall car conductor claimed £50 damages in the County Court from a motor cab proprietor for personal injuries and damage to clothing sustained through being struck in the back by a cab while he was standing in the gutter to reverse the trolley-arm with a pole. The defence was that it was "plaintiff's fault if he was sauntering across the road without taking care." In dismissing the action the Judge held that there had been no negligence on the part of the driver. Even had there been negligence, he should hold that there was contributory negligence on the part of plaintiff.

YORK.

RECOGNITION OF INSPECTORS' EXTRA WORK.

York Corporation have granted the tramway inspectors an increase of 5s. per week in their wages. Councillor W. H. Sessions, in moving this payment, mentioned that the inspectors had deferred the application for a year at the committee's request, and in addition they had had their work increased by the training of 157 new drivers and conductors since the war began. As to the point previously raised about an excessive number of inspectors, it had been ascertained that whereas in other towns of corresponding size there was one inspector to about eight conductors, York had only one inspector to ten conductors. In commending the work of Mr. J. W. Hame, the manager and engineer, the chairman of the committee said he had had a great deal to contend with. A new branch had been opened to Hull Road, and a motor omnibus service inaugurated in addition to the old service, to staff which they had to train new employees. Of 105 drivers and conductors at present employed only 16 were old employees.

YORKSHIRE MANAGERS' ASSOCIATION.

At a meeting of this Association, held in Leeds on November 16, there were present Messrs. J. B. Hamilton (Leeds), W. J. McCombe (Hull), R. H. Wilkinson (Huddersfield), E. E. Nicoll (Barnsley), W. Browne (Mexborough), J. V. Moinett (Scarborough), W. McGibbon (Ossett), J. W. Hame (York), E. A. Paris (Liversedge), H. L. White (Grimsby), J. Galloway (Halifax), J. F. Caird (Halifax), J. Parkinson (Dewsbury), C. J. Jewell (Wakefield), and H. England (Wakefield). The members lunched at the Queen's Hotel, and afterwards adjourned to the tramway offices. The Secretary had received letters of apology from Messrs. Fearnley, Spencer, Cross, and Acland. The Chairman (Mr. J. B. Hamilton) initiated a discussion on the requirements of the "competent military authority" respecting the lighting of cars, and after a very full discussion, it was resolved that the Secretary should draft a letter to be sent to the "competent military authority," and also ask that a deputation from the association should be received. Among other questions discussed were advertisements on cars; depletion of staffs owing to the requirements of the military authorities, rates of pay, leaving certificates under the Munitions Act, special cars for munition workers, etc. In connection with the discussion which occurred on the rates of pay prevailing on the various tramways in the area covered by the association, it was suggested that each member should forward to the secretary a statement of the rates of pay, together with all supplementary concessions such as pay for overtime, free riding, uniforms, war bonus, and any other concession given to employees. Mr. Hamilton kindly provided tea, and on the motion of Mr. Wilkinson, seconded by Mr. McCombe, he was accorded a hearty vote of thanks.

FOR HIGH-CLASS
CONDENSING PLANT
WRITE TO
THE MIRRLEES WATSON CO., LTD.,
SCOTLAND STREET, GLASGOW.

Digitized by Google

PATENT LIST.

Abstracted for "The Tramway and Railway World" from the Official Journal of Patents.

*** If the inventions have been communicated the names of the communicators are given below in italics.

APPLICATIONS FOR LETTERS PATENT.

Differential gear for motor vehicles (15,600)—T. H. Cleathero and F. Spurr.
Brake apparatus for motor road vehicles (15,735)—H. Dearden.
Motor vehicles (15,604)—H. J. Dew.
Tires for wheels of railway and road vehicles for increasing adhesion and forming semi-resilient tread (15,777)—C. R. Enock.
Device for supporting and uniting rails (15,577)—R. Fryer.
Points and switches for railways and tramways (15,690)—A. Morgan.
Apparatus for operating tramway points (15,487)—C. E. Whyatt.
Electric rail and road vehicles (15,448)—J. M. & J. S. Wilson.
Driving mechanism for heavy motor vehicles (15,665)—W. G. Wilson.
Combined differential gear and engine crank shaft for motor vehicles (15,912)—S. E. Alley.
Back axle and driving gear combination (16,117)—S. E. Alley.
Motor vehicles (16,019, 16,020, 16,021, 16,022, 16,080)—Daimler Company, H. J. Balcombe, E. Boughton, and F. W. Lanchester.
Anchorage for tramway rails (15,829)—J. Gordon.
Brake adjusters (16,052)—A. E. W. Maseyk.
Means for starting engines of petrol-electric vehicles (16,032)—J. Sankey and Sons and W. A. Stevens.
Gear and brake control for motor cars (16,092)—W. G. Terrett.
Longitudinal sleepers for tracks (15,835)—O. Valeri.
Metal railway sleepers and chairs (16,426)—G. J. Fisher.
Attachment for trolley poles of electric cars (16,461)—W. James.
Motor vehicle transmission and steering (16,438)—G. W. Mascord.
Direction indicators for vehicles (16,467)—W. G. Nichols.
Live axles of motor cars (16,373)—Soc. C. Blum et Cie.
Trolley wheel guide for tramcars (16,839)—G. Askey.
Motor road vehicles (16,630)—R. Booth.
Method of supplying power to electrically propelled trains without continuous conductors (16,652)—A. Burns.
Motor vehicles (16,713)—G. M. Caulfeild and H. F. St. G. Caulfeild.
Railway coach and train propulsion (16,715).—Daimler Company and F. W. Lanchester.
Tipping bodies for trucks, motor wagons, etc. (16,932)—A. Frost and W. H. Scottorn.
Device for checking and registering number of passengers and amount of fares earned on tramcars, etc. (16,769)—W. S. Laurie.
Motor vehicle bodies (16,936)—G. Maddox.
Overhead trolleys for electric traction (16,611)—C. and R. Moore.
Tram rails (16,696)—M. E. Morgan and W. A. Morgan.
Motor omnibus seat (16,692)—C. T. Nichols.
Brakes for electric tramcars (16,749)—W. H. Turner and R. H. Wilkinson.

SPECIFICATIONS PUBLISHED.

1915.

Anti-vibration devices for use on motor vehicles (12,348)—Brophy.
Vehicles (16,721)—British Thomson-Houston Company (*General Electric Company*).
Three-point suspension for the power and speed units of motor vehicles (14,254)—Guy Motors, Limited, and Guy.
Construction of bodies for motor vehicles (14,645)—Hibbert.
Self-propelled vehicles (16,732)—Watney.
Means of adapting a light motor chassis for heavy loads (17,183)—Murphy and McGee.
Wheels and tires of motor vehicles (14,948)—Swain.
Brake mechanism (15,086)—Sloper.
Self-propelled vehicles (15,980)—Watney.
Locomotives, railway motor cars, etc. (16,030)—Baguley Cars, Limited, and Baguley.
Motor tractors (16,101)—Omnitractor Syndicate, Limited, and Smith.
Trimming of motor vehicle bodies (17,885)—Maudslay.

1916.

In the following list the numbers in italics are those that the specifications will finally bear and under which they will be indexed and abridged before acceptance and finally printed. The application numbers should, however, still be used for correspondence purposes.

Fluid pressure braking apparatus (589—*100,881*)—Westinghouse Brake Company.
Joint covers or protectors applicable to steering joints for motor vehicles (2,083—*101,576*)—S. Joseph.
Steering and fore-carriage mechanism for motor vehicles (5,146—*101,590*)—F. J. Bretherton, P. W. Robson, and Clayton and Shuttleworth, Limited.
Protector for motor vehicle tires (10,813—*101,616*)—J. W. Rooney.
Transmission brake bands for motor vehicles (6,868—*101,672*)—T. L. White.
Signalling device for motor cars and other road vehicles (4,160—*101,756*)—C. W. Bunn.
Rail joints (8,295—*101,846*)—G. Harris.
Combined variable-speed and clutch mechanism for motor driven vehicles (771—*101,896*)—G. J. Dallison.
Point or switch operating mechanism (1,266—*101,902*)—A. Tanguay, D. Quintal, and A. Robert.
Driving mechanism for motor vehicles (3,813—*101,917*)—W. O. Kuhn.
Multiple control apparatus for electric railways (10,099—*101,023*)—Akt.-Ges. Brown, Boveri et Cie.

THE TRAMWAY AND LIGHT RAILWAY ASSOCIATION OFFICES.

The Government having taken over Caxton House, Westminster, the Tramway and Light Railway Association have secured offices in Sanctuary House, Tothill Street, Westminster, nearly opposite Caxton House. The telephone number will remain as before, viz., Victoria 2110.

Colonial and Foreign Tramways Traffic Returns.

NAME OF COMPANY.	1915. WEEKS ENDED. Oct. 30	Nov. 6	Nov. 13	Nov. 20	Nov. 27	1916. WEEKS ENDED. Oct. 28	Nov. 4	Nov. 11	Nov. 18	Nov. 25	AGGREGATE. Wks.	1916.	Increase or Decrease.
	£	£	£	£	£	£	£	£	£	£		£	£
Anglo-Argentine	48,033	54,194	53,091	51,294	52,407	52,134	53,120	52,460	53,617	52,241	48	2,401,981	+ 4,896
Calcutta ... ... Rs.	53,883	59,988	60,812	59,583	69,691	62,764	68,243	70,198	73,292	71,206	48	3,203,718	+171,557
Hong Kong ... ... $	...	...	...	...	...	...	...	...	...	...	46	623,225	+149,607
Madras ... ... Rs.	31,293	(2 weeks)	29,441	(2 weeks)	...	31,819	(2 weeks)	31,596	(2 weeks)	...	45	665,506	+ 47,182
Pernambuco ... ... $	2,968	3,240	3,189	3,283	3,098	3,166	3,453	3,504	3,555	3,400	47½	144,447	— 716

Companies Issuing Monthly Statements.

	1915. June	July.	Aug.	Sept.	Oct.	Nov.	1916. June.	July.	Aug.	Sept.	Oct.	Nov.	Wks.	AGGREGATE. 1916.	+ or -
	£	£	£	£	£	£	£	£	£	£	£	£		£	£
Ballarat & Bendigo ...	2,692	2,677	2,860	3,075	3,401	...	2,793	2,704	2,791	2,850	3,390	...	28	22,110	+ 600
Brazilian Traction Mlrs	6591940	6703000	6576000	6494000	6793000	...	6961000	7195000	7184000	7037000	...	...	44	68,286,000	+4,035,890
Brisbane	29,880	31,150	35,064	30,360	31,880	31,120	31,390	32,880	37,900	32,530	32,760	26,740	48	357,160	+ 10,086
British Columbia $	498,093	510,723	507,126	517,022	538,826	...	529,078	538,293	550,293	540,440	573,544	...	18	2,202,570	+ 128,873
Buenos Ayres Lacroze	40,421	41,460	41,468	39,355	43,516	46,033	36,213	38,439	36,431	37,075	39,670	42,603	22	207,402	— 16,614
Burma	...	...	25,159	22,163	...	...	...	...	24,412	23,749	...	...	9	48,161	— 839
Cape Town	...	...	...	...	...	...	12,920	13,357	13,394	...	14,238	...	—	—	—
Carthagena & Herrerias	2,059	2,157	1,523	1,252	2,169	2,090	3,512	2,371	2,081	1,779	2,539	2,252	48	27,391	+ 7,552
Cordoba	14,059	14,375	14,159	13,210	13,441	...	14,129	14,263	13,852	13,389	13,533	...	31	98,087	+ 740
East India	2,194	2,231	2,266	2,054	2,069	2,065	2,283	2,220	2,522	2,523	2,080	1,942	17	9,067	+ 613
Kalgoorlie	2,707	2,775	3,165	2,997	...	...	2,500	2,521	3,021	2,782	...	...	39	23,267	— 1,849
La Plata	3,875	4,054	4,164	3,894	4,405	4,564	3,735	3,909	3,792	3,994	4,435	4,342	48	46,399	— 429
Lima	...	...	32,004	30,530	32,211	...	...	...	33,395	33,348	33,292	...	44	337,350	+ 16,858
Manaos ... Rs.	...	...	...	...	...	...	144,913	152,380	147,774	141,286	...	...	—	—	—
Manila	...	23,750	...	...	...	...	...	...	33,700	...	...	...	31	887,739	+ 39,986
Melbourne	...	...	...	...	...	...	69,275	...	...	...	...	...	—	—	—
Mexico ... $	...	...	...	...	...	...	...	...	...	...	...	...	—	—	—
Monte Video	24,266	25,161	26,494	25,070	27,167	28,407	25,300	25,220	26,044	26 711	...	28,404	4	28,404	— 3
Peruvian ... $	759,374	724,838	819,039	755,280	806,900	751,720	929,500	835,430	895,900	911,910	945,590	925,820	22	4,514,650	+ 656,873
Port Elizabeth ...	...	...	...	...	...	...	2,809	3,166	2,863	...	3,131	...	—	—	—
Rangoon	4,997	4,629	4,510	4,445	4,886	5,028	4,205	4,357	4,253	4,137	5,043	5,033	48	51,404	— 1,839
Toronto ... $	787,558	773,013	762,627	804,902	792,001	...	884,491	867,789	889,241	913,535	907,460	...	44	8,913,224	+ 970,618
Winnipeg ... $	255,549	248,022	251,189	261,982	286,146	...	254,686	242,688	249,795	267,497	278,817	...	44	2,740,271	— 59,324

(Continued on page 432)

Digitized by Google

TRAFFIC RETURNS—*continued.*

Tramways and Omnibus Undertakings in the United Kingdom.

NAME OF COMPANY OR CORPORATION.	1915. WEEKS ENDED.					1916. WEEKS ENDED.					AGGREGATE.		
	Oct. 30	Nov. 6	Nov. 13	Nov. 20	Nov. 27	Oct. 28	Nov. 4	Nov. 11	Nov. 18	Nov. 25	Wks.	1916.	Increase or Decrease.
	£	£	£	£	£	£	£	£	£	£		£	£
Aberdare U.D. Council	373	346	402	339	...	403	426	450	363	...	34	13.518	+ 1.543
Aberdeen Corporation	1,619	1,838	1,861	1,606	1,573	1,771	1,841	1,958	1,817	1,770	29	48,675	+ 2,891
Accrington Corporation	526	511	504	504	...	560	540	552	550	...	33	19.376	+ 794
Ayr Corporation	245	239	251	229	224	278	272	271	265	262	—	12,976	+ 1.148
Bath Electric	*	...	...	...	...	...	...	...	...	...	—	—	—
Birkenhead Corporation	1,314	1,317	1,362	1,286	1,232	1,547	1,594	1,546	1,444	1,514	34½	53,405	+ 5.664
Birmingham Corporation	15,023	15,212	15,355	15,229	14,752	15,133	14,377	14,462	13,047	12,675	34	550,554	+ 60.733
Birmingham Corp. Motor Omnibuses	815	806	804	798	768	962	1,014	1,044	1,108	1,069	34	34,548	+ 4,939
Blackburn Corporation	1,087	1,099	1,080	1,065	1,004	1,158	1,086	1,109	1,139	1,021	34½	44,120	— 981
Blackpool and Fleetwood	356	425	291	284	247	379	435	345	297	284	47	42,411	+ 4,869
Blackpool Corporation	*	...	...	...	...	...	...	...	...	...	—	—	—
Bolton Corporation	2,581	2,600	2,583	2,461	2,402	2,737	2,884	2,853	2,661	2,702	35	100,982	+ 7.321
Bournemouth Corporation	1,771	1,728	1,733	1,559	1,587	2,049	2,047	2,082	1,832	1,891	35	83.146	+ 6,754
Bradford Corporation	5,914	6,482	6,020	5,856	5,739	6,358	6,392	6,223	6,263	5,990	34	235.805	+ 8.490
Brighton Corporation	940	951	918	844	811	1,133	1,097	1,127	971	1,015	34½	45.358	+ 4,965
Bristol	8,910	9,651	9,718	9,596	9,634	9,811	10,480	10,124	9,762	9,351	47	474.395	+ 23.826
Burnley Corporation	1,560	1,492	1,488	1,425	1,404	1,595	1,696	1,574	1,535	1,523	35	60.058	+ 3,503
Burton-on-Trent Corporation	262	269	281	258	244	285	287	272	263	263	34	9,589	— 474
Bury Corporation	1,291	1,252	1,237	1,146	1,097	1,274	1,343	1,313	1,220	1,223	34½	50,112	+ 2,450
Cardiff Corporation	2,490	2,452	2,539	2,392	2,388	3,004	3,018	2,995	2,858	2,871	34	104.246	+ 10.516
Chatham and District	1,061	1,082	1,070	988	970	1,212	1,234	1,179	1,191	1,049	47	58.061	+ 3,181
Chesterfield Corporation	258	248	260	256	249	237	242	256	260	232	34	9,585	+ 278
Colne Corporation	278	238	234	219	210	250	258	245	249	240	—	...	--
Cork Electric	486	461	473	442	425	493	499	493	514	457	47	24,092	+ 453
Croydon Corporation	*	...	...	...	...	...	...	...	...	...	—	—	—
Derby Corporation	975	979	1,055	979	917	1,113	1,160	1,134	1,010	1,008	34½	39,455	+ 2,919
Dover Corporation	*	...	...	...	...	...	...	...	...	...	—	—	—
Dublin and Lucan	135	126	115	103	99	151	130	126	130	110	21	3,566	+ 291
Dublin United	5,833	5,784	5,880	5,513	5,351	6,164	6,250	6,040	6,162	5,830	47	286,584	+ 715
Dundee City	1,321	1,354	1,388	1,267	1,231	1,354	1,369	1,363	1,355	1,326	27½	38,582	+ 936
East Ham Corporation	1,246	1,200	1,222	1,225	1,218	1,251	1,284	1,222	1,192	1,120	34½	45.215	+ 153
Exeter Corporation	340	333	347	304	292	377	388	389	372	388	34	14,061	+ 755
Gearless Motor 'Buses	*	...	...	...	...	...	...	...	...	...	—	—	—
Glasgow Corporation	21,866	21,877	21,795	19,687	20,261	23,936	23,785	23,694	23,463	23,246	25½	599,699	+ 46,434
Glasgow Subway	1,182	1,156	1,192	1,300	1,242	1,219	1,255	1,220	1,236	1,251	47	54,139	+ 4,331
Glossop (Urban Elec. Supply Co.)	127	122	124	122	119	140	145	139	134	134	48	6,688	+ 667
Halifax Corporation	2,007	1,935	2,033	1,885	1,857	2,097	1,875	2,021	1,980	1,774	33½	77,055	+ 955
Halifax Corp. Motor Omnibuses	44	40	42	40	39	49	47	49	47	44	33½	1,696	— 19
Hastings and District	739	761	790	706	674	836	808	829	771	728	47	49,259	+ 3,175
Huddersfield Corporation	2,450	2,440	2,512	2,391	2,357	2 661	2,722	2,667	2,575	2,512	34	98,147	+ 8,441
Hull Corporation	2,982	3,139	3,104	3,094	3,088	3,119	3,218	3,244	3,151	3,071	34	107,448	+ 1,873
Ilford U.D. Council	582	582	585	574	...	625	651	640	587	...	33	23.042	+ 1,246
Ilkeston Corporation	*	...	...	...	...	...	...	...	...	...	—	—	—
Ipswich Corporation	493	474	480	446	434	436	437	419	416	395	34	18,150	— 1,096
Isle of Thanet	246	250	248	219	211	258	286	279	245	235	8	2,269	+ 23
Kilmarnock Corporation	163	153	156	147	143	177	169	172	168	171	27½	4,934	+ 159
Lanarkshire	2.001	2,144	2,019	1,904	1,803	2,448	2,312	2,267	2,340	2,167	47	109,002	+ 15.808
Lancashire United	1,617	1,613	1,596	1,537	1,501	1,869	1,774	1,815	1,803	1,667	47	86,392	+ 4,876
Leeds City	8,314	8,736	8,748	8,437	8,206	9,585	9,641	9,417	9,418	9,146	35	339,700	+ 30,915
Leicester Corporation	*	...	...	...	...	...	...	...	...	...	—	—	—
Leith Corporation	749	738	728	670	661	842	864	846	834	811	27½	24.707	+ 3,117
Leyton U.D. Council	1,506	1,409	1,471	1,458	1,426	1,449	1,520	1,503	1,512	1,351	34	57,297	+ 1,053
Liverpool Corporation	12.963	12.873	13,052	12,505	12,383	14,265	14,321	14,230	13,983	13,676	47½	666,257	+ 37,828
Llandudno and Colwyn Bay	215	213	190	187	171	254	221	221	213	199	51½	18.610	+ 1,221
London County Council	44,334	43,741	44,703	44,493	...	47,016	47,482	46,549	47,356	...	32½	1,596,652	+ 152,038
London General Omnibus	*	...	...	...	...	...	...	...	...	...	—	—	—
London United	*	...	...	...	...	...	...	...	...	...	—	—	—
Lowestoft Corporation	*	...	...	...	...	...	...	...	...	...	—	—	—
Maidstone Corporation	182	189	190	179	168	197	196	197	199	175	34	7,610	— 95
Manchester Corporation	17,621	17,151	17,455	16,342	16,006	18,678	18,641	18,514	18,108	17,928	32	650,074	+ 36,389
Metropolitan Electric Tramways	*	...	...	...	...	...	...	...	...	...	—	—	—
National Steam Car	*	...	...	...	...	...	...	...	...	...	—	—	—
Nelson Corporation	194	172	187	...	...	214	198	185	...	...	32½	6.993	+ 538
Newcastle-on-Tyne Corporation	6,388	6,375	5.799	5,596	5,597	6,985	6.998	6,918	6,772	6,572	34	230.739	+ 13.887
Newport (Mon.) Corporation	783	773	814	752	735	951	1,057	959	929	970	34	33,151	+ 4,031
New St. Helens and District	897	902	901	882	846	1,085	1,056	1,049	1,039	922	21	24,408	+ 1,914
Northampton Corporation	651	635	664	629	592	714	735	739	724	720	34	24,595	— 768
Nottingham Corporation	3,561	3,478	3,635	3,559	3,433	3,939	3,859	3,904	3,923	3,608	34	134,804	+ 6,270
Oldham Corporation	2,250	2,148	2,123	2,006	1,928	2,214	2,347	2,294	2,108	2,226	35	87,683	+ 5,197
Portsmouth Corporation	2,054	2,126	2,066	1,960	1,908	2,464	2,404	..	2,144	2,163	—	—	—
Preston Corporation	909	941	934	927	906	1,137	1,130	1,132	1,106	1,067	33½	37,926	+ 4,850
Provincial	1,996	2,036	2,018	1,945	1,877	2,134	2,046	1,986	1,927	1,866	8	16.864	+ 325
Reading Corporation	757	723	759	714	679	859	904	850	838	801	33½	29.604	+ 2,467
Rhondda Tramways	1,170	1,185	1,179	1,186	1.109	1,384	1,326	1,273	1,301	1,202	47	60.650	+ 5.293
Rochdale Corporation	1,586	1,573	1,582	1,472	1,411	1,611	1,655	1,624	1,521	1,509	34½	62.180	+ 2,458
Rotherham Corporation	1,274	1,196	1,174	1,140	1,138	1,588	1,629	1,654	1,546	1,600	34½	54.569	+ 13.817
Salford Corporation	5.051	4,928	4,919	4,656	4,586	5,231	5,401	5,370	5,056	5,165	33½	191.088	+ 9,309
Sheffield Corporation	9,008	9,275	9,299	9,086	8,936	10,489	10,588	10,849	10,353	10,585	35½	371,844	+ 56.898
Southampton Corporation	1,426	1,451	1,438	1,426	1,277	1,623	1,771	1,676	1,666	1,512	33½	57.554	+ 5.605
Southend-on-Sea Corporation	614	607	561	576	545	685	699	691	693	602	34	33,602	+ 3,945
South Metropolitan Tramways	*	...	...	...	...	...	...	...	...	...	—	—	—
South Shields Corporation	761	751	735	700	702	815	821	790	828	805	34½	29.103	+ 1,527
Sunderland Corporation	1,428	1,469	1,424	1,379	1,381	1,625	1,631	1,631	1,555	1,628	34	56,921	+ 4,668
Sunderland District	573	544	536	510	553	698	575	644	646	625	4	2.561	+ 418
Swindon Corporation	172	179	170	173	165	200	199	196	207	192	33½	7.050	+ 290
Torquay Tramways	427	419	398	386	364	520	498	454	480	434	47	28 217	+ 2,367
Tramways (M.E.T.) Omnibus Co.	*	...	...	...	...	...	...	...	...	...	—	—	—
Tyneside Tramways and Tramroads	539	540	521	495	494	611	582	589	617	525	21	14.172	+ 1,171
Wallasey Corporation	1,093	1,081	1,123	1,060	1,026	1,221	1,222	1,197	1,197	1,148	30½	48.295	+ 3,114
Walsall Corporation	767	762	782	769	730	822	814	808	807	747	48	38,775	+ 3,442
Walthamstow U.D. Council	708	703	721	718	696	979	992	949	933	912	34	38.308	+ 6.653
Warrington Corporation	448	467	462	465	438	509	525	522	513	491	34	17.413	+ 1.469
West Ham Corporation	2,881	2,761	2.870	2,831	2.778	3,091	3,160	3,027	2,997	2,781	33½	110.645	+ 4.734
Wigan Corporation	1,682	1,509	1,540	1.497	1,347	1,720	1,701	1,723	1,701	1,641	34	57,730	+ 5,073
Wolverhampton Corporation	*	...	...	...	...	...	...	...	...	...	—	—	--
Yorkshire (West Riding)	1,398	1,715	1,502	1,420	1,419	1,672	1,801	1,886	1,569	1,675	48	84,514	+ 8.752

*TRAFFIC RETURNS SUSPENDED.

Owing to the European war, the Government have taken over the railways of Great Britain as from August 4, 1914, and the issue of traffic returns has been suspended. Consequently the traffic returns of the electric railways which usually appear on this page cannot be given.

The Publication of the Traffic Returns of the Tramways marked with an asterisk in the above table have also been suspended during the war.

TRAMWAY DIRECTORIES.

A useful feature of this issue is the directory of electric railways and electric tramways which will be found among the advertising pages. This directory contains the names of the chief officials and the principal particulars relating to each undertaking.

THE TRAMWAY AND RAILWAY WORLD

can be obtained, post free, at the following rates:

For the United Kingdom—
Twenty-five Shillings per annum (including 64 issues, of which 12 are large illustrated numbers).

For Places Abroad—
Thirty Shillings per annum.

Tel. No: **2948** Gerrard.
Telegraphic Address: **"Tramigro," London.**

Amberley House, Norfolk St., W.C.

Digitized by Google

DAIMLER COMMERCIAL VEHICLES are not an expense—they are a Profitable Investment.

THERE are many Owners of Commercial Motor Vehicles to-day who view with increasing alarm the expense sheets and maintenance costs of their motor service. THEY ARE NOT DAIMLER OWNERS. The Owner of a Daimler is reaping his profits from a good investment. True, he parted with a little more capital in his original outlay, but gilt-edged securities can never be bought at very low prices, even in war time.

It is only after a period of hard work and continual service that quality begins to tell, but then the difference is very striking. After two or three years the owner of the "cheap" vehicle is struggling for a solution to his abnormal expenses, with a repair bill that will not be suppressed, and a heavy capital depreciation that must be faced.

But the Daimler is then in its prime. The Sleeve-Valve Engine is developing as much or even more power than when first delivered. The chassis is sound and tight, the repair bill is a trifle, overhaul is not essential and breakdowns are unknown. Depreciation is a known quantity, easily provided for out of the profits arising from good service.

Write for the book "Actual Experience."

Daimler

The Daimler Company
Coventry

Digitized by Google

BRITISH **NAPIER** BUILT

BUSINESS VEHICLES

Railway Delays!

These are **Acute** now. Be Independent by Purchasing a

3½ TON NAPIER BUSINESS VEHICLE.

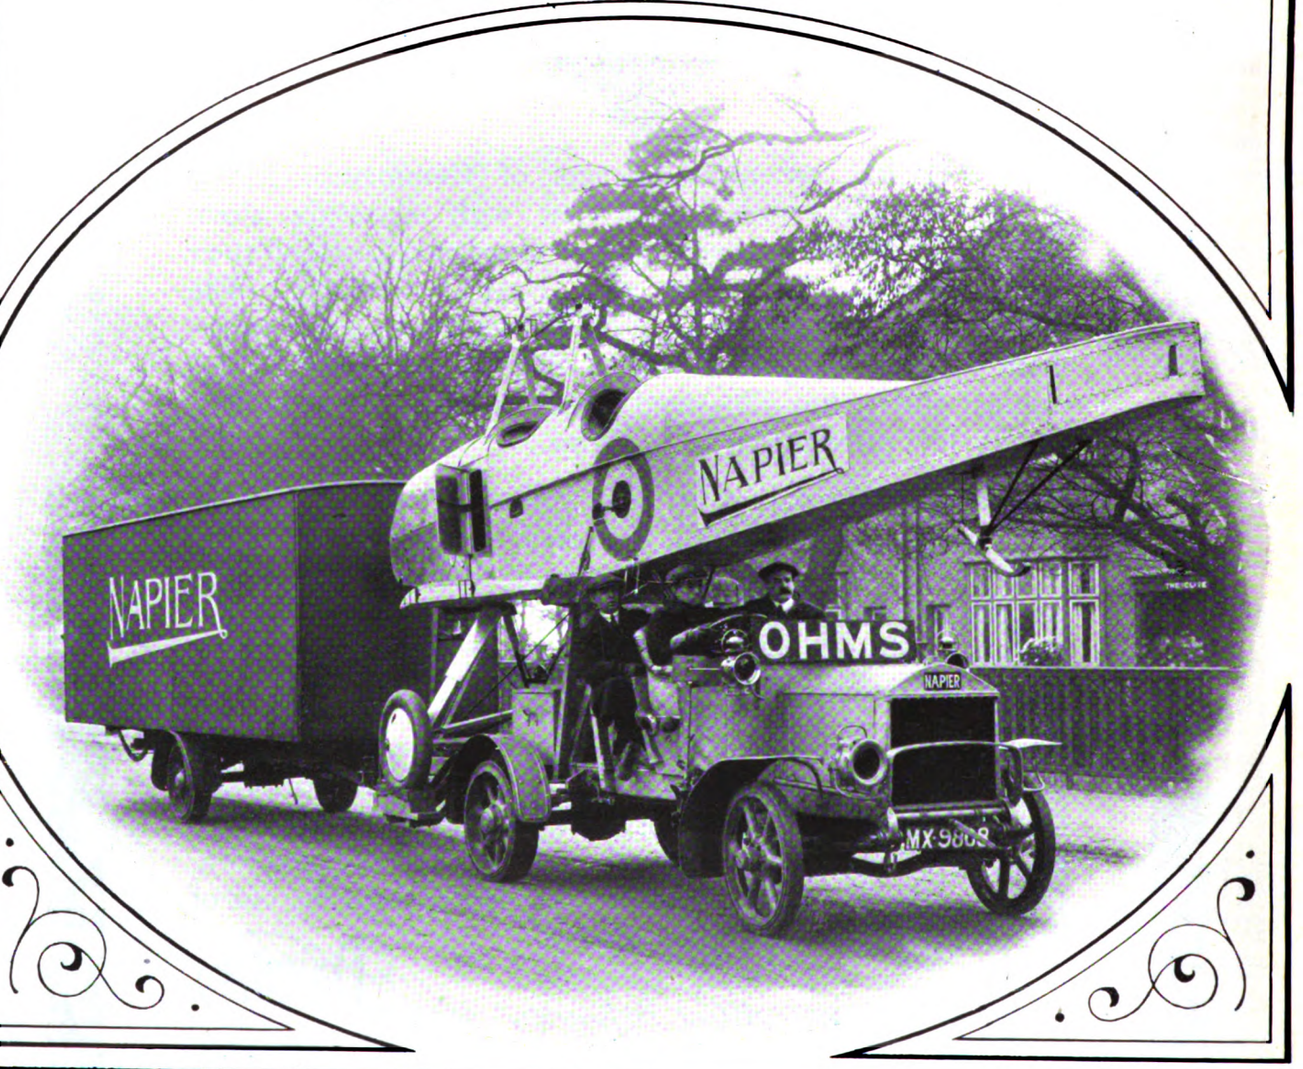

Full particulars from

D·NAPIER & SON, LTD.,

WORKS:-
ACTON, LONDON, W.

14, NEW BURLINGTON STREET, LONDON, W.

Digitized by Google

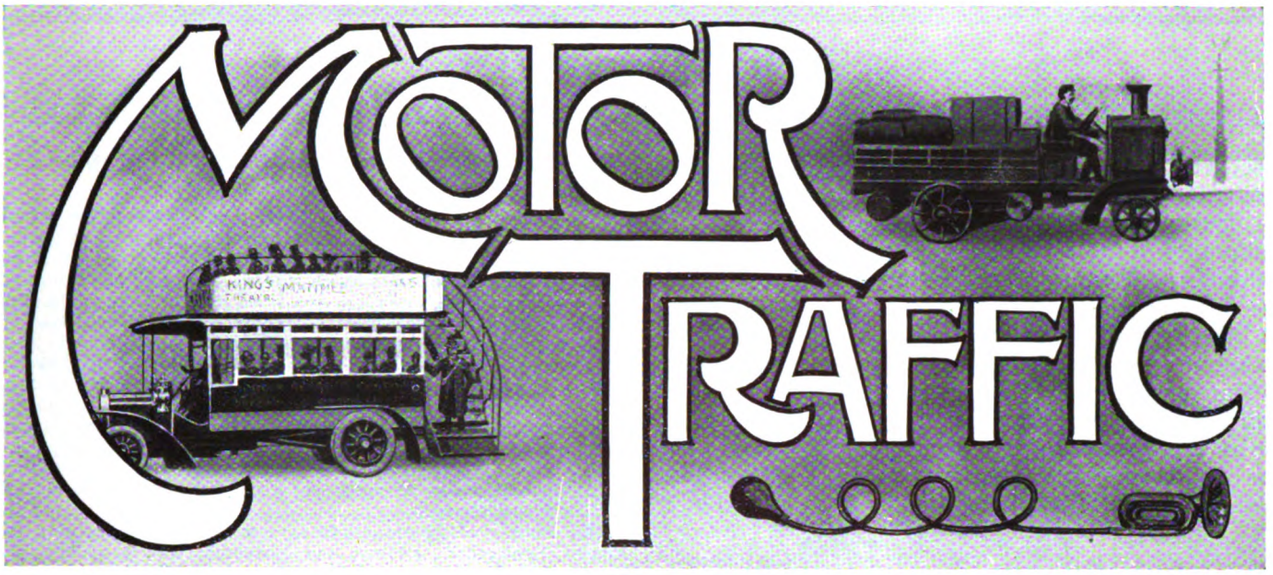

The war has taught us many lessons, and has played havoc in all directions with preconceived ideas. So far as transport has been concerned it has done much to alter previous impressions as to the relative importance and functions of road and railway. In the few years immediately preceding 1914 we had witnessed a sort of renaissance of road traffic, owing to the growing efficiency of motor vehicles, but it seemed to be generally accepted that such revival could only be partial and limited, and that its scope would eventually prove comparatively narrow, and, in any case, much more restricted than enthusiasts were inclined to admit. The war has to a very large extent justified the enthusiasts, however, and proved the cautious folk to be in the wrong. The possibilities of the motor lorry have been shown to be far wider and more multifarious than all but a select few would have predicted. One does not need to refer to such exploits as those of the Marne, Egypt, and the Caucasus to support this contention. More apposite and more striking than any of these is the almost epic story of the lorries of Verdun, where it was proved beyond all doubt, for the first time, that one road, a sufficiency of motor lorries, plus adequate organisation, was an efficient substitute for a railway line. Had it not been for this "endless chain" of motors, the state of Verdun would have been one of siege, the fortress could not have been supplied, and its fall could scarcely have been obviated. The reason why this achievement stands out so pronouncedly from all others of the war is that it affords the one great example of the successful use of motor transport in an operation which, although purely warlike, has some bearing on what might be required under less exciting conditions. There can, of course, be no actual comparison between the task of supplying a city attacked by a powerful and relentless enemy, requiring to be munitioned as well as victualled and generally supplied, as against that of meeting the wants of that same city in times of peace, because the conditions at Verdun during those fateful weeks were at least a hundred times more exacting than they would be in normal times. We are, therefore, entitled to regard this exploit as an outstanding proof that the proposition that a road and mechanical transport thereon may render a railway unnecessary, can no longer be dismissed as impracticable.

* * * * * *

By the time the war has come to an end we shall have acquired a great deal of fresh knowledge, not only on the subject of motor transport, but on the transport problem in all its ramifications. On that score we are believed to suffer under peculiar disabilities in this country, and in the process of reconstruction that must come with peace we might do worse than bend our energies in the direction of investigating the nature and extent of our present deficiencies, and set to work to remedy them where they are found to exist. One word of warning, however, is necessary. Such an investigation must proceed with a perfectly open mind. Its concern must be to consider the transport problem *as a whole*, and to decide how, with the various means at our disposal, we may obtain the best and most economical service all round. There is no doubt that a good deal of the work done by the railways might better be performed by road vehicles, given the necessary facilities, and, conversely, some, at least, of the facilities given by motor vehicles, both as to goods and passenger carrying, are not easily defensible, either on economic grounds or those of public policy. If we are not to have regrettable loss and waste of effort and resources in the future, it is absolutely essential that we should avoid a state of cut-throat competition between various systems of transport. There is work for all of them to do, and whilst the community may appear to profit for a while from their competition one against the other, such profit is always illusory, especially when a broad view of its effects is taken.

With the coming of the longest and darkest nights of the year the question of safety in the streets acquires renewed urgency. Although there is a very welcome drop in the numbers of street casualties in London for the 12 months ended October 31, there has been during the last few weeks a most disturbing upward tendency in the statistics of inquests held upon people killed in the streets at night. In one district recently there were three such cases in a single day, and in another no less than five. We must, of course, accept the restricted lighting as necessary in the present circumstances, and make the best of it. But it is a striking fact that some districts seem to suffer far more heavily than others, and although there are obvious reasons why the mortality rate from this cause should be higher in Central London, as compared with localities outside that area, it is difficult to understand the variation in the figures as affecting one district against another where traffic conditions are more or less analogous. For this there must be some specific cause, but it requires a certain amount of observation to

Digitized by Google

MOTOR TRAFFIC.

discover it. It must, however, have occurred to many whose movements in London are not confined to one particular quarter that there is a noticeable want of uniformity in the measures adopted, both in restricting lighting and in regard to the extra precautions taken to meet the present abnormal conditions. For instance, in adjacent localities will be found the greatest diversity in lighting; in one all the street lamps are lighted but obscured with green pigment, in the other no street lighting whatever. In some of the London boroughs kerbs are whitened, in others they are not. The use of such safety devices as red lamps at traffic centres, or on refuges, again is left to purely local initiative.

* * * * * *

These somewhat inexplicable variations as between various London districts—for there is obviously no rhyme or reason in them—exist to an even greater extent as between different towns in the provinces. On the whole, the restrictions are much more drastic in the provinces than in the metropolis, and the increase in the numbers of street casualties is proportionately much higher than in London. This state of things appears, on the face of it, to be quite needless. It may be advisable to darken towns, say, in Lancashire to the same extent as London, but what case there is for carrying the curtailment farther it is difficult to imagine. Their risk from enemy aircraft is demonstrably no greater than that of London, to say the least, while the increase in the numbers of deaths from street accidents is, conservatively speaking, no less. There must be a mean between the requirements of safety to people moving about in the streets and the necessities of the air menace, and there seems to be no grounds as to why it should not be properly ascertained and applied uniformly all over the country. In the same way safety precautions should be standardised, so that drivers are not subject to the confusion and danger inevitable in passing from one locality where obstacles are lighted to another where they are not, or from streets in total darkness to others in which there is at least a modicum of illumination. Methods of traffic regulation and local police practice should be co-ordinated, and for this and the other purposes referred to a conference of police authorities and local representatives might well be called. Some measure of the kind is all the more necessary because throughout the country the lighting restrictions now in force relatively to those of last year are much more pronounced. This applies individually as well as generally, and the result is that the places that were very dark in comparison with others last winter are now darker still, and thus the lack of uniformity and standardisation is even accentuated.

THE DEFINITION OF MOTOR SPIRIT.

The Commercial Motor Users' Association obtained an official interpretation of the meaning of the term "motor spirit," over which there has been controversy since the Order in Council of August 18. A communication was forwarded to the Home Office strongly representing "the expediency of issuing an immediate instruction to chief constables to allow no prosecutions to be instituted under the Order unless the fuel in question pays the petrol tax." The association have now been informed by the Home Office that, after consultation with the Board of Customs and the Board of Trade, the Secretary of State has made a suggestion to the police forces on the lines suggested.

RELAXATION OF PETROL RESTRICTIONS.

The Petrol Control Committee announced on November 7 that new licences (free of duty) for the purchase of motor spirit for use in hackney and commercial vehicles and in industral processes will be issued to holders of licences which expired at the end of the month. The new licences will cover a period of six months. An application for the renewal of a licence which expired in November should be made on the form attached to the licence at page 7, and should have been sent to the Secretary, Petrol Control Committee, 19, Berkeley Street, W., between November 16 and 25. Holders of free-of-duty licences who for special public services have already received a supplementary allowance of motor spirit cannot be granted any further increase. The Committee are prepared to consider applications from those who have not received a supplementary allowance for an increase not exceeding 10 per cent. of the amount authorised in their existing licences.

The number of gallons allotted to motor cabs in London for August, September, October, and November was 60 gallons per month per cab. For the month of December, according to a statement in Parliament, the allotment will be 90 gallons.

MOTOR CABS AND THE RESTRICTION REGULATION.

The Cardiff stipendiary magistrate, on November 15, decided that a motor cab does not come within the scope of the regulation under the Defence of the Realm Orders restricting the use of motor spirit. The case was brought as a test action by the Watch Committee, the defendant being summoned for unlawfully using motor spirit to drive a cab on a pleasure trip. The summons was dismissed.

PERMITS FOR MOTOR CONSTRUCTION.

On November 6 the Minister of Munitions gave notice that he "prohibits until further notice any person, firm, or company engaged in the manufacture or repair of any vehicle designed for mechanical transport or traction, or any part of such vehicle, from carrying out in any factory, workshop, or other premises, without a permit issued under the authority of the Admiralty, the Army Council, or the Ministry of Munitions, any work consisting in the manufacture, assembling, or erection of any new or unused motor internal combustion engine, designed or adapted for mechanical traction, or of any new or unused motor cycle, motor chassis, motor wagon, or of any tractor or other motor vehicles of any kind propelled by mechanical means, except work required to complete contracts placed by the Admiralty, the War Office, the Ministry of Munitions, or an Allied Government, on or before the date of this Order." Repairs or replacements are not affected by the Order.

DEPUTATION ON ARTERIAL ROADS.

Replying to a deputation on November 1 on the subject of arterial roads in Greater London, Mr. Long, President of the Local Government Board, said that all he could do at present was to ask Sir Geo. Gibb, as head of the Road Board, to examine the schemes, and they would no doubt report to the Government in due course as to the relative importance of the roads. The deputation represented 137 municipal authorities and professional bodies of Greater London, and the report placed before Mr. Long was the outcome of the work of conferences held during the past eight years under the chairmanship of Ald. Regester, chairman of Middlesex County Council. That gentleman informed Mr. Long that the conference had come to an almost unanimous approval of the proposed roads suggested by the late Traffic Branch of the Board of Trade. The deputation did not expect that the money should be spent at present, but it was of great importance that the course of these roads should be laid down, so that town planning schemes around London might be developed in accordance with the scheme. Mr. G. H. Hume, chairman of the Highways Committee of the London County Council, stated that that body were not committed to the scheme, but it was essential that they should be prepared to deal with the traffic put upon Inner London.

SHELTER FOR OMNIBUS PASSENGERS.—The company running the motor omnibuses which link up Dover with places inland are about to erect a shelter for passengers in Saxon Street, Dover. There will be standing for six vehicles. The Town Council have agreed to the use of the site.

Digitized by Google

MOTOR TRAFFIC.

MOTOR VEHICLE PROGRESS.

TWENTIETH ANNIVERSARY OF THE ABOLITION OF THE RED FLAG.

November 14 was the twentieth anniversary of the date upon which the Locomotives on Highways Act, 1896, came into force. Upon that day in 1896 the small number of automobilists then existing celebrated by a run from London to Brighton their emancipation from the traction engine enactment that required their cars to be preceded by a man carrying a red flag. Prosecutions for infringements of the law had taken place in various parts of the country. A regulation made by the Local Government Board under the new Act fixed the maximum speed of the cars at 12 miles per hour, although a speed two miles higher was mentioned in the Act.

It was under the lower speed that the procession to Brighton, organised by the Motor Car Club (now the Royal A.C.) was conducted, but that was not a matter of importance, for only about half of the 35 machines completed the journey. In our issue of December, 1896, we observed that "nobody doubted that horseless vehicles could do in England what they had done in France, nor did anyone expect that the mere removal of legislative restrictions in England would at once convert imperfect machines into practical and efficient means of transport. But we would not minimise the importance of the new industry. It will no doubt in time prove of great benefit and flourish exceedingly."

Great progress in reliability was achieved in the years intervening before the Motor Car Act of 1903 was introduced in the House of Lords. This measure raised the speed limit to 20 miles per hour, and instituted the use of registered numbers. The Act came into force on January 1, 1904, but its passage was not secured without great opposition, much of which was based on the dust that motor vehicles then raised on roads not constructed for fast traffic. The leaders of the automobile movement in the Legislature were Lord Montagu, who has recently gone to the East as Inspector-General of motor transport; the Hon. Arthur Stanley, chairman of the Royal A.C., who has done such valuable work as head of the Red Cross movement during the war; and Sir Henry Norman. The Act has since been renewed from year to year, and although a Royal Commission sat in 1905 to consider its working and to suggest amendments, the numerous recommendations that they made have not been carried out.

An unlooked-for advance was made in 1909. In return for motorists consenting to the imposition of increased payments for licence and petrol duty, funds were allocated by the Government to a new department set up under the title of the Road Board, and charged with the duty of securing improved roads and making grants to local authorities for construction. The outbreak of the war has led to the suspension of a number of important schemes that the Board proposed to undertake, including the classification of roads. The same cause has also brought about a cessation of activity in other departments closely affecting commercial and public passenger vehicles. A technical difficulty in the Finance Act of 1913 had caused the withdrawal of the Government's scheme for increased road grants to local authorities. The question of the taxation paid by those two classes of vehicles was also under consideration, while a departmental committee of the Local Government Board had entered upon the task of considering matters connected with the weights of the machines and their tire widths.

The motor vehicle in this country owes its development, apart from the club movement, to the support of wealthy purchasers and to the enterprise of makers in producing racing cars, notably for the Gordon-Bennett international race. As long ago as 1899 the War Office, after two years' consideration, expressed approval of the practicability of motor transport vehicles, but it was not until 1909 that the trials for subsidy vehicles were instituted. During the intervening years the War Office had in 1901 offered prizes in trials of self-propelled vehicles which were required for the South African war, when Thornycroft and Foden vehicles were selected. The credit for the first encouragement of the commercial or heavy vehicle belongs to the Royal Agricultural Society of England. In 1898 this society organised trials for motor vans at their Birmingham show, when the Daimler Motor Company secured the first award for light vans. The next organisation to foster the heavy side of the movement was the Liverpool Self-propelled Traffic Association, which carried out a number of trials, beginning in 1901. Only a year before that date the Automobile Club had carried out their first 1,000-mile reliability trial for private cars, following an exhibition of vehicles at the Agricultural Hall. In 1903 there was another 1,000-miles reliability trial for tourist cars, accompanied by an exhibition at the Crystal Palace.

It was not until 1907 that the club organised a 1,000-mile trial for commercial vehicles, in connection with which the timorous War Department gave certificates for vehicles using petroleum fuel and suitable for military work.

MANNING OF THE "TANKS."

Apropos of our illustration of an armoured car propelled by petrol on the caterpillar system of traction, it is of interest to state that although one or two have been disabled in the capture of the German positions, the enemy has not managed to secure one. A correspondent serving in the Motor Gun Corps writes:—"An element of over-eagerness, as well as other things, has been the principal reason for a few of the 'Tanks' being knocked out, but that is a cause that will

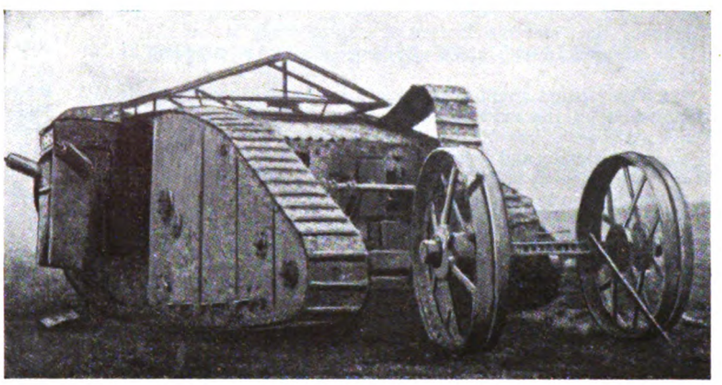

Rear View of a "Tank," which had seen Service.

soon rectify itself. Except for the somewhat cramped position inside and the inconvenience of the heat and fumes, the general impression among the men is one of security, most of our casualties having occurred through members of the crews coming out of the cars in order to see what was going on. Only a dull uproar reaches the ears of the occupants inside, as, apart from the fact of being closed up, the noise of the engines makes the report of your own guns seem dull."

NAPIERS IN THE AIR SERVICE.

The extent to which the products of the works of D. Napier and Son, Limited, are utilised for war as well as for peace is partly indicated by the appended illustration. The firm has supplied hundreds of heavy motor vehicles for national and business purposes, and there has also been a great demand for their light car chassis for

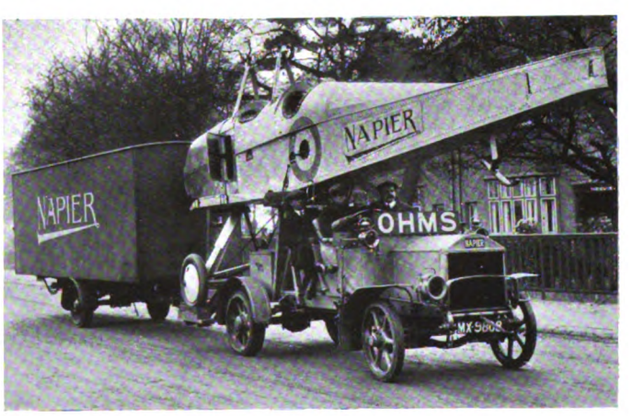

the use of the services and also for ambulances. From time to time our illustrations have shown what a valuable work the Napier commercial vehicles are doing in transporting goods to and from railway trucks in the great centres of industry. The present picture provides another aspect of the many-sided activities of the Napier machines both on and above the earth.

Digitized by Google

MOTOR TRAFFIC.

OMNIBUSES ON RURAL ROADS.

DAMAGES AWARDED AGAINST OXFORD TRAMWAYS COMPANY.

In the King's Bench Division, on November 15, Mr. Justice Sankey gave judgment in the action Abingdon Rural District Council *v.* City of Oxford Electric Tramways, Limited, in which the Council claimed £198 as expenses incurred in repairs to Foxcombe Hill Road and Wootton Road, between Oxford and Abingdon, because of damage done by the excessive weight and extraordinary traffic of defendants' motor omnibuses. Defendants denied that they had subjected the roads to excessive weight or extraordinary traffic, or had caused any damage to the roads, and they asserted that the roads had not been properly maintained and repaired. Mr. Clavell Salter, K.C., and Mr. Willoughby Williams appeared for plaintiffs, and Mr. Vesey Knox, K.C., and Mr. Eustace Hills for defendants.

Solicitors:—Messrs. Church, Adams, and Prior, for Messrs. Challenor, Son, and Welch, Oxford; Mr. Sydney Morse.

The arguments of counsel which preceded the judgment are of interest.

Mr. Vesey Knox, for the defendants, submitted that it was clearly established by the evidence of the Council's own witnesses that these roads were, broadly speaking, of the main road type, bearing main road traffic, and were not ordinary agricultural roads. The point, therefore, could not be taken by Mr. Salter that these were agricultural roads and the defendants should have taken main roads for their service. This was the first case in which the claim had been made that motor omnibus traffic was "extraordinary traffic." The burden of proof lay upon the plaintiff Council. These omnibuses were ordinary motor omnibuses, and the case in regard to alleged excessive speed had completely broken down. In no case had there been a claim by a Council that motor omnibus traffic was extraordinary traffic. Other District and Rural Councils had not thought fit to bring such a case, although plenty of localities could be referred to where roads of a more rural character had motor omnibus traffic. All over the country local authorities and men who were well acquainted with the needs of their particular localities had had to deal with these problems, and had never brought such a case into the High Court. The fact that there had never previously been such a case was a clear indication of the general sense of the community that in these days motor omnibuses were of the common order of traffic. They were not so 20 years ago, but they were to-day. They had evidence of the use of the road by motor cars, and now motor omnibuses had arrived, which were for the general use of the public for whom the roads were provided.

Mr. Justice Sankey said he could quite understand that extraordinary traffic might become ordinary traffic, but he had difficulty in seeing that it could be called ordinary traffic when first it started on the road.

Mr. Vesey Knox said that the position here was this—at first there was a horse omnibus service, then a small motor omnibus service, and then the latter was increased as the demands increased. The present traffic was therefore being run on roads that had horse omnibuses previously, and the present form of traction merely represented an improved form. There might be found expressions in some of the judgments that suggested that traffic could be extraordinary because it was new, but this was stretching the meaning of the term "extraordinary" rather far. Here the roads had had a form of locomotion before this alleged extraordinary traffic was started.

Mr. Clavell Salter, on behalf of the plaintiff Council, in reply, said that if he proved that this was in fact extraordinary traffic, and that extraordinary expense had been thereby occasioned, he must succeed in the action. The defence had suggested that there had been non-repair of the highways—that the roads were not sufficiently and adequately maintained for the ordinary traffic of the neighbourhood. He submitted that the latter defence was not established, and if it was established that it was not a defence open to the defendants under this section. The question of whether traffic was extraordinary or not must always be considered in regard to the particular locality; it was purely and absolutely a question of fact upon the circumstances of the case. Therefore he contended that the only question was whether, having regard to these particular roads, this traffic that had come upon them was extraordinary upon these roads. An attempt had been made to introduce matters that were entirely outside of the section. He contended that the case was fully proved.

Mr. Justice Sankey, in giving judgment, said (according to *The Times* report) that the road along which defendants began to run omnibuses in 1914 left the main road from Oxford to Abingdon about two miles out of Oxford, and took a south-westerly direction to Foxcombe Hill. In the neighbourhood there was a new residential district known as Boars Hill. The omnibuses then went to Abindgon along Wootton Road. He found as a fact that the road from Foxcombe Hill to Wootton Road was a country lane, more or less, that there was hardly any traffic along it before the omnibuses came, except that of a few carts; and that the road was very narrow and tortuous. Wootton Road was a better road, but did not approach the character of a main road. His lordship next dealt with the question whether the traffic complained of was extraordinary, and he referred to Hill *v.* Thomas (9 *The Times* Law Reports, 647; [1893] 2 Q.B. 333), and Etherley Grange Coal Company *v.* Auckland District Highway Board (10 *The Times* Law Reports 62; [1894] 1 Q.B. 37), where Lord Esher said that "the ordinary traffic on the particular road must be looked to in order to see whether the traffic is extraordinary, and that it is none the less extraordinary with regard to that road because it would be ordinary traffic on another road." The last case on the subject was Barnsley British Co-operative Society *v.* Worsborough Urban Council (32 *The Times* Law Reports, 41; [1916] 1 A.C., 291). In that case Lord Loreburn said: "I can understand cases in which it might be properly thought that it was extraordinary by reason of the purpose, or the occasion, or the quality, or the quantity, or the method of use." Whether particular traffic was extraordinary traffic must be a question of fact in each case. Counsel for defendants said that this was the first case in which it had been sought to make the owners of motor omnibuses liable for extraordinary expenses on the ground that such traffic was extraordinary traffic. His lordship thought that statement did not advance the solution of the problem, which depended on the circumstances in which the omnibuses ran over the road. On some roads, like the Strand, omnibuses were not extraordinary traffic; on other roads one was just as likely to meet a mastodon as a motor omnibus, and in such case it could not be said that the running of a motor omnibus was ordinary traffic. The defendant's omnibuses were much heavier than any of the traffic on the roads in question before the advent of the motor omnibuses, and a census of the traffic from September 28 to October 4, 1915, showed the vast preponderance of the omnibuses over any other motor traffic of comparable weight along the roads, there being 135 omnibuses, against 11 covered motor vans, eight motor lorries, and two traction engines with trailers. Counsel for defendants said that the question was whether a service of omnibuses run to serve the needs of a district could be extraordinary traffic. His lordship was unable to see how the demand of a district for traffic which was extraordinary could turn that traffic into ordinary traffic, although the traffic might be necessary traffic, and might in the future become ordinary traffic. The only thing, however, which he had to consider was the present traffic over the roads as they were at the present time. He came to the conclusion that the traffic in question was extraordinary traffic, and that the roads had been properly kept up, and that plaintiffs had incurred extraordinary expenses to the amount of £350 in repairing the roads. Defendants, however, said that their liability was limited by section 12 of the Locomotive Act, 1898, to expenses incurred within 12 months from the beginning of the action on July 20, 1915, whereas plaintiffs were claiming for expenses incurred from March 31, 1914. Further, plaintiffs said that some of the damage was due to the cartage of sand over the roads. Taking those facts into consideration, his lordship thought that plaintiffs were entitled to £350, and he gave judgment for that amount.

BRIGHTON OMNIBUS SETTLEMENT.

The Corporation of Brighton, on November 23, arrived at a settlement of the troubles that had been experienced during the past two years in consequence of the desire of two companies to run public passenger motor vehicles in the borough. For many years the Brighton and Hove United Omnibus Company had provided the services, and although Hove Corporation had also granted licences to Thomas Tilling, Limited, the latter company were unable to take up passengers in Brighton owing to the Watch Committee of that town refusing to grant licences for their vehicles. Messrs. Tilling, in January last, appealed to the High Court, but the Lord Chief Justice and his colleagues upheld the action of the Corporation as regards the refusal of omnibus licences, the Court holding that the Council had acted on the advice of the chief constable upon the traffic conditions. In the matter of licences for chars-a-bancs, which the Watch Committee had recommended should be granted, but which the Corporation refused, the Court decided in favour of Messrs. Tilling.

Negotiations that have since taken place resulted in the Brighton and Hove United Omnibus Company applying to the Brighton Council for the renewal of their licences, which expired on December 10. The company also informed the Corporation that arrangements were in progress for the transfer of their rolling stock, premises and

Digitized by Google

MOTOR TRAFFIC.

plant to Thomas Tilling, Limited, at the end of the preceding month. The Watch Committee recommended that Thomas Tilling, Limited, be informed that upon the completion of the purchase the Council would transfer to them the other company's licences for 41 petrol motor omnibuses, 12 electric omnibuses, and 8 horse omnibuses, and would agree to the substitution of eight petrol motor omnibuses in place of the eight existing horse omnibuses, subject to the vehicles being approved by the chief constable. The Committee were agreeable to renew the licences for 41 petrol motor omnibuses for a further period of three months, but they were averse to granting Messrs. Tilling's application for 14 additional licences, though willing to allow their petrol omnibuses then running in Brighton and Hove to be substituted for a corresponding number of similar vehicles, subject to the vehicles being passed by the chief constable. With regard to a number of additional routes and services suggested by Messrs. Tilling, the committee counselled that consideration thereof be deferred. Finally the committee resolved "that Thomas Tilling, Limited, be further informed that, while agreeing to the above transfer, the Council reserve all rights and powers vested in the Corporation under the Brighton Corporation Acts, 1903 and 1912, and to be acquired under the Provisional Order now being promoted by them in Parliament to provide and work motor omnibuses or a system of trackless trolleys either themselves or by their lessees."

When the matter came before Brighton Council on November 23, it was discussed in committee. The recommendations of the Watch Committee were confirmed with the exception of the clause relating to the proposed new services. On the latter question the Corporation decided that Messrs. Tilling's proposals should be further considered not later than the meeting of the Corporation to be held on December 21.

PETROL LORRY COSTS.

DETAILS SUBMITTED BY THE BEDFORDSHIRE COUNTY SURVEYOR.

In his annual report for the year ended March 31 last, Mr. F. W. Smart, county surveyor of Bedfordshire, includes the appended schedule of the detail costs of working the three petrol motor lorries owned by the County Council during the year and also for three-quarters of the preceding year. Mr. Smart observes:—"It will be noticed that the cost per hour for petrol lorries has increased by 7d. and the cost per ton-mile by 1d.; the former is accounted for by the general increase in cost of labour and spare parts, which were very difficult to obtain, and then at a greatly increased cost. The cost per ton-mile will always vary, as the ruling factor is the length of the journey, and in consequence of haulage continuously through the winter up to Haynes Park camp for the military authorities being comparatively a short journey, this cost is higher than last year, but approximately the same as the previous year.

"The fourth lorry ordered by the Council in November, 1915, from Commercial Cars, Limited, has not yet been delivered, and I am given to understand that there is no probability of delivery for some time yet. Steam wagons have been hired to a slightly larger extent than previously. Comparing the cost of the Council's lorries with those of the hired ones per hour, the difference appears to be very slight, being only 1d. per hour, but for a true comparison the average tonnage of materials hauled must be taken into consideration, and the following is an analysis on this basis, viz.:—In 1,574 hours the hired lorries conveyed 1,896 tons at an average cost of 3s. 0d. per ton, and during the same number of hours the Council's lorries conveyed 2,907 tons at an average cost of 2s. 6d. per ton."

The total cost of working the Council's lorries was £1,046 9s., while the hired lorries cost £360 15s., and horse cartage £4,364 3s. Practically nothing but tarred-slag macadam has been used for improved surfacing work, and of a total quantity of 10,388 tons laid down during the year, 9,288 tons were manufactured at the depot, the balance being purchased for use in the South District.

Many of the principal roads have been considerably damaged by military and heavy motor traffic, especially the roads around Bedford and the Watling Street, where the heavy traffic is continuous throughout the year. It was necessary in the case of Watling Street to prepare a scheme for reconstruction and the strengthening of the abutments of several sections, as it is most undesirable to re-surface with tarred slag until the strengthening works have been carried out. These works are now in hand, but it will be several years before the full length is completed, as it is only possible with the present conditions of labour to undertake a small section each year.

SCHEDULE showing Detail Costs of Bedfordshire County Council Motor Lorries. Year ended December, 1915.

Number of Lorry.	Working Hours. Loading.	Outward Journeys.	Unloading.	Inward Journeys.	Total.	Mileage Covered.	Number of Loads Carted.	Weight of Loads Carted.	Materials. Petrol.	Motor Engine Oil.	Gear Oil.	Waste.	Cloths.	Common Oil.	Paraffin Oil.	Grease.	Carbide.	Tires.	Total Cost of Labour, Materials, Tires, Spares Etc.	Depreciation of Capital.	Total.	Cost per Ton-Mile.	Cost per Working Hour.
								Tons.	Cwts.	Gals.	Gals	Gals.	Lbs.	Lbs.	Gals.	Gals.	Lbs.	Lbs.		£ s. d.	£ s. d	£ s. d.	d	d.
1	779	642	313	505	2,239	12,678	857	4,283	19	2,236	111	28	4	16	3	2	269	9	—	419 12 6	104 15 9	524 8 3	3·97	56·2
2	809	666	381	560	2,416	12 596	943	4,692	15	2 346	156	40	7	9	4	4	269	15	—	423 5 6	104 15 9	528 1 3	4·04	52·5
3	581	488	302	400	1 771	9,998	579	2,891	16	1,516	95	18	8	4	1	8	203	8	—	299 19 6	104 15 9	404 15 3	3·89	54·8
TOTAL ...	2,169	1,796	996	1,465	6,426	35,272	2,379	11,868	10	6,098	362	86	19	29	8	14	741	32	7	1,142 17 6	314 7 3	1,457 4 9	3·97	54·4
½-Yr. 1914	1,734	1,864	719	1,665	5,982	38,424	2.072	10,548	3	6,528	359	77	15	47	5	21	218	29	9	948 8 7	243 14 0	1,192 2 7	2·93	17·8

MOTOR VEHICLES FOR MUNICIPALITIES.

CHESTER COUNCIL have acquired a 1-ton electric lorry.

DEVONSHIRE COUNTY COUNCIL have decided to purchase a steam tractor.

ISLINGTON COUNCIL have resolved to obtain a motor sweeping machine.

MARGATE COUNCIL have agreed to purchase a motor fire engine out of revenue.

CONSETT COUNCIL are purchasing a motor wagon for the removal of house refuse.

BOURNEMOUTH COUNCIL contemplate obtaining a motor fire engine and a chassis for an escape.

LOCHERBER DISTRICT COMMITTEE have purchased a motor car for the use of the road surveyor.

SALFORD COUNCIL have provided a motor car for the exclusive use of the mayor of that borough.

WALSALL COUNCIL are considering the question of purchasing a 300-gallon steam fire engine.

BRADFORD CITY COUNCIL have advertised for tenders for the supply of mechanically-propelled road sweeping machines.

HALIFAX TRAMWAYS COMMITTEE have ordered a 3-ton motor tower wagon from Halley's Industrial Motors, Limited, Glasgow.

SALFORD COUNCIL have placed an order with Halley's Industrial Motors, Limited, for a 2-ton chassis for the tramways department, and with Fodens, Limited, Sandbach, for a steam wagon fitted with a crane.

BRIGHTON WORKS COMMITTEE have called for a report on the use of motor vehicles for street cleansing and refuse removal. The chairman of the committee is to visit other towns in company with the surveyor, to view such vehicles at work.

LANCASTER CORPORATION have received delivery of two electric omnibuses from Edison Accumulators, Limited, with bodies made by the Brush Electric Manufacturing Company. The vehicles seat 22 passengers, and their speed is 12 miles per hour. Three vehicles have been ordered.

BATTERY VEHICLE FOR BREAKDOWNS, ETC.—The electric lorry and an electric passenger car which Wolverhampton Corporation have agreed to purchase for the tramways department will be used for speedy conveyance to breakdowns, repairs and testing, also for supervision by the management. The surface contact boxes of the Lorian system are tested twice a week by a tramcar coupled to a service car, but the use of a battery vehicle will prevent loss of time and add to efficiency. The same remark is applicable in the case of a breakdown.

Digitized by Google

MOTOR TRAFFIC.

WOMEN IN MOTOR WORKS.

The necessity of sending every available man to the forces has led to a reduction of male labour even in the workshops of motor vehicle manufacturers whose products are requisitioned by the Admiralty and the War Office. The extent to which women have been trained to fill the vacancies is a matter of which very little has been written for public perusal. That the substitution has been very largely and successfully arranged is evident from what has been done by the Albion Motor Car Company, Limited, of Glasgow. This company's output of vehicles has of necessity been larger during the past two years than at any period in its history, and towards this achievement female labour has contributed to no small extent during the present year. These operatives are to be found

in four departments, a photograph of one of which is given on this page. One of the departments in question is the gauging and typing, where the women attend to the typing of parts. In the drilling shop they work the lighter multi-spindle drills, and they are responsible for the carrying out of the external grinding in the department shown in our illustration. They also work medium sized milling machines in another shop.

INDIAN MOTOR VEHICLE IMPORTS.

The present prosperity of India is clearly indicated by the enormous increase of imports in motor vehicles, mostly light ones for private use, and of tires. There is evidently (says the writer of the Indian notes in the *Contract Journal*) no war-saving campaign in the land nor restriction in the use of motor spirit—while cars, tires, and spirit are so urgently wanted for purposes of war by England and her Allies. The purchase of motor cars in April, May, and June last amounted to £232,989, or over £91,000 more than in 1914. If the same rate of increase continues during the remainder of the fiscal year, the figures will exceed those of 1915–16 by £160,000, and show a total of nearly a million sterling for 1916–17. In the first three months of the financial year the number of cars imported were 1,154 as against 554 in 1915 and 506 in 1914; while the values of tires were £65,195 and of tubes £19,137, as against £30,325 and £9,718 respectively in 1914. The United States handled in the same months nine-tenths in number and eight-tenths in price of these. Great Britain still controls three-quarters of the business in parts of cars, motor cycles, and accessories.

PNEUMATIC TIRED STRETCHER CARRIER.

The truth of the old adage "necessity is the mother of invention" has never been more clearly demonstrated than during the past two years of war. Thus we have seen the almost impossible achieved on land, on sea, under the sea, and in the air. New guns, new explosives, and new equipment of all kinds have been evolved, while the development of mechanical traction has amazed even those who have understood its possibilities. In life-saving appliances the inventive ingenuity of our engineers has been equally active,

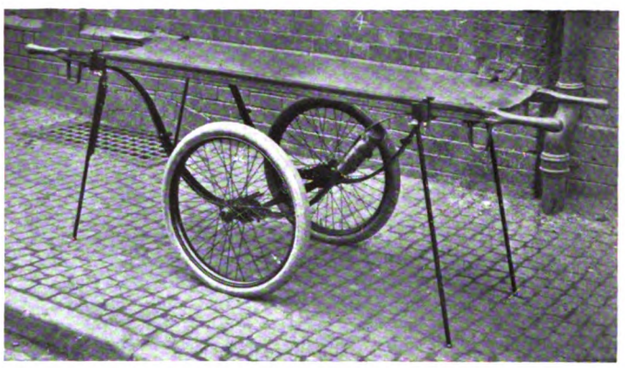

A Pneumatic Stretcher Carrier.

and we have from time to time published illustrated descriptions of motor ambulances, which both for capacity and comfort leave little to be desired. One of the latest machines designed to expedite the removal of the wounded is a stretcher carrier which is manufactured by Messrs. Alfred Wiseman and Company, of Birmingham, who are well known in the tramway field.

As will be seen from the illustrations, the appliance is simple and compact. The special feature in its design, however, which has so commended itself to the War Office authorities, and has made it so popular with the ambulance men in the field, is the rapidity with which it can be taken from its collapsed position, as shown on the step of the motor car in Fig. 2 and set up for use. The secret of this quick action is to be found in the fact that no section is taken

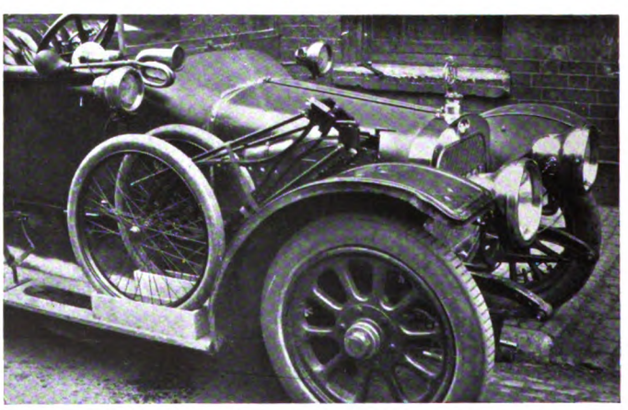

The Carrier Folded and Carried on the Mud Guard of a Motor Car.

apart, all movable members are held in position by thumb screws, which, being released, permits of the carrier being closed to the collapsible position.

The illustration in Fig. 1 shows the carrier complete with its stretcher in position. It will be seen that iron legs support each corner; these are attached by means of a shackle joint to the end of the springs which form the actual supports for the stretcher. Clips are provided at each corner which hold the stretcher securely on the carrier. In this position so firm is the structure that minor operations can be performed, while complete dressings can be applied with the greatest ease and comfort both for the patient and staff. The legs are securely held by means of the thumb screws;

Digitized by Google

MOTOR TRAFFIC.

when these are released the legs can be raised and placed into a catch attached to the spring when the carrier with its patient is ready for removal. To close the carrier so that it may be fitted on the steps of a motor car, the spring arms are folded over and the axle, which is built upon the trellis-work principle, and is held in position by a thumb screw, is then made to collapse by merely pressing the two wheels together. The wheels, which are of the ordinary wire type, have stout pneumatic tires of good section. The whole equipment only weighs 80 lbs. and two men can easily lift the carrier and patient over the worst of the ruts and holes.

MOTOR AND TIRE COMPANIES.

The Daimler Company.

Sir Hallewell Rogers, who presided at the annual general meeting of the Birmingham Small Arms Company, in which the Daimler Company, Limited, Coventry, is included, moved the confirmation of the following dividends:—On the "A" preference shares at the rate of 5 per cent. per annum, less income tax, for the six months ended July 31; on the "B" preference shares at the rate of 6 per cent. per annum, less income tax, for the six months ended July 31; on the ordinary shares a further interim dividend of 15 per cent., free of income tax, in addition to the interim dividend of 5 per cent. paid in April last. The chairman gave an outline of the great work upon which the company are engaged, including rifles, Lewis machine guns, cycles, motor cycles, etc. The Daimler Company had manufactured motor engines, cars, military transport and commercial vehicles. Letters had been received testifying to the extraordinary efficiency of the company's machines at the front under most trying circumstances. The chairman added:—"The shareholders will be interested in learning that the Daimler Company, which is owned by us, has, in its particular direction, effected great service to the country. It has utilised the capacity of its greatly extended works, and the brains of its organisation, in largely increasing its output. Most of you as business men will be acquainted with the big industrial association, in the inauguration of which Mr. F. Dudley Docker, C.B., has taken a large part, and which is to be known as the Federation of British Industries. Believing as they do that this federation will be able to wield an enormous influence to the advantage of British trade, your directors have decided that the company shall join this federation, and your deputy-chairman, Mr. E. Manville, has been appointed on the executive council." Mr. Edward Manville, in seconding the resolution, drew attention to what the chairman had said in regard to the Daimler Company.

Dennis Brothers (1913), Limited.

Mr. Nicholas P. Andrew, who presided on November 23 at the annual general meeting of Dennis Brothers (1913), Limited, motor vehicle and fire engine manufacturers, of Guildford, remarked that at the last general meeting he pointed out that a serious inroad had been made into the company's private connection and goodwill through the unavoidable action of the War Department in having commandeered their whole output, and having thus compelled buyers of commercial vehicles to send their orders either abroad or else to firms in this country who had hitherto built nothing that seriously competed with the company's product. Just at that period, however, the War Department released a portion of their output for sale to firms employed on Government work—a privilege which was greatly appreciated by the directors. But the privilege was quickly withdrawn. Apparently the War Office requirements increased, and the company's product was too good to be dispensed with. Then followed a period when they were buoyed up with the hope that by prohibition of imports of foreign vehicles the foreigner would not be able to build up a connection to their detriment. In this they were so far disappointed; importation continued. This matter of goodwill was of importance to the company, because in normal times it was the foundation of their profit-earning capacity, and moreover it stood as a considerable asset in the balance sheet. When the excess profits tax was introduced they hoped the depreciation of the goodwill would be allowed for, but that had not been done. For the year ended September, 1914, they had been allowed to retain 50 per cent. of the excess profits, for 1915 40 per cent., and for the year now closed they were to retain their pre-war standard, plus 20 per cent. increase and such allowances as they might be entitled to. They hoped to receive fair and liberal treatment, especially in view of the thorough manner in which the company had succeeded in increasing its deliveries. The Government were sometimes accused of lavishness, but they did not experience it; but, on the contrary, found the Government a keen buyer. Dealing with the accounts, he stated that the net profit amounted to £120,180, after deduction of £28,333 for general depreciation and writing off. They had been able to acquire extra land adjoining their factory site at an economical price. The board had thought it prudent to allocate to general reserve account £70,000 as a further reserve against goodwill and as provision for an unascertained liability in in the form of special taxation. Therefore, temporarily, the reserve stood at £120,000. The directors recommended the payment of a final dividend of 1s. per share, making 10 per cent. for the year, and a bonus of 1s. per share, thus bringing up the total distribution to 15 per cent. The satisfactory results now reported were chiefly due to the unremitting attention which the managing directors gave to their duties. (Applause.)

Mr. H. R. Dennis seconded. He remarked that during the past 12 months the demand of the War Office for the company's production had not abated. The directors were able to show a slightly improved result for the past year without raising prices to the Government, who were paying for military wagons the same price to-day as at the outbreak of war. At the outbreak of war the goodwill was a very valuable asset and was supported by a large number of orders on hand, but unfortunately, through working for the Government, they had been prevented from maintaining it, and he feared it was passing into the control of foreigners. For this reason, the position after the war would be a very difficult one unless the Government were fully awakened to the situation. It appeared urgently necessary that the Empire as a whole should assist their industry by imposing adequate import duties upon foreign vehicles. (Hear, hear.) If British manufacturers were not enabled to extend their markets and output, a serious degree of industrial disorganisation was inevitable. The company's premier position as fire engine manufacturers had been fully maintained, and in the orders placed in this country and in the countries of our Allies this company had figured more prominently than any other maker.

John I. Thornycroft and Company, Limited.

The directors recommend a dividend of 10 per cent. on the ordinary shares for the past year. In their report they state that the business was more than three times the pre-war average. The distribution for 1914-15 was similar to that now announced, for 1913-14, 8 per cent., for 1912-13, 2½ per cent., and for 1911-12, 5 per cent.

Dunlop Rubber Company.—The directors announce a further dividend of 10 per cent. on ordinary shares, making 15 per cent. for the year ended August 31. The dividends for each of the three previous years were similar to those proposed for the past year, while 12½ per cent. was paid on ordinary shares for 1911-12. Creation of 1,000,000 B preference shares of £1 each, entitled to a fixed cumulative dividend of 6½ per cent., is recommended by the Board.

Increase of Capital of the Dunlop Rubber Company.—At a meeting of the Dunlop Rubber Company on November 7, the shareholders approved of a resolution to increase the capital to £3,000,000 by the issue of £1,000,000. Sir Arthur du Cros, who presided, and moved the resolution, stated that the money was required to increase the company's stocks of raw materials and manufactured goods to the value of about £750,000, also to provide additional capital to finance the manufacture and sale of solid tires. In the United States the demand for solid tires had doubled within two years, and had reached a total of 1½ million tires. In Europe there were more solid tire transport vehicles in use than in the United States, and the enormous number of vehicles brought into commission would exist after the war, and would be used to supplement railways and would be invaluable in countries not fully developed. The Dunlop Company's output of solid tires had increased 4½ times in four years, and when their new mill was completed they would be able to increase their trade by 15 times. He might mention that in one year alone, taking the returns from leading users, such as the London General Omnibus Company and so forth, the average increase in the efficiency of the company's solid tires had been 45 per cent. That increase in efficiency was the result of ceaseless watchfulness in their laboratories, where last year, even with their greatly depleted staff, they had carried out 73,000 distinct and separate tests all tending to improve the efficiency of their output. German competition had been eliminated, but that had been replaced by American competition. The Government, with a view of restricting the import of goods which could be produced in this country, and so avoiding the export of gold, first imposed heavy import duties; later they abandoned that method in favour of total prohibition, but in connection with rubber goods the prohibition had been withdrawn. He considered the object of the Government in that withdrawal could have been achieved without sacrificing the interests of the industry. Their business in France had completely recovered itself, and stood higher than ever before.

Digitized by Google

MOTOR TRAFFIC.

MOTOR TRAFFIC NOTES.

Number of Petrol Licences.—During the three months ended September 30, 292,250 licences to consume petrol were issued by the Petrol Control Board.

Omnibuses at Perth.—It is recorded of the motor omnibuses run in connection with Perth Corporation Tramways that the vehicles have done remarkably well as feeders of the tramways.

Motor Spirit for Sheffield Omnibuses.—Sheffield Corporation Tramways Committee have placed a contract with Messrs. Meade-King, Robinson and Company for the supply of motor spirit for the omnibus department.

San Francisco Omnibuses.—The city engineer has suggested to the Board of Supervisors that a motor omnibus service should be instituted from the Potrero Avenue terminus of the San Francisco Municipal Railway to Hunters Point, which is three miles distant.

Drake and Gorham Electric Vehicles.—At the annual meeting of Messrs. Drake and Gorham, at 66, Victoria Street, S.W., on November 8, Mr. B. M. Drake (chairman) stated that the battery vehicle department had been able to demonstrate on an extended scale the economy and convenience that could be obtained from electric haulage.

Motor Fuel from Natal Molasses.—The production of motor fuel from molasses has been considerably advanced of late in Natal. The assets of the original company, says the High Commissioner for the Union of South Africa, have been taken over by a new company, who, as soon as certain Excise difficulties are removed, are prepared to proceed on a big scale with the manufacture of alcohol.

Laffly Sweepers Unobtainable.—Marylebone Council have been unable to secure delivery of the third Laffly motor road sweeper, which was ordered in December, 1915, the French Government having requisitioned all the machines at the company's works and forbidden the manufacture or export of any more. As the export of spare parts is also prohibited, the Council are endeavouring to get them made in this country.

Queue for Birmingham Omnibus Passengers.—In consequence of complaints that passengers on motor omnibuses arriving at New Street terminus were permitted to obtain a penny ticket in order to secure seats for the outward journey, the Watch Committee have ordered the management not to permit the practice. Passengers coming to town to travel out again are now to alight and take up position at the end of the queue.

Road Material Delivered on Tramways.—The Ohio Electric Railway, Springfield, Ohio, is doing a considerable business in delivering crushed stone for roads and other purposes from quarries located on the company's lines and from connecting steam railroads. The convenience of deliveries made in this manner has proved very great. The stone is loaded into side dump cars, flat-bottom gondola cars, and hopper-bottom gondola cars.

Motor Vehicle Works for Cork.—Trafford Engineering Company, Manchester, have agreed to purchase for £10,000 Cork Park racecourse and some ground abutting on the quays for the purpose of erecting a motor factory, with the stipulation that £200,000 should be expended on buildings thereon and a guarantee to employ 2,000 persons on the completion of the work. The vendors of the land were Cork Corporation and the local Harbour Commissioners.

Tires not Affected by the Motor Car Order.—The Dunlop Rubber Company, Limited, state that a misapprehension seems to have arisen in regard to the latest order forbidding the manufacture of motor cars or parts, and the execution of repairs thereto, without a permit from the Admiralty, the Army Council, or the Ministry of Munitions. In some people's minds motor tires appear to be included in the order; but this is not the case. Neither the manufacture of Dunlop tires nor their distribution to the public is affected.

Advertising against Jitney Dangers.—The Dallas (Tex.) street railways are seizing on opportune themes for their advertisements in their campaign for business against the jitneys. An advertisement in the daily newspapers during the Texas State Fair at Dallas, addressed to "Fair Visitors," said, "Why take chances of being robbed or assaulted by thugs or bandits? Ride the street cars. The safe way." The appeal was based on the fact that there had been numerous robberies and holdups by persons pretending to operate jitneys.

Important Decision Affecting Heavy Motor Cars.—The Commercial Motor Users' Association have won an important appeal on behalf of users of heavy motor cars. A member was convicted at Birkenhead for causing a 4-ton Sentinel steam wagon to stand on a bridge contrary to the by-laws of Chester County Council. Although evidence was produced to show that the vehicle was registered as a heavy motor car, the magistrates held that it was a locomotive within the meaning of the Act, and imposed a fine. The appeal was heard in the Divisional Court before the Lord Chief Justice, Mr. Justice Ridley, and Mr. Justice Low, when the appeal was allowed with costs.

Posthumous Award to an Omnibus Driver.—The Commercial Motor Users' Association have made a posthumous award of their merit badge—which was instituted in 1911 for acts of distinction in connection with public service and commercial motor vehicles—to the late driver Thomas Jones, who lost his life in a successful attempt to avert a serious disaster in North Wales. His omnibus began to run backwards down a steep hill at Carnarvon. Jones successfully steered a zigzag course backwards down the hill for 300 yards, when, seeing that a collision with a wall at the bottom was inevitable, he threw some children who were sitting beside him clear of the vehicle, but was himself pinned underneath when it overturned, and was the only one killed. The badge and a cheque for five guineas have been forwarded to his widow.

Chars-a-Bancs and Petrol: Engine Heating Allowed.—The Rapid Motor Transport Company, Limited, of Glasgow, one of the members of the Commercial Motor Users' Association, were summoned, under the Defence of the Realm Act, for using petrol for the purpose of heating the engine of a chars-a-banc. Evidence was produced to show that although petrol was used to heat the engine prior to the commencement of the run, the actual run was made on paraffin. The Procurator Fiscal contended that this came under the Prohibition Order, but the Sheriff held a contrary view and acquitted the accused. The Procurator Fiscal appealed against the decision, and the association took steps to support their members, the case being down for hearing before the Justiciary Court at an early date, but the Procurator Fiscal has now intimated that the appeal will not be proceeded with. The association have been advised that the appeal would not have been withdrawn except on the instructions of Crown Counsel, and the result, therefore, is an authoritative decision that petrol may be used for heating paraffin engines on chars-a-bancs.

Spencer-Moulton Solid Tires.—A series of photographs appears among our advertising pages showing various makes of wagons fitted with Spencer-Moulton solid rubber tires. The collection shows these well-known peripheries on various phases of duty, including war and ordinary industrial work; and the photographs further indicate that Spencer-Moulton tires are in favour in widespread parts of the kingdom. A number of tramway and railway companies, like the War Office and Crown Agents for the Colonies, and many private owners, are patrons of what have become known as "the superb mileage tires." During the last few days the senders of renewal orders have included users of the Foden steam vehicle shown in the accompanying photograph. The machine is in use in a part of England where the roads are not the choicest in the land.

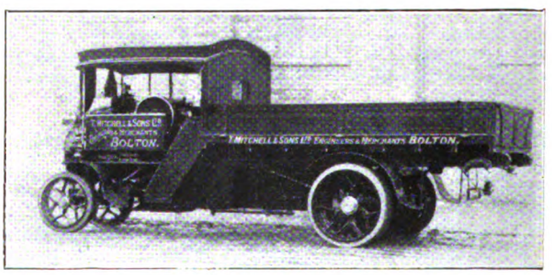

LONDON STREET TRAFFIC CASUALTIES.

The Home Secretary on November 21 presented to the House of Commons the following return showing the number of deaths, the number of persons injured, and the number of accidents known to the police to have been caused by tramway cars, motor omnibuses, and other motor vehicles in the Metropolitan Police district in the years 1914 and 1915 and till the end of October in the present year:—

Year.	No. of persons killed by			No. of persons injured by		
	Tramway cars.	Motor Omnibuses.	Other Motor Vehicles.	Tramway cars.	Motor Omnibuses.	Other Motor Vehicles.
1914	37	148	308	3,171	3,007	8,460
1915	86	154	426	4,001	2,572	9,793
1916 to Oct. 31 ...	63	135	311	3,085	1,810	6,937

In the three years referred to, the number of accidents caused to tramway cars was 5,254, 6,142, and 4,594 respectively; by motor omnibuses, 6,521, 4,981, and 3,394; and by other motor vehicles, 20,150, 21,913, and 15,988.

Digitized by Google

"TYNE METAL" BRAKE SHOES

Hard Wear Resisting.

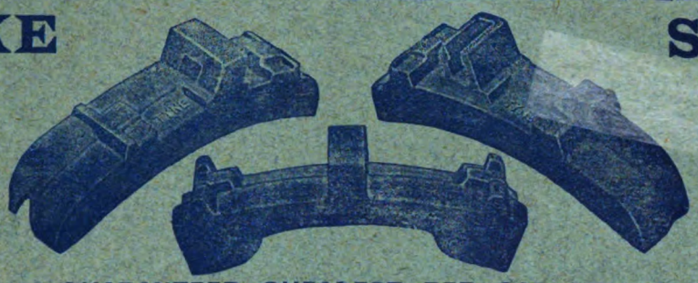

Good Braking Effect.

GUARANTEED CHEAPEST PER CAR MILE.

Sole Manufacturers:
TYNE METAL COMPANY, Ltd., Skinnerburn Road, NEWCASTLE-ON-TYNE.

TRAMWAY SUPPLIES, LTD.

TRAMWAY ENGINEERS,

Sole Selling Agents for S. Dixon & Son's Tramway Material.

160, Woodhouse Lane, Leeds.

Sole Manufacturers of
TURNER'S PATENT AUTOMATIC POINT CONTROLLERS.
OVERHEAD LINE MATERIAL and SUPPLIES.

Telegrams: "Controllers, Leeds." Telephone 3488 Leeds.

STEWARTS AND LLOYDS LTD

FOR
TRAMWAY POLES
AND
ELECTRIC LIGHT
STANDARDS

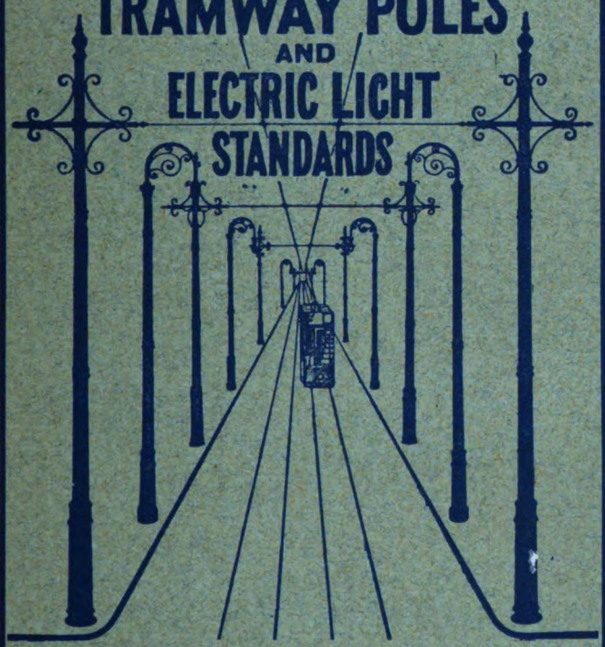

TELEGRAPH AND TELEPHONE POLES
TRANSMISSION TOWERS

Offices: Oswald St., GLASGOW; Broad St. Chambers, BIRMINGHAM; Winchester House, Old Broad St., LONDON, E.C.

Telephone: 228, West Bromwich
2 Lines.

Telegrams: Brockhouse,
West Bromwich.

J. BROCKHOUSE & CO., LTD.
West Bromwich,
ENGLAND.

MANUFACTURERS OF
SPRINGS,
FORGINGS,
STAMPINGS,
PRESSED WORK,
BOLTS, Etc.
FOR EVERY DESCRIPTION
OF
ROAD VEHICLES.

YOUR ENQUIRIES SOLICITED.

Printed for the Proprietors by Chorley & Pickersgill, Ltd., The Electric Press, Leeds, and Published by the Proprietors at their Offices at Amberley House, Norfolk Street, London, W.C., July 13, 1916

Digitized by Google

DICK, KERR & Co. Ltd.

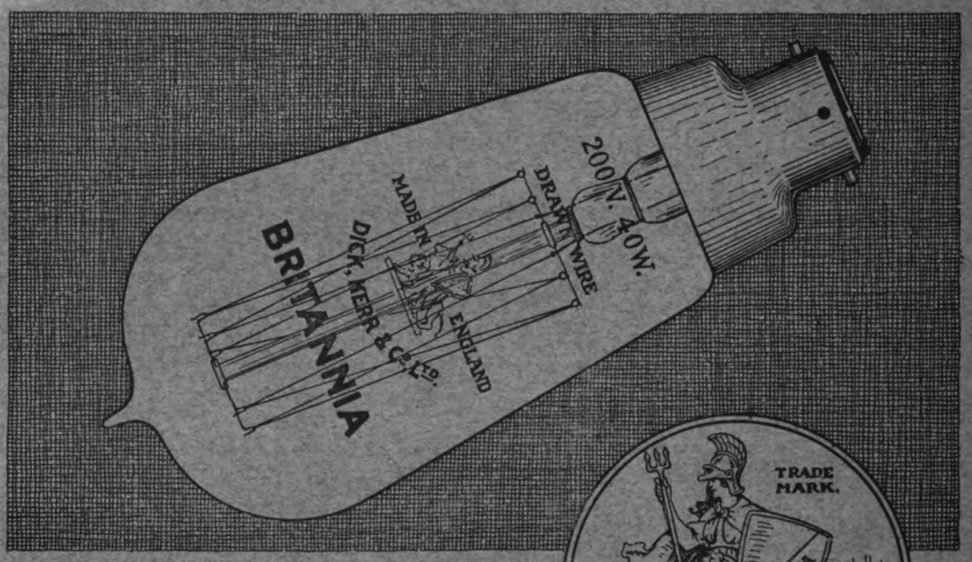

The BRITANNIA
DRAWN WIRE LAMP

takes a just credit and no more than a just credit for its high-grade finish. Added to that,—strength, durability & economy in service, give both seller and user alike, lasting satisfaction.

LICENSED UNDER BRITISH PATENTS NOS. 21513/06, 27712/03, AND OTHERS.

ABCHURCH YARD, CANNON ST., LONDON, E.C.

BRANCH OFFICES

MANCHESTER, NEWCASTLE, LEEDS, TOKYO, SYDNEY, JOHANNESBURG, BUENOS AIRES, RIO JANEIRO, MOSCOW AND MILAN.

Digitized by Google

THE TRAMWAY AND RAILWAY WORLD.
(REGISTERED AS A NEWSPAPER.)
FOUNDED, 1892.

PRICE ONE SHILLING

AUGUST 10, 1916
Vol. XL., No. 8
WITH
"MOTOR TRAFFIC" SECTION

Contents, Page xi.
Index to Advertisements, Page xiii.

Offices: AMBERLEY HOUSE, NORFOLK STREET, LONDON, W.C.
Telegrams, "TRAMIGRO, LONDON."
Telephone No., "GERRARD 2948."

The Tramway and Railway WORLD

ILLUSTRATED

A REVIEW OF PROGRESS IN *Electric* AND OTHER *Traction.*



G.E.C. Electrical Plant

Dynamos, Turbo-Alternators, Rotary Convertors, Motors, Switchboards, Switchgear Cables, etc.
Engineering Works, Witton, near Birmingham. Write for illustrated bulletins, sent free.

The General Electric Company, Ltd.

Head Office: 67 Queen Victoria St., London, E.C. Branches and Agencies throughout the world.

Digitized by Google

ROLLING STOCK SPECIALITIES.

BRITAIN
EXPECTS
BRITISH
BUYERS
TO BUY
BRITISH
GOODS

OUR RATTAN

(NATURAL, GLAZE, DULL FINISH, OR COLOURED)

in twill, straight, or fancy weaves,
canvas backed or unbacked, is

BRITISH MADE THROUGHOUT

from the splitting of the cane to the finished article.

We hold **LARGE STOCKS OF RAW MATERIALS** and can

GUARANTEE PROMPT DELIVERIES.

Particulars of other **BRITISH SPECIALITIES** *upon application.*

THE GENERAL SEATING COMPANY LTD.
13 CITY ROAD, LONDON, E.C.

Digitized by Google

THE TRAMWAY AND RAILWAY WORLD.
(REGISTERED AS A NEWSPAPER.)
FOUNDED, 1892.

PRICE ONE SHILLING

SEPTEMBER 14, 1916
Vol. XL., No. 14
WITH
"MOTOR TRAFFIC" SECTION

INDEXED

Contents, Page xi.
Index to Advertisements, Page xiii.

Offices: AMBERLEY HOUSE, NORFOLK STREET, LONDON, W.C.
Telegrams, "TRAMIGRO, LONDON."
Telephone No., "GERRARD 2948."

The Tramway and Railway WORLD

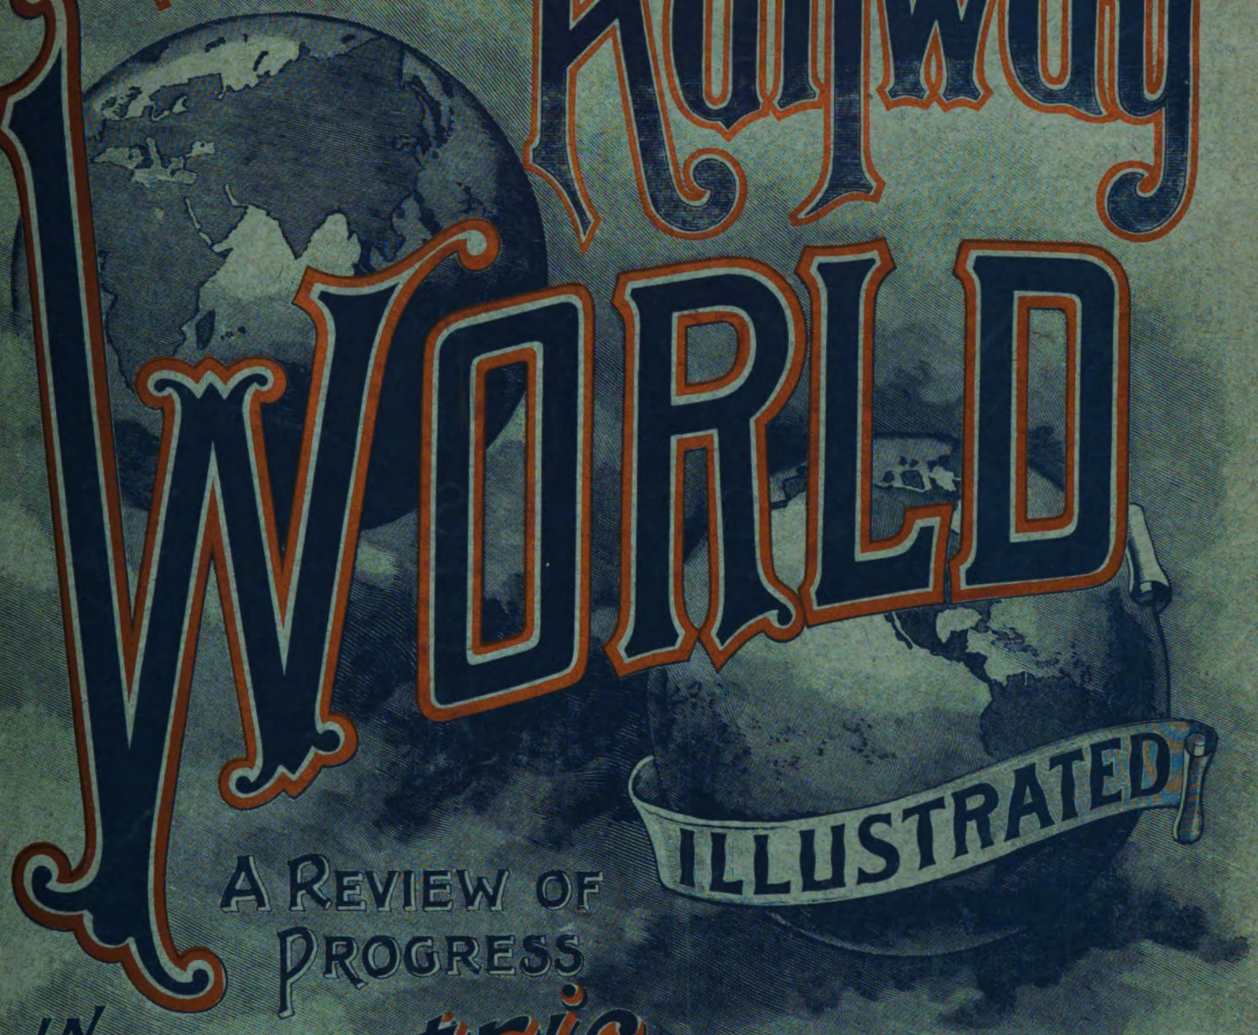

ILLUSTRATED

A REVIEW OF PROGRESS IN *Electric* AND OTHER *Traction.*

TPB

Osram
G·E·C
LAMPS
Traction Type

The Strong and Efficient Lamps for Tramcar and Railway Lighting
Specially constructed to stand rough handling and excessive vibration. From 90 to 135 volts.
Made at the Osram-Robertson Lamp Works, Hammersmith, London, W.
Wholesale only:—
The General Electric Company, Limited
Head Office: 67 Queen Victoria St., London E.C.

Digitized by Google

ROLLING STOCK SPECIALITIES.

BRITAIN
EXPECTS
BRITISH
BUYERS
TO BUY
BRITISH
GOODS

OUR RATTAN

(NATURAL, GLAZE, DULL FINISH, OR COLOURED)

in twill, straight, or fancy weaves,
canvas backed or unbacked, is

BRITISH MADE THROUGHOUT

from the splitting of the cane to the finished article.

We hold **LARGE STOCKS OF RAW MATERIALS** and can

GUARANTEE PROMPT DELIVERIES.

Particulars of other **BRITISH SPECIALITIES** *upon application.*

THE GENERAL SEATING COMPANY LTD.
13 CITY ROAD, LONDON, E.C.

Digitized by Google

INDEXED

THE TRAMWAY AND RAILWAY WORLD.
(REGISTERED AS A NEWSPAPER.)
FOUNDED, 1892.

PRICE ONE SHILLING

OCTOBER 12, 1916
Vol. XL., No. 19
WITH
"MOTOR TRAFFIC" SECTION

Contents, Page xi.
Index to Advertisements, Page xiii.

Offices: AMBERLEY HOUSE, NORFOLK STREET, LONDON, W.C.
Telegrams, "TRAMIGRO, LONDON."
Telephone No., "GERRARD 2948."

TPB

The Tramway and Railway WORLD

ILLUSTRATED

A REVIEW OF PROGRESS IN *Electric* AND OTHER *Traction.*



G.E.C. *Electrical* **Plant**

Dynamos, Turbo-Alternators, Rotary Convertors, Motors, Switchboards, Switchgear Cables, etc.
Engineering Works, Witton, near Birmingham. Write for illustrated bulletins, sent free.

The General Electric Company, Ltd.

Head Office: 67 Queen Victoria St., London, E.C. Branches and Agencies throughout the world.

Digitized by Google

ROLLING STOCK SPECIALITIES.

BRITAIN
EXPECTS
BRITISH
BUYERS
TO BUY
BRITISH
GOODS

OUR RATTAN

(NATURAL, GLAZE, DULL FINISH, OR COLOURED)

in twill, straight, or fancy weaves,
canvas backed or unbacked, is

BRITISH MADE THROUGHOUT

from the splitting of the cane to the finished article.

We hold **LARGE STOCKS OF RAW MATERIALS** and can

GUARANTEE PROMPT DELIVERIES.

Particulars of other **BRITISH SPECIALITIES** *upon application.*

THE GENERAL SEATING COMPANY LTD.
13 CITY ROAD, LONDON, E.C.

Digitized by Google

INDEXED

THE TRAMWAY AND RAILWAY WORLD.
(REGISTERED AS A NEWSPAPER.)
FOUNDED, 1892.

PRICE ONE SHILLING

NOVEMBER 9, 1916
Vol. XL., No. 24.
WITH
"MOTOR TRAFFIC" SECTION

Contents, Page xi.
Index to Advertisements, Page xiii.

Offices: AMBERLEY HOUSE, NORFOLK STREET, LONDON, W.C.
Telegrams, "TRAMIGRO, LONDON."
Telephone No., "GERRARD 2948."

The Tramway and Railway WORLD

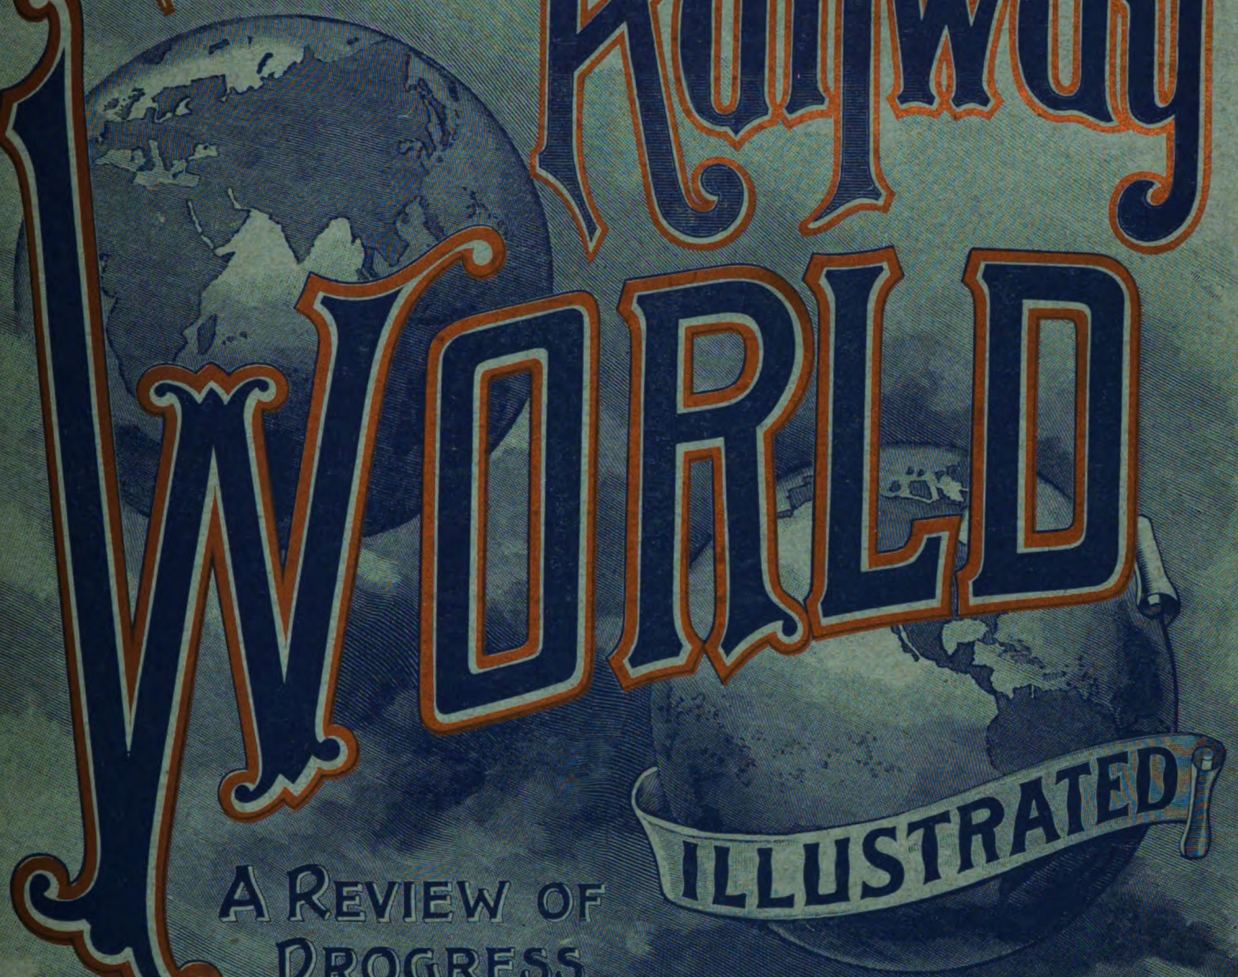

ILLUSTRATED

A REVIEW OF PROGRESS IN *Electric* AND OTHER *Traction.*

Osram
G·E·C
LAMPS
Traction Type

The Strong and Efficient Lamps for Tramcar and Railway Lighting
Specially constructed to stand rough handling and excessive vibration. From 90 to 135 volts.
Made at the Osram-Robertson Lamp Works, Hammersmith, London.
Wholesale only:—
The General Electric Company, Limited
Head Office: 67 Queen Victoria St., London E.C.

Digitized by Google

ROLLING STOCK SPECIALITIES.

BRITAIN
EXPECTS
BRITISH
BUYERS
TO BUY
BRITISH
GOODS

OUR RATTAN

(NATURAL, GLAZE, DULL FINISH, OR COLOURED)

in twill, straight, or fancy weaves,
canvas backed or unbacked, is

BRITISH MADE THROUGHOUT

from the splitting of the cane to the finished article.

We hold **LARGE STOCKS OF RAW MATERIALS** and can

GUARANTEE PROMPT DELIVERIES.

Particulars of other **BRITISH SPECIALITIES** *upon application.*

THE GENERAL SEATING COMPANY LTD.
13 CITY ROAD, LONDON, E.C.

Digitized by Google

THE TRAMWAY AND RAILWAY WORLD.
(REGISTERED AS A NEWSPAPER.)
FOUNDED, 1892.

PRICE ONE SHILLING

DECEMBER 7, 1916
Vol. XL., No. 29.
WITH
"MOTOR TRAFFIC" SECTION

Contents, Page xi.
Index to Advertisements, Page xiii.

Offices: AMBERLEY HOUSE, NORFOLK STREET, LONDON, W.C.
Telegrams, "TRAMIGRO, LONDON."
Telephone No., "GERRARD 2948."

The Tramway and Railway WORLD

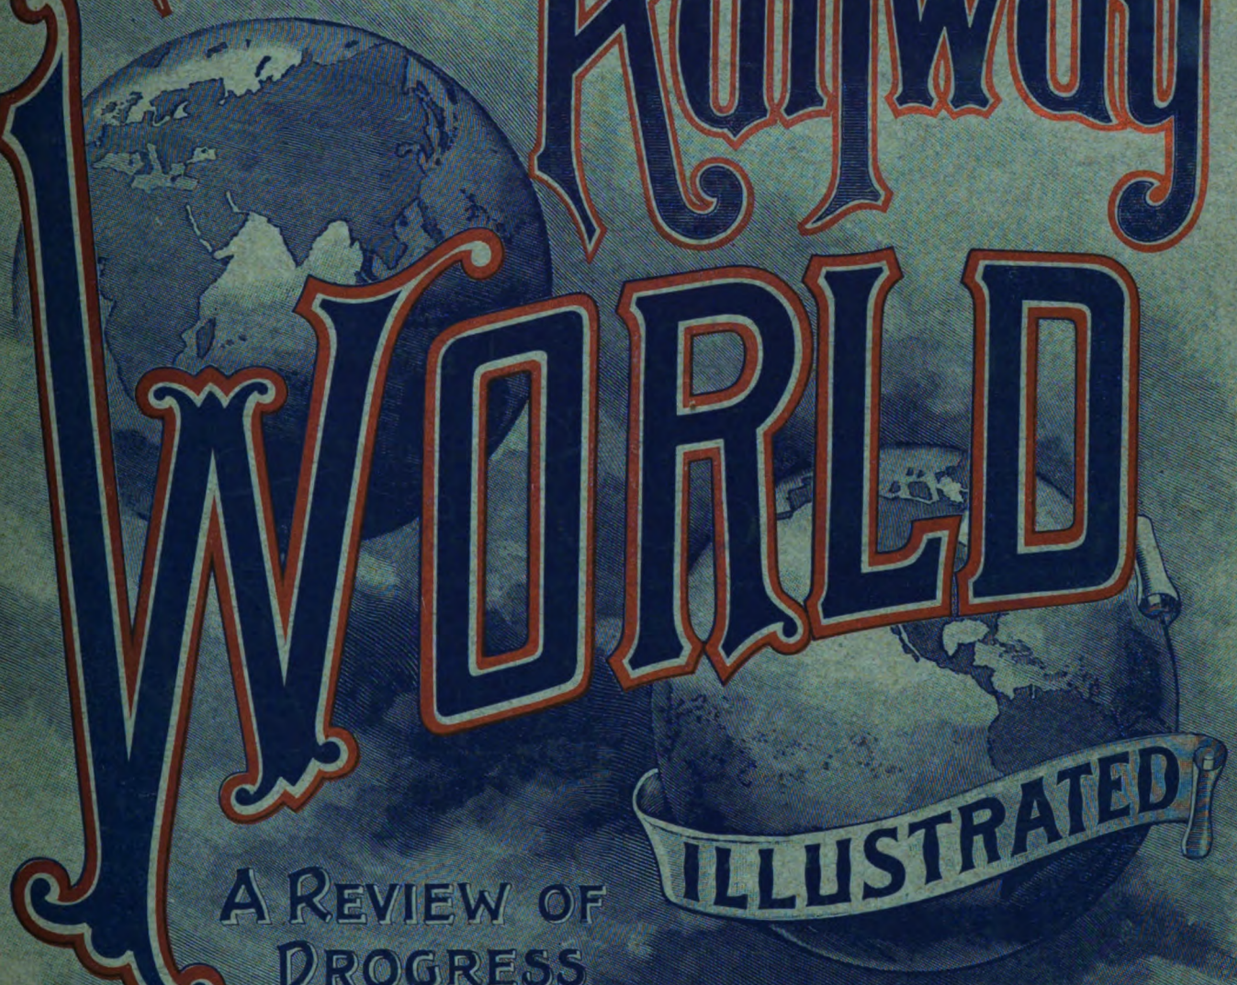

ILLUSTRATED

A REVIEW OF PROGRESS IN *Electric* AND OTHER *Traction.*

Osram
G·E·C
LAMPS
Traction Type

The Strong and Efficient Lamps for Tramcar and Railway Lighting
Specially constructed to stand rough handling and excessive vibration. From 90 to 135 volts.
Made at the Osram-Robertson Lamp Works, Hammersmith, London.
Wholesale only:—
The General Electric Company, Limited
Head Office: 67 Queen Victoria St., London E.C.

Digitized by Google

ROLLING STOCK SPECIALITIES.

BRITAIN
EXPECTS
BRITISH
BUYERS
TO BUY
BRITISH
GOODS

OUR RATTAN

(NATURAL, GLAZE, DULL FINISH, OR COLOURED)

in twill, straight, or fancy weaves,
canvas backed or unbacked, is

BRITISH MADE THROUGHOUT

from the splitting of the cane to the finished article.

We hold **LARGE STOCKS OF RAW MATERIALS** and can

GUARANTEE PROMPT DELIVERIES.

Particulars of other **BRITISH SPECIALITIES** *upon application.*

THE GENERAL SEATING COMPANY LTD.
13 CITY ROAD, LONDON, E.C.

Digitized by Google

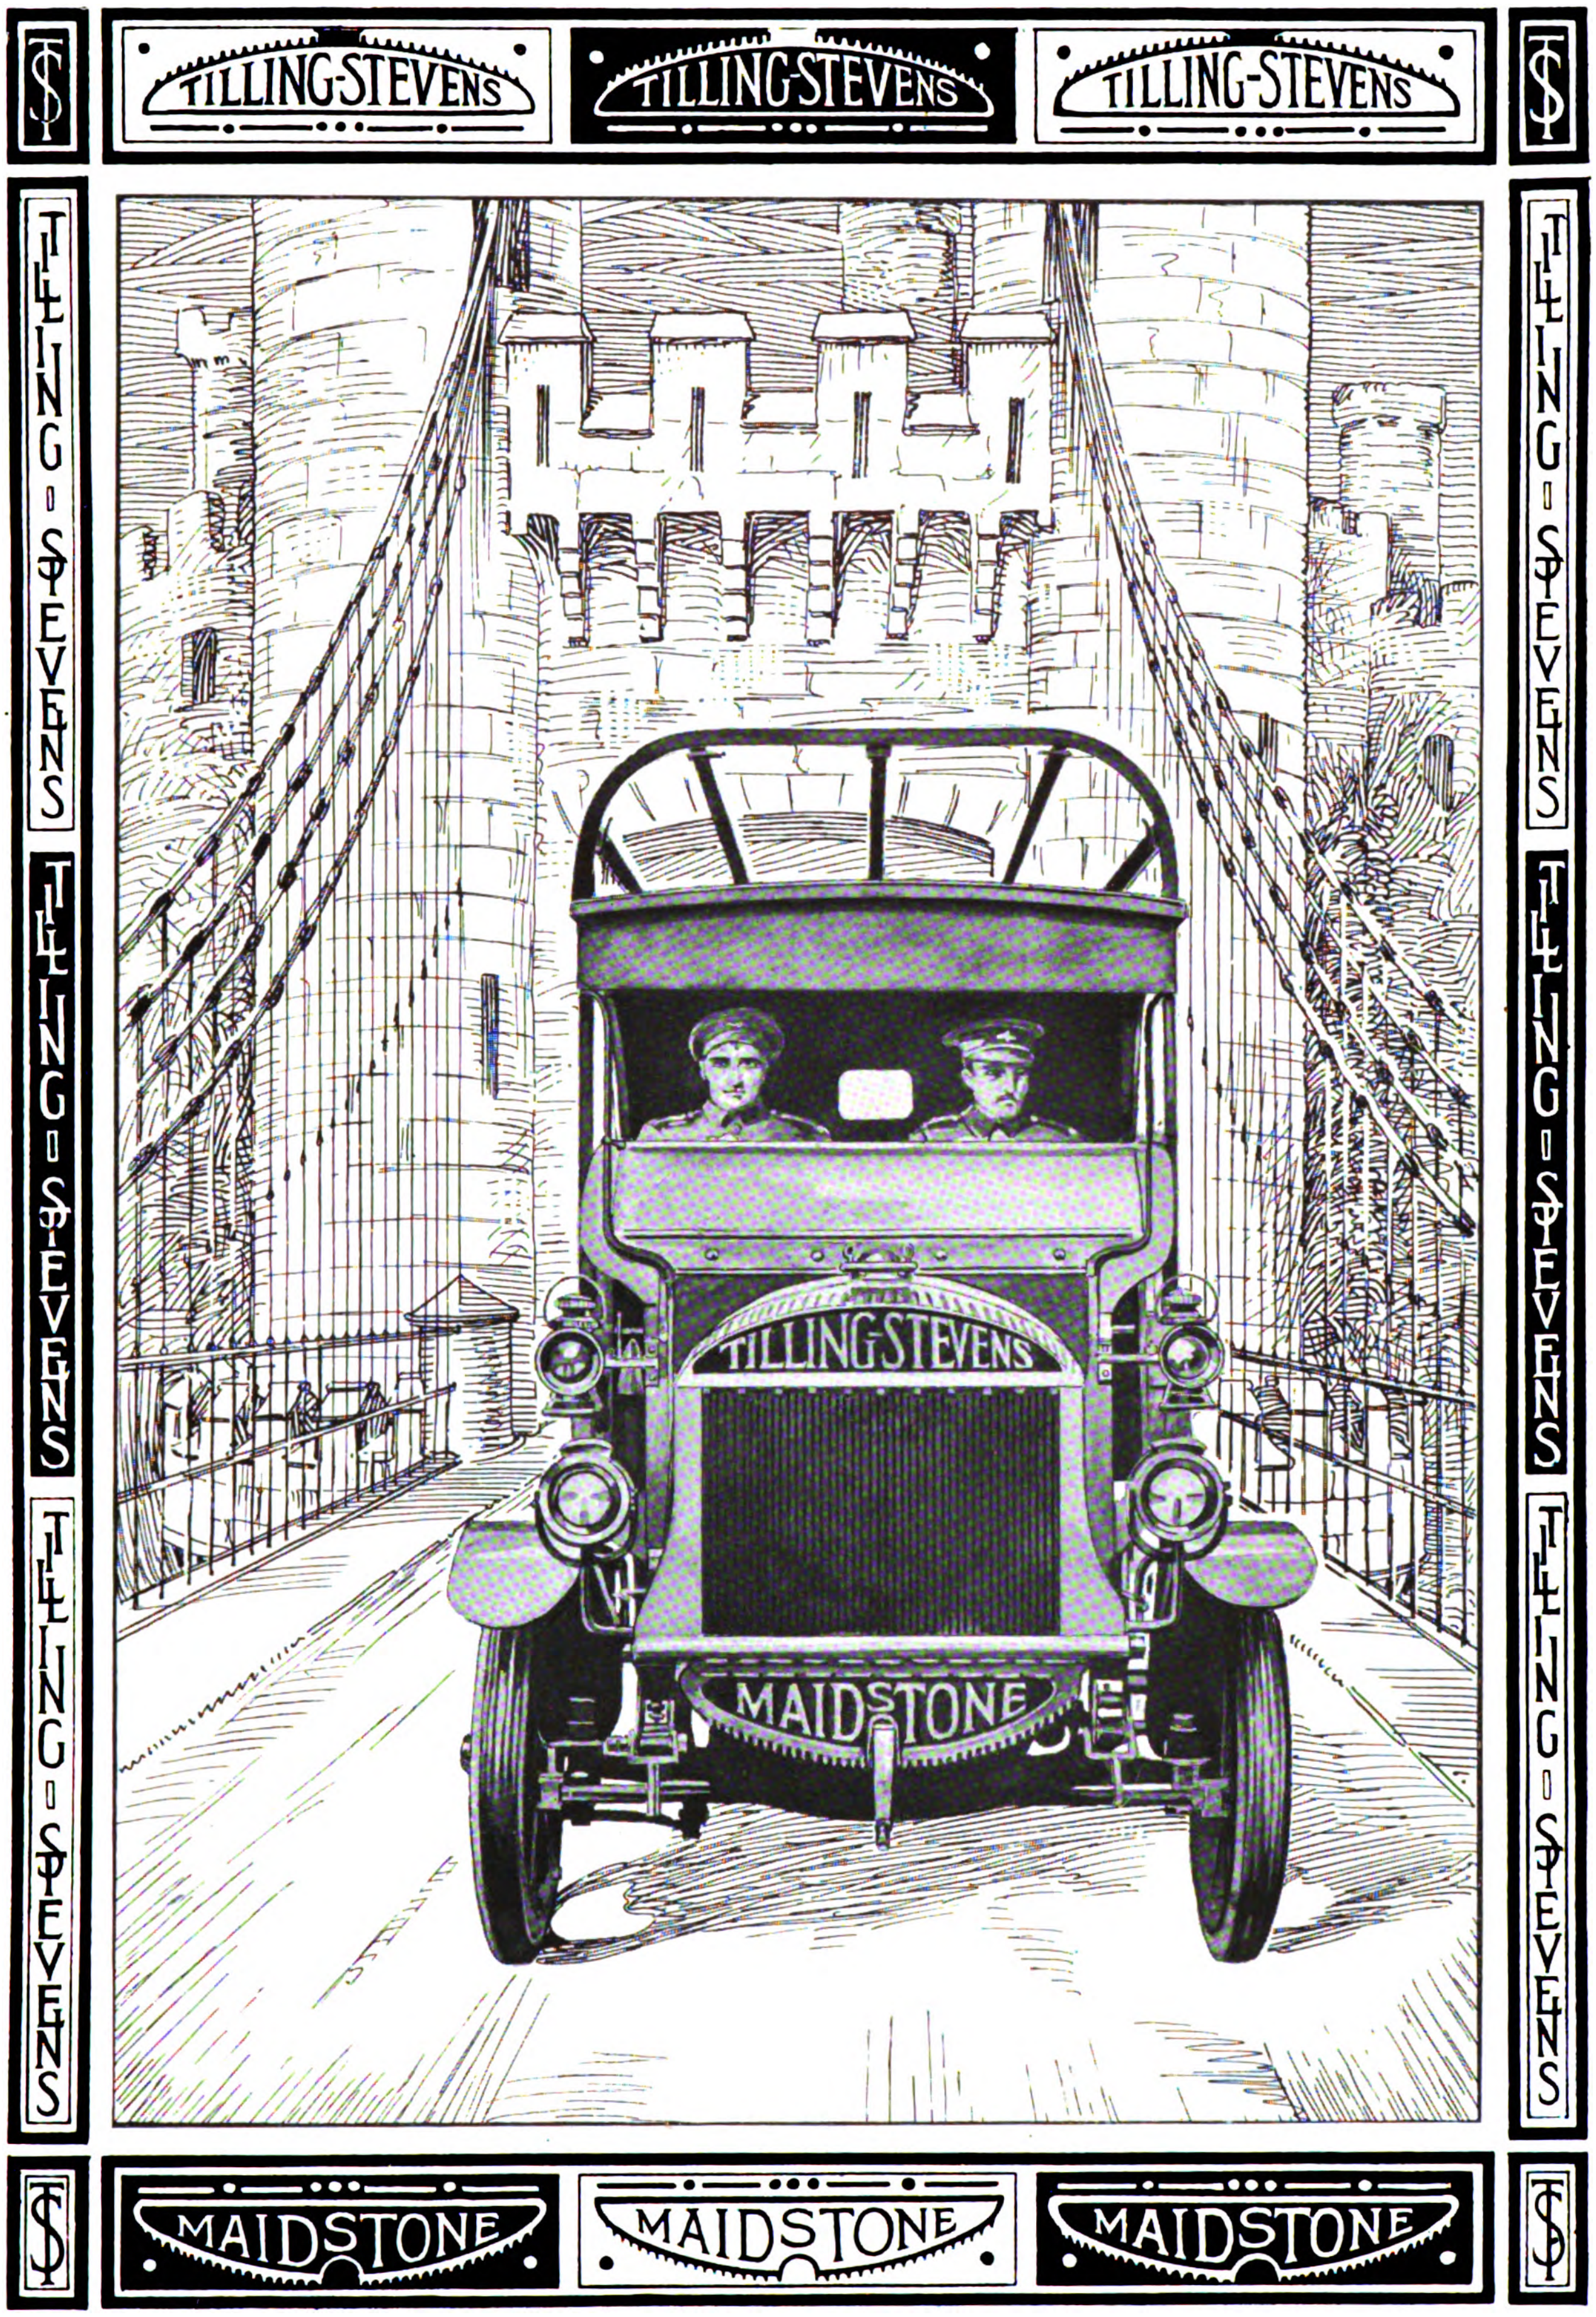

Digitized by Google

NOT THE MOST EXPENSIVE— BUT THE BEST

DENNIS

UTILITY VEHICLES FOR ALL PURPOSES ARE FAMOUS THROUGHOUT THE WORLD FOR THEIR WONDERFUL RELIABILITY

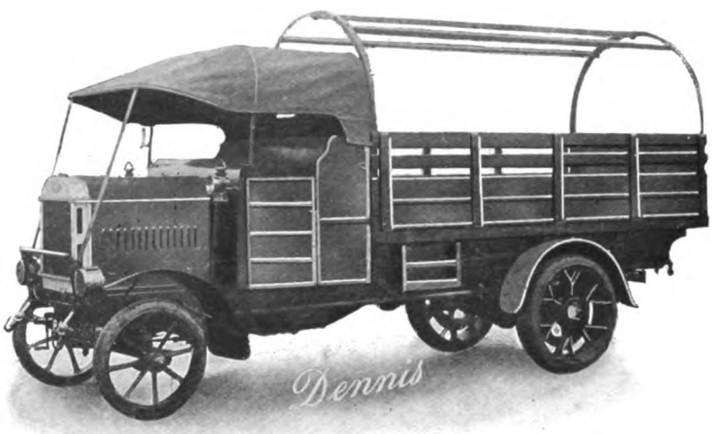

The Standard DENNIS War Office A type Lorry.
Hundreds now in service. Any kind of body can be fitted.

DENNIS BROS. (1913) LTD.
GUILDFORD, England
Telegrams: "DENNIS, GUILDFORD."
Telephone: GUILDFORD 129, 329, 529

Digitized by Google

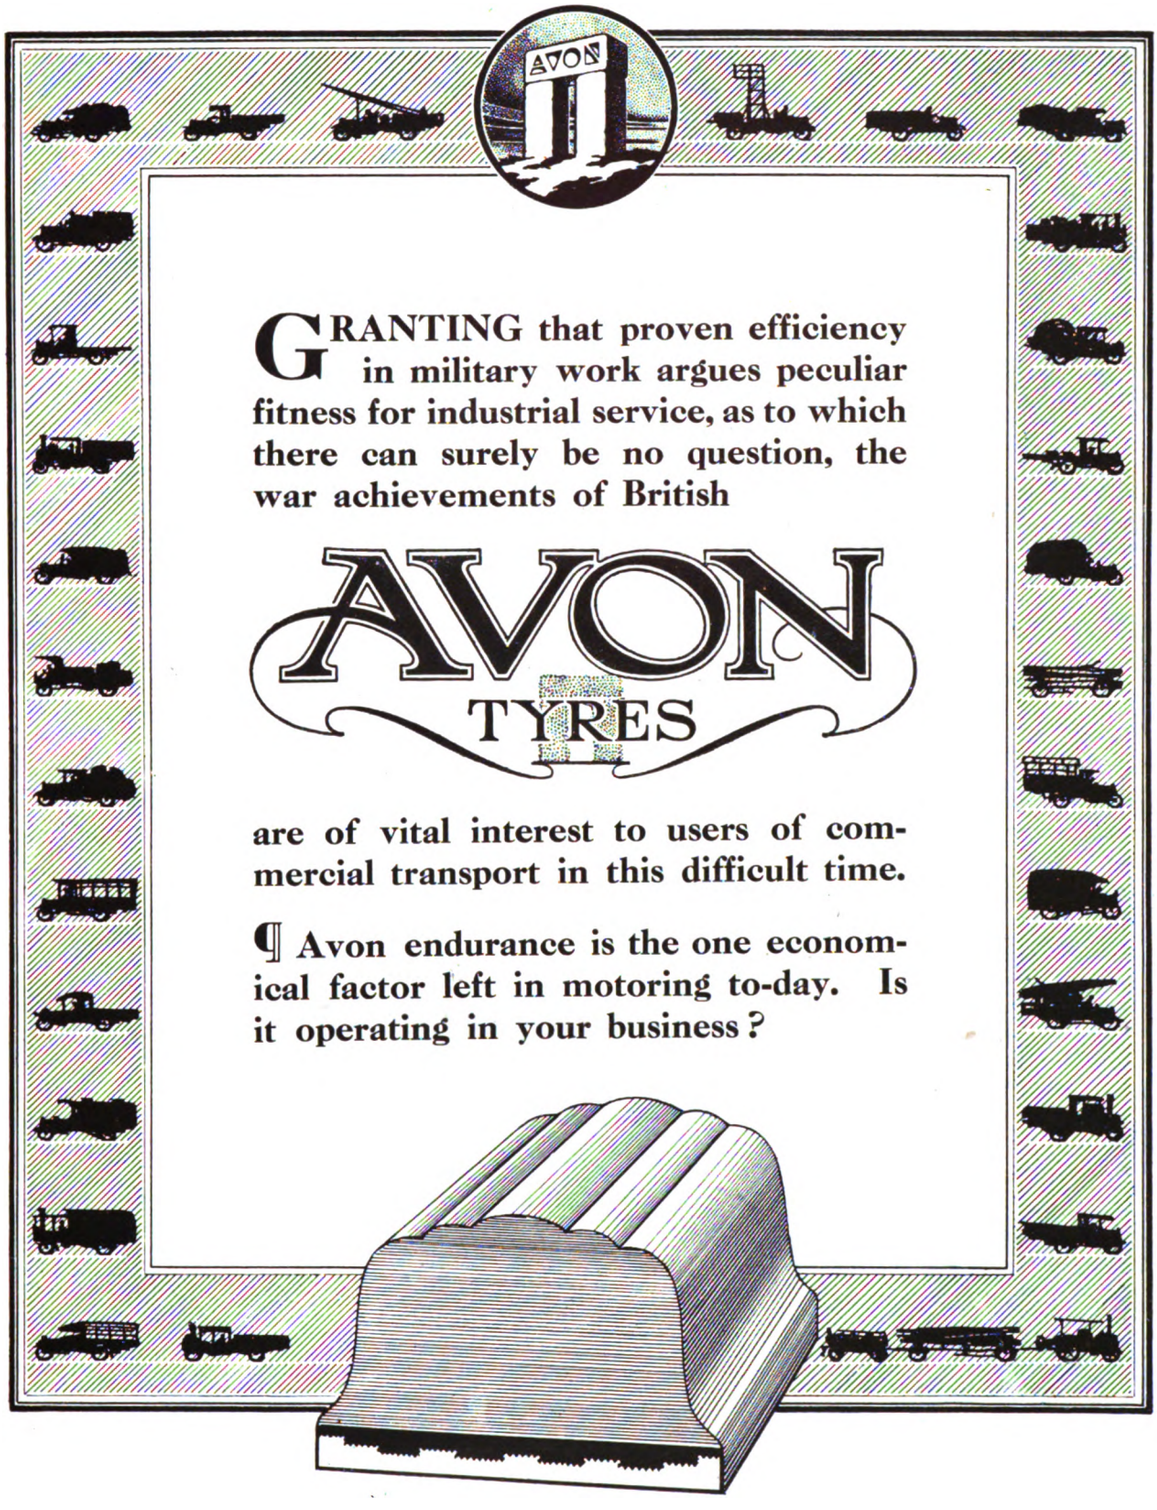

GRANTING that proven efficiency in military work argues peculiar fitness for industrial service, as to which there can surely be no question, the war achievements of British

AVON TYRES

are of vital interest to users of commercial transport in this difficult time.

¶ Avon endurance is the one economical factor left in motoring to-day. Is it operating in your business?

THE AVON INDIA RUBBER CO., LTD., 19, Newman Street, Oxford Street, London, W.

WORKS: Melksham and Bradford-on-Avon. MANCHESTER—38, King Street West. GLASGOW—55, Queen Street. BIRMINGHAM—Broad Street Chambers. BRISTOL—119, Victoria Street. NEWCASTLE—5, Gallowgate. NOTTINGHAM—Mansfield Road. ABERDEEN—106, Union Street. SWANSEA—Fisher Street. DUBLIN—L. J. Sullivan, "Cnoc Aluin," Dalkey. PARIS—88, Avenue des Ternes. List of Solid Tyre Pressing Stations on request.

866

Digitized by Google

Halley

MUNICIPAL VEHICLES



RELIABLE, DURABLE AND ECONOMICAL

THE HIGH QUALITIES OF RELIABILITY, ECONOMY AND DURABILITY, WHICH HAVE ESTABLISHED THE REPUTATION OF THE HALLEY IN ALL PARTS OF THE WORLD ARE SPECIAL FEATURES OF OUR MUNICIPAL VEHICLES

HALLEY'S INDUSTRIAL MOTORS LTD.

YOKER——————GLASGOW

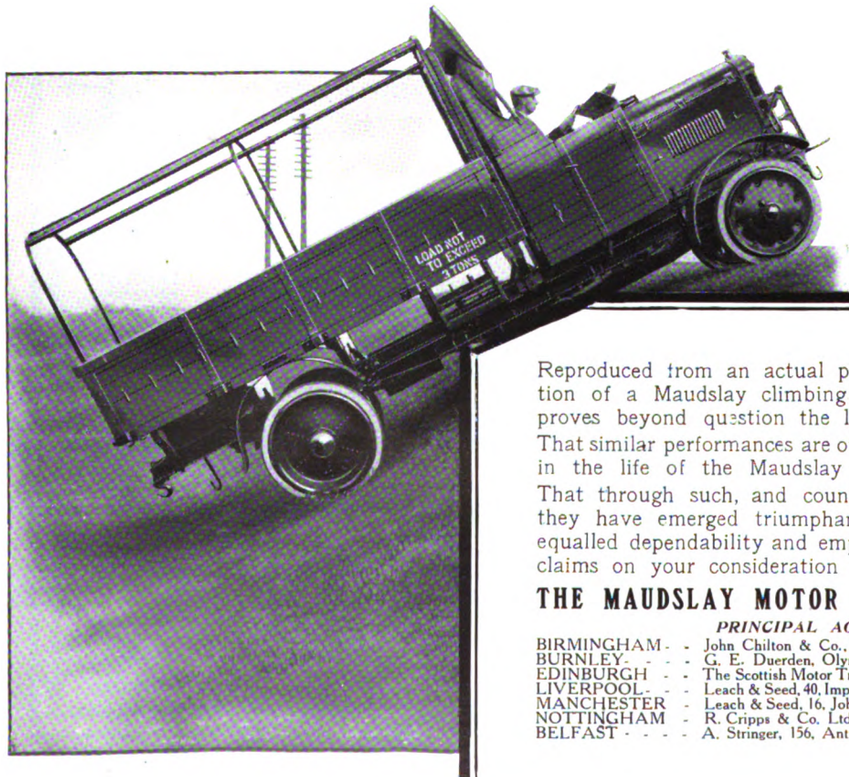

Reproduced from an actual photograph, this illustration of a Maudslay climbing a gradient of 1 in $1\frac{3}{4}$ proves beyond question the lorry's wonderful power. That similar performances are of almost daily occurrence in the life of the Maudslay on War Service and—That through such, and countless other, severe tests they have emerged triumphant, evidences their unequalled dependability and emphasises their unrivalled claims on your consideration for after-War purchase.

THE MAUDSLAY MOTOR CO. LTD., COVENTRY

PRINCIPAL AGENTS:

BIRMINGHAM - - John Chilton & Co., 71, Broad Street.
BURNLEY - - - - G. E. Duerden, Olympia Street.
EDINBURGH - - The Scottish Motor Traction Co. Ltd., East Fountainbridge.
LIVERPOOL - - Leach & Seed, 40, Imperial Buildings, Exchange Street East.
MANCHESTER - Leach & Seed, 16, John Dalton Street.
NOTTINGHAM - R. Cripps & Co. Ltd., Lower Parliament Street.
BELFAST - - - - A. Stringer, 156, Antrim Road.

SS

Digitized by Google

"LEYLAND

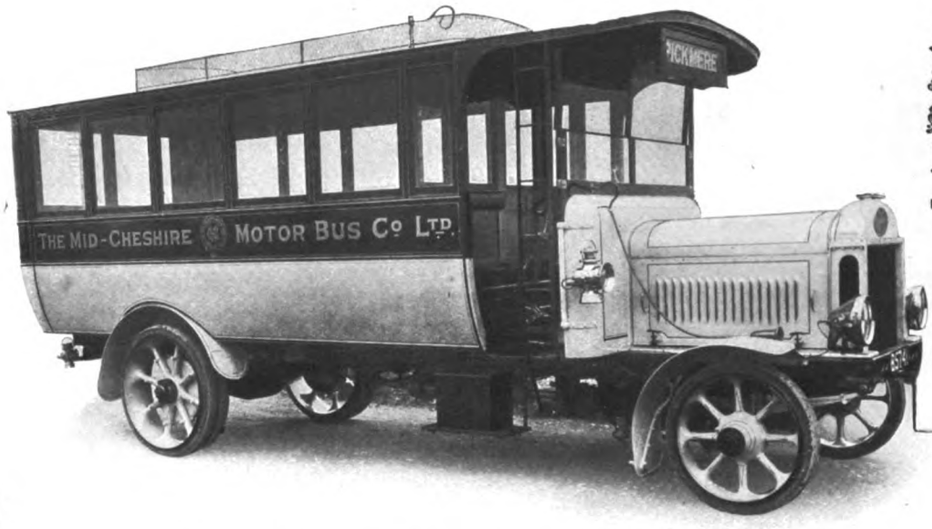

By Appointment to H.M. The King.

"LEYLAND" (STANDARD) SINGLE-DECK 'BUS TO SEAT 32 INSIDE.

STANDARD TOWER WAGON.

PETROL MOTOR, TIPPING ROAD METAL.

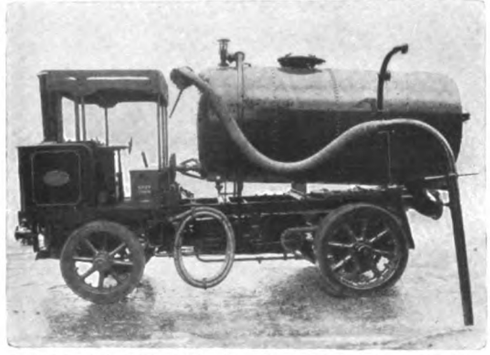

STEAM VACUUM TANK WAGON & GULLEY FLUSHER.

MANUFACTURERS OF

Fire Engines,
Fire Tenders,
Municipal Motors of all kinds,
Rail Cars,
Self Propelled Tram Cars,
Tower Wagons,
Petrol Lorries, Vans, Omnibuses, etc.,
and STEAM WAGONS, etc.

Send for our Latest Catalogue.

London Office: 47, NEW KENT ROAD, S.E.

LEYLAND MOTORS (1914) LTD.,

LEYLAND, LANCS.

Digitized by Google

STRAKER SQUARE

STANDS HIGHEST
IN THE
INDUSTRIAL
VEHICLE
WORLD.

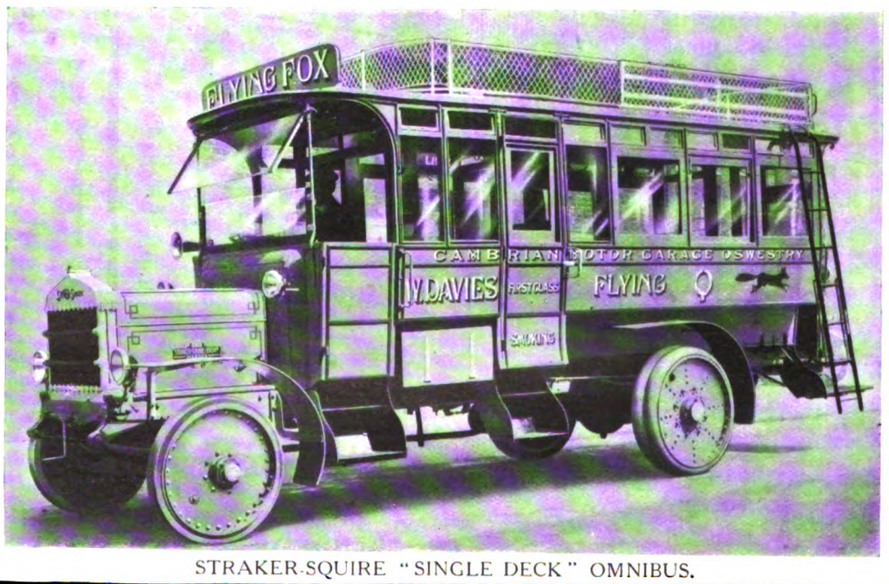

STRAKER-SQUIRE "SINGLE DECK" OMNIBUS.

BLACKFRIARS·LONDON·SE

Digitized by Google

KARRIER COMMERCIAL MOTOR VEHICLES

Our entire output of Karrier Lorries is doing Service for King and Country at present

Equally at your Service when once more released

Let us enter your order for rotational delivery

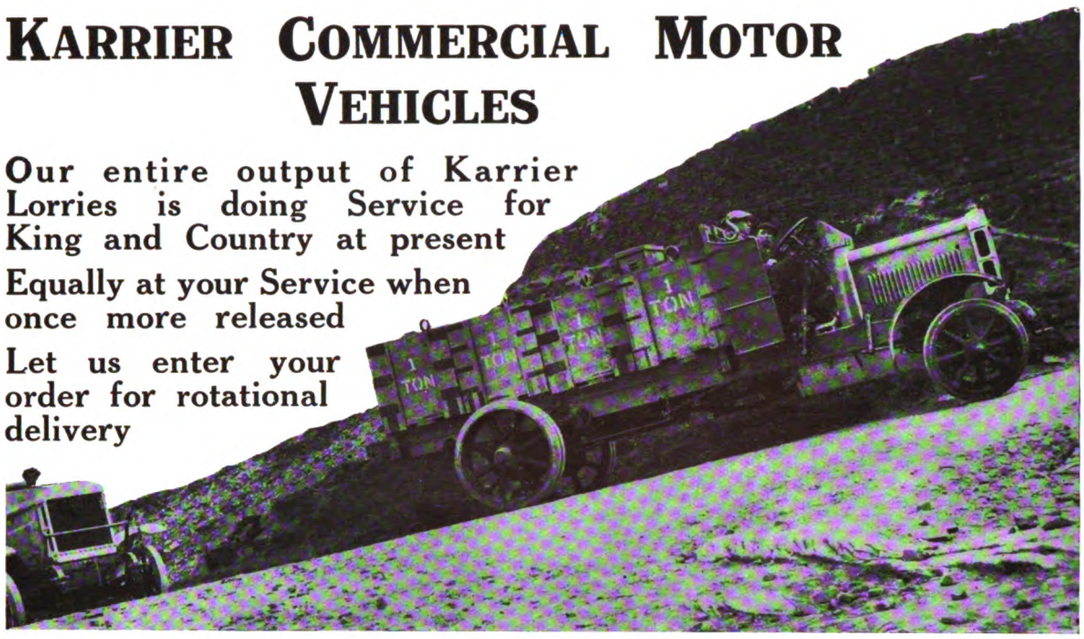

Write for full particulars to the Manufacturers—

CLAYTON & CO., HUDDERSFIELD, LTD.

KARRIER WORKS

HUDDERSFIELD

Telephones: Huddersfield, 1441 (3 lines)

Telegrams: "Karriakar, Huddersfield"

Albion Hydraulic Tipping Waggon

The illustration shows the 32 h.p. 4-ton Albion Hydraulic Tipping Waggon, a typical example of Albion reliability and fine workmanship. The whole four-ton load can be tipped in about one minute. The Albion Company are recognised specialists in the construction of UTILITY VEHICLES of all kinds.

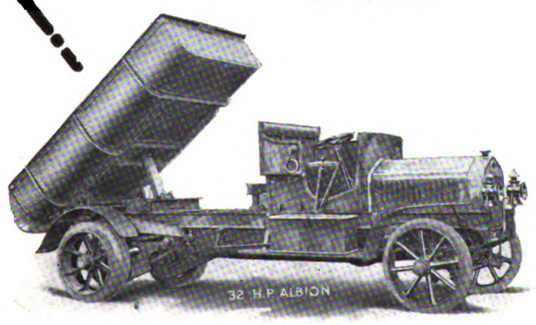

Now is the time for full enquiry and discussion, with a view to early delivery when military exigencies permit.

Write to-day to

ALBION MOTOR CAR CO., Ltd.,
SCOTSTOUN, GLASGOW.

Glasgow Office—105, St. Vincent Street.
Manchester—283, Deansgate.
Sheffield—Stirling Chambers, Campo Lane.
London Office and Repair Depot—
21-22, Upper Rathbone Place, Oxford Street

Digitized by Google

PROOF PER PHOTOGRAPHS.

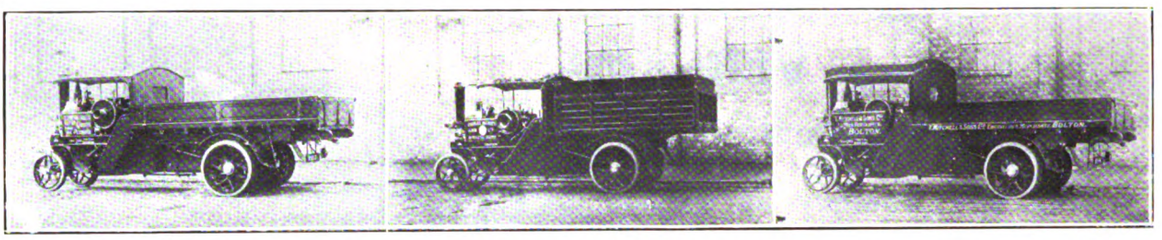

This pictorial page gives some idea of the widespread use of motors on home service and on war duty.

Private users, corporations, railway and tramway companies, etc., etc., are catholic in their choice of vehicles. As to the equipment of the cars, whether these be light delivery vans or real heavyweights, there is a fast-growing inclination to fit them with Spencer-Moulton Solid Rubber Tyres. These are known by the happy title of Superb-Mileage Tyres. They are guaranteed for 10,000 miles, and it is well known that the Spencer-Moulton guarantee is worth 20s. to the £.

As with Fodens, so is it with Thornycrofts: they are to be met in many parts of Europe, and doing well on the make of tyres referred to above.

The three Fodens depicted above have been selected from a collection of photographs from all parts of the country. Tyre sizes for Foden 3-tonners are 140 m/m section, and for 5-tonners 160 m/m section.

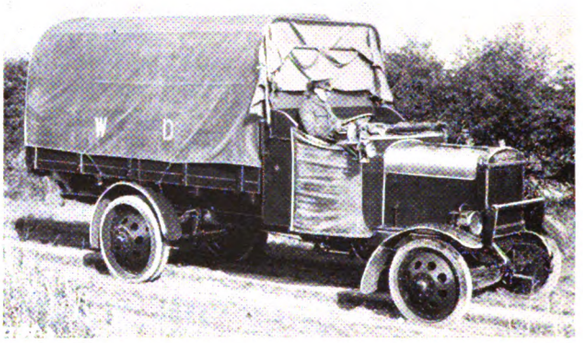

The above illustration depicts a Thornycroft 40 H.P. Type "J" lorry as supplied for war service.

Messrs. Thornycroft, like other leading chassis makers, fit Spencer-Moulton tyres.

Whatever class of wagon you buy, specify this make of tyre. The manufacturers of same or the makers of cars can let you have any information you require about Tyre Service.

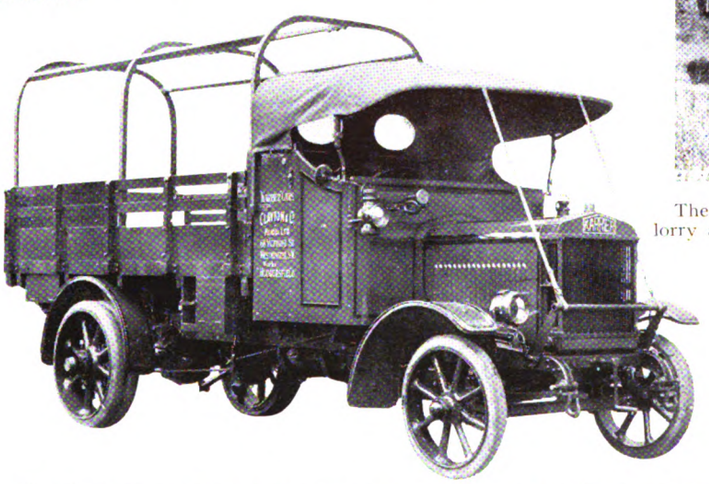

The illustration at foot shows one of the most interesting fleets of vehicles in England—six Sentinels, owned by Mr. J. T. Lawton, of Manchester, and engaged six days a week on transport over 200 miles of road betwixt that city and London. These wagons are shod with Spencer-Moulton tyres.

The Karrier car (on left), as fitted with Spencer-Moulton Solids, is another fine combination of chassis-cum-tyre.

The test hill, with a section that inclines at about 1 in 3, near Huddersfield, is one of the most remarkable of its kind. It is wonderful to watch a Karrier on its test—and thrilling to an observer on board. Messrs. Clayton and Company (Huddersfield) fit Spencer-Moulton tyres.

SPENCER-MOULTON

TRADE MARK

Space precludes the publication here of further photographic proof of how the great chassis firms are ready to fit Spencer-Moulton solid rubber tyres, and the widespread adoption of these products by users in every section of trade and industry.

Readers of THE TRAMWAY AND RAILWAY WORLD will be specially interested in the fact that the Spencer-Moulton firm have made tyres for the railway companies for over 44 years.

Complete information about Spencer-Moulton tyres can be had, along with quotations, by users who send for List 101 from—

GEO. SPENCER, MOULTON & CO., LTD., Head Office Solid Tyre Dept., 230, Deansgate, MANCHESTER. Telegrams: "Solspen," Manchester. Telephones 5180-1, City. Works, Kingston Mills, Bradford-on-Avon. Registered Office, 67-69, Cannon St., E.C. Fitting Agents all over the kingdom.

DEPOTS.—GLASGOW: 65-67, Bothwell St. LEEDS: 68, Albion St. NOTTINGHAM: A. R. Atkey & Co., Trent St. BRADFORD: Eric S. Myers, 52, Manningham Lane, etc. DUBLIN: C. E. Jacob, 184, Great Brunswick St. BELFAST: Spence & Johnstone, 32, Linenhall St. CARLISLE: County Garage Co., 14a, Botchergate. DERBY: A. R. Atkey & Co., Beckett S. HUDDERSFIELD: W. H. Atkinson & Co., St. John's Road and East Parade. NEWCASTLE-ON-TYNE: Forth Engine & Motor Co., Pottery Lane.

Digitized by Google

PAY A LITTLE MORE AND HAVE A "LACRE"

10 CWT. to 6 TONS

Lacre
ALL BRITISH

10 CWT. to 6 TONS

LACRE MUNICIPAL VEHICLES

USED BY THE FOLLOWING CORPORATIONS MUNICIPALITIES AND GOVERNMENTS

GLASGOW
MANCHESTER
BRADFORD
MELBOURNE
SINGAPORE
BANGKOK
JOHANNESBURG
KIMBERLEY
CANADA
CEYLON
NEW SOUTH WALES
SOUTH AFRICA
SIAM
AND THE BRITISH AND ALLIED GOVERNMENTS
Etc., Etc.

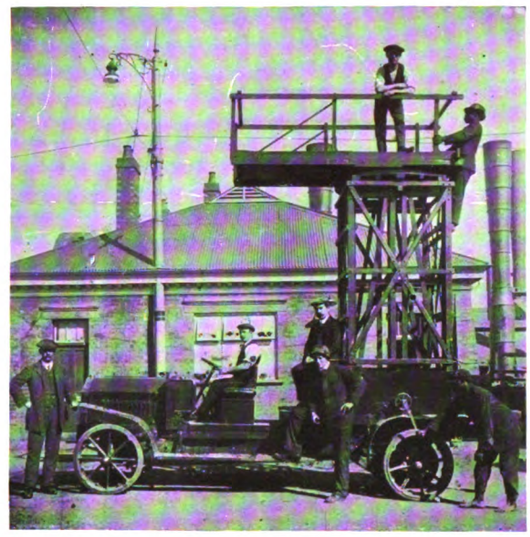

30 h.p. "Lacre" Tower Wagon supplied to the Johannesburg Municipal Tramways.

MANUFACTURERS OF

VANS
LORRIES
TRANSPORT WAGONS
TOWER WAGONS
TIPPING WAGONS
TANK WAGONS
ROAD-SWEEPING MACHINES
VACUUM SEWAGE PLANT
WATER CARTS
REFUSE WAGONS
FIRE ENGINES
OMNIBUSES
CHAR-A-BANCS
Etc., Etc.

"Lacre" Telegraph Wagon, constructed for the General Post Office (Construction Branch).

THE LACRE COMPANY are THE Specialists for Municipal Motor Vehicles of all kinds

"Lacre" Road Sweeper supplied to the Glasgow Corporation, who have ordered FIVE further Machines.

The LACRE MOTOR CAR COMPANY, Ltd.

Principal Sales and Maintenance Depot

78, YORK ROAD, KING'S CROSS, LONDON, England

Registered Offices and Works: LETCHWORTH, Herts., England.

MANCHESTER Sales Office and Repair Depot:
Mayfield Station Buildings, London Road, Manchester.

TELEPHONES NORTH 2708. LETCHWORTH 154. CEN. MANCHESTER 655.
TELEGRAMS UNBAFFLED, LONDON LETCHWORTH AND MANCHESTER.

CLAUDE BROWNE, MANAGING DIRECTOR

14

Digitized by Google

THE
BELL PUNCH & PRINTING Co., LTD.

52-58 TABERNACLE STREET, LONDON, E.C.

Telegrams: "Belpunch, London." **Telephone:** 7531 Central.

PUNCHES

FOR

OMNIBUSES—TRAMWAYS—RAILWAYS

TICKETS

OMNIBUSES—TRAMWAYS—RAILWAYS

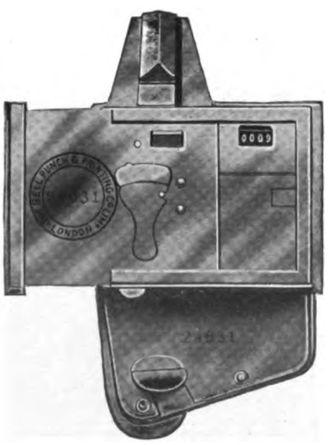

Established 1876.

Enquiries addressed to the SECRETARY, will receive prompt attention.

TUDOR
ACCUMULATORS
FOR ELECTRIC VEHICLES.

ELECTRIC OMNIBUS.—BRIGHTON AND HOVE.

About 16 Electric Omnibuses have been in regular service for the past six years, and TUDOR Accumulators have been employed exclusively.

THE TUDOR ACCUMULATOR Co., Ltd.
3, Central Buildings, Westminster, London, S.W.
Works: DUKINFIELD, near MANCHESTER.

DOCKERS'
SUPERFINE PAINTS
and
EXTRA DURABLE VARNISHES
for
TRAMCARS AND OMNIBUSES.

DOCKERS'
'HERMATOR' PAINTS AND ENAMELS
for
POLES & POWER STATIONS.

CATALOGUES AND PATTERN BOOKS FREE ON APPLICATION.

DOCKER BROTHERS Ltd.,
170 Bishopsgate, LONDON, E.C.,
And SIRMINGHAM.

Digitized by Google

TRADE MARK
WOOD-MILNE

Some Reasons why

you should buy

WOOD-MILNE

British-made

Solid Band Tyres

BECAUSE they are British.

BECAUSE the Foreign-made Tyre offers no National advantage from an economic point of view.
(Imports £3,500,000 per annum.)

BECAUSE our representatives are on Military Service, and we are not prepared to "import" substitutes.

BECAUSE it is sound business. Quality, Price, Service, and Supplies are right.

GUARANTEED 10,000 MILES

WRITE FOR PARTICULARS

Digitized by Google

BOTH DOING
EXCELLENT WORK.

THE SHREWSBURY S.T. & CHALLINER TYRE Co LTD,
MANCHESTER & LONDON.
Branches:— BIRMINGHAM, LEEDS, DUBLIN,
& SYDNEY AUSTRALIA.

Digitized by Google

THORNYCROFT

COMMERCIAL MOTOR VEHICLES

CHARS-A-BANCS

MOTOR 'BUSES

AND ALL CLASSES OF MUNICIPAL AND PUBLIC SERVICE VEHICLES

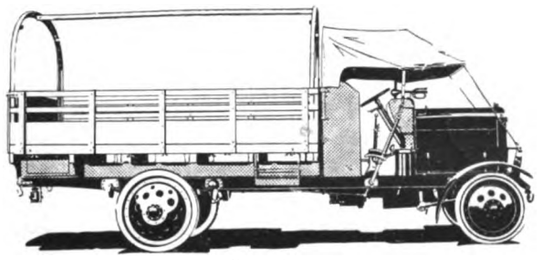

40 h.p. type "J" 3½ ton Lorry

Many hundreds of this type have been supplied for Military service abroad

JOHN I. THORNYCROFT & CO., Limited
CAXTON HOUSE
WESTMINSTER, LONDON, S. W.

Order Vehicles Now!

LARGE numbers of business firms are adopting the wise far-seeing policy of placing orders for lorries now—for delivery as soon as circumstances permit.
We, in common with a few other leading motor vehicle manufacturers are required to devote our entire output for war purposes, consequently orders can only be accepted for rotational delivery.
The earlier orders are placed on our books, the earlier will be the delivery of the vehicle later on.

Practical Working Tests

have proved that there is no friction surface to equal Ferodo fabric. The London Underground Railways and the London Motor Buses rely upon it exclusively for braking purposes. The adoption of Ferodo-lined brakes on the London Underground enabled them to treble the train service owing to the rapid deceleration and the absence of firing and short circuit troubles occasioned by the metallic dust from the metal to metal brakes. The brakes on the London buses give an average life of over 50,000 miles and they pull up every few yards. Isn't this sufficient evidence to induce you to fit your motor vehicles with

FERODO

CLUTCH AND BRAKE LININGS

Contractors to the War Office and Admiralty, London General Omnibus Company, and Underground Electric Railways of London and Paris. List M 15 *from*

THE HERBERT FROOD CO., Ltd.
Works—CHAPEL-EN-LE-FRITH

We hold stocks at London, Birmingham, Belfast, Bristol, Cardiff, Edinburgh, Glasgow, Liverpool, Manchester, and Newcastle

L3



Educate Your Drivers.

Are your drivers getting the best results out of the engines entrusted to them?

600,000 owners of motor vehicles have proved that the

ZENITH CARBURETTER

saves petrol and increases power—have you a Zenith on your engines? If not, educate your drivers in efficiency by providing the Zenith Carburetter on all existing cars and specifying it for new ones. You will find yourself scores of pounds per annum in pocket in consequence.

Send, as a first step, for descriptive booklet No. 57.

ZENITH CARBURETTER CO., LTD.
40-42, Newman Street - - - London, W.
Telephone: Regent 4812-4813.

Digitized by Google

COVENTRY ROLLER CHAINS

Suit every type of British & American Service Vehicle.

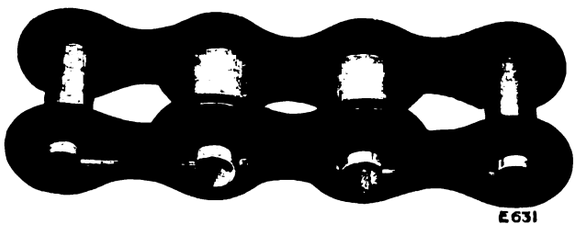

B. TYPE.

Every Link Detachable.

Catalogue D/6V post free.

"THE COVENTRY" CHAIN CO. LTD.,
COVENTRY, ENGLAND.

TELEPHONE: 228, WEST BROMWICH, 2 LINES.

TELEGRAMS: BROCKHOUSE, WEST BROMWICH.



J. BROCKHOUSE & CO. LTD.

West Bromwich,
ENGLAND.

MANUFACTURERS OF

SPRINGS,
FORGINGS,
STAMPINGS,
PRESSED WORK,
BOLTS, Etc.

FOR EVERY DESCRIPTION OF

ROAD VEHICLES.



YOUR ENQUIRIES SOLICITED.

TO USERS OF COMMERCIAL LORRIES AND BUS CHASSIS

LARGE & VARIED STOCK OF NEW PARTS

suitable for Buessing, De Dion, Darracq - Serpollet, Milnes - Daimler, Maudsley, Straker or Wolseley Chassis

FOR DISPOSAL

Also quantities of

BALL RACES, BOLTS & NUTS, AND GENERAL REPAIRING STOCK.

For particulars and to view, apply The Purchasing Agent,
LONDON GENERAL OMNIBUS CO., LTD.,
Electric Railway House,
Broadway, Westminster,
S.W.

Digitized by Google

Commercial Vehicle Tyre Equipment.

Van Owner: "Hullo, Dunlop! I've something here to interest you! These three and four ton lorries are using up a devil of a lot of tyres. Can you suggest any reason for it?"

Dunlop (*after looking at the tyres*): "Difficult to say—may be your own fault or that of the tyres. Anyway, if you want to be on the safe side, as far as tyres are concerned, why don't you fit Dunlops? I make just as good Solid Rubber Tyres as Pneumatics."

Van Owner: "I didn't realise . . . . . ."

Dunlop: "Well, it's a fact, nevertheless, as a test will show you."

Van Owner: "Is that so? Well, I'll try them."

DUNLOP RUBBER COMPANY, Ld.,
FOUNDERS OF THE PNEUMATIC TYRE INDUSTRY.
PARA MILLS, ASTON CROSS, BIRMINGHAM.

DUNLOPS can be obtained and are fitted free of charge at Birmingham, Glasgow, Leeds, London, Newcastle, Manchester, Bristol, Nottingham, Liverpool, Dublin, Belfast.

Trade Mark.

Digitized by Google

"Yeoman Service"



The HETTON MOTOR CO., Ltd. 38

AUTOMOBILE ENGINEERS.

HETTON-LE-HOLE, Co. Durham.

Complete Overhauls. Vulcanising. Petrol, Oils.
CARS for HIRE. Tyres, Greases. Any make of Car supplied.

Clients cars driven at Owner's risk

The Charabanc is booked on the assumption that it is in order on the day booked and the company does not accept any responsibility for loss, etc. due to unforeseen breakage of any mechanical part

August 14th 1916.

Gentlemen I am instructed by the Directors of the above Company, to let you know how Satisfied they are with the 28 Seater Chas-a-banc W. P. type. You supplied five years ago. It has done Yeoman Service, & is admired by everyone in the North, for its Consistency: It still does its work with the same ease as when new, Only on the 13th inst It ran fully loaded. 180 miles through the Lake District without a hitch We also desire to thank you, for the very prompt manner in which You have Sent us renewals. We can only add that our Commer Chas-a-banc has & Still is giving Every possible Satisfaction.

James Adam.
Secretary.
THE HETTON MOTOR COMPANY, LIMITED.

"COMMER" CAR. REG^d TRADE MARK.

"COMMER" CAR. REG^d TRADE MARK.

"COMMER CARS"

FOR GOODS AND PASSENGERS

Commercial Cars, Ltd., Luton

Digitized by Google

Will you test this tyre against the one you are now using?

LOOK at the hundreds of commercial vehicles that fill the busy streets of London and the cities, towns, and villages throughout the country - see the lines of Army wagons wending their train-like way on the country highways, and you will see thousands of Goodyear Band Tyres.

Manufacturers, Brewers, Omnibus Companies, Corporations, Governments, Fire Brigades, Gas Companies, Haulage Contractors, Railways, etc.—all are experiencing Goodyear Service from the tyre that was tested and proved before ever it was put on the market.

Goodyear experts submitted over 2000 tyres to every possible usage.

When they found one tyre-structure that came out top over all tests — one that beat all records for durability—they stamped it with the name "Goodyear," and sent it out into the world, knowing full well that it would stand up to the needs of the commercial-vehicle owner.

That is the history of its manufacture ; but the Goodyear Band Tyre is making history every day.

You want a tyre that will give you long life and resiliency—a tyre that will keep your vehicles in constant commission, and will cause a notable reduction in your running costs.

Will you send a post-card making an appointment for the Goodyear man to call and explain how you can test the Goodyear Band Tyre against the ones you are now using? It will incur no increased cost, and will place you under no obligation. Address your post-card to Dept. "T.W."

THE GOODYEAR TYRE & RUBBER CO.
(Great Britain), Ltd.,
Central House, Kingsway, London, W.C.
Branches at Manchester, Birmingham, Glasgow, Dublin, and Belfast.
Canadian Factory : Bowmanville, Ontario.

GOODYEAR
BAND TYRES.

180

Digitized by Google

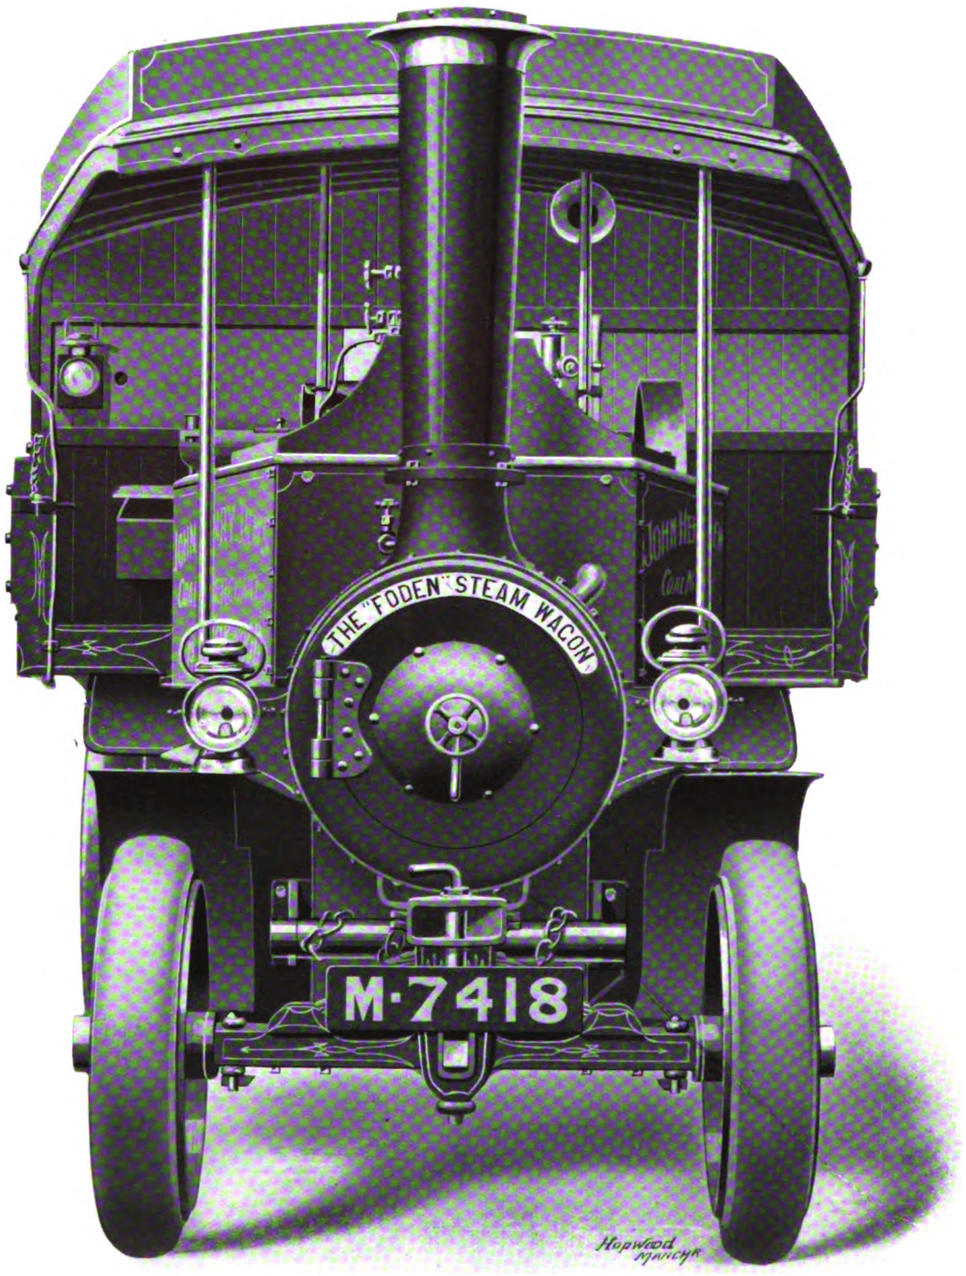

FODENS LIMITED, SANDBACH

WILL BE PLEASED TO SEND CATALOGUE AND PARTICULARS ON APPLICATION.

Digitized by Google

TYRES

How to run Commercial Cars more economically—and how not to.

In their desire to save expense, some Commercial Car Owners may be tempted to experiment with "cheaper" tyres.

That way danger lies!

Cheaper Tyres mean inferior quality, and the money saved in the initial cost, with a considerable sum besides, will be needed very quickly to make good the defects of the tyre. Ultimately it will be found that the lower-priced tyre was a very expensive purchase.

True Economy consists in obtaining the best value for the money. The Henley Solid Band Tyre gives such good and continuous service that it is not only the *best* Solid Tyre made, but it is by far the most economical tyre to use. Though guaranteed for 10,000 miles, it is more frequently than not found that this figure is substantially exceeded.

HENLEY

SOLID BAND TYRES

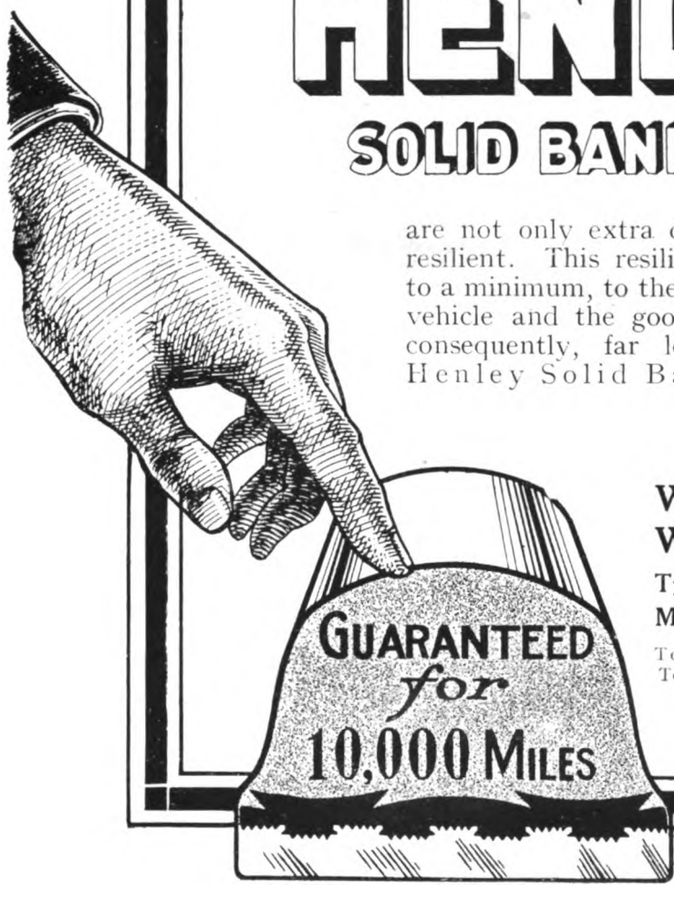

are not only extra durable, but also extra resilient. This resiliency reduces vibration to a minimum, to the great advantage of the vehicle and the goods carried. There are, consequently, far less breakdowns when Henley Solid Band Tyres are used.

Write for Quotations.

W. T. Henley's Telegraph Works Co., Limited,

Tyre Dept., 18, New Union St., MOORFIELDS, LONDON, E.C.

Telephone—No. 3886 London Wall.
Telegrams—"Hetewocol, Ave, London."

Digitized by Google

THE

MANUAL OF ELECTRICAL UNDERTAKINGS

AND DIRECTORY OF OFFICIALS.

"THE ANNUAL ENCYCLOPÆDIA OF THE ELECTRICAL INDUSTRY."—Vide Press.

TWENTIETH ANNUAL VOLUME,
1916—1917.

2,000 Pages, Demy 8vo. 50 Maps of Electric Supply, Tramway and Railway Undertakings.

NOW READY.

Price, Carriage Paid, Inland, 21/- net.

Postage Abroad: Europe, 1/9; New Zealand, 2/-; Asia, 3/-; North and South America and Australia, 4/-; Africa, 5/-

SPECIAL SUPPLEMENT INCLUDED.

LARGE MAP (36 ins. by 20 ins.) OF THE UNITED KINGDOM.

Showing all the Electric Traction, Light, and Power Undertakings. Additional copies (mounted), 10/6 each.

Also large Map of the Electrical Railways in London and District.

Particulars of 2,650 Electrical and Allied Undertakings representing £481,000,000 capital.

BRIEF SUMMARY OF CONTENTS:

(Latest Accounts at date of going to Press are included)

PROGRESS OF THE YEAR. 100 PAGES.

Historical Survey of the Electrical Industry, including particulars of Parliamentary Applications, Statistical Comparisons, and other data not obtainable from any other source, German Electrical and Allied Companies, Electrical Trade after the War, Imports and Exports, Highest and Lowest Prices of Electrical Investments, etc., etc.

SECTION I.—LIGHTING, POWER AND TRACTION. 1,000 PAGES.

Complete Record of all Lighting, Power and Traction Undertakings. Particulars of System, Voltage, Mains, Plant at Stations and Sub-Stations, Track, Gauge, Gradients, Curves, Cars, etc. Chief Officials, Full Profit and Loss Accounts and Balance Sheets, Comparative Tables, Dividends, etc.

SECTION II.—TELEGRAPH AND TELEPHONE. 60 PAGES.

Complete Record of all Telegraph and Telephone Undertakings, Chief Officials, Full Accounts, Comparative Tables, Dividends Paid, etc.

SECTION III.—MANUFACTURING AND MISCELLANEOUS. 170 PAGES.

Complete Record of all Manufacturing and other Electrical and Allied Companies. Chief Officials, Capitalisation, Financial Position, Comparative Tables, Dividends, etc.

SECTION IV.—COLONIAL AND BRITISH POSSESSIONS. 160 PAGES.

Particulars of Traction, Lighting, and Power Undertakings in North and Central America, West Indies, Africa, Mauritius, Australasia, Europe, and Asia (British Possessions). Chief Officials, Plant, Balance Sheets, Comparative Tables, etc.

SECTION V.—DIRECTORIES OF 20,000 OFFICIALS, WITH ADDRESSES. 270 PAGES.

Comprising over 20,000 Names, including Central Station and Tramway Engineers, Secretaries, Directors, Consulting Engineers, Managers, Members of I. of E.E., etc. Names and Addresses of 4,500 Members of Lighting and Tramways Committees, and 4,000 Electrical Contractors in the United Kingdom.

Index of Undertakings, Electrical Companies registered since 1856, BUYERS' GUIDE, etc., etc.

ORDER FROM

THE ELECTRICAL PRESS, LTD. - - - 13-16, Fisher Street, Southampton Row, London, W.C.

Telephones: HOLBORN 2012, 2143. Telegrams: "FARSIGHTED WESTCENT LONDON."

Digitized by Google

J. W. COURTENAY, Ltd.,

Tramway and Omnibus Advertising Contractors.

Offices:

LONDON: *Amberley House, Norfolk Street, W.C.*
EDINBURGH: *34, St. Andrew Square.*
LIVERPOOL: *Princes Buildings, 81, Dale Street.*
BIRMINGHAM: *147, Corporation Street.*
LEEDS: *Standard Assurance Buildings,*
NEWCASTLE-on-TYNE: *50, Grey Street. [City Square.*

HIGHEST RENTS PAID for sole rights of advertising on any system of Tramways or Omnibuses.

All Advertisements kept in perfect condition by an efficient staff of workmen.

Sole Contractors for

Liverpool Corporation Tramways.
Edinburgh & District Tramways Company, Ltd.
Belfast City Tramways.
Leeds City Tramways.
Birmingham Corporation Tramways.
Leicester Corporation Tramways.
Nottingham Corporation Tramways.
Portsdown & Horndean Light Railway Co.
Wakefield & District Light Railway.
Londonderry Tramways Company.
Calcutta Tramways Co., Ltd.
Cawnpore Electric Tramways.
Delhi Electric Tramways.
Mandalay Electric Tramways.
Dover Corporation Tramways.
Newcastle-on-Tyne Corporation Tramways.
Brighton, Hove, & Preston United Omnibus Co., Ltd.
Cork Electric Tramways and Lighting Co., Ltd.
Isle of Thanet Electric Tramways Company Ltd.
Keighley Corporation Tramways.
Keighley Corporation Motor 'Buses.
Burton-on-Trent Corporation Tramways.
Scarborough Electric Tramways Co., Ltd.
Aberdeen Suburban Tramways Co.
Paisley & District Tramways Co.
Hastings & District Electric Tramways Co., Ltd.
Gosport and Fareham Tramways Co.
Doncaster Corporation Tramways.
Cardiff Corporation Tramways.
Plymouth Corporation Tramways.
Gloucester Corporation Light Railways.
Ilkeston Corporation Tramways.
Stockport Corporation Tramways.
Accrington Corporation Tramways.
Ilford Council Tramways.
Aberdeen Corporation Tramways.
Bradford Corporation Tramways.
Southampton Corporation Tramways.
Halifax Corporation Tramways.
Perth Corporation Tramways.

J. W. COURTENAY, Ltd., are sole agents in the United Kingdom for advertising rights on the tramcars in most of the towns in the following countries, viz.:—
FRANCE, ITALY, SWITZERLAND, GREECE, and EGYPT.

MANUFACTURERS OF

Transparent Coloured Glass and Opal Glass

ADVERTISING TABLETS.

Digitized by Google

R.E.T.

RAILLESS ELECTRIC TRACTION for passengers and freight.

Rubber Tyres. No Rails.

Also Battery Driven Vehicles and MOTOR LORRIES of all kinds.

The
R.E.T. CONSTRUCTION CO. LTD.
Balm Road, Hunslet, LEEDS

"HELE-SHAW."

BEST QUALITY MATERIAL.

ACCURATE WORKMANSHIP.

TEETH MACHINE-CUT FROM SOLID.

TURNED BOLTS FOR SPLIT WHEELS.

We manufacture the finest

GEAR WHEELS AND PINIONS FOR

ELECTRIC TRAMWAYS, RAILWAYS, etc.

ALL TYPES STOCKED SUCH AS

B.T.H., DICK-KERR, WESTINGHOUSE, BRUSH, etc.

CONTRACTS EXECUTED FOR L.C.C., MANCHESTER, LEEDS, SALFORD, SHEFFIELD, etc.

These Gears are made on specially designed Machines of our own manufacture, and our PRICES are unbeatable when QUALITY is taken into consideration. Send for further particulars to the Manufacturers:

B H-S
The Mark of Excellence

The British Hele-Shaw Patent Clutch Co. Ltd.

Telephone: 1133
Telegrams: "Prehension, Oldham."

Suthers Street, OLDHAM, England

TRACTION SUPPLIES

SECTION INSULATORS
FROGS & CROSSINGS

FEL

IN STOCK
At Pre-War Prices.

GEO. W. GREEN & CO., (FELTHAM) LTD.

Q-FEL WORKS,
FELTHAM, MIDDLESEX.
Tel.: "CUFEL, FELTHAM."

Digitized by Google

WALTER SCOTT LTD.

THE LEEDS STEEL WORKS,

Telegrams: LEEDS. "Bessemer, Leeds."

Manufacturers of

ROLLED STEEL JOISTS, CHANNELS, ETC.

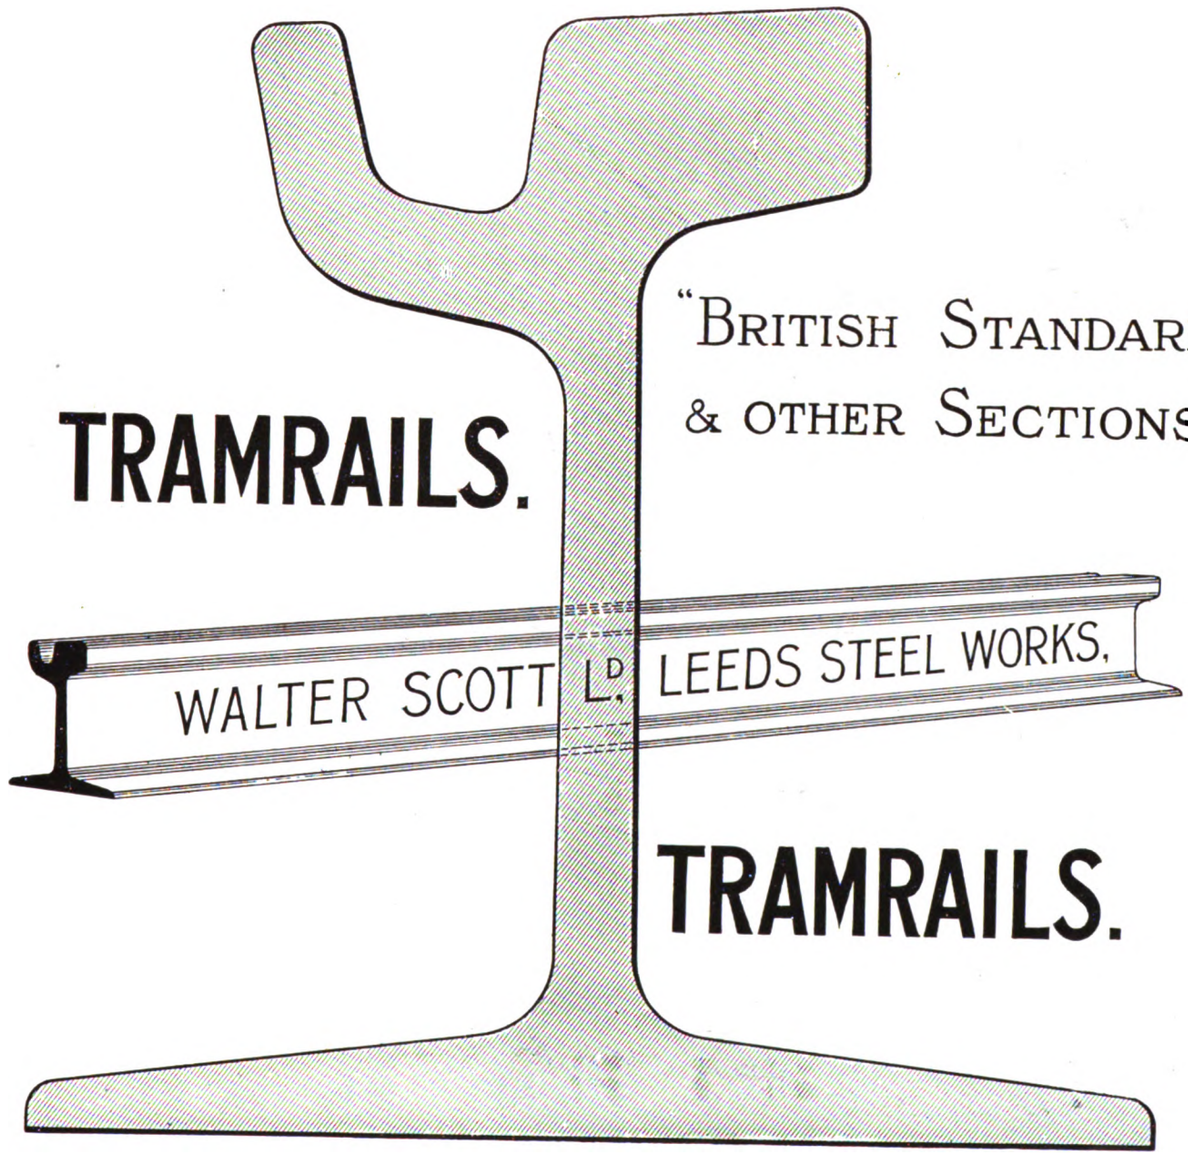

Also Makers of

MILD STEEL BLOOMS, BILLETS, SLABS, FLATS, TINBARS & ROUNDS.

Riveted Plate and Compound Girders, Stanchions, &c.

Digitized by Google

EDGAR ALLEN & CO.

LTD.

Imperial Steel Works
SHEFFIELD

SPECIALITÉ:—

DEPÔT FANS

—IN—

ALLEN'S IMPERIAL MANGANESE STEEL

The Best Material on the Market for resisting Wear.

DESIGNS and ESTIMATES prepared, and SURVEYS TAKEN.

Digitized by Google

"TYNE METAL" BRAKE SHOES

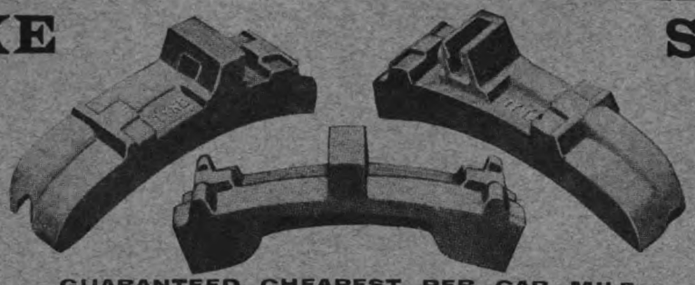

Hard Wear Resisting.

Good Braking Effect.

GUARANTEED CHEAPEST PER CAR MILE.

Sole Manufacturers:
TYNE METAL COMPANY, Ltd., Skinnerburn Road, NEWCASTLE-ON-TYNE.

TRAMWAY SUPPLIES, LTD.

TRAMWAY ENGINEERS,

Sole Selling Agents for S. Dixon & Son's Tramway Material.

160, Woodhouse Lane, Leeds.

Sole Manufacturers of

TURNER'S PATENT AUTOMATIC POINT CONTROLLERS.
OVERHEAD LINE MATERIAL and SUPPLIES.

Telegrams: "Controllers, Leeds." Telephone 3488 Leeds.

"GROVER SPRING WASHER" NUT-LOCK

FOR . . .
FISH BOLTS (Iron or Steel)
ROLLING STOCK,
SIGNAL WORK, &
GENERAL PURPOSES,
ELECTRICAL WORK, &c.

BEWARE OF ALL CHEAP IMITATIONS
They are like the original in appearance only.

SALES OVER 135,000,000.
Made in all sizes from $\frac{1}{16}$ in. to 4 inches, and in Millimetres.

GROVER & Co. Ltd. Britannia Engineering Works, Carpenters Rd., Stratford, London, E. Telegraphic Address: "ADOPTED STRAT, LONDON." Telephone STRATFORD 984-985.

SIMPLEX LEAD GLAZING

FOR ROOFS, SKYLIGHTS, & HORTICULTURAL WORK.
No Special Contract Required.

NO ZINC, IRON, OR PUTTY USED.

ANY QUANTITY SUPPLIED.
Millions of superficial feet in use on thousands of Structures.



Write for full Illustrations, Testimonials, and Particulars (sent post free).

Are You Satisfied With Your Ticket Service ?

Telegrams: "TICKETS, GLASGOW."

If you ask that question of the managers of the largest tramway undertakings, both at home and abroad, the answer will be:

"Yes, we use Glasgow Tickets."

May we send you some specimens? We produce tickets in any style, in any quantity, and print in any language.

Whenever you want tickets, either paper or pulp, we shall be pleased to quote you.

Freedom from ticket worry will be assured if you send your orders to

GLASGOW NUMERICAL TICKET & CHECKBOOK PRINTING CO.
31, FINNIESTON ST. GLASGOW

Printed for the Proprietors by Chorley & Pickersgill, Ltd., The Electric Press, Leeds, and Published by the Proprietors at their Offices at Amberley House, Norfolk Street, London, W.C., December 7, 1916

Digitized by Google

DICK, KERR & Co. Ltd.

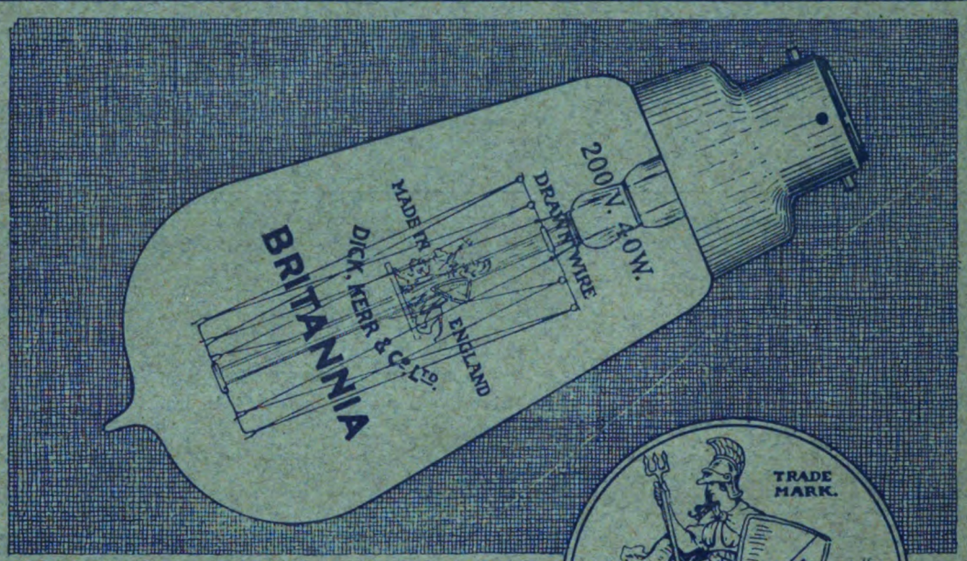

The BRITANNIA
DRAWN WIRE LAMP

takes a just credit and no more than a just credit for its high-grade finish. Added to that,—strength, durability & economy in service, give both seller and user alike, lasting satisfaction.

LICENSED UNDER BRITISH PATENTS NOS. 21513/06, 27712/03, AND OTHERS.

ARCHURCH YARD, CANNON ST. LONDON, E.C.

BRANCH OFFICES,
MANCHESTER, NEWCASTLE, LEEDS, TOKYO, SYDNEY, JOHANNESBURG, BUENOS AIRES, RIO JANEIRO, MOSCOW AND MILAN.

Digitized by Google

Digitized by Google

Digitized by Google

Digitized by Google

THE NEW YORK PUBLIC LIBRARY
REFERENCE DEPARTMENT

This book is under no circumstances to be taken from the Building

JUL 14 19
JUL 23 19
JUL 22 3

form 419

Digitized by Google

B'D MAY 25 1917

Digitized by Google
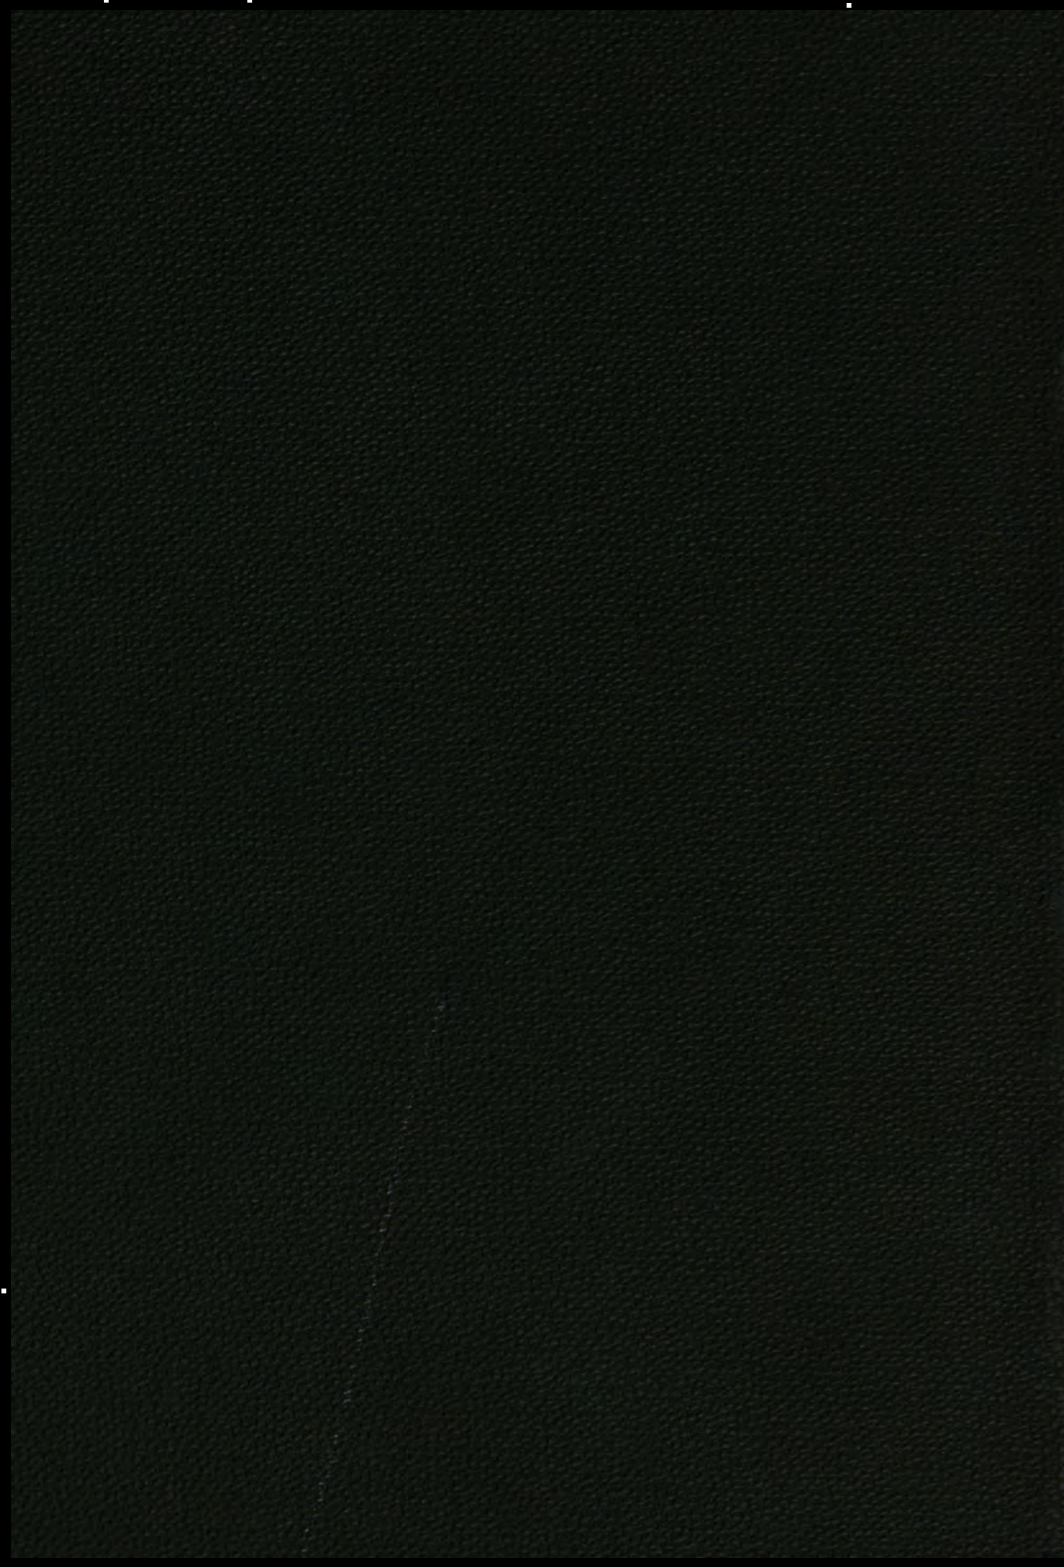
Digitized by Google